




Test report No:
2150819R-RF-US-P06V02

FCC & ISED TEST REPORT

Product Name	LocoTrack Primary
Trademark	LocoTrack Primary
Model and /or type reference	HGD4, HGP4
FCC ID	2AYMO-LTP-H4-1
IC	27269-LTPH41
Applicant's name / address	System Loco Ltd Parkfield, Greaves Park, Lancaster
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB558074 D01v05r02 RSS-Gen Issue 5 / RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Scott Shen/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2021-09-10
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees.....	4
General conditions.....	4
Environmental conditions.....	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments	6
Used Equipment	7
Uncertainty.....	9
1 General Information.....	10
1.1 General Description of the Item(s)	10
1.2 Antenna Information.....	11
1.3 Data Rate	12
1.4 Channel List	13
2 Description of Test Setup	14
2.1 Operating mode(s) used for tests.....	14
2.2 Support / Auxiliary equipment / unit / Test software for the EUT	14
2.3 Test Configuration / Block diagram used for tests	15
2.4 Testing process	16
3 Verdict summary section	17
3.1 Standards	17
3.2 Deviation(s) from the Standard(s) / Test Specification(s)	17
3.3 Overview of results.....	18
3.4 Test Facility	19
4 Test Results.....	20
4.1 AC Power Line Conducted Emission	20
4.1.1 Limit.....	20
4.1.2 Test Setup.....	20
4.1.3 Test Procedure	20
4.1.4 Test Data.....	21
The EUT is powered by dc, so this test item is not applicable	21
4.2 Emissions in restricted frequency bands	22
4.2.1 Limit.....	22
4.2.2 Test Setup.....	24

4.2.3	Test Procedure	25
4.2.4	Test Data.....	26
4.3	Emissions in non-restricted frequency band	48
4.3.1	Limit.....	48
4.3.2	Test Setup.....	48
4.3.3	Test Procedure	48
4.3.4	Test Data.....	49
4.4	Radiated Emission Band Edge	50
4.4.1	Limit.....	50
4.4.2	Test Setup.....	50
4.4.3	Test Procedure	51
4.4.4	Test Data.....	52
4.5	DTS Bandwidth	77
4.5.1	Limit.....	77
4.5.2	Test Setup.....	77
4.5.3	Test Procedure	77
4.5.4	Test Data.....	78
4.6	Fundamental emission output power	80
4.6.1	Limit.....	80
4.6.2	Test Setup.....	80
4.6.3	Test Procedure	81
4.6.4	Test Data.....	82
4.7	Power Density	83
4.7.1	Limit:.....	83
4.7.2	Test Setup.....	83
4.7.3	Test Procedure	83
4.7.4	Test Data.....	84
4.8	Antenna Requirement	85
4.8.1	Limit:.....	85
4.8.2	Antenna Connector Construction:.....	85
5	Test setup photo and EUT Photo	86

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 25, 2021
Date (start test)	May. 26, 2021
Date (finish test)	Jul. 15, 2021

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2150819R-RF-US-P06V02	V1.0	Initial issue of report.	2021-09-10

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Data Rate;
 - Chapter 1.4 Channel List.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100906	2021.04.28	2022.04.27
Two-Line V-Network	R&S	ENV216	101044	2021.03.20	2022.03.19
50ohm Termination	SHX	TF2	7081402	2020.09.23	2021.09.22
50ohm Termination	SHX	TF2	7081403	2020.09.23	2021.09.22
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2021.07.11	2022.07.10
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2021.07.11	2022.07.10
4TX MIMO Power Sensor	Keysight	X8750A	MY59400102	2021.03.31	2022.03.30
Coaxial Cable	Woken	SFL402	F02-150410-044	2021.01.01	2021.12.31
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2021.07.09	2022.07.08

Radiated Emission(Below 1GHz) / AC3

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100176	2021.08.15	2022.08.14
Loop Antenna	R&S	HFH2-Z2	833799/003	2021.03.04	2022.03.03
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9168	01100	2021.05.20	2022.05.19
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC3-C	2021.03.31	2022.03.30
Temperature/Humidity Meter	RTS	RTS-8S	EMC03	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

Radiated Emission(Above 1GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2021.03.20	2022.03.19
Amplifier	Keleto	LNPA	SK20190225	2020.09.25	2021.09.24
Preamplifier	EMCI	EMC184045SE	980263	2021.05.22	2022.05.21
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2021.08.23	2022.08.22
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2021.04.19	2022.04.18
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2021.03.31	2022.03.30
Coaxial Cable	ROSENBERGER	LA1-C011- 2000/3000	AC5-40G	2021.03.20	2022.03.19
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2021.07.09	2022.07.08
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name/PMN	LocoTrack Primary
Model No./HVIN	HGD4, HGP4
FCC ID	2AYMO-LTP-H4-1
IC	27269-LTPH41
Manufacturer	Qisda Corp
Manufacturer address	169 Zhujiang Road, New District, Suzhou
Model Difference	The two models have the same PCBA, the difference between the 2 model is that the HGD4 have a 4 AA battery pack connected, the HGP4 have an 8 AA battery pack connected, and associated housings
EUT identification	2150819R-1 is used for radiated test items 2150819R-2 is used for conducted test items

Note: Model HGD4 is chosen to perform test.

Wireless specification	WIFI
Operating frequency range(s)	2400~2483.5MHz
Type of modulation	DSSS: BPSK, QPSK, CCK OFDM: BPSK, QPSK, 16QAM, 64QAM
Number of channel	802.11b/g/n(20MHz): 11

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50 Hz
	☐	AC: 220 – 240 Vac, 50/60 Hz
	☒	6 Vdc by battery
	☐	Battery:

1.2 Antenna Information

Antenna model / type number.....:	N/A		
Antenna serial number.....:	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology	☒	SISO	
	☐	MIMO	☐ Basic
			☐ CDD
			☐ Beam-forming
Antenna Type	☐	External	☐ Dipole
			☐ Sectorized
	☒	Internal	☐ PIFA
			☒ PCB
			☐ Metal Antenna
Antenna Gain	3.52 dBi		

1.3 Data Rate

IEEE 802.11b

Modulation	Data Rate(Mb/s)
DSSS	1
DSSS	2
CCK	5.5
CCK	11

IEEE 802.11g

Modulation	Coding rate	Data Rate(Mb/s)
BPSK	1/2	6
BPSK	3/4	9
QPSK	1/2	12
QPSK	3/4	18
16-QAM	1/2	24
16-QAM	3/4	36
64-QAM	2/3	48
64-QAM	3/4	54

IEEE 802.11n

Spatial streames	MCS Index	Modulation	Coding rate	Data Rate(Mb/s)			
				20MHz		40MHz	
				800ns GI	400ns GI	800ns GI	400ns GI
1	0	BPSK	1/2	6.5	7.2	13.5	15.0
1	1	QPSK	1/2	13.0	14.4	27.0	30.0
1	2	QPSK	3/4	19.5	21.7	40.5	45.0
1	3	16-QAM	1/2	26.0	28.9	54.0	60.0
1	4	16-QAM	3/4	39.0	43.3	81.0	90.0
1	5	64-QAM	2/3	52.0	57.8	108.0	120.0
1	6	64-QAM	3/4	58.5	65.0	121.5	135.0
1	7	64-QAM	5/6	65.0	72.2	135.0	150.0

Note 1: Support of 400ns GI is optional on transmit and receive.

1.4 Channel List

IEEE 802.11b/g & IEEE 802.11n(20MHz)

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
001	2412 MHz	002	2417 MHz	003	2422 MHz	004	2427 MHz
005	2432 MHz	006	2437 MHz	007	2442 MHz	008	2447 MHz
009	2452 MHz	010	2457 MHz	011	2462 MHz	-	-

Note: The General Description of the Item(s), antenna information, Data Rate and Channel List in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n(20MHz)

2.2 Support / Auxiliary equipment / unit / Test software for the EUT


The EUT has been tested with the following auxiliary equipment / unit / software:

Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think pad L440	Lenovo	Adapter
Software	Type / Version	Manufacturer	Supplied by
EspRFtestTool	N/A	N/A	N/A


2.3 Test Configuration / Block diagram used for tests

The following test setup / configuration / block diagram has been used during the tests:

Test setup Diagram- Radiated Test

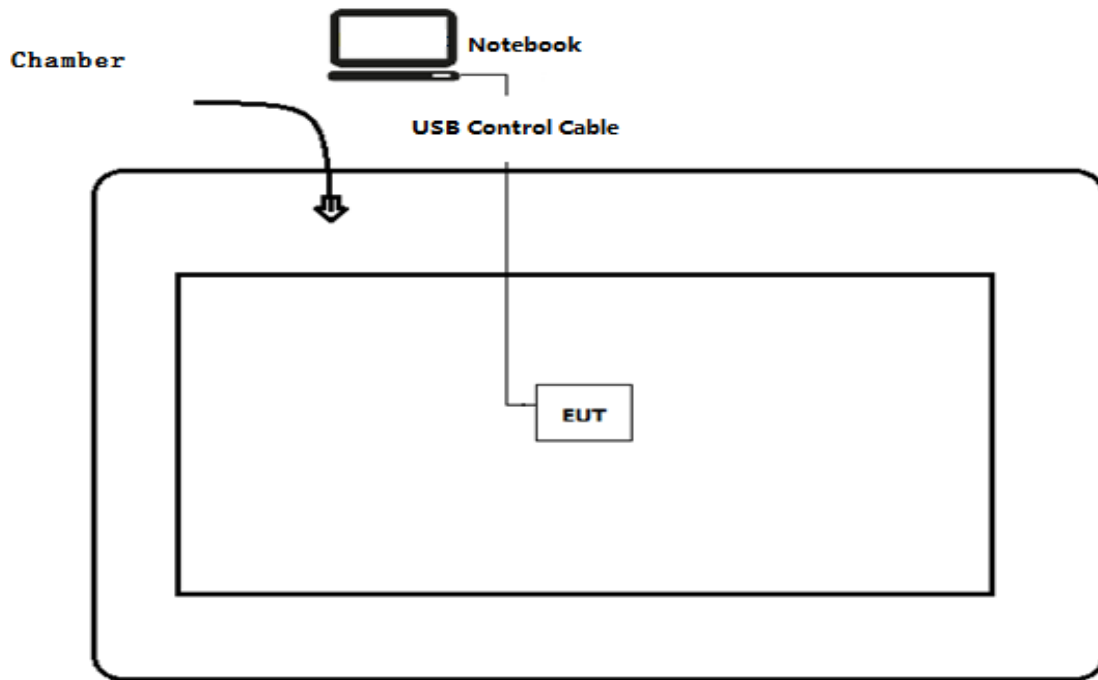

Test setup Diagram- Conducted test

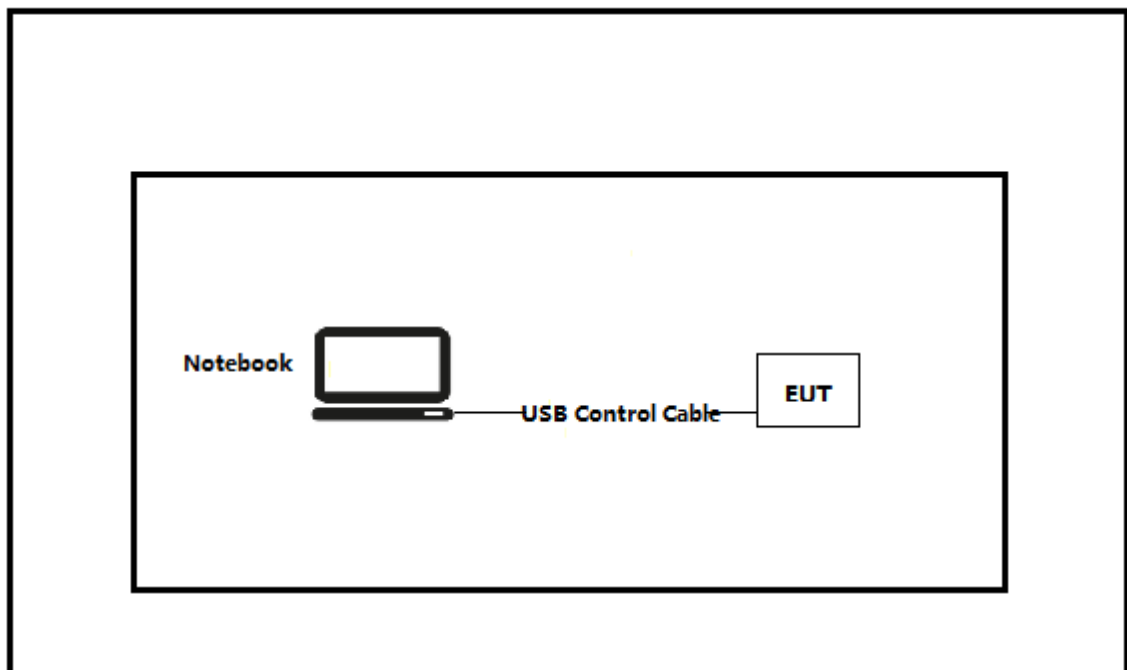

2.4 Testing process

1	Setup the EUT as shown in Section 2.3.
2	Execute the test software on the notebook.
3	Configure the test mode, the test channel, and the data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2021	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 1	2019	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	PASS	---
Emissions in restricted frequency bands	FCC 15.247(d), 15.209	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d)	PASS	---
Radiated Emission Band Edge	FCC 15.247(d), 15.209	PASS	---
Fundamental emission output power	FCC 15.247(b)(3)	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	PASS	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section A5.5	PASS	---
Radiated Emission Band Edge	RSS-247 Issue 2 Section A5.5	PASS	---
Occupied Bandwidth	RSS-Gen Issue 5 Section 6.6 RSS-247 Issue 2 Section A5.2(1)	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section A5.4(4)	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section A5.2(2)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 8.3	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: PASS


4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

4.1.2 Test Setup

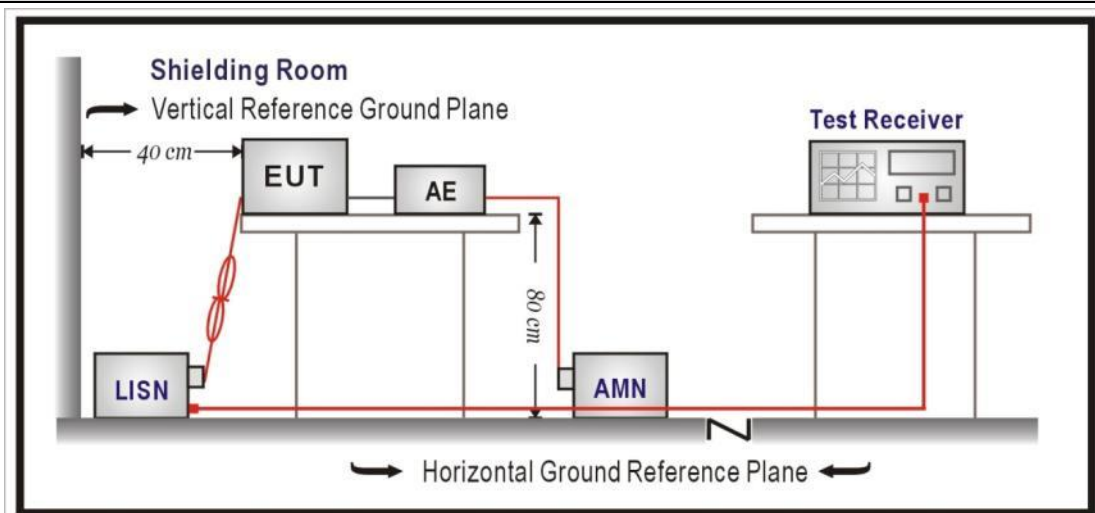

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

The EUT is powered by dc, so this test item is not applicable.

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205; 15.209

Restricted Bands of operation for FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6
13.36 – 13.41	--	--	--

Restricted Bands of operation for ISSED

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	--
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	--
8.41425 - 8.41475	240 - 285	5350 - 5460	--
12.29 - 12.293	322 - 335.4	7250 - 7750	--
12.51975 - 12.52025	399.9 - 410	8025 - 8500	--
12.57675 - 12.57725	608 - 614	--	--

Restricted Band Emissions Limit


Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).


Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

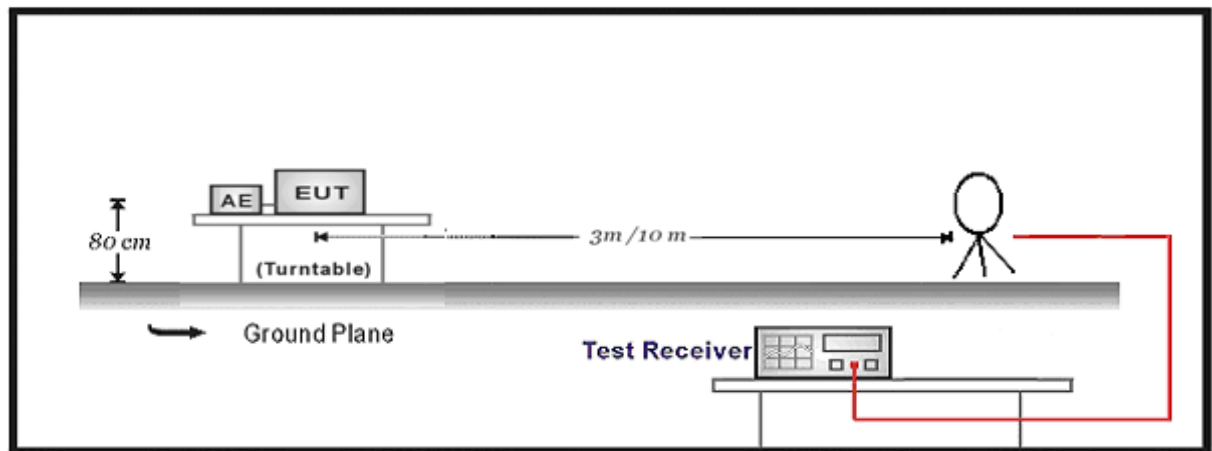

30MHz-1GHz Test Setup:

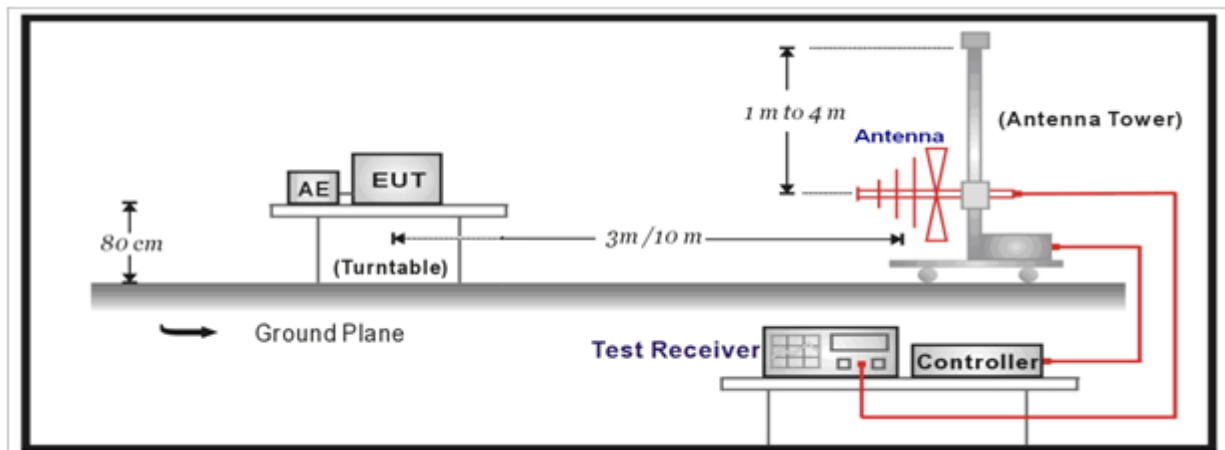

Above 1GHz Test Setup:

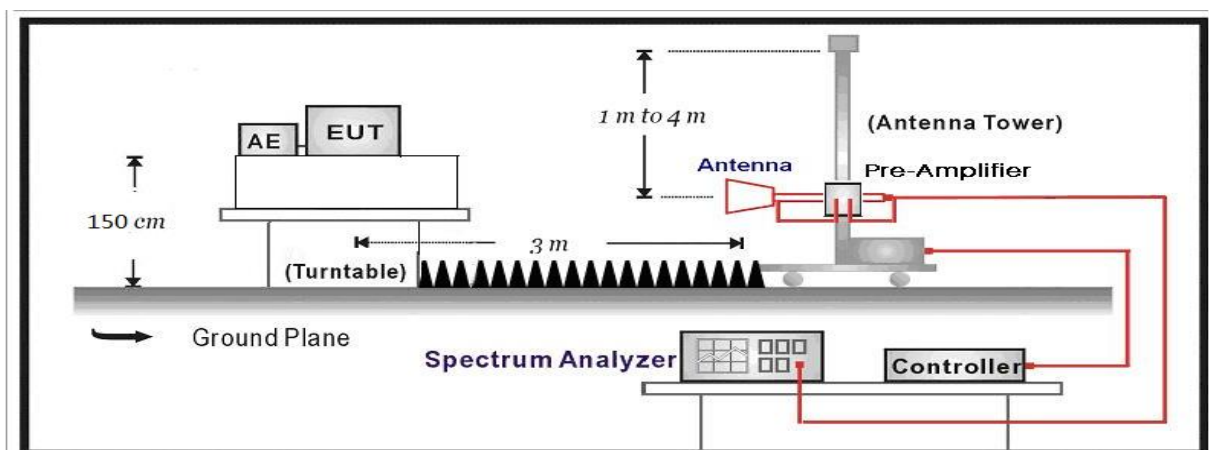


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	6.3	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	☐	ANSI C63.10	11.12.2.4	Peak power measurement procedure
	☐	ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
	☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
	☐	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


4.2.4 Test Data

Profile: 2150819R	Page No.: 19
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2412MHz by 802.11bl	

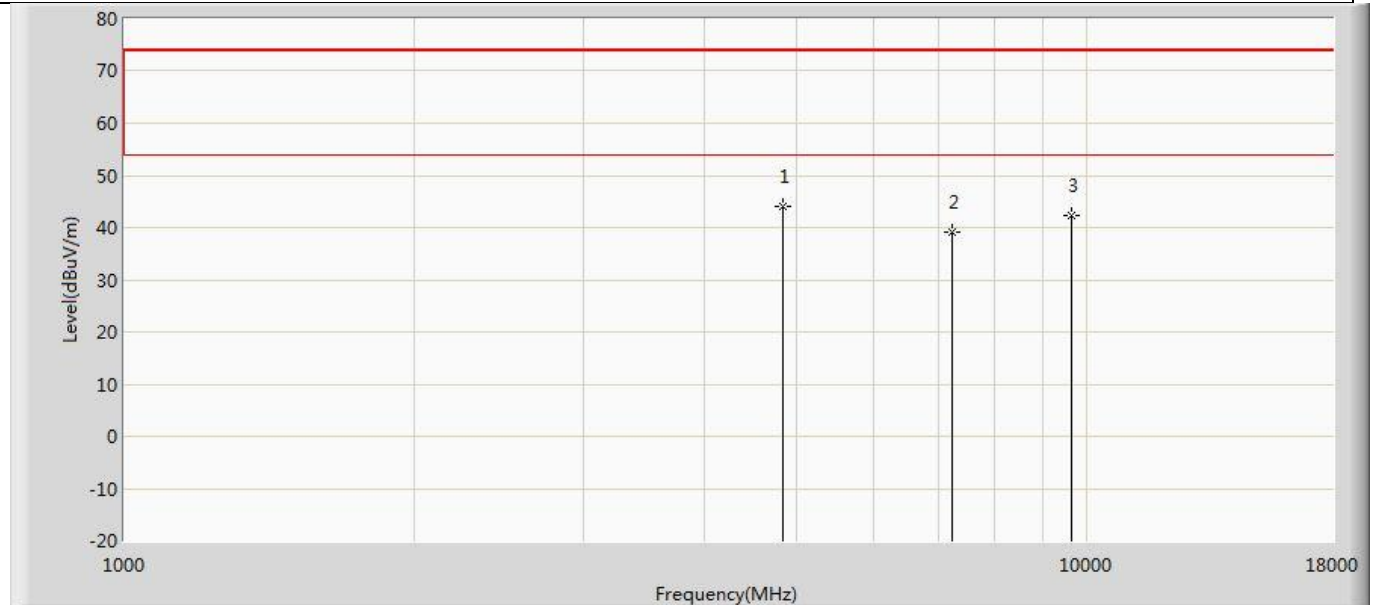


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4824.000	44.016	50.925	-29.984	74.000	-6.909	PK
2		7236.000	39.267	42.504	-34.733	74.000	-3.237	PK
3		9648.000	42.316	41.682	-31.684	74.000	0.634	PK

Profile: 2150819R	Page No.: 20
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2412MHz by 802.11b	

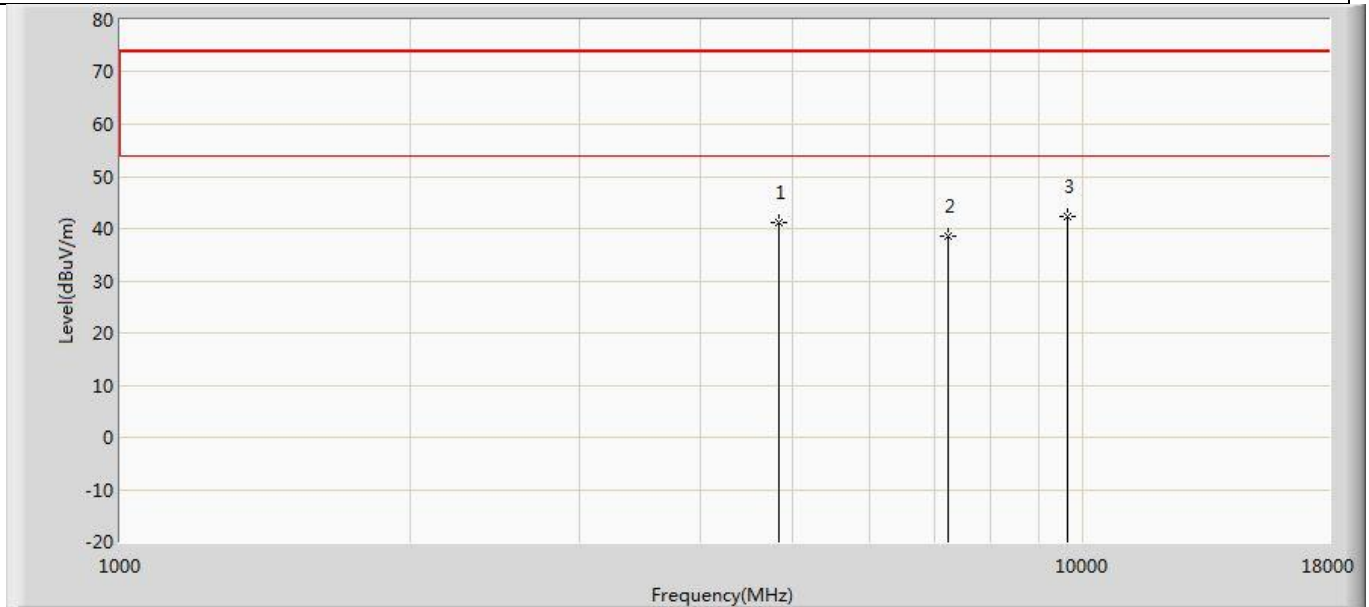


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	41.150	48.059	-32.850	74.000	-6.909	PK
2		7236.000	38.473	41.710	-35.527	74.000	-3.237	PK
3	*	9648.000	42.289	41.655	-31.711	74.000	0.634	PK

Profile: 2150819R	Page No.: 21
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2437MHz by 802.11b	

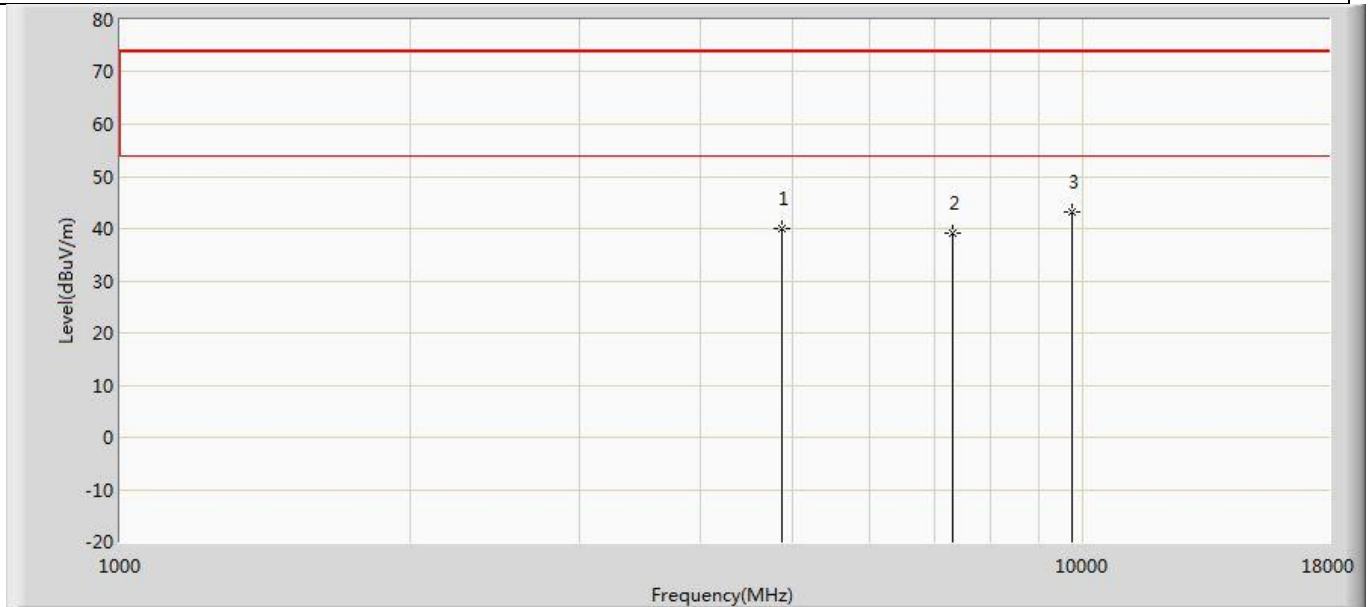


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	40.090	46.793	-33.910	74.000	-6.703	PK
2		7311.000	39.034	41.920	-34.966	74.000	-2.886	PK
3	*	9748.000	43.152	42.428	-30.848	74.000	0.725	PK

Profile: 2150819R	Page No.: 22
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2437MHz by 802.11b	

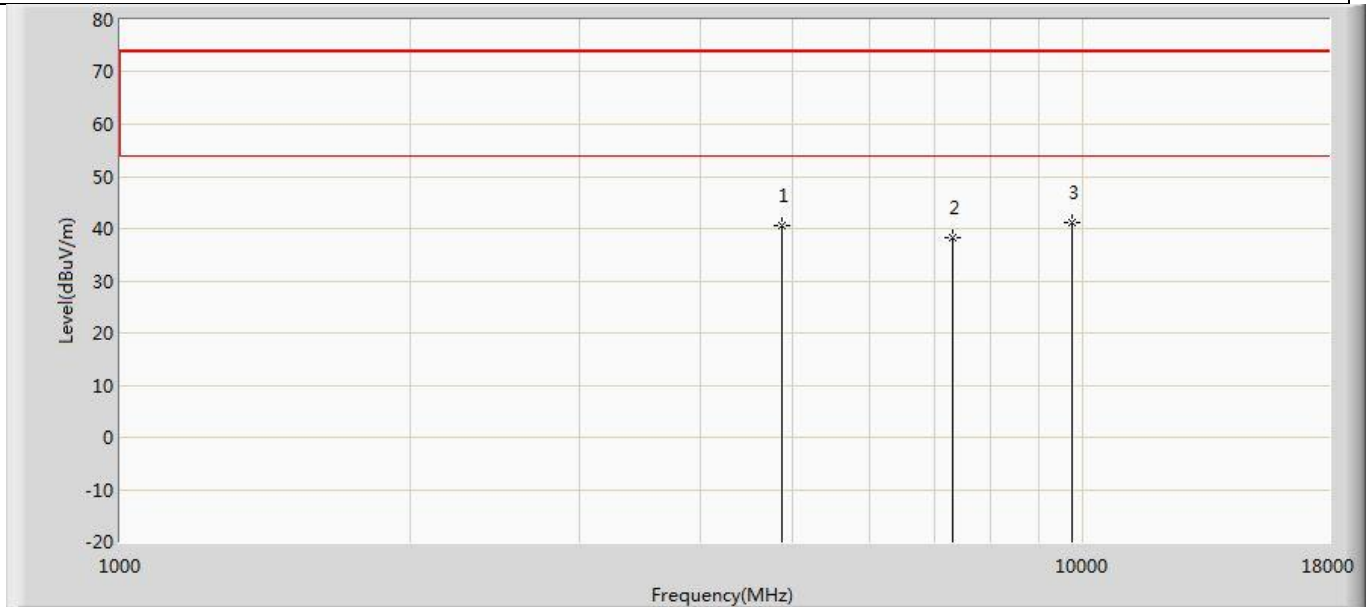


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	40.552	47.255	-33.448	74.000	-6.703	PK
2		7311.000	38.263	41.149	-35.737	74.000	-2.886	PK
3	*	9748.000	41.275	40.551	-32.725	74.000	0.725	PK

Profile: 2150819R	Page No.: 23
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2462MHz by 802.11b	

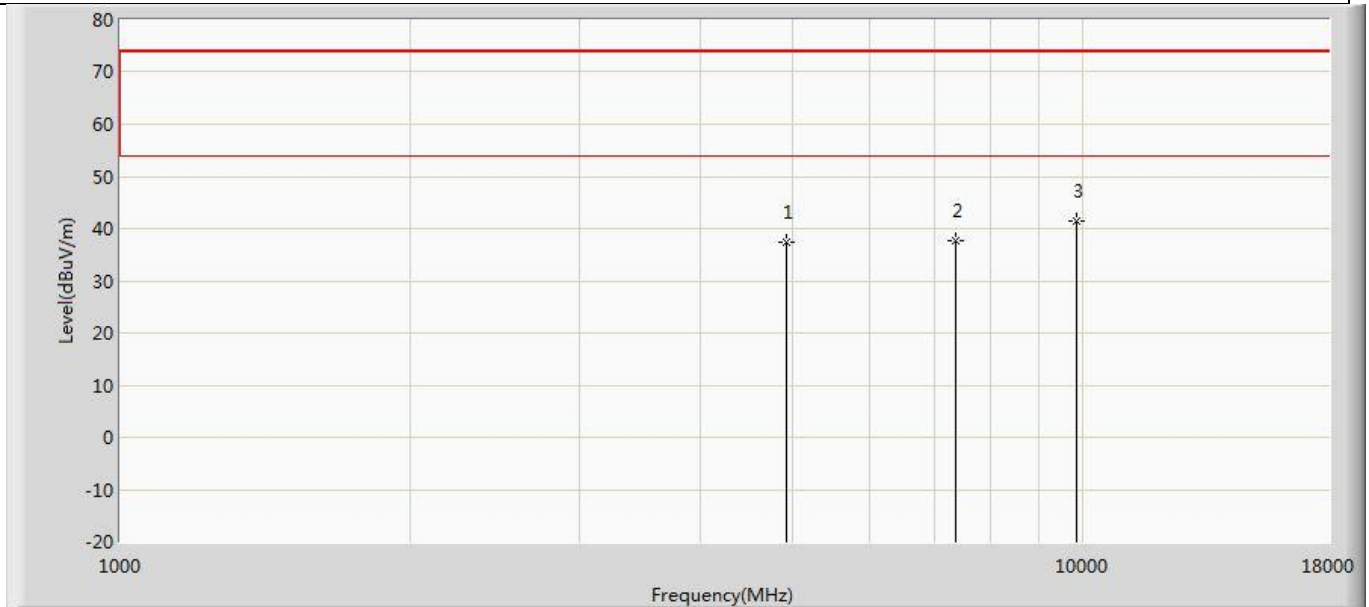


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.278	44.151	-36.722	74.000	-6.873	PK
2		7386.000	37.787	40.987	-36.213	74.000	-3.200	PK
3	*	9848.000	41.350	40.065	-32.650	74.000	1.285	PK

Profile: 2150819R	Page No.: 24
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2462MHz by 802.11b	

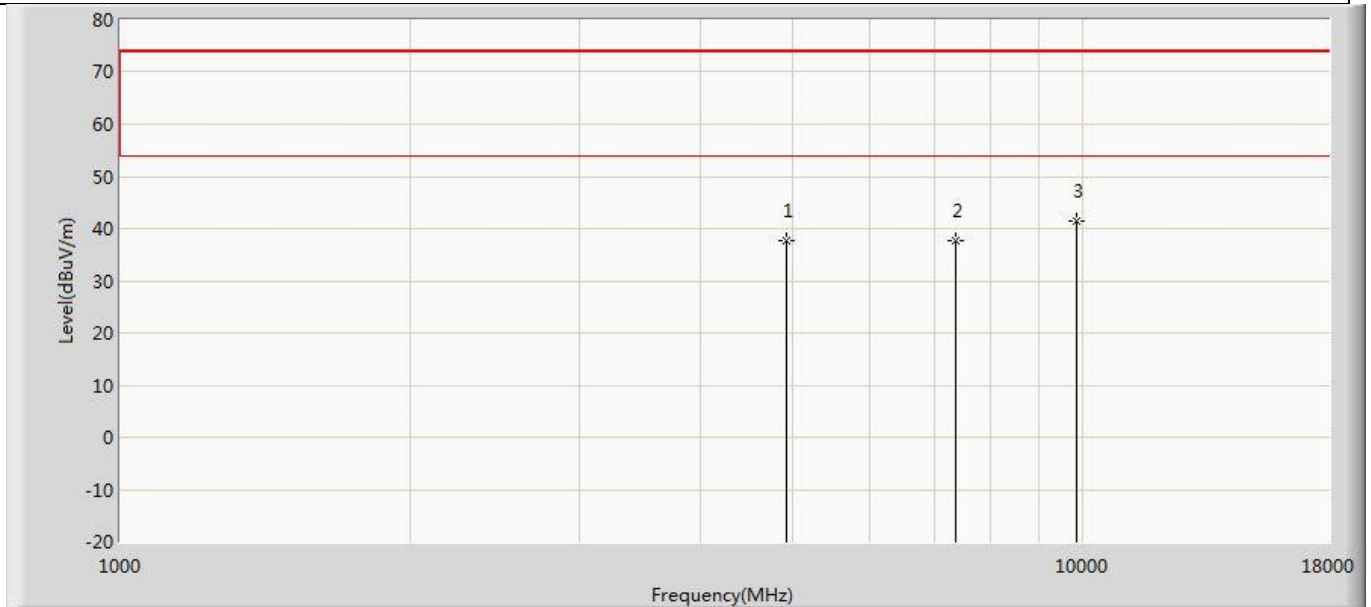


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.643	44.516	-36.357	74.000	-6.873	PK
2		7386.000	37.663	40.863	-36.337	74.000	-3.200	PK
3	*	9848.000	41.361	40.076	-32.639	74.000	1.285	PK

Profile: 2150819R	Page No.: 25
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

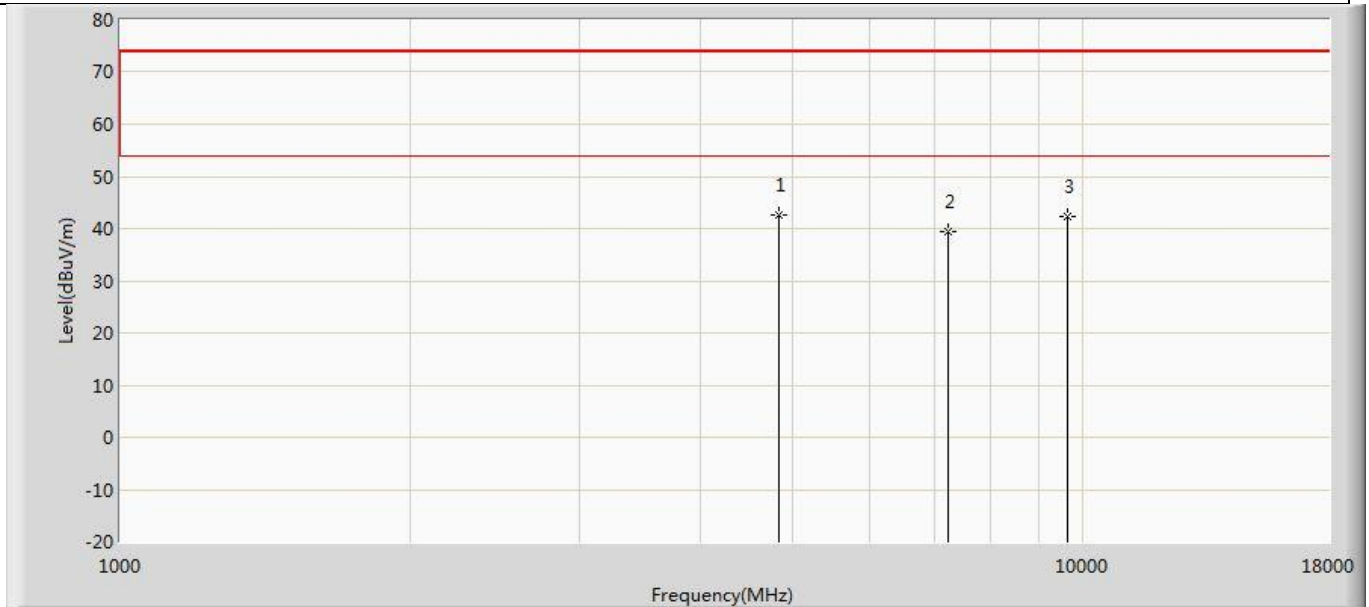


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4824.000	42.466	49.375	-31.534	74.000	-6.909	PK
2		7236.000	39.407	42.644	-34.593	74.000	-3.237	PK
3		9648.000	42.358	41.724	-31.642	74.000	0.634	PK

Profile: 2150819R	Page No.: 26
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

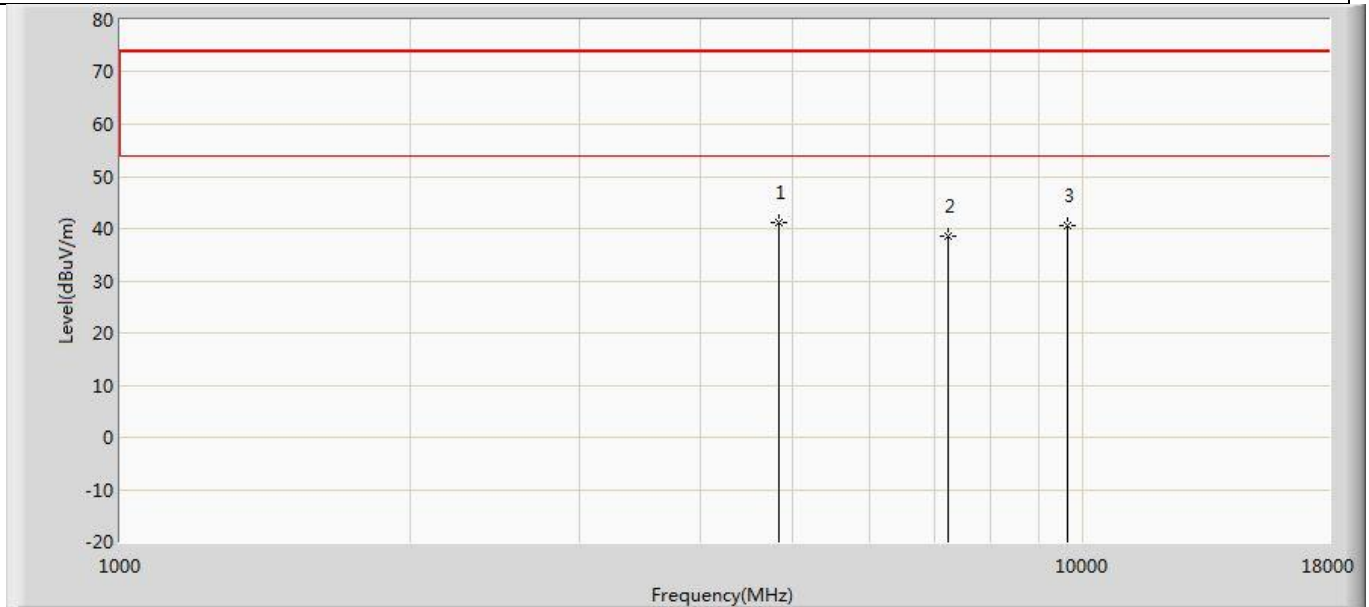


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4824.000	41.203	48.112	-32.797	74.000	-6.909	PK
2		7236.000	38.473	41.710	-35.527	74.000	-3.237	PK
3		9648.000	40.666	40.032	-33.334	74.000	0.634	PK

Profile: 2150819R	Page No.: 27
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2437MHz by 802.11g	

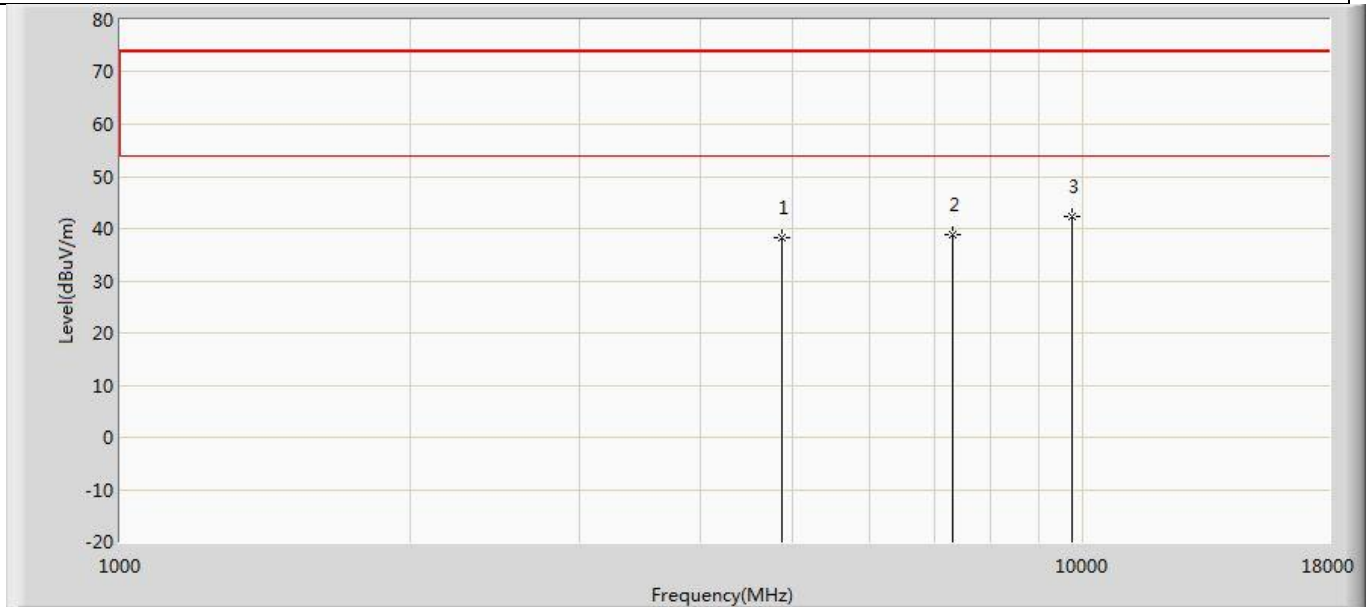


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	38.167	44.870	-35.833	74.000	-6.703	PK
2		7311.000	38.699	41.585	-35.301	74.000	-2.886	PK
3	*	9748.000	42.225	41.501	-31.775	74.000	0.725	PK

Profile: 2150819R	Page No.: 28
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2437MHz by 802.11g	

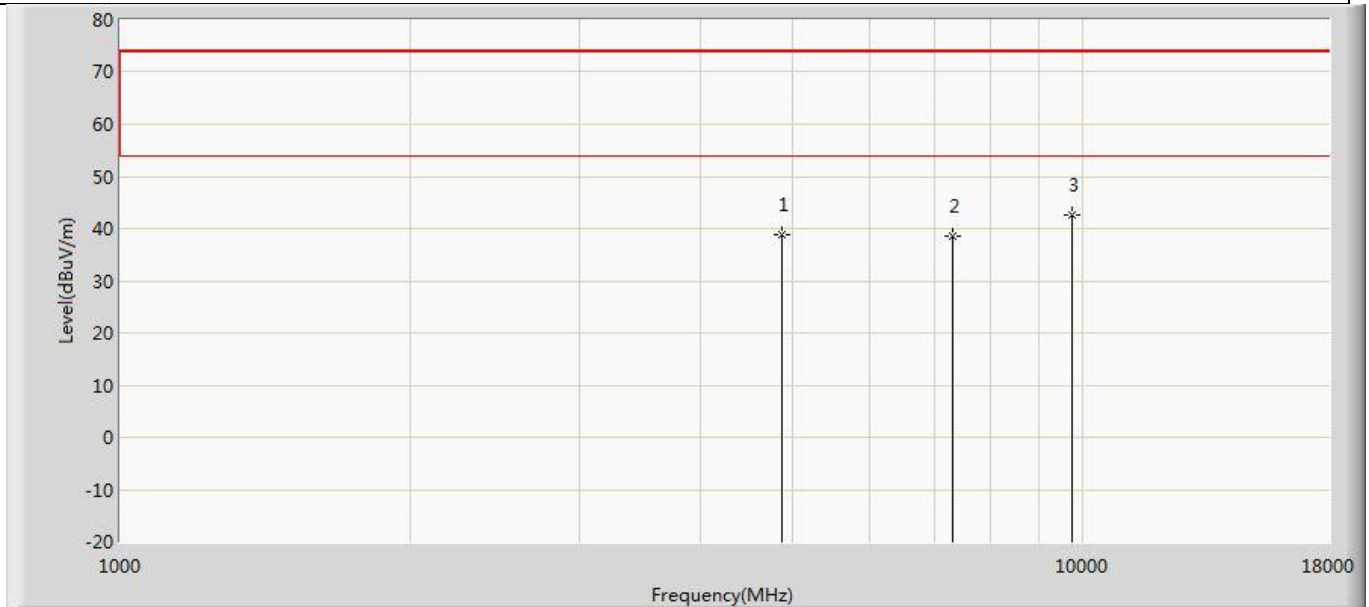


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	38.852	45.555	-35.148	74.000	-6.703	PK
2		7311.000	38.602	41.488	-35.398	74.000	-2.886	PK
3	*	9748.000	42.607	41.883	-31.393	74.000	0.725	PK

Profile: 2150819R	Page No.: 29
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

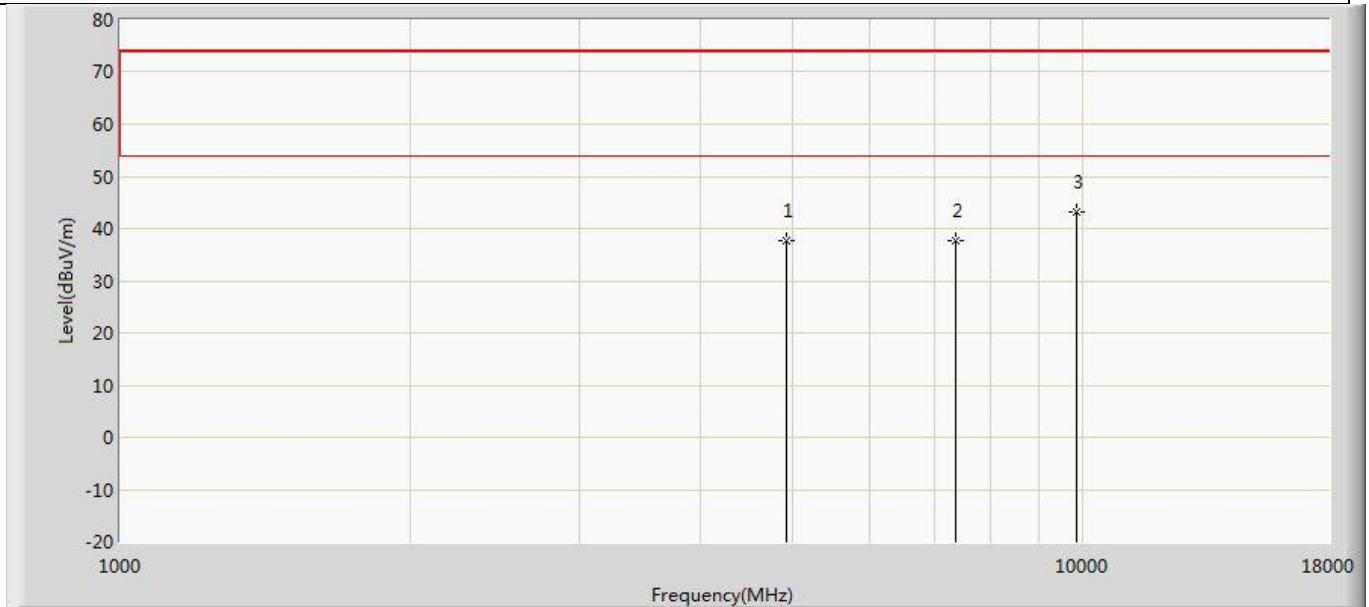


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.646	44.519	-36.354	74.000	-6.873	PK
2		7386.000	37.631	40.831	-36.369	74.000	-3.200	PK
3	*	9848.000	43.214	41.929	-30.786	74.000	1.285	PK

Profile: 2150819R	Page No.: 30
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

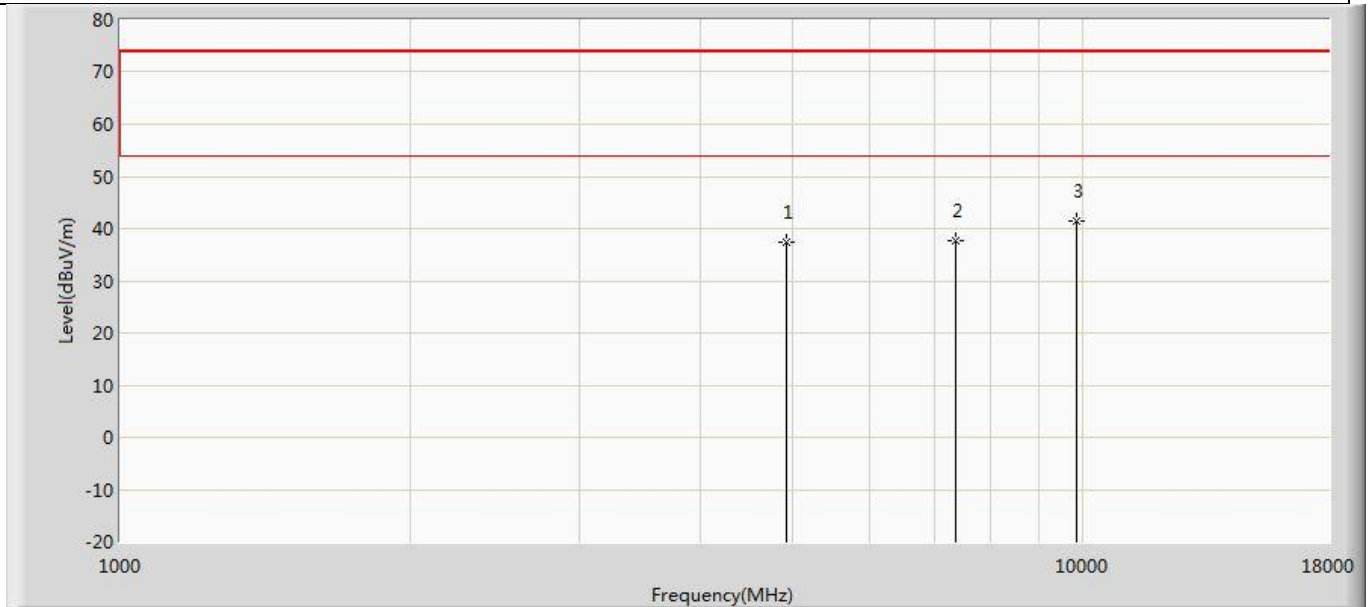


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	37.354	44.227	-36.646	74.000	-6.873	PK
2		7386.000	37.563	40.763	-36.437	74.000	-3.200	PK
3	*	9848.000	41.591	40.306	-32.409	74.000	1.285	PK

Profile: 2150819R	Page No.: 31
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

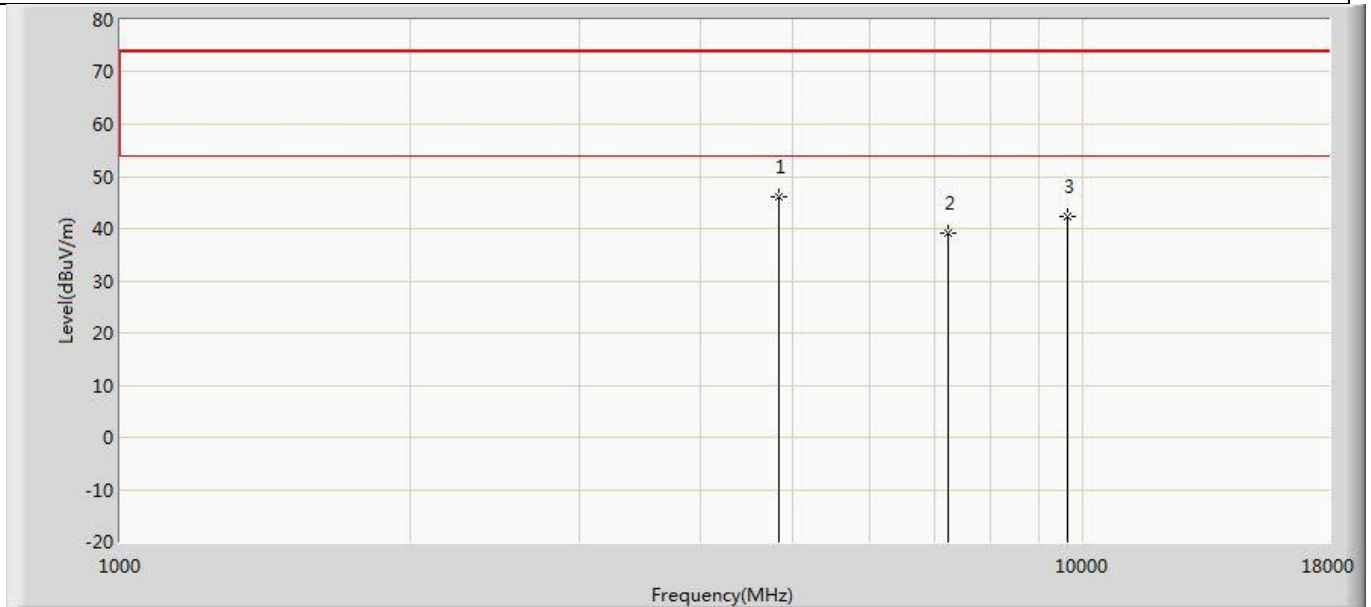


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4824.000	46.171	53.080	-27.829	74.000	-6.909	PK
2		7236.000	39.106	42.343	-34.894	74.000	-3.237	PK
3		9648.000	42.427	41.793	-31.573	74.000	0.634	PK

Profile: 2150819R	Page No.: 32
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

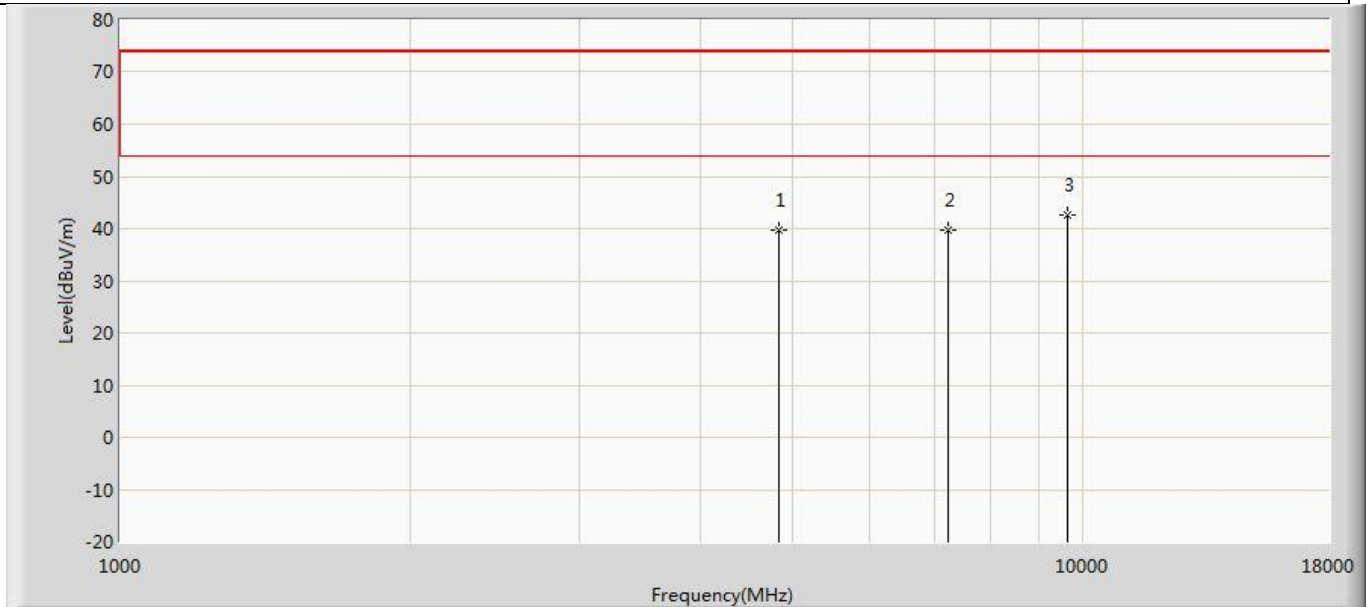


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4824.000	39.688	46.597	-34.312	74.000	-6.909	PK
2		7236.000	39.750	42.987	-34.250	74.000	-3.237	PK
3	*	9648.000	42.591	41.957	-31.409	74.000	0.634	PK

Profile: 2150819R	Page No.: 33
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2437MHz by 802.11n(20MHz)	

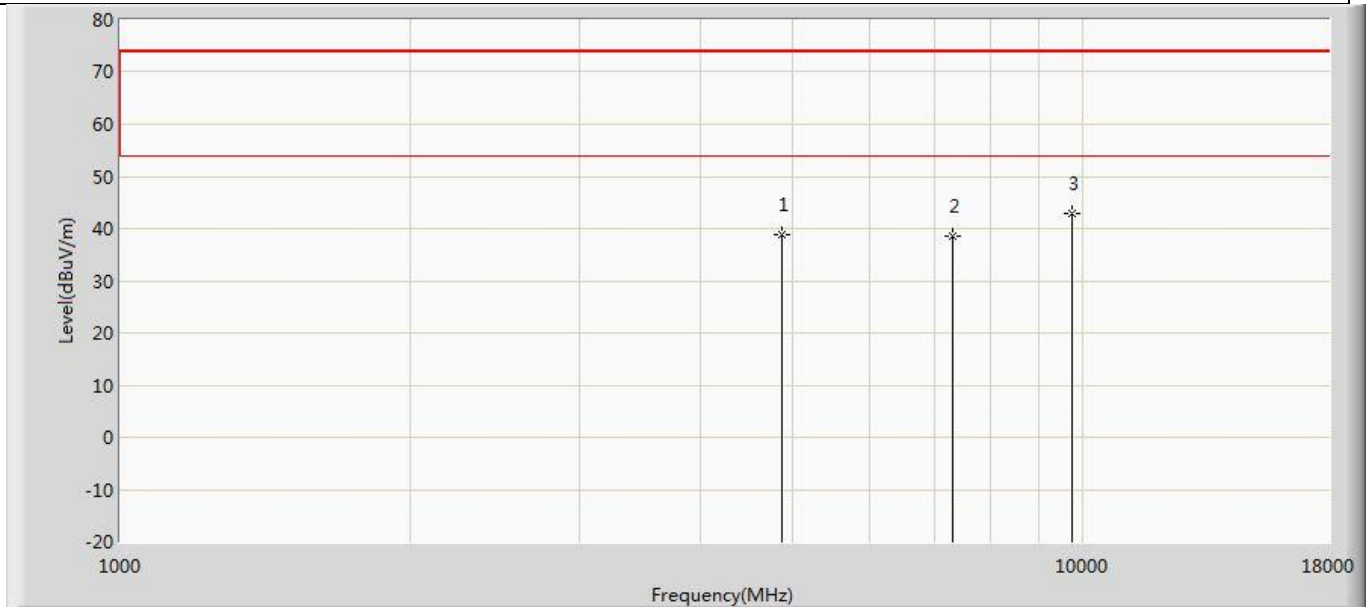


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	38.757	45.460	-35.243	74.000	-6.703	PK
2		7311.000	38.587	41.473	-35.413	74.000	-2.886	PK
3	*	9748.000	43.004	42.280	-30.996	74.000	0.725	PK

Profile: 2150819R	Page No.: 34
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2437MHz by 802.11n(20MHz)	

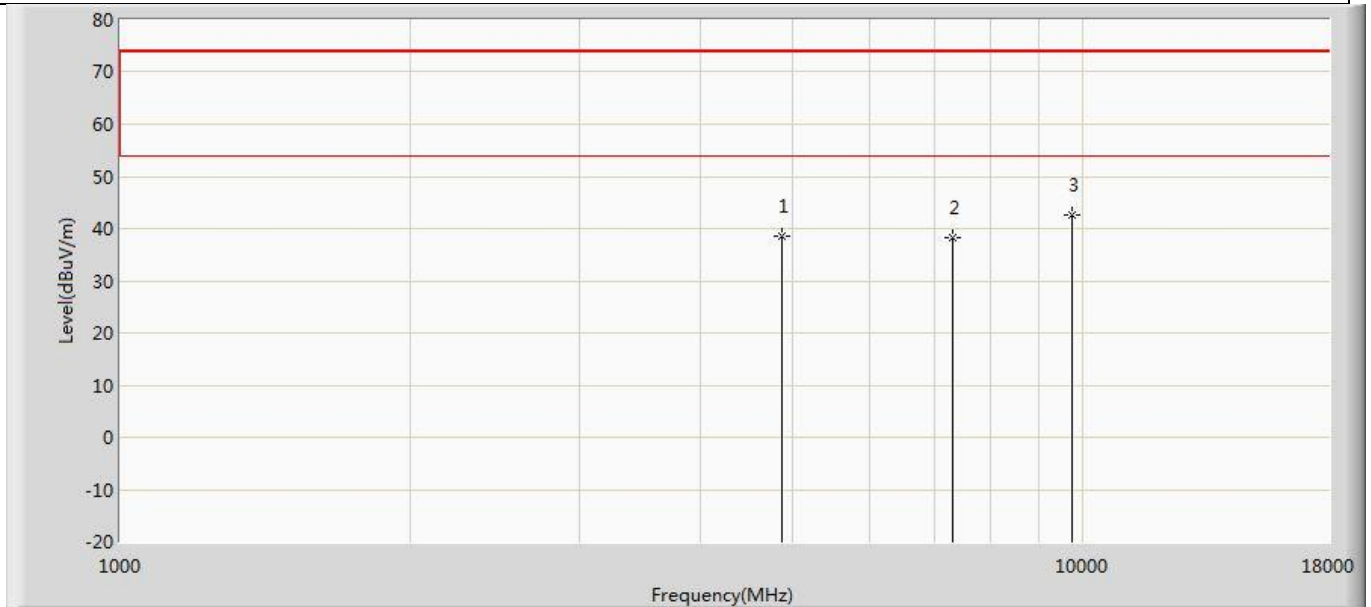


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4874.000	38.625	45.328	-35.375	74.000	-6.703	PK
2		7311.000	38.154	41.040	-35.846	74.000	-2.886	PK
3	*	9748.000	42.704	41.980	-31.296	74.000	0.725	PK

Profile: 2150819R	Page No.: 35
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

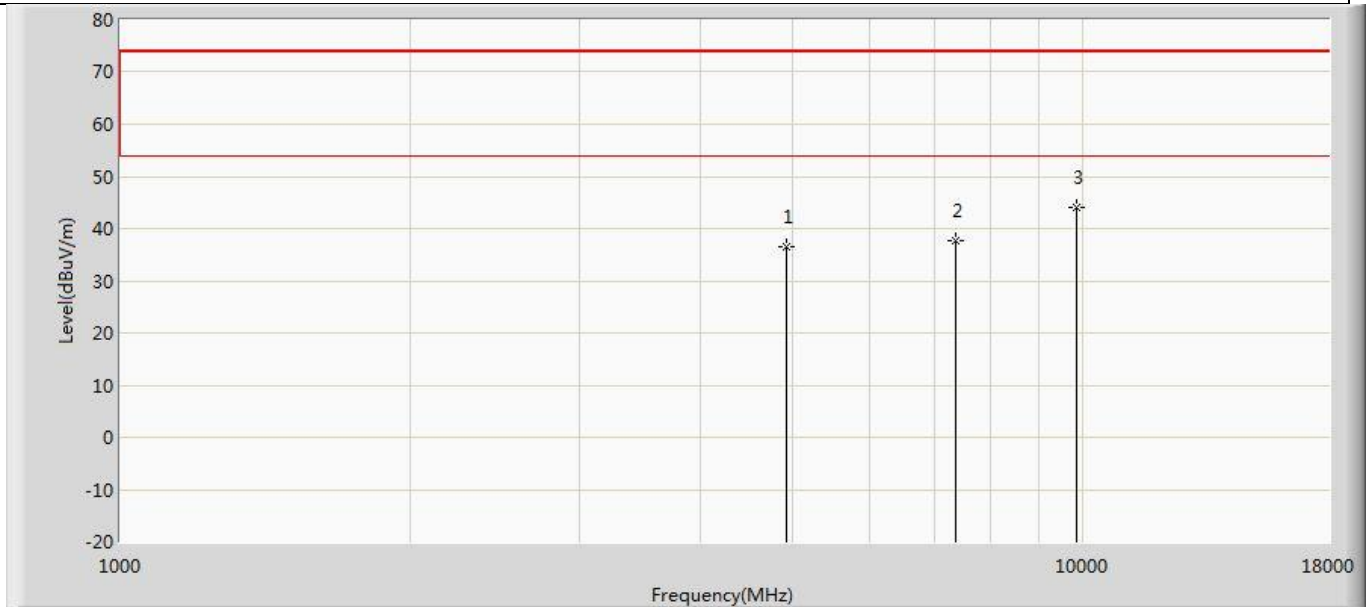

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	36.482	43.355	-37.518	74.000	-6.873	PK
2		7386.000	37.692	40.892	-36.308	74.000	-3.200	PK
3	*	9848.000	43.953	42.668	-30.047	74.000	1.285	PK

Profile: 2150819R	Page No.: 36
Engineer: Tongben	
Site: AC5	Time: 2021/07/10 - 13:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

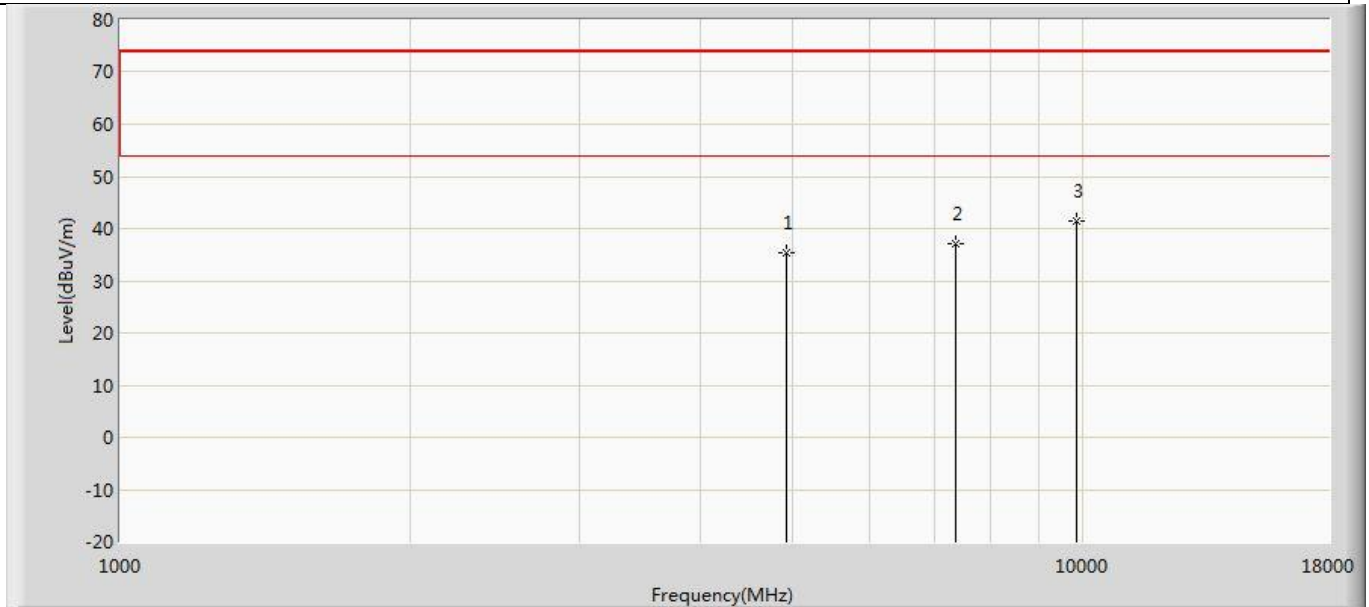


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4924.000	35.387	42.260	-38.613	74.000	-6.873	PK
2		7386.000	37.205	40.405	-36.795	74.000	-3.200	PK
3	*	9848.000	41.521	40.236	-32.479	74.000	1.285	PK

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).
3. The test frequency range, 9kHz~30MHz and Above 18GHz worst case are at least 6dB below the limits, therefore no data appear in the report.
4. This limit applies for using average detector, if the test result of peak is lower than average limit, then average measurement needn't be performed.


The worst case of Radiated Emission below 1GHz:

Profile: 2150819R	Page No.: 15
Engineer: wangyingfei	
Site: AC3	Time: 2021/07/13 - 21:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1	

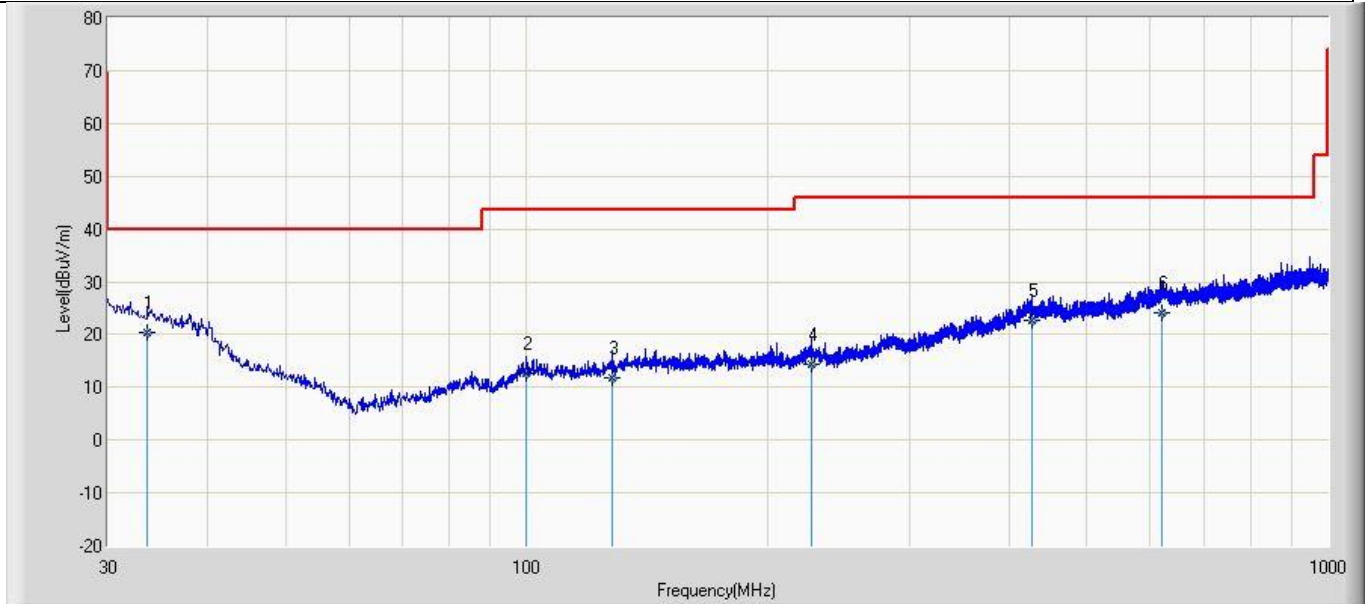

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	33.638	20.356	-5.586	-19.644	40.000	25.943	QP
2		99.840	12.648	-4.196	-30.852	43.500	16.844	QP
3		127.970	11.889	-4.915	-31.611	43.500	16.804	QP
4		226.425	14.335	-4.220	-31.665	46.000	18.555	QP
5		427.700	22.641	-4.252	-23.359	46.000	26.893	QP
6		621.701	24.024	-5.508	-21.976	46.000	29.532	QP


Profile: 2150819R	Page No.: 16
Engineer: wangyingfei	
Site: AC3	Time: 2021/07/13 - 21:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1	

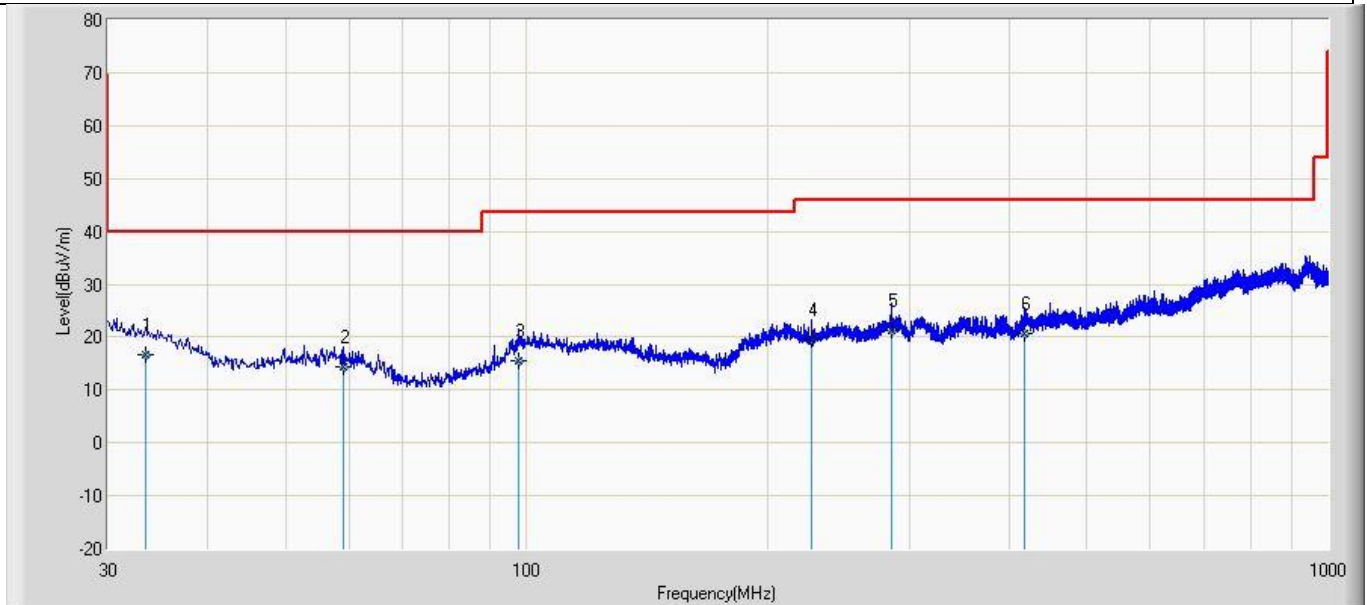

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	33.395	16.782	-6.102	-23.218	40.000	22.884	QP
2		59.100	14.267	-1.925	-25.733	40.000	16.192	QP
3		97.658	15.509	-5.567	-27.991	43.500	21.075	QP
4		226.910	19.482	-2.459	-26.518	46.000	21.941	QP
5		284.746	21.364	-3.334	-24.636	46.000	24.699	QP
6		418.849	20.621	-4.596	-25.379	46.000	25.217	QP


Simultaneous transmission:

Profile: 2150819R	Page No.: 51
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 10:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Simultaneous transmission with BT + WIFI	

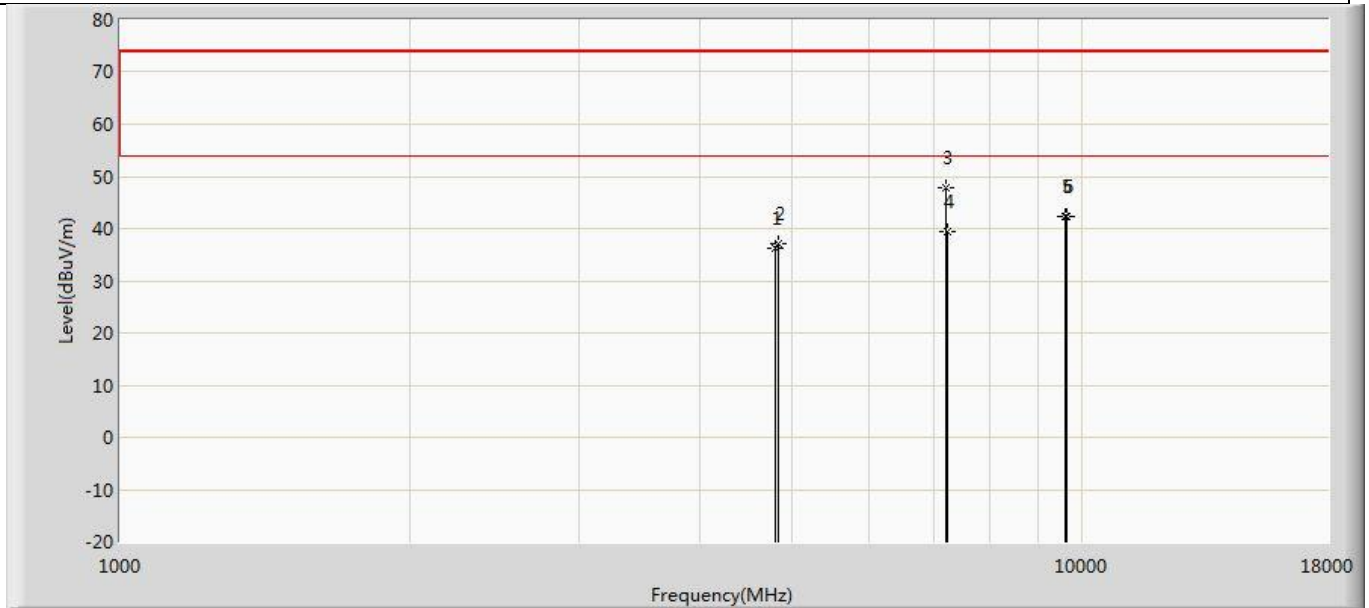

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		4804.000	36.092	43.288	-37.908	74.000	-7.197	0	0	PK
2		4824.000	36.996	43.905	-37.004	74.000	-6.909	0	0	PK
3	*	7206.000	47.855	50.601	-26.145	74.000	-2.746	0	0	PK
4		7236.000	39.467	42.704	-34.533	74.000	-3.237	0	0	PK
5		9608.000	42.193	41.607	-31.807	74.000	0.585	0	0	PK
6		9648.000	42.371	41.737	-31.629	74.000	0.634	0	0	PK

Profile: 2150819R	Page No.: 52
Engineer: Tongben	
Site: AC5	Time: 2021/07/15 - 10:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Simultaneous transmission with BT + WIFI	

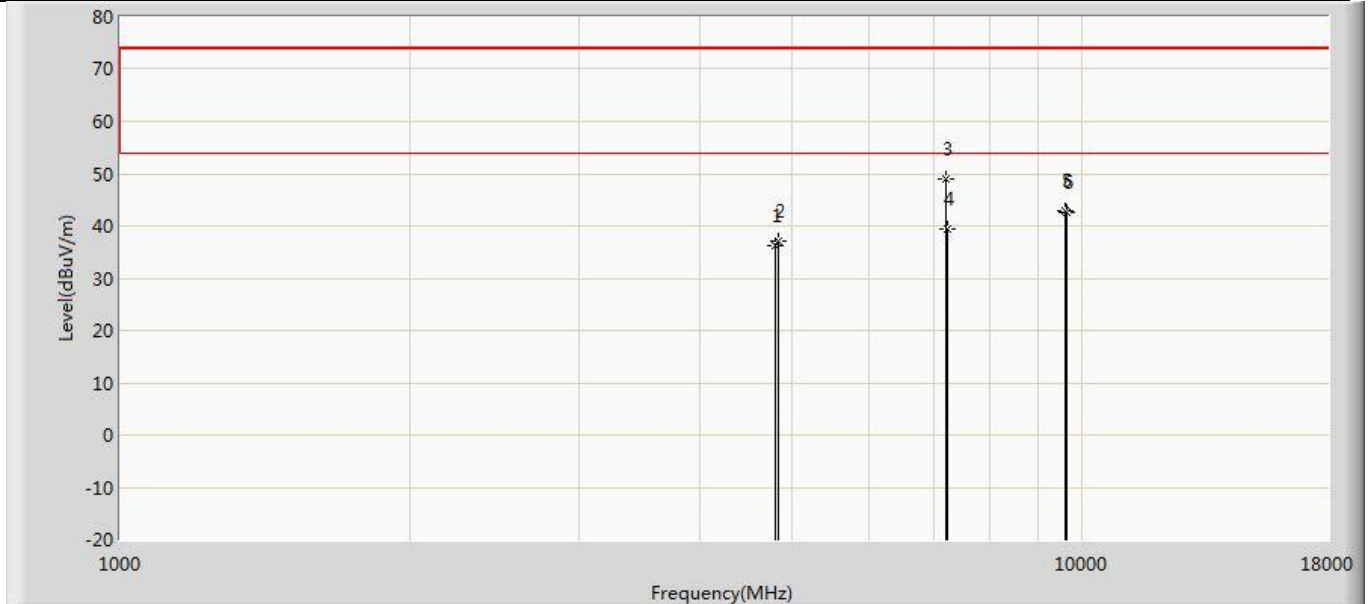


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		4804.000	36.357	43.553	-37.643	74.000	-7.197	0	0	PK
2		4824.000	37.056	43.965	-36.944	74.000	-6.909	0	0	PK
3	*	7205.000	48.883	51.598	-25.117	74.000	-2.715	0	0	PK
4		7236.000	39.473	42.710	-34.527	74.000	-3.237	0	0	PK
5		9608.000	42.919	42.333	-31.081	74.000	0.585	0	0	PK
6		9648.000	42.670	42.036	-31.330	74.000	0.634	0	0	PK

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).


Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

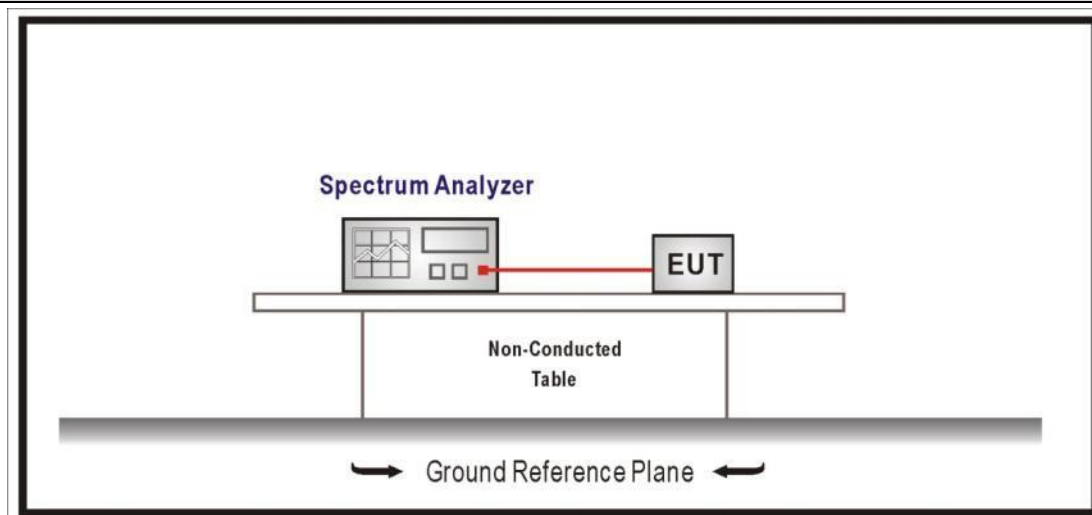4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data


Mode 1 2412MHz

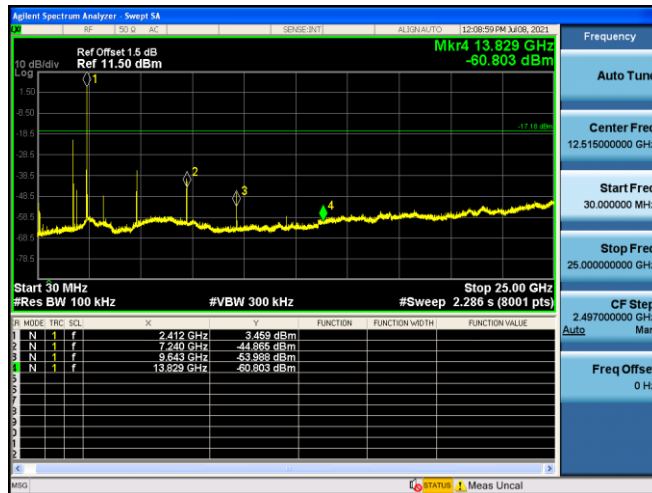


Mode 1 2462MHz




Mode 2 2412MHz

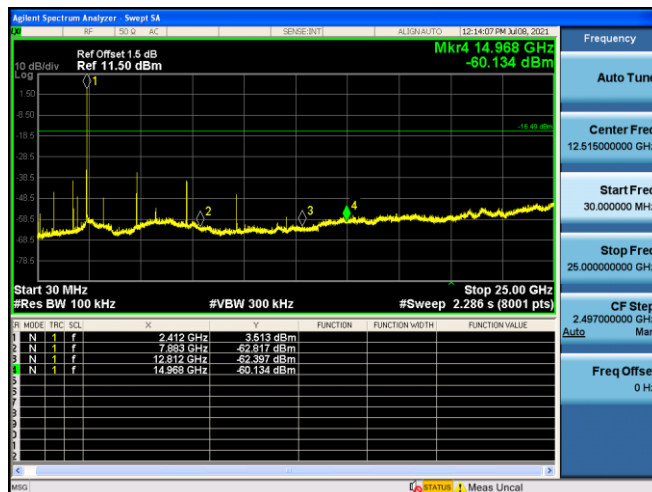


Mode 2 2462MHz

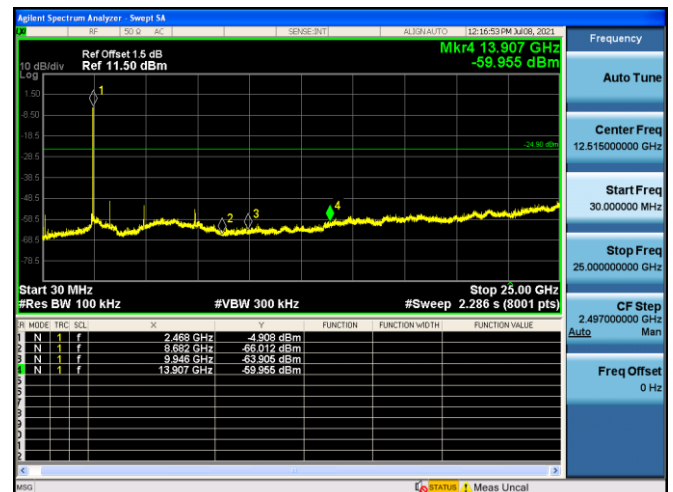

Mode 3 2412MHz

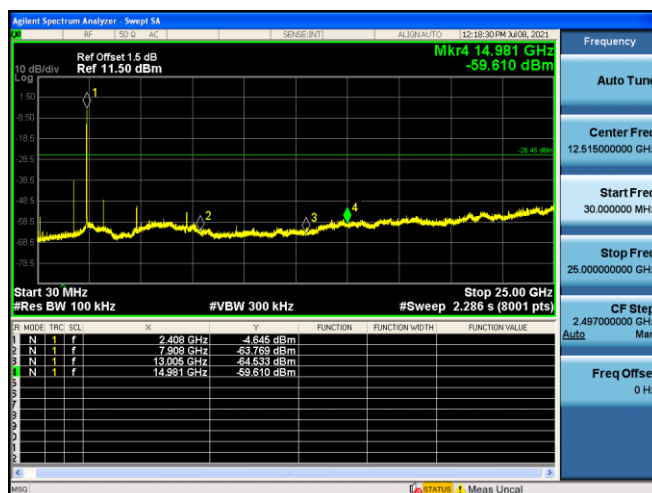

Mode 3 2462MHz

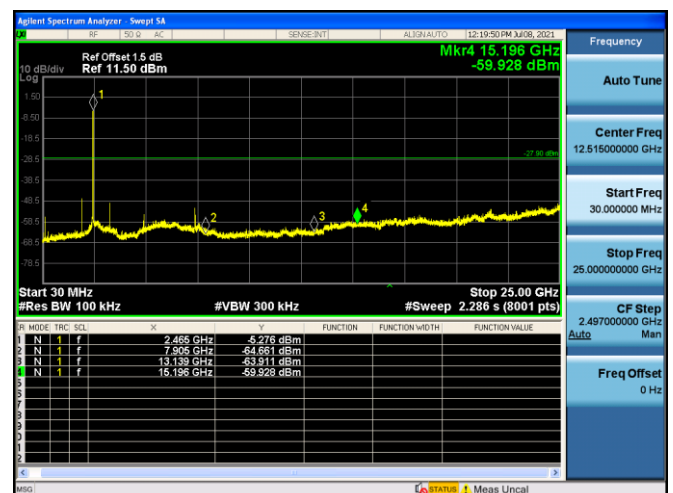


4.4 Radiated Emission Band Edge**VERDICT: PASS****4.4.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390 2483.5-2500	PK	74	1	3
	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.4.2 Test Setup

Above 1GHz Test Setup:

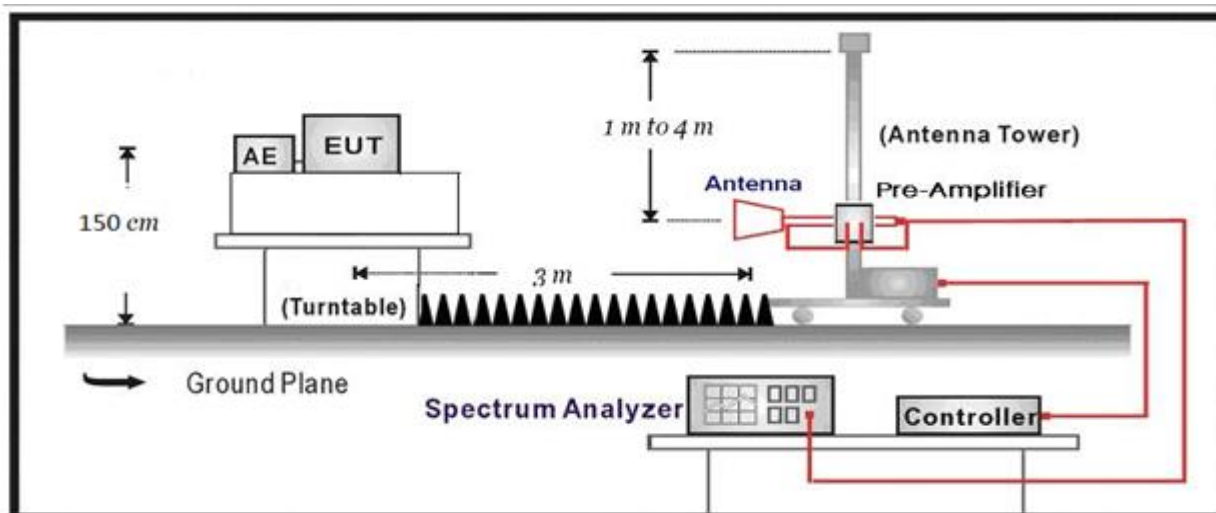

4.4.3 Test Procedure

	References Rule			Chapter	Description
☒	ANSI C63.10			6.10	Band-edge testing
	☒	ANSI C63.10		6.10.5	Restricted-band band-edge measurements
	☐	ANSI C63.10		6.10.6	Marker-delta method
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10		11.12.1	Radiated emission measurements
	☒	ANSI C63.10		6.3	Radiated spurious emission test
☐	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10		11.12.2	Antenna-port conducted measurements
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☐	ANSI C63.10	11.12.2.4	Peak power measurement procedure
		☐	ANSI C63.10	11.12.2.5	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


4.4.4 Test Data

Test Mode	Tx On (ms)	VBW (kHz)	Tx On + Tx Off (ms)	Duty Cycle (%)
1	4.18	0.22	4.72	88.6
2	0.68	1.5	0.795	85.5
3	0.64	1.6	0.755	84.8


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: VBW $\geq 1/T$ will be used.


802.11b

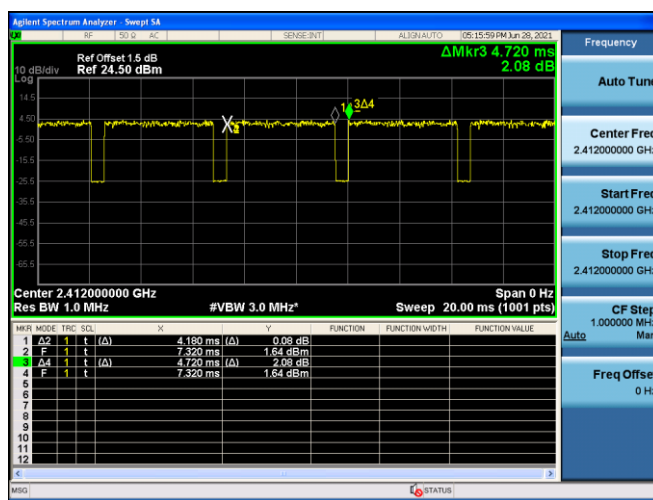


802.11g

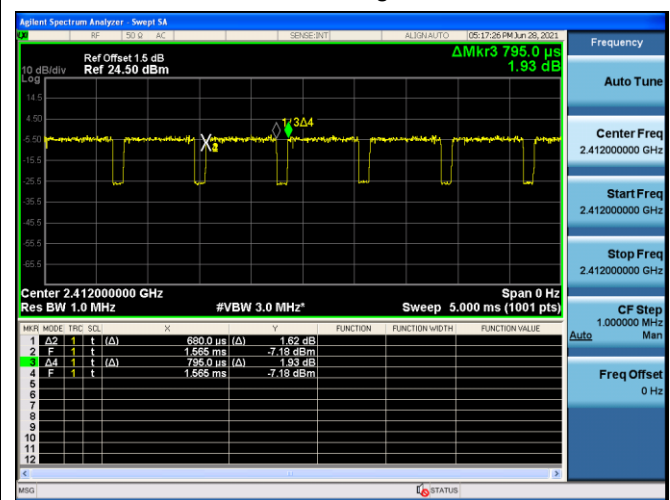

802.11n(20MHz)

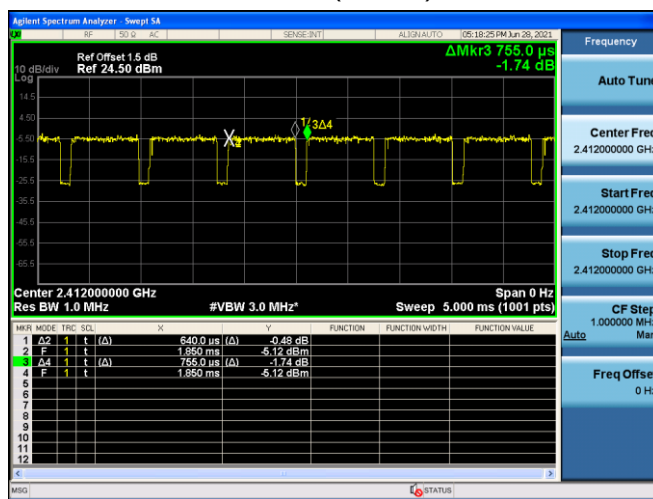


Profile: 2150819R	Page No.: 1
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 22:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2412MHz by 802.11b	

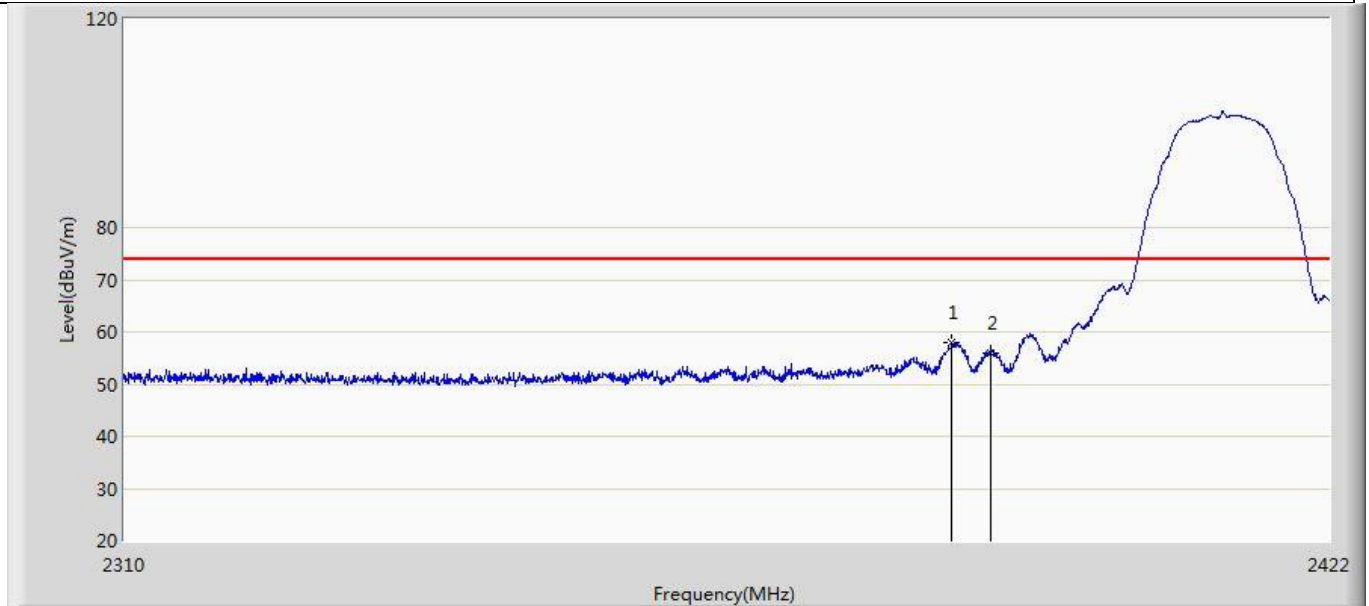


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.328	57.846	24.026	-16.154	74.000	33.819	PK
2		2390.000	55.975	22.131	-18.025	74.000	33.843	PK

Profile: 2150819R	Page No.: 2
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1: Transmit at 2412MHz by 802.11b	

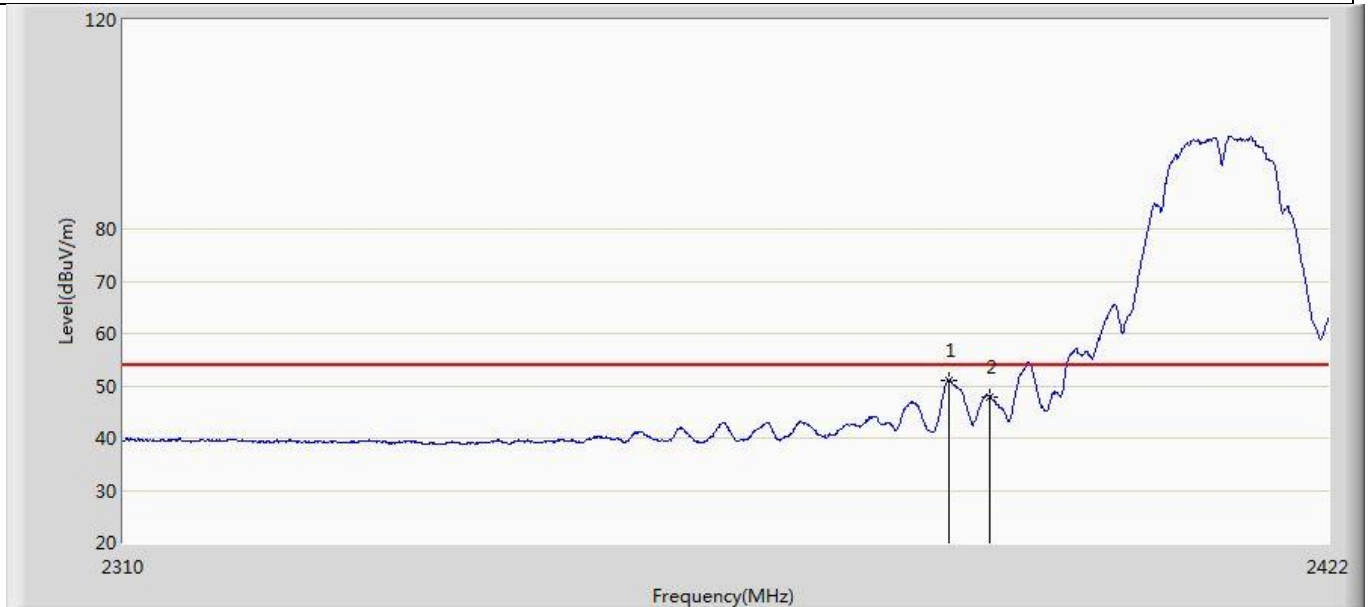


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.160	51.022	17.204	-2.978	54.000	33.819	AV
2		2390.000	47.956	14.112	-6.044	54.000	33.843	AV

Profile: 2150819R	Page No.: 3
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2412MHz by 802.11b	

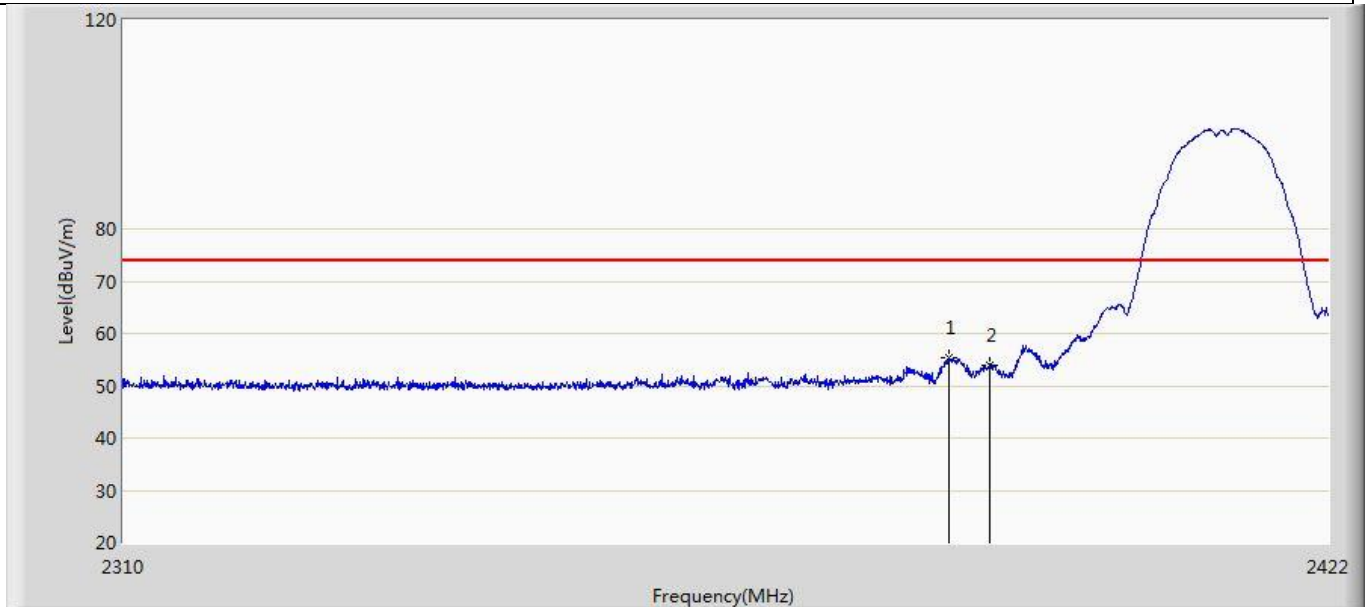


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.216	55.481	21.662	-18.519	74.000	33.819	PK
2		2390.000	53.860	20.016	-20.140	74.000	33.843	PK

Profile: 2150819R	Page No.: 4
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1: Transmit at 2412MHz by 802.11b	

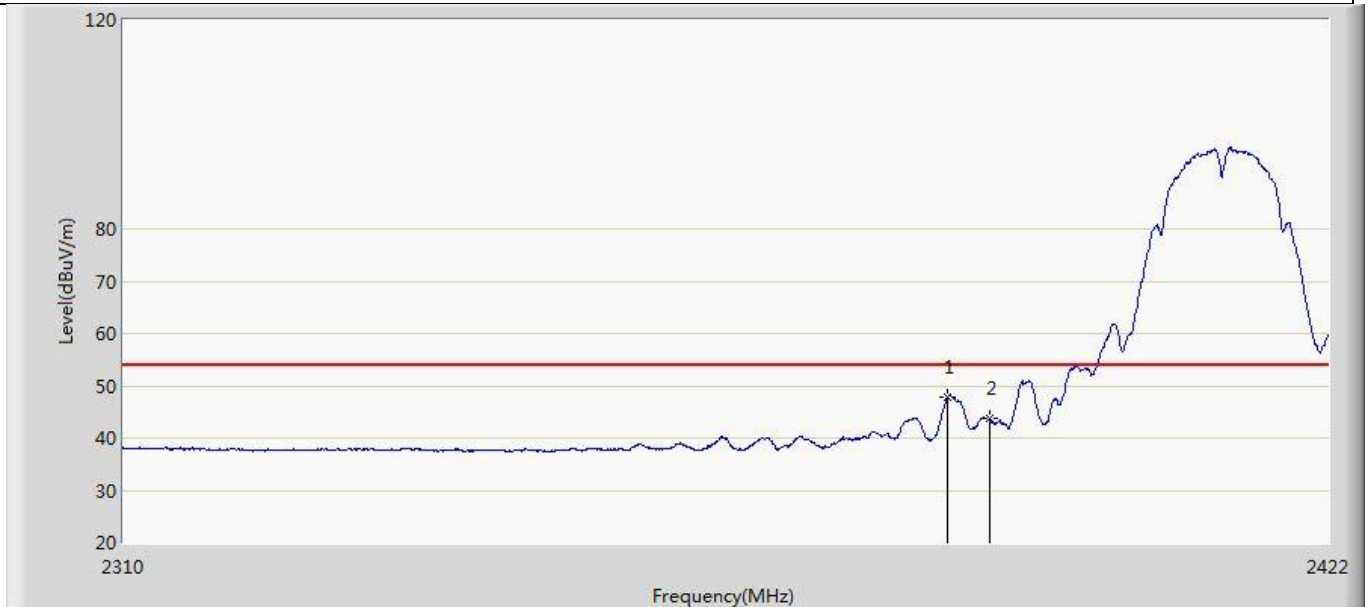


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2386.104	47.877	14.059	-6.123	54.000	33.818	AV
2		2390.000	43.765	9.921	-10.235	54.000	33.843	AV

Profile: 2150819R	Page No.: 5
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2462MHz by 802.11b	

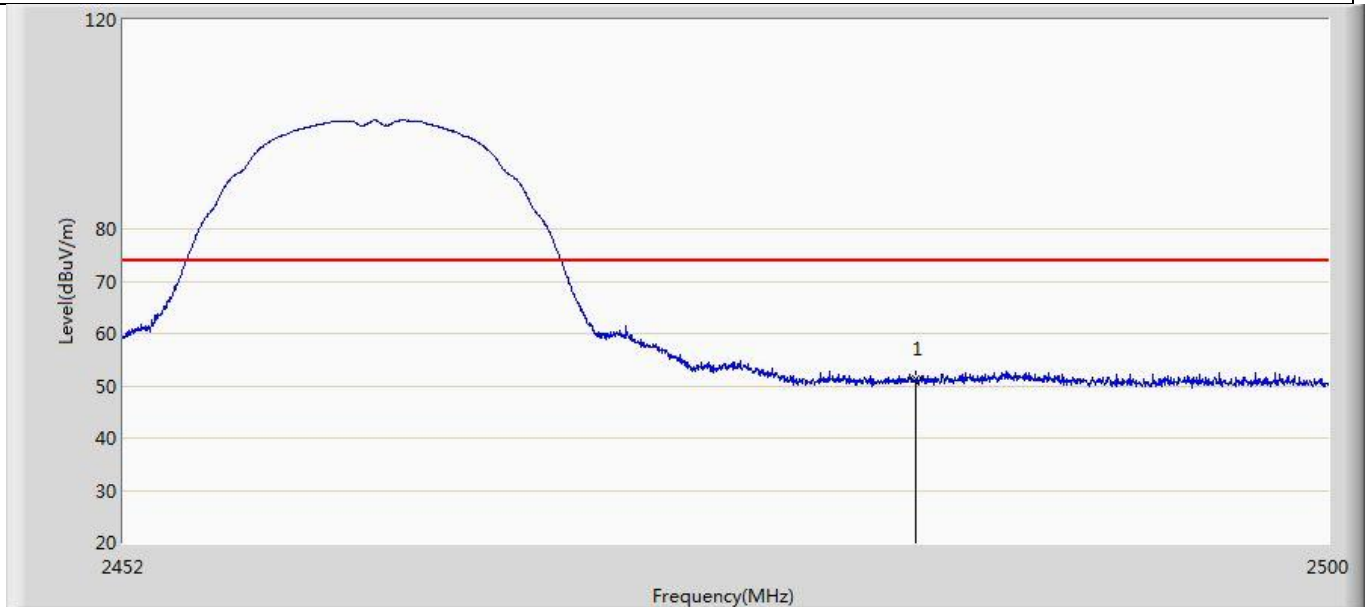


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.206	17.183	-22.794	74.000	34.023	PK

Profile: 2150819R	Page No.: 6
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:12
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1: Transmit at 2462MHz by 802.11b	

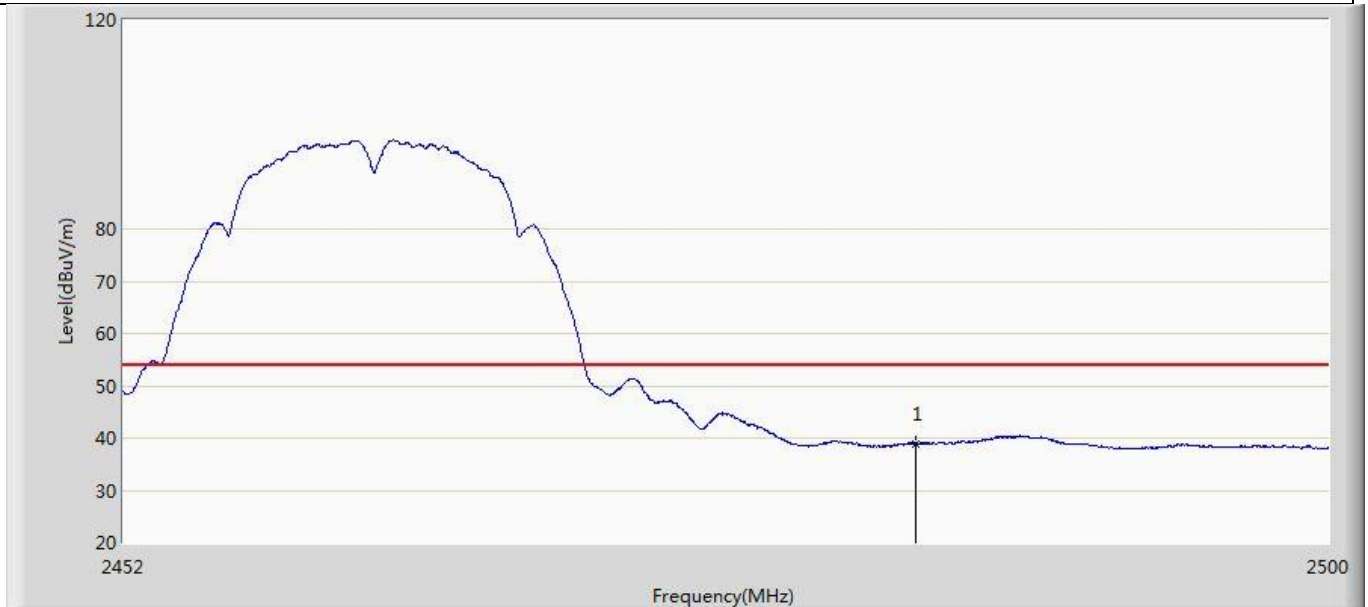


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	38.983	4.960	-15.017	54.000	34.023	AV

Profile: 2150819R	Page No.: 7
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1:Transmit at 2462MHz by 802.11b	

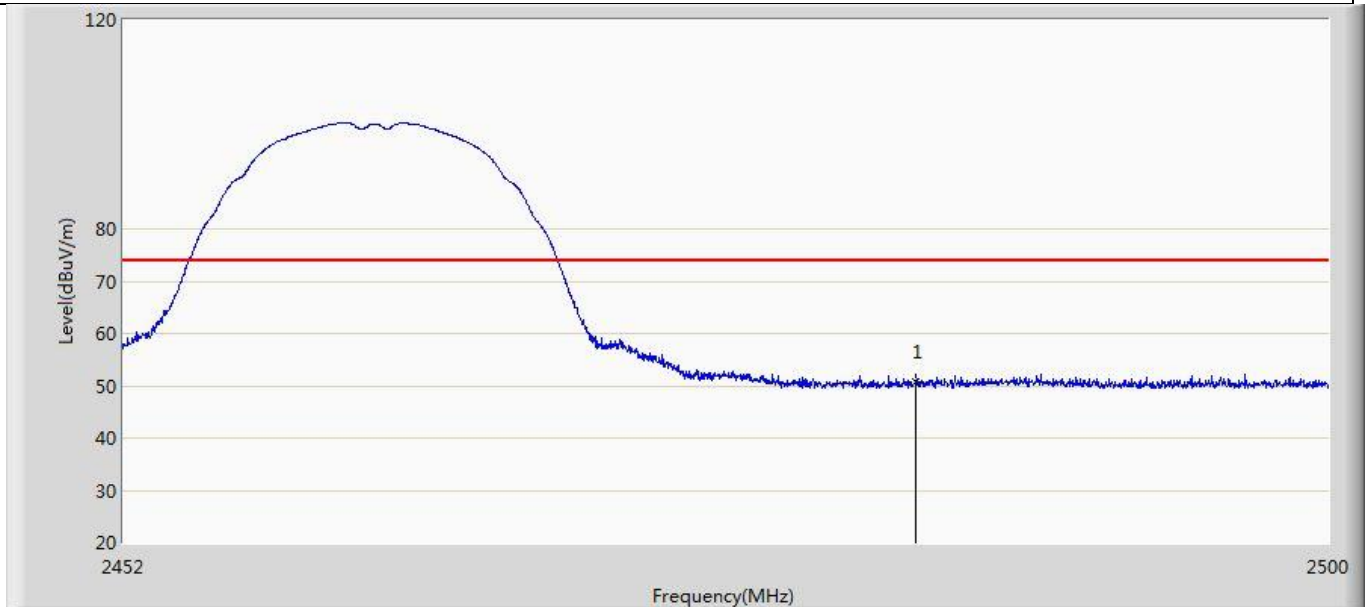


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.765	16.742	-23.235	74.000	34.023	PK

Profile: 2150819R	Page No.: 8
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:16
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 1: Transmit at 2462MHz by 802.11b	

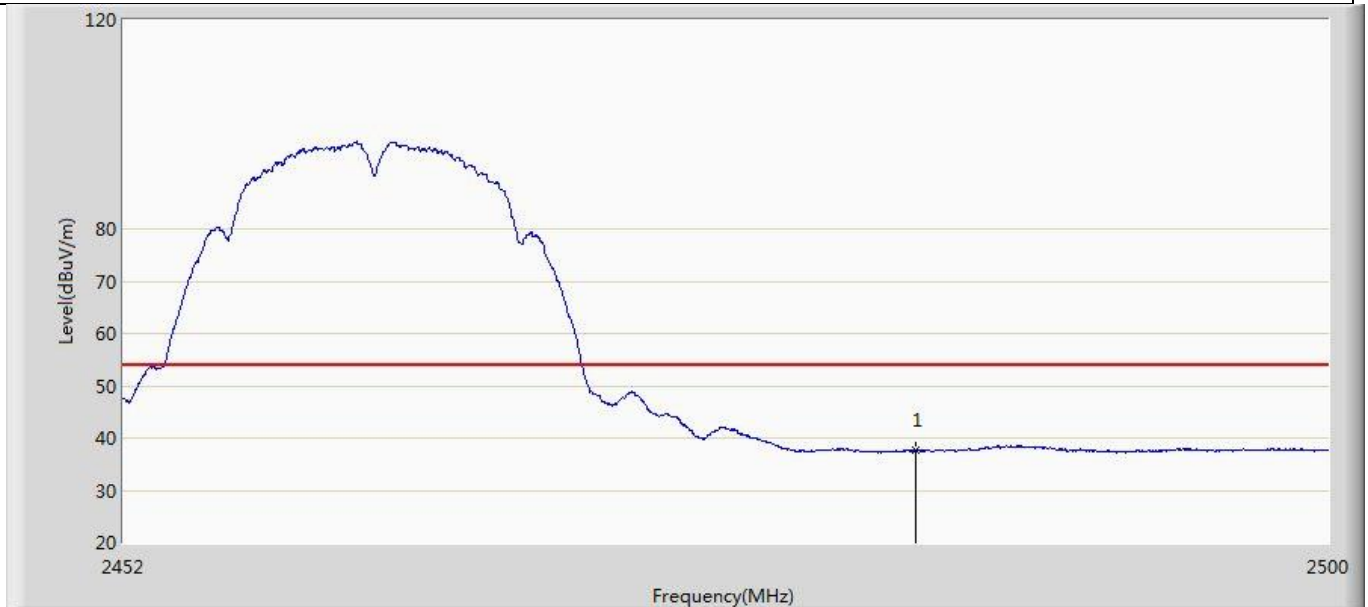


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	37.552	3.529	-16.448	54.000	34.023	AV

Profile: 2150819R	Page No.: 9
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:18
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

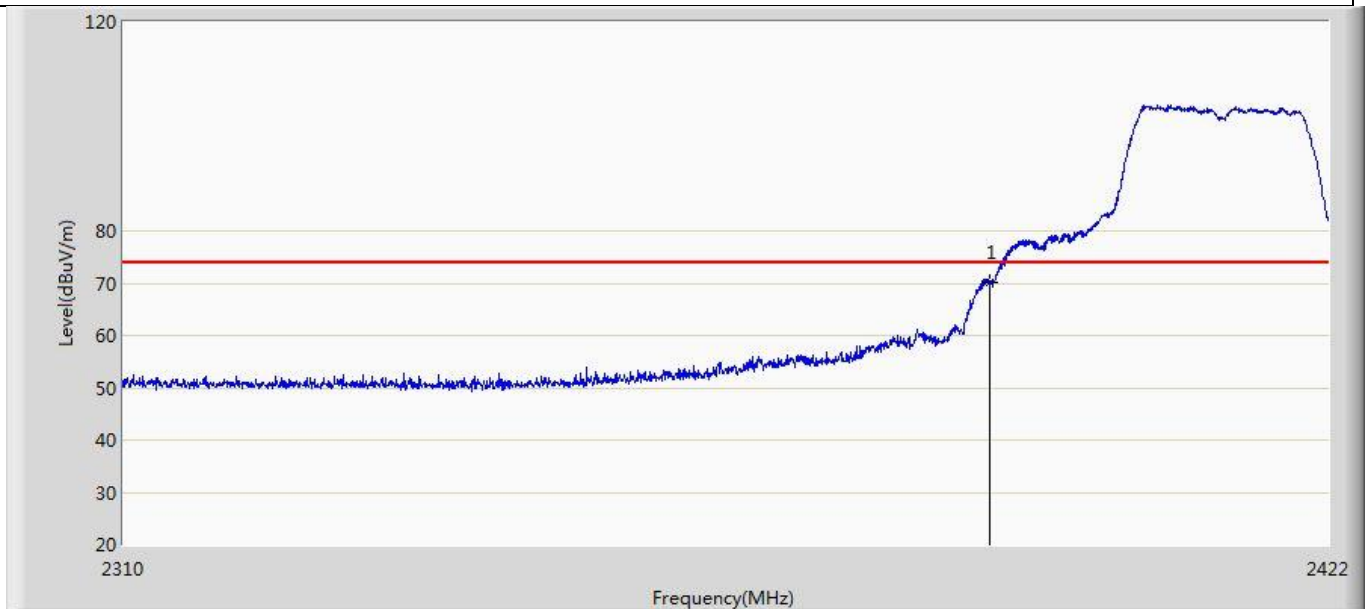


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	70.230	36.386	-3.770	74.000	33.843	PK

Profile: 2150819R	Page No.: 10
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

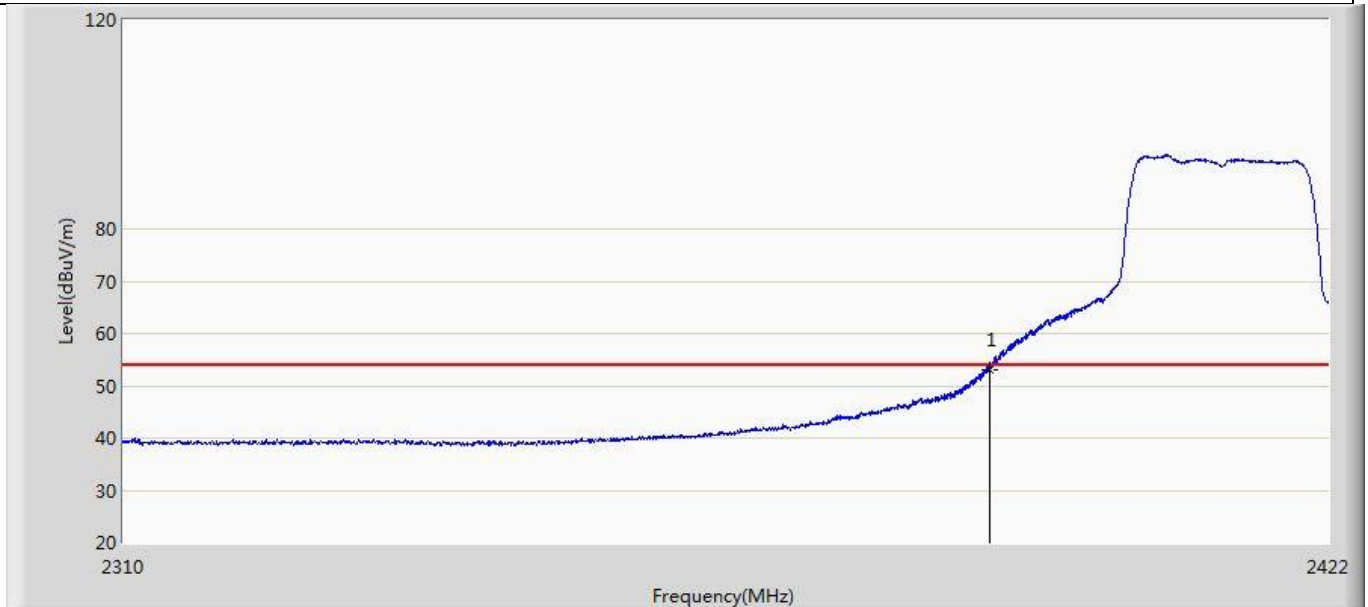


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	53.164	19.320	-0.836	54.000	33.843	AV

Profile: 2150819R	Page No.: 11
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

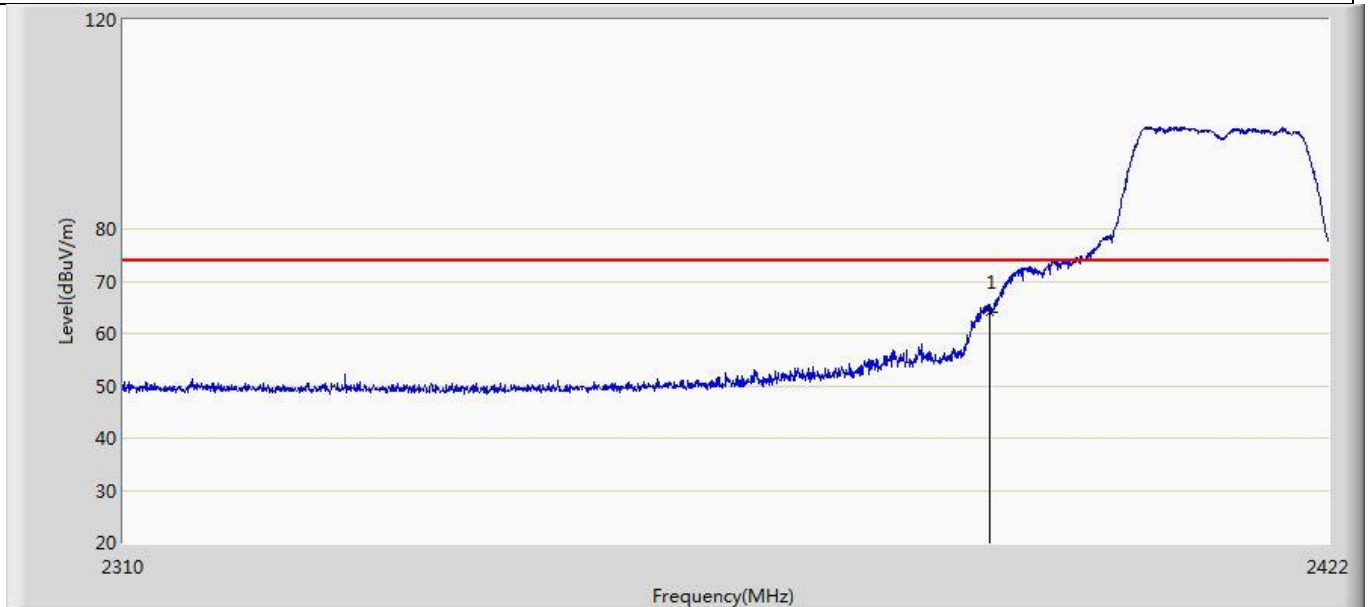


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	64.075	30.231	-9.925	74.000	33.843	PK

Profile: 2150819R	Page No.: 12
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:26
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2412MHz by 802.11g	

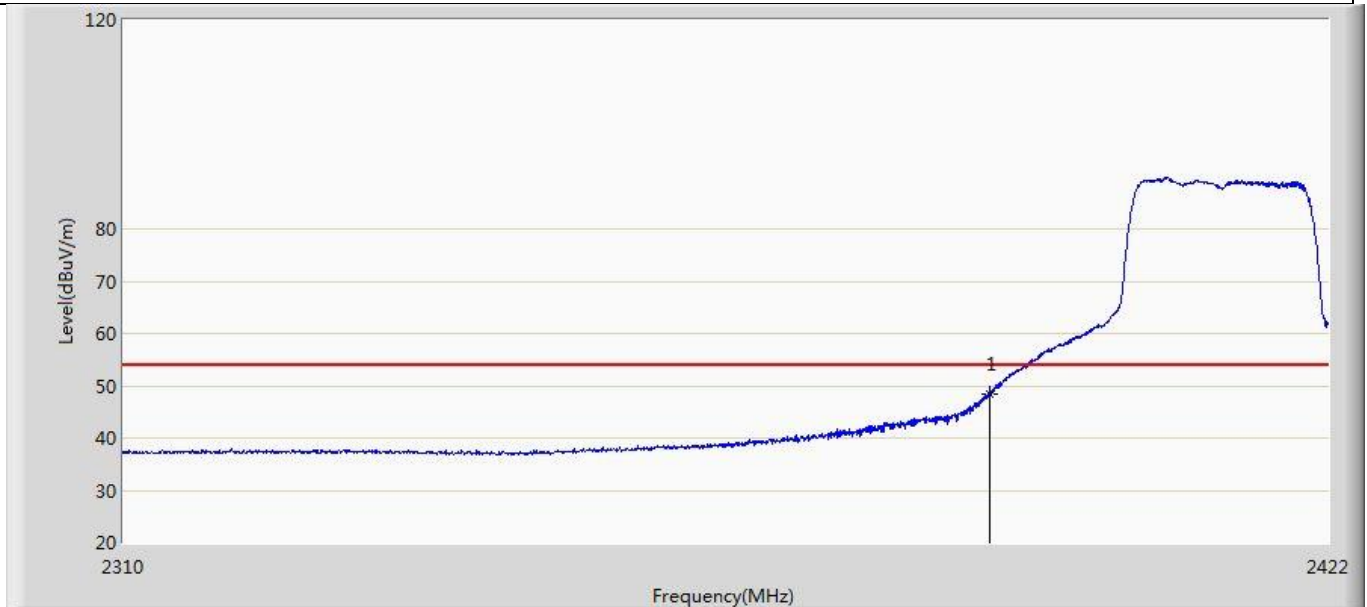


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	48.442	14.598	-5.558	54.000	33.843	AV

Profile: 2150819R	Page No.: 13
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

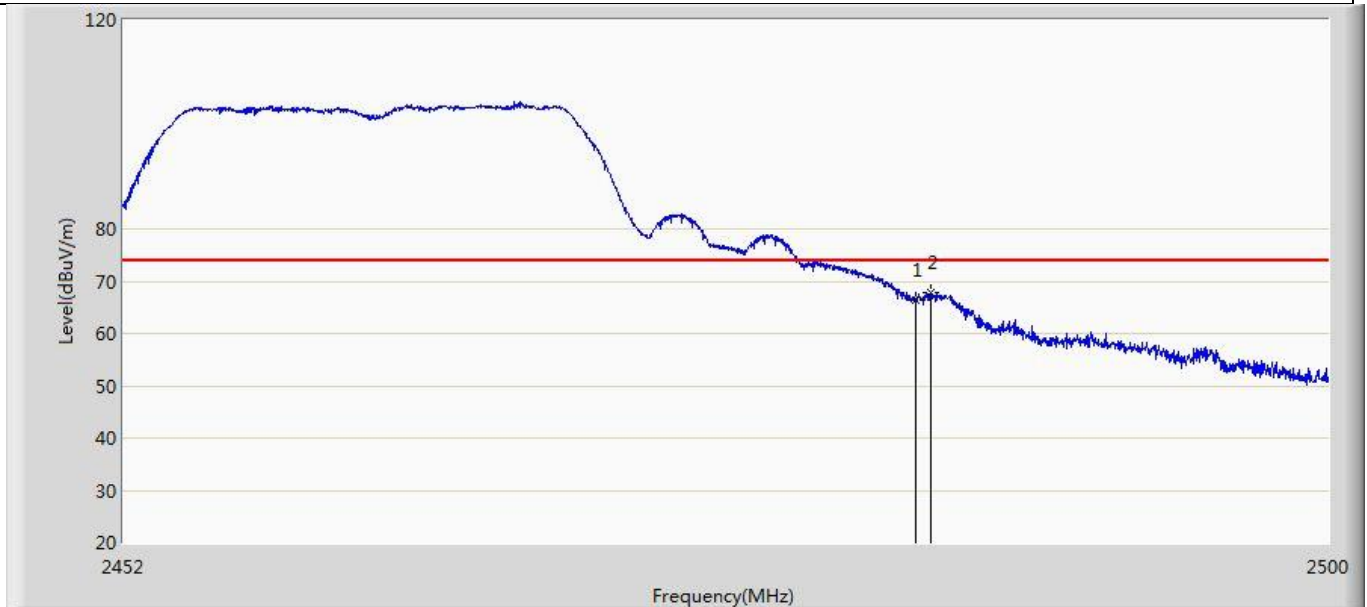


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	66.287	32.264	-7.713	74.000	34.023	PK
2	*	2484.064	67.874	33.848	-6.126	74.000	34.027	PK

Profile: 2150819R	Page No.: 14
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

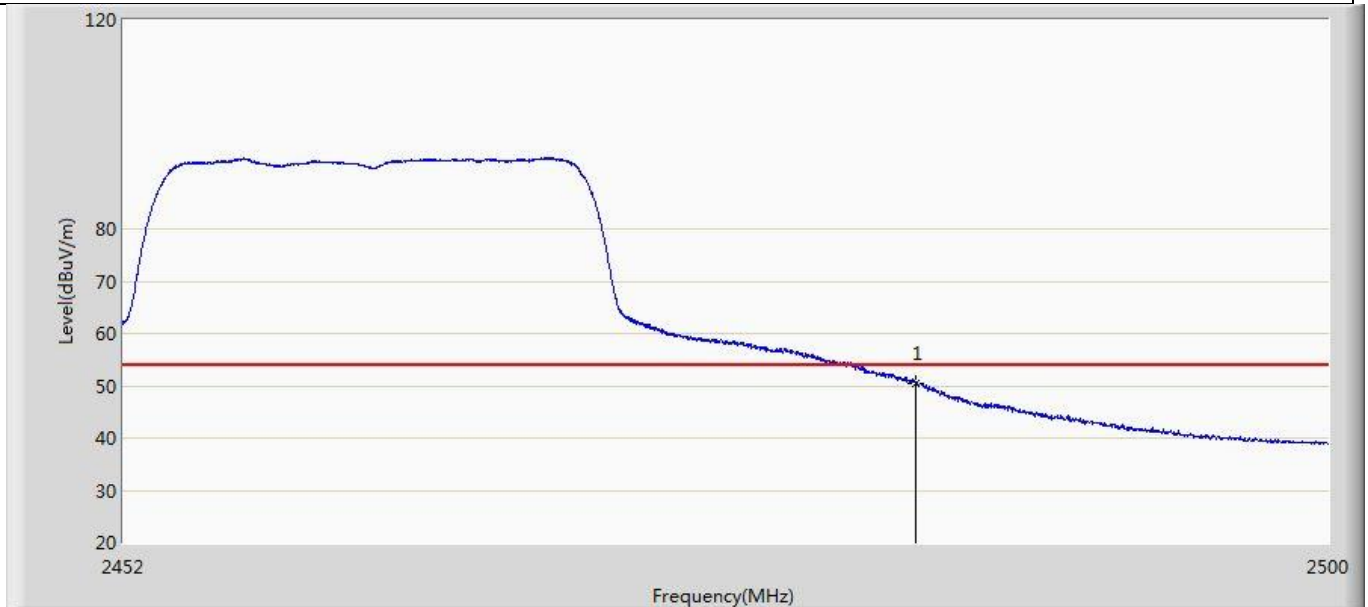


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	50.532	16.509	-3.468	54.000	34.023	AV

Profile: 2150819R	Page No.: 15
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

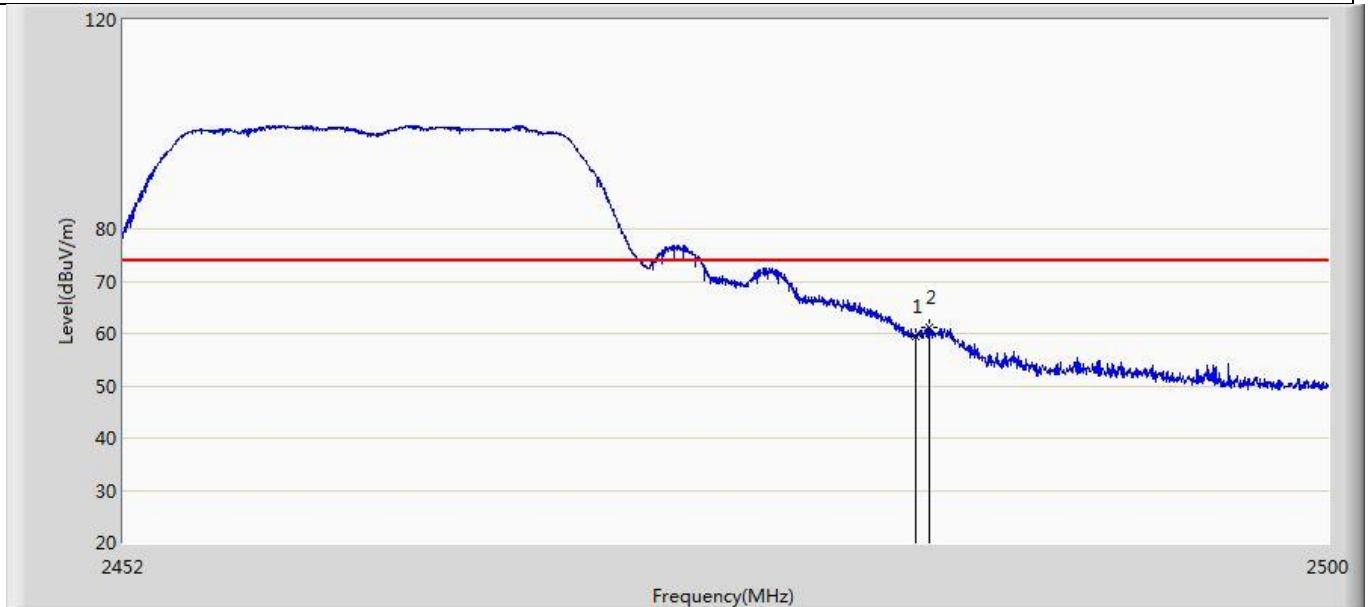


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2483.500	59.452	25.429	-14.548	74.000	34.023	PK
2	*	2484.040	61.192	27.166	-12.808	74.000	34.027	PK

Profile: 2150819R	Page No.: 16
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 2:Transmit at 2462MHz by 802.11g	

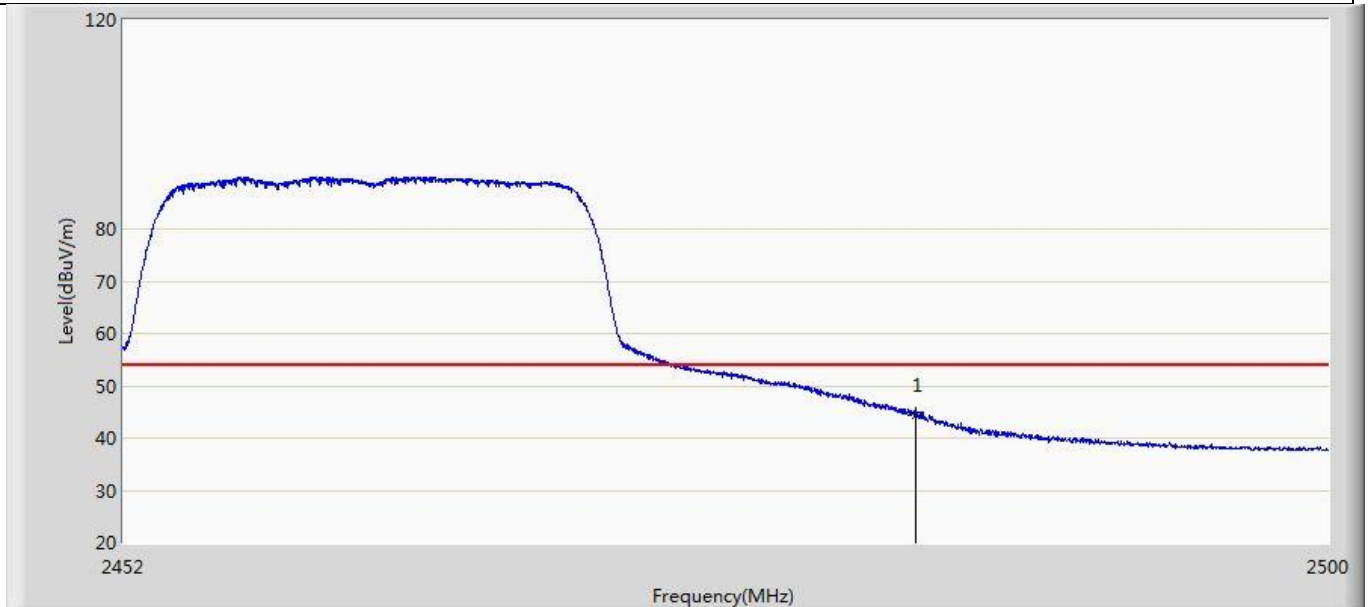


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	44.370	10.347	-9.630	54.000	34.023	AV

Profile: 2150819R	Page No.: 17
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

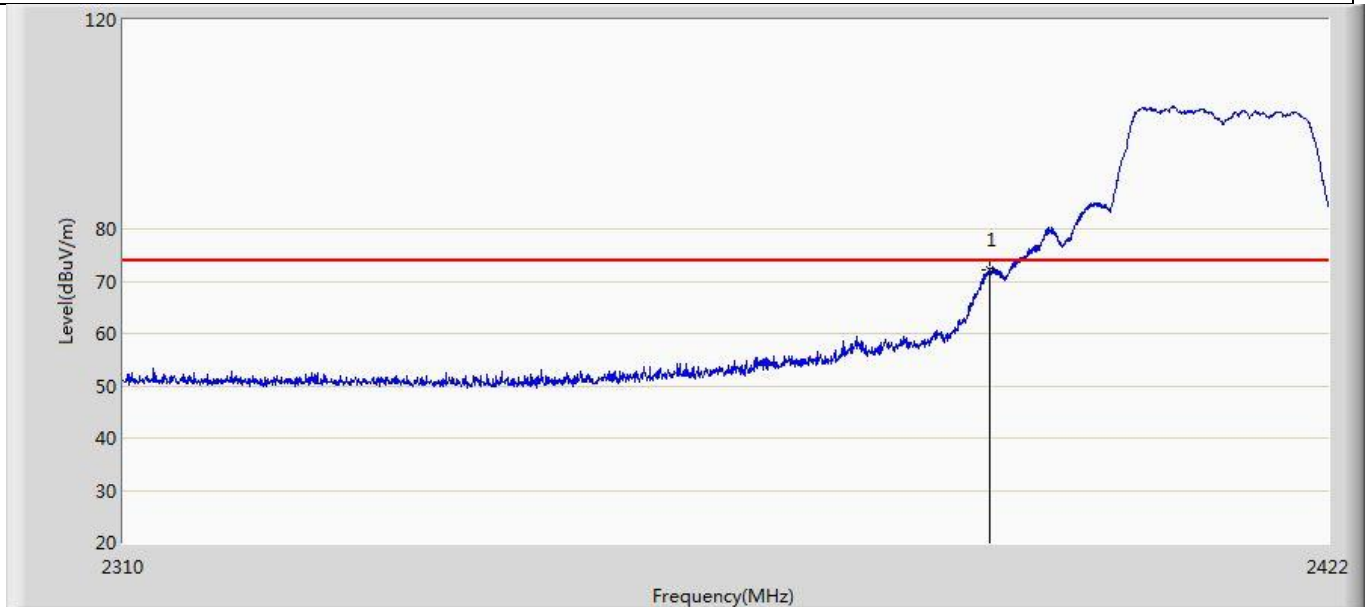


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	72.094	38.250	-1.906	74.000	33.843	PK

Profile: 2150819R	Page No.: 18
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:41
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

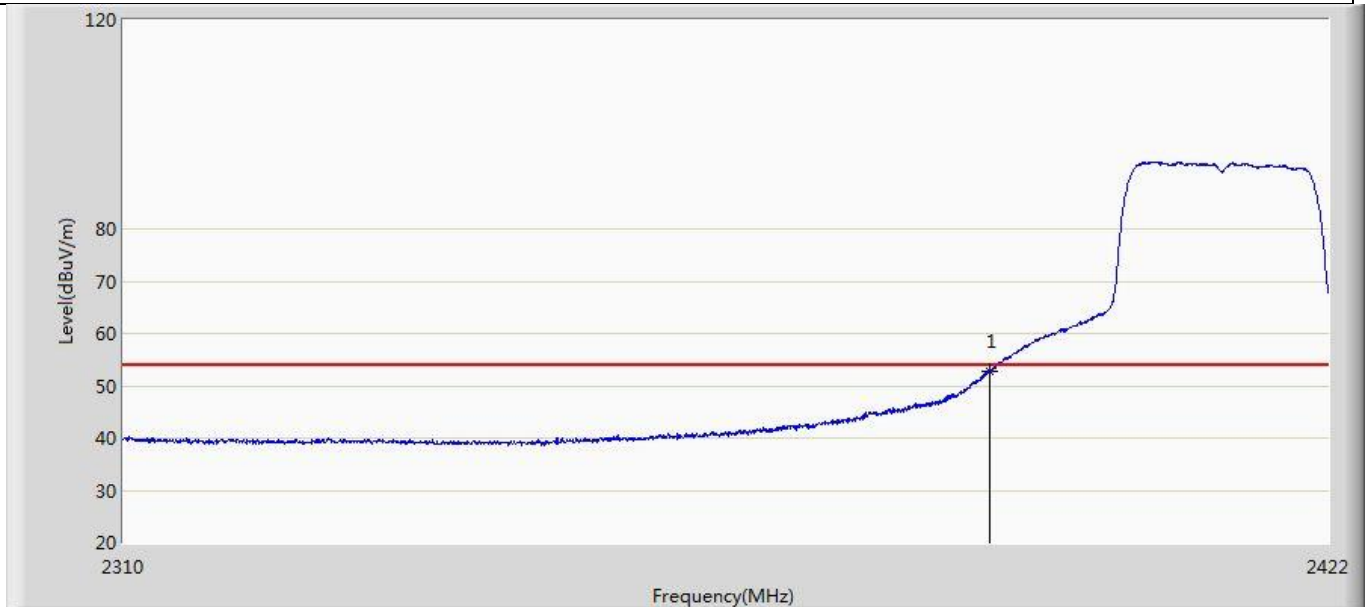


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	52.712	18.868	-1.288	54.000	33.843	AV

Profile: 2150819R	Page No.: 19
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:49
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

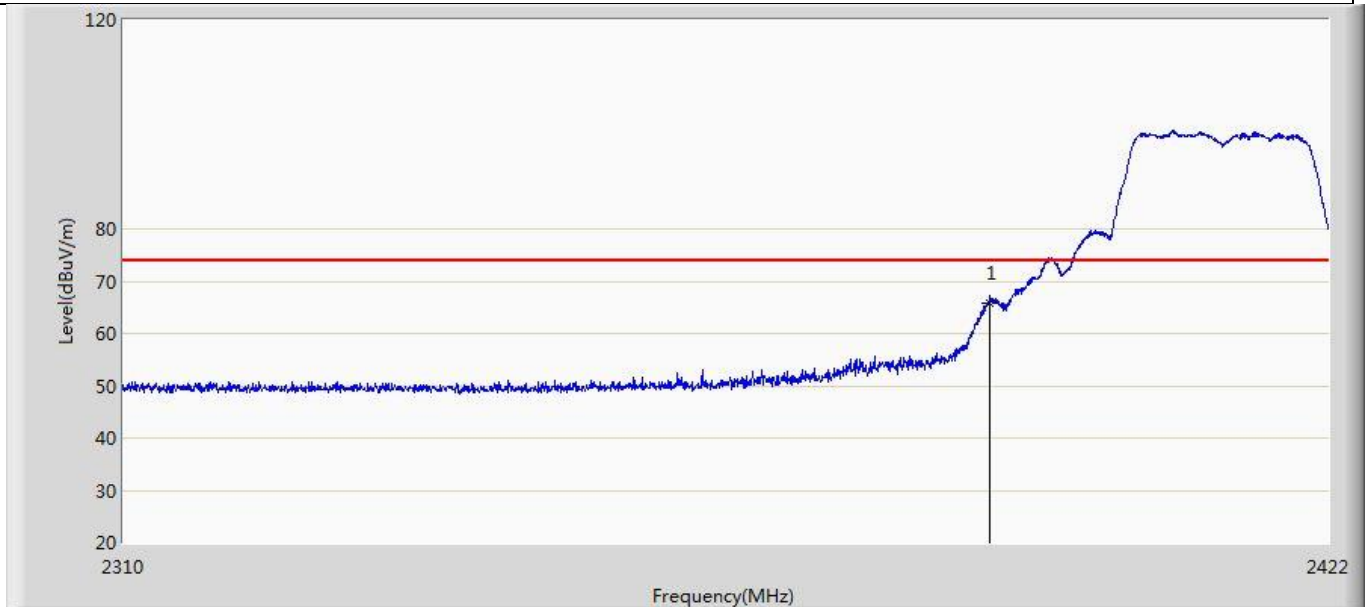


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	65.835	31.991	-8.165	74.000	33.843	PK

Profile: 2150819R	Page No.: 20
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2412MHz by 802.11n(20MHz)	

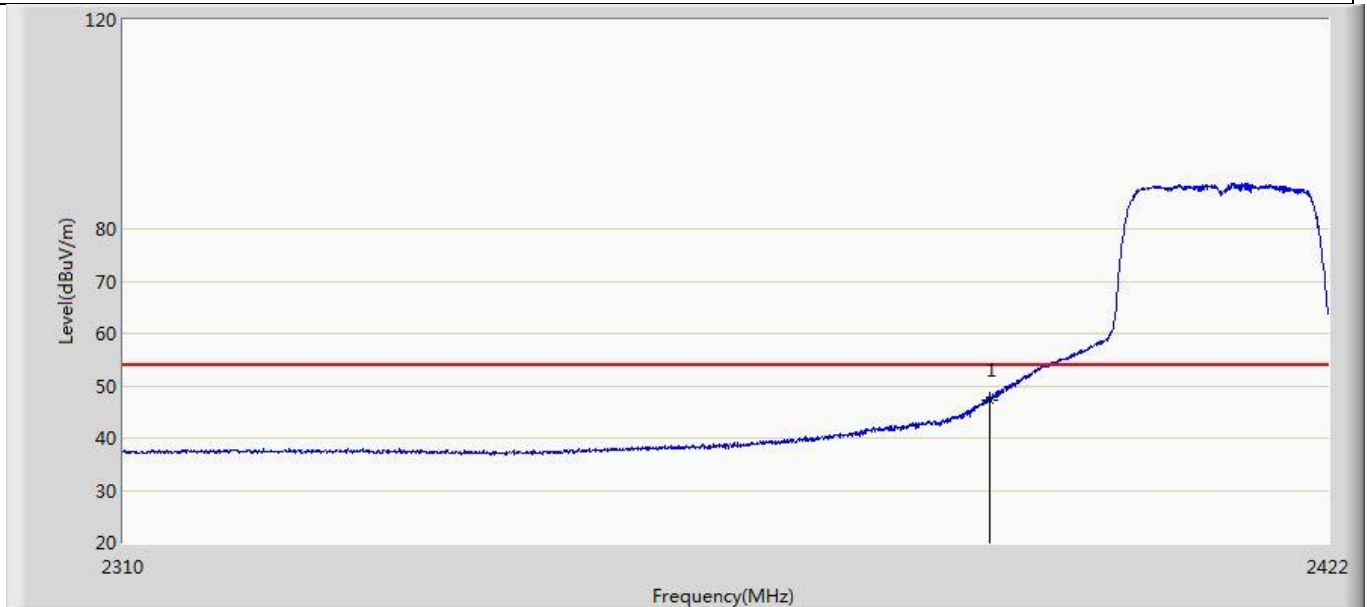


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	47.266	13.422	-6.734	54.000	33.843	AV

Profile: 2150819R	Page No.: 21
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

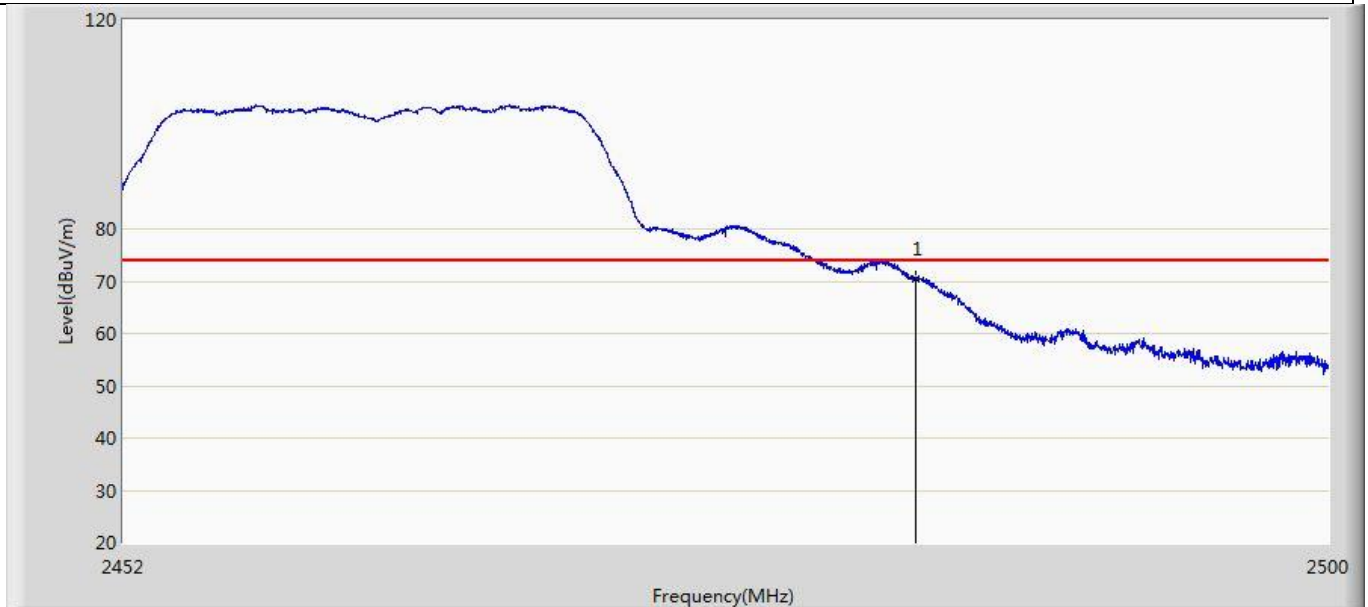


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	70.428	36.405	-3.572	74.000	34.023	PK

Profile: 2150819R	Page No.: 22
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Horizontal
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

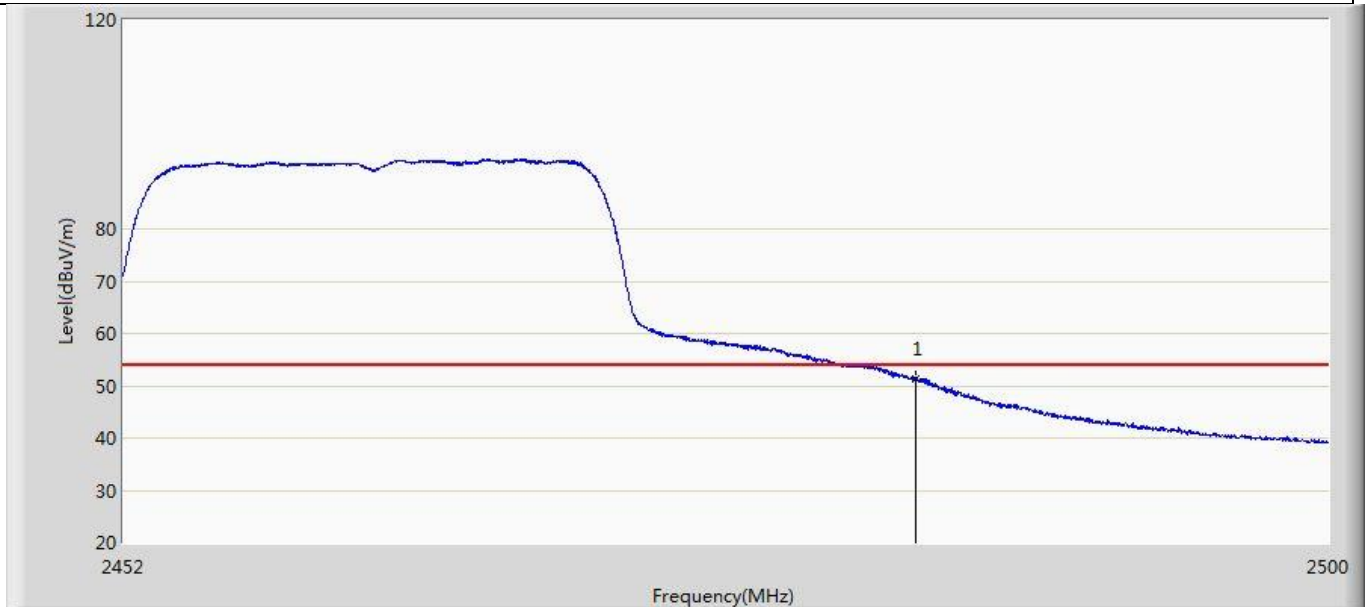


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	51.325	17.302	-2.675	54.000	34.023	AV

Profile: 2150819R	Page No.: 23
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

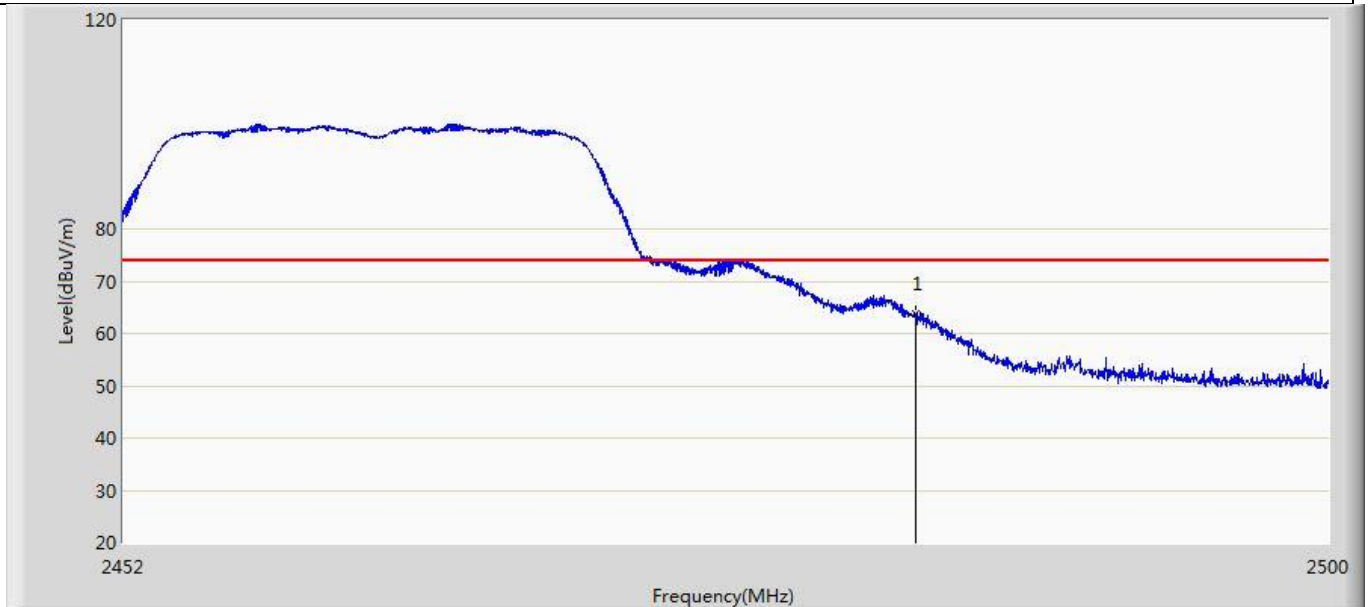

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	63.668	29.645	-10.332	74.000	34.023	PK

Profile: 2150819R	Page No.: 24
Engineer: Tongben	
Site: AC5	Time: 2021/07/01 - 23:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00123988_(1-18GHz)	Polarity: Vertical
EUT: LocoTrack Primary	Power: 6 Vdc
Note: Mode 3:Transmit at 2462MHz by 802.11n(20MHz)	

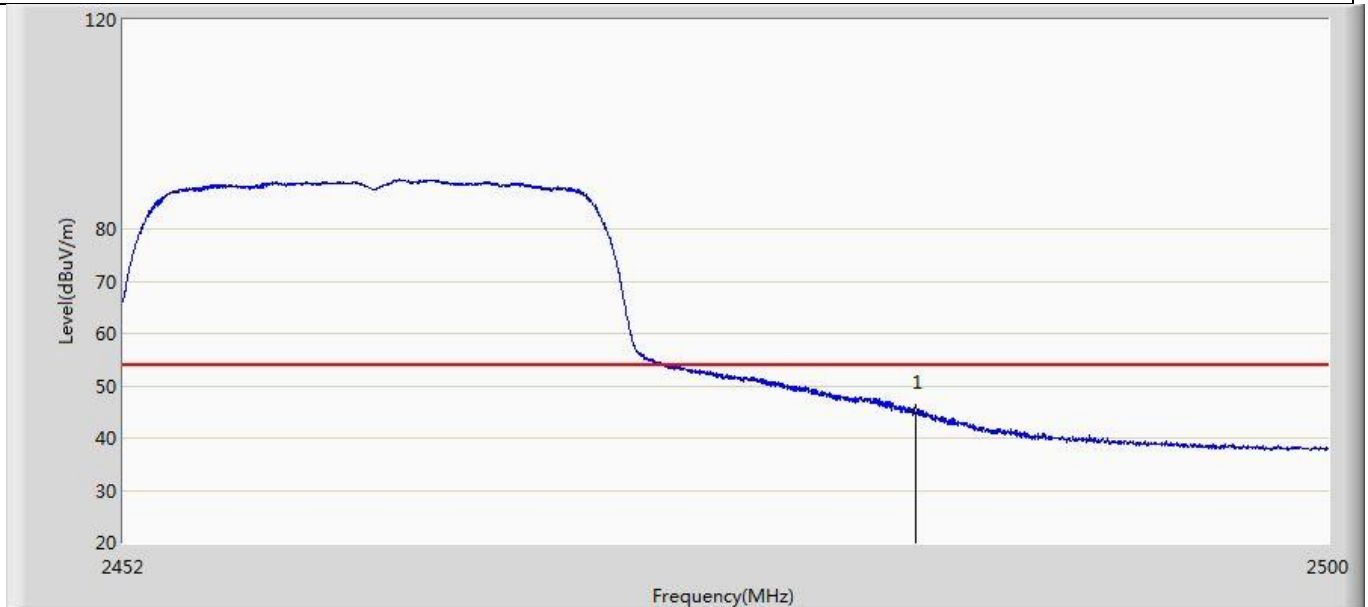

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	45.068	11.045	-8.932	54.000	34.023	AV


4.5 DTS Bandwidth**VERDICT: PASS****4.5.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
-----------------	---

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

Standard	ANSI C63.10 Paragraph 6.7
-----------------	---------------------------

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. The occupied bandwidth should be within the required frequency range.

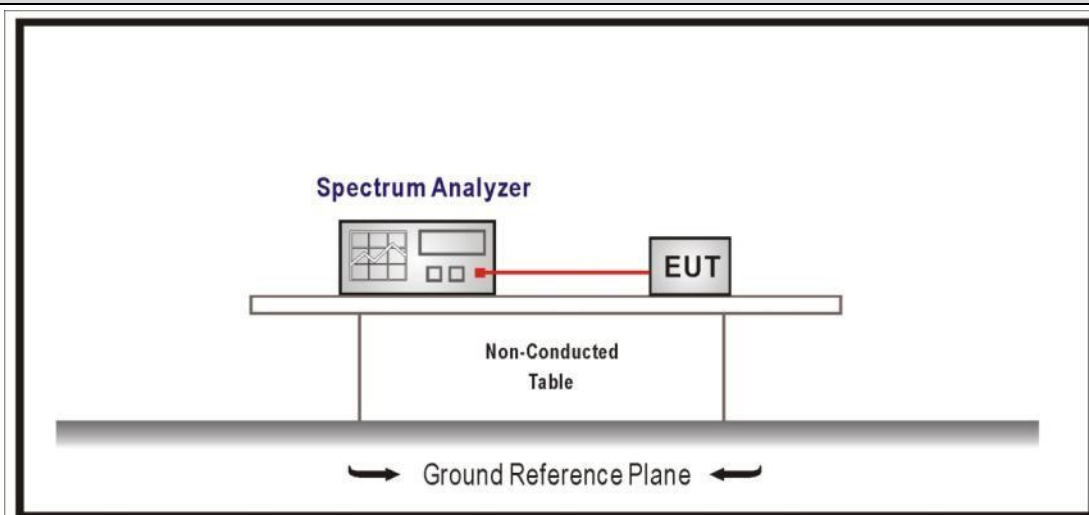
4.5.2 Test Setup**4.5.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
	☐ ANSI C63.10	11.8.1	Option 1
	☒ ANSI C63.10	11.8.2	Option 2
☒	ANSI C63.10	6.9	Occupied bandwidth
	☐ ANSI C63.10	6.9.2	relative measurement procedure
	☒ ANSI C63.10	6.9.3	power bandwidth (99%) measurement procedure

4.5.4 Test Data

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	1	2412	8.085	≥500	Pass
	6	2437	8.55	≥500	Pass
	11	2462	8.562	≥500	Pass
2	1	2412	16.28	≥500	Pass
	6	2437	16.28	≥500	Pass
	11	2462	15.80	≥500	Pass
3	1	2412	15.69	≥500	Pass
	6	2437	16.30	≥500	Pass
	11	2462	15.81	≥500	Pass

Note: The worst case of Occupied Bandwidth as below:

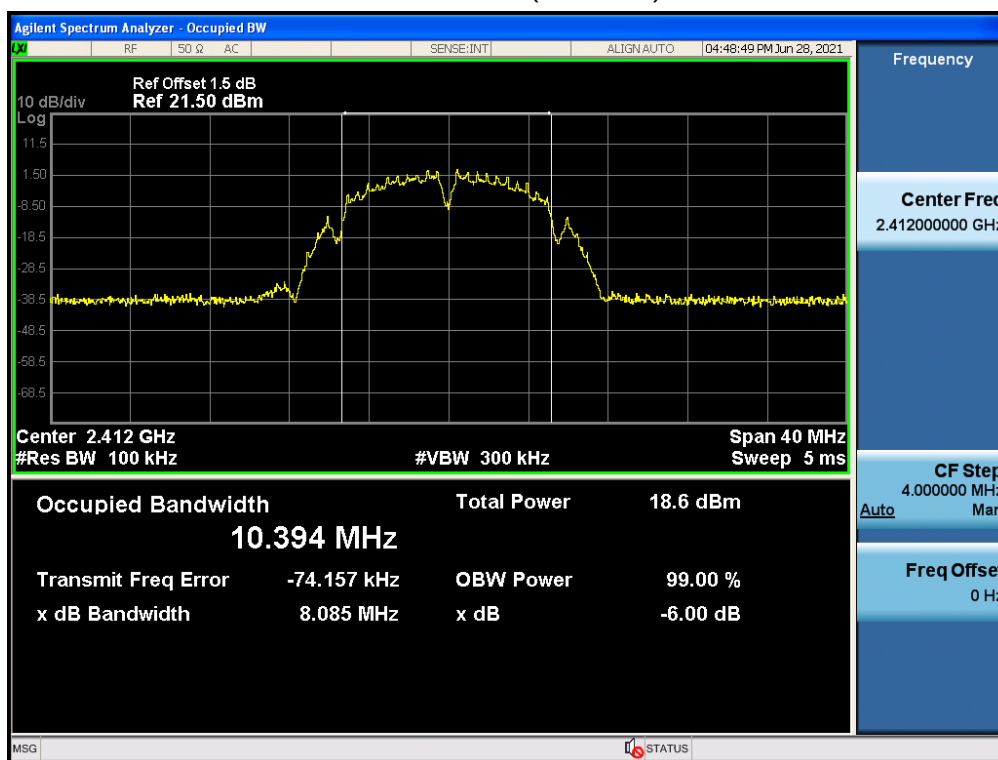
6dB Occupied Bandwidth**Mode 1 CH01 (2412MHz)**

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	Limit	Result
1	1	2412	10.673	Within frequency range	Pass
	6	2437	10.498	Within frequency range	Pass
	11	2462	10.568	Within frequency range	Pass
2	1	2412	16.336	Within frequency range	Pass
	6	2437	16.319	Within frequency range	Pass
	11	2462	16.344	Within frequency range	Pass
3	1	2412	17.241	Within frequency range	Pass
	6	2437	17.259	Within frequency range	Pass
	11	2462	17.24	Within frequency range	Pass

Note: The worst case of Occupied Bandwidth as below:

99% Occupied Bandwidth

Mode 3 CH01 (2412MHz)

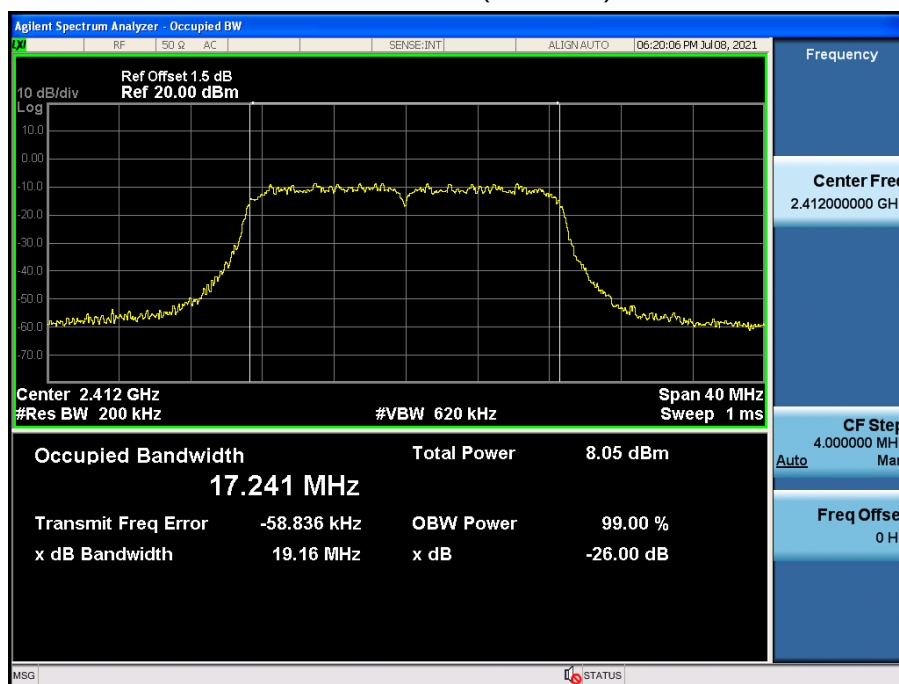


4.6 Fundamental emission output power**VERDICT: PASS****4.6.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	Pout ≤ 30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)
☐	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3
☐	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)
☐	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

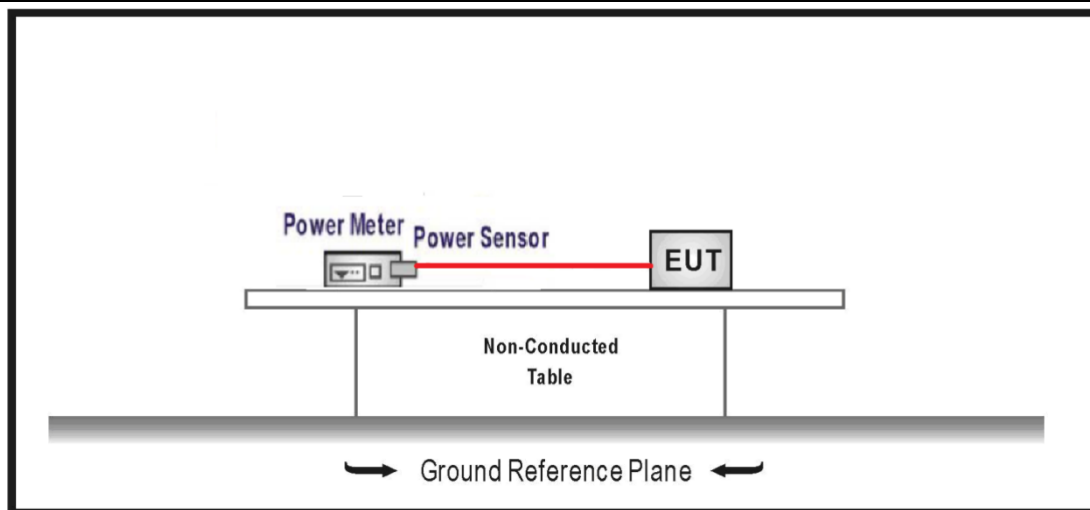4.6.2 Test Setup

4.6.3 Test Procedure


	References Rule			Chapter	Description		
☒	ANSI C63.10			11.9	Fundamental emission output power		
	☒	ANSI C63.10			11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10		11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10		11.9.1.2	Integrated band power method	
		☒	ANSI C63.10		11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10			11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)	
			☐	ANSI C63.10		11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10		11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10		11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10		11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10		11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10		11.9.2.2.5	Method AVGSA-3A
		☒	ANSI C63.10			11.9.2.3	Measurement using a power meter (PM)
			☒	ANSI C63.10		11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10		11.9.2.3.2	Method AVGPM-G

4.6.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power PK (dBm)	EIRP PK (dBm)	Conducted Power AV (dBm)	EIRP AV (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	1	2412	4.52	8.04	2.12	5.64	≤30	≤36	Pass
	6	2437	4.38	7.90	2.35	5.87	≤30	≤36	Pass
	11	2462	4.18	7.70	2.09	5.61	≤30	≤36	Pass
Mode 2	1	2412	8.07	12.02	5.21	8.73	≤30	≤36	Pass
	6	2437	8.67	12.19	5.35	8.87	≤30	≤36	Pass
	11	2462	8.50	12.02	5.18	8.70	≤30	≤36	Pass
Mode 3	1	2412	8.72	12.24	5.35	8.87	≤30	≤36	Pass
	6	2437	8.52	12.04	5.43	8.95	≤30	≤36	Pass
	11	2462	8.44	11.96	5.39	8.91	≤30	≤36	Pass

4.7 Power Density**VERDICT: PASS****4.7.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (e)

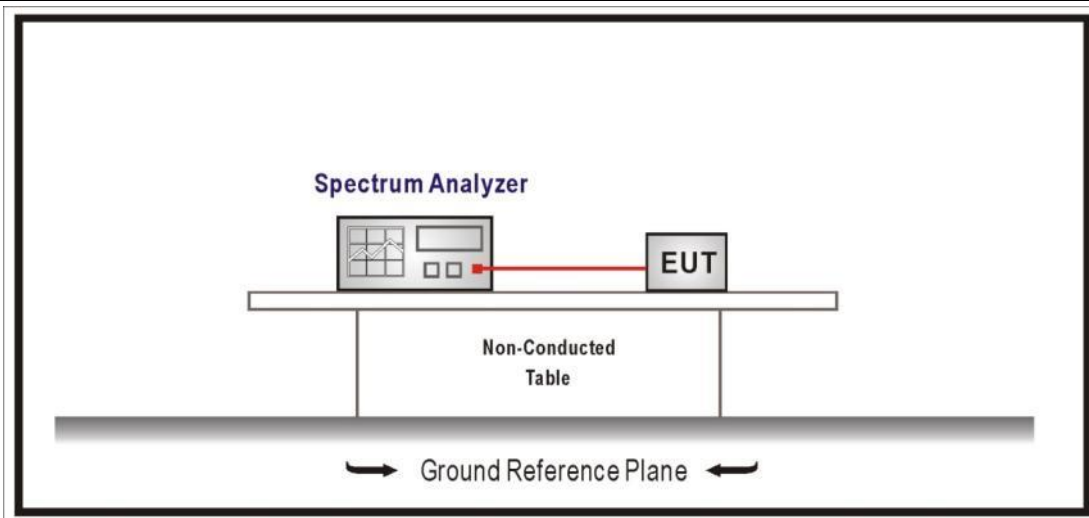Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.7.2 Test Setup****4.7.3 Test Procedure**


	References Rule	Chapter	Description
☒	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
☐	ANSI C63.10	11.10.7	Method AVGPSD-3
☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	1	2412	-21.435	≤8	Pass
	6	2437	-21.812	≤8	Pass
	11	2462	-22.031	≤8	Pass
2	1	2412	-23.923	≤8	Pass
	6	2437	-24.025	≤8	Pass
	11	2462	-25.873	≤8	Pass
3	1	2412	-24.192	≤8	Pass
	6	2437	-26.362	≤8	Pass
	11	2462	-24.672	≤8	Pass

Note: The worst case of PSD as below:

Mode 1 / CH01 / 2412MHz

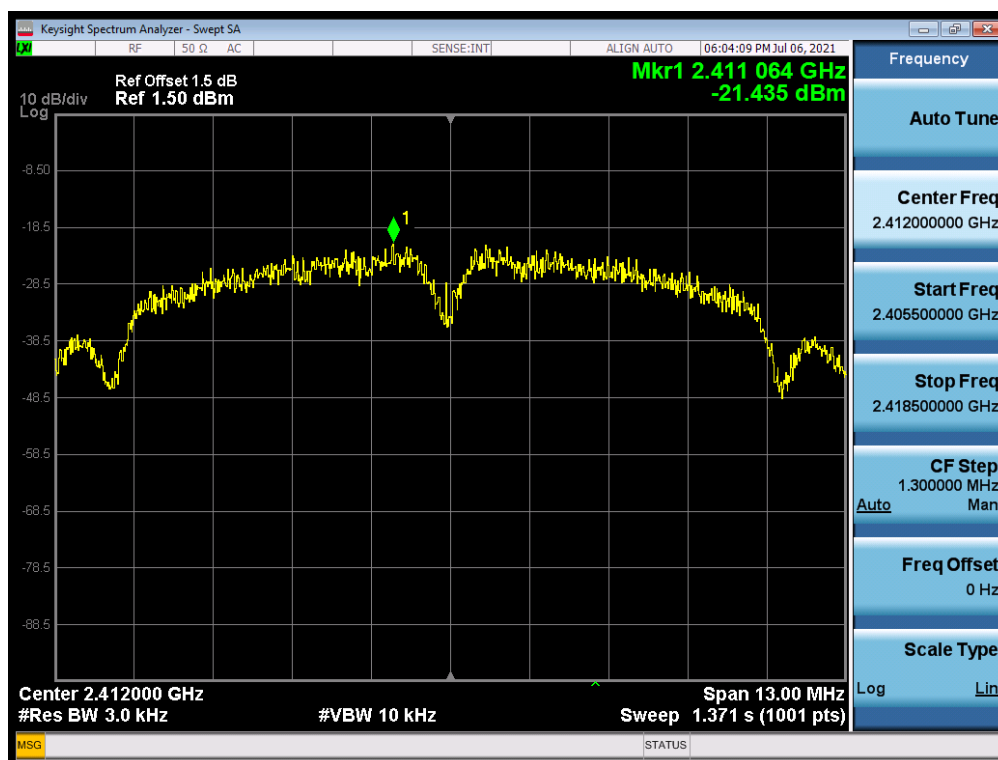

4.8 Antenna Requirement**VERDICT: PASS****4.8.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.8.2 Antenna Connector Construction:

The use of a permanently attached antenna



The antenna use of a unique coupling to the intentional radiator



The use of a nonstandard antenna jack or electrical connector

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____