

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Side_5mm_Ch1

Communication System: WLAN 2.4GHz; Frequency: 2412.0 ; Duty Cycle: 1:1.009

Medium: HSL_2450_220623 Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(8.41, 8.41, 8.41); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10315-AAB
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (120.0 mm x 48.0 mm): Measurement Grid: 10.0 mm x 12.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.312 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.658 W/kg; SAR (8g) = 0.371 W/kg; SAR (10g) = 0.340 W/kg;

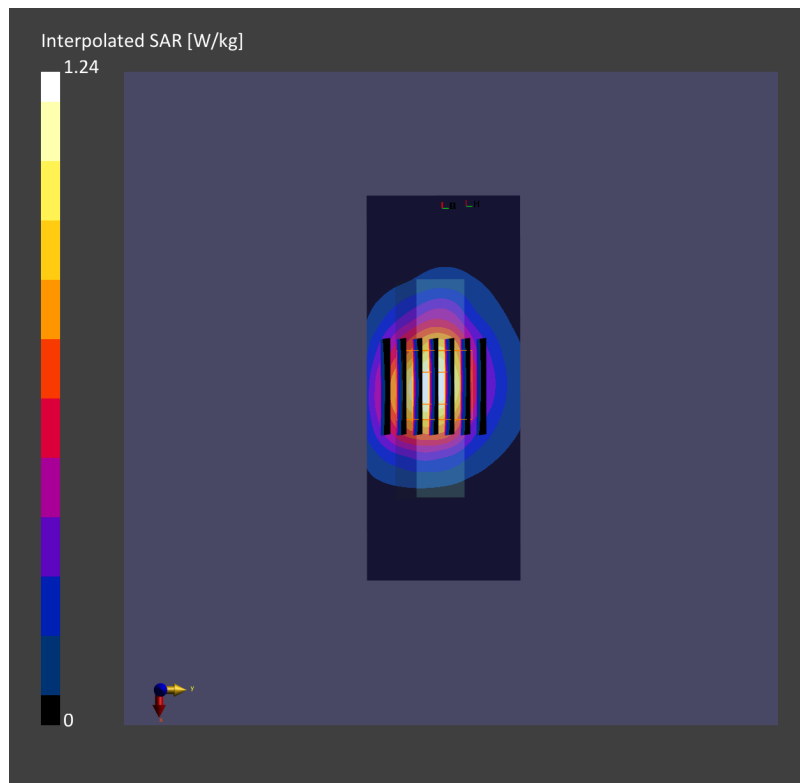

#02_WLAN5GHz_802.11ac-VHT40 MCS0_Right Side_5mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.0 ; Duty Cycle: 1:1.149

Medium: HSL_5250_220623 Medium parameters used: $f = 5230.0$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.45, 5.45, 5.45); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10534-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A


Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.850 W/kg; SAR (10g) = 0.325 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.891 W/kg; SAR (8g) = 0.381 W/kg; SAR (10g) = 0.334 W/kg;

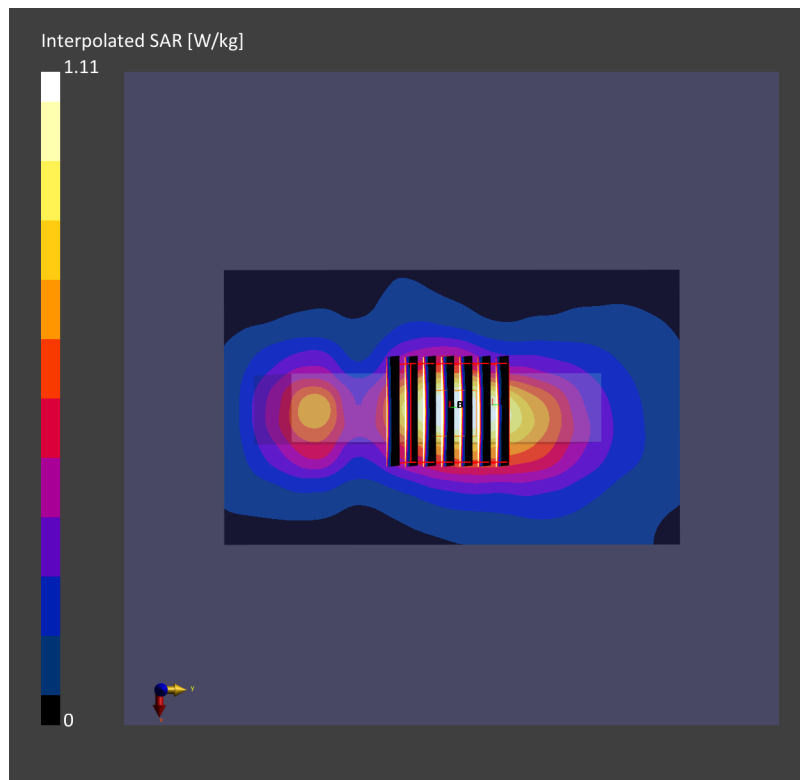

#03_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0 ; Duty Cycle: 1:1.064

Medium: HSL_5750_220623 Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(5.0, 5.0, 5.0); Calibrated: 2021-11-03
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2021-11-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: cDASY6 V6.6.0.13926
- UID: WLAN, 10544-AAC
- MAIA: Area Scan: N/A; Zoom Scan: N/A

Area Scan (60.0 mm x 100.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.656 W/kg; SAR (10g) = 0.254 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.679 W/kg; SAR (8g) = 0.305 W/kg; SAR (10g) = 0.274 W/kg;

