



FCC RADIO TEST REPORT

FCC ID : 2AYOA-4007
Equipment : AI GLASSES
Brand Name : Oakley Meta
Model Name : OW8001
Applicant : Luxottica Group S.p.A.
Piazzale Cadorna 3 20123 Milan, Italy
Manufacturer : Luxottica Group S.p.A.
Piazzale Cadorna 3 20123 Milan, Italy
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 29, 2025 and testing was performed from May 29, 2025 to Jun. 21, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR551226B	01	Initial issue of report	Aug. 01, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	
3.6	15.207	AC Conducted Emission	Pass	
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Yuri Huang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax,
Sample 1	G2
Sample 2	G5
Antenna Type	WLAN: IFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	1

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
AC Conducted Emission	Mode 1: BLE TX (1Mbps Ch19) + Charging from Charging case (USB Cable with Adapter) for Sample 1
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

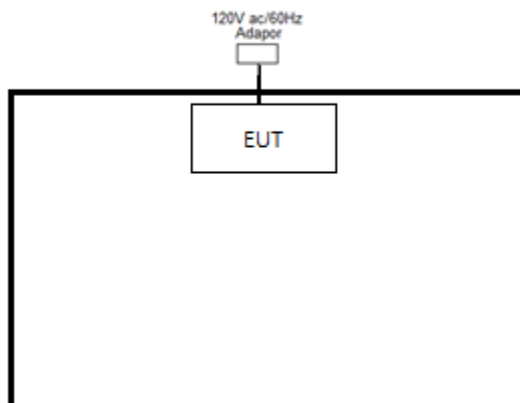

<Bluetooth Tx Mode>



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	Salcomp	MA0122	FCC DoC	Unshielded, 0.97m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.1 Version 4.0.152.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

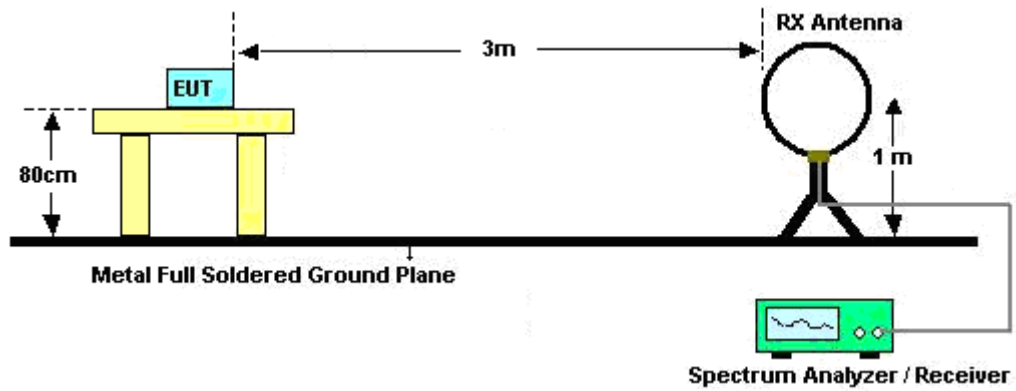

For radiated test from 30MHz to 1GHz

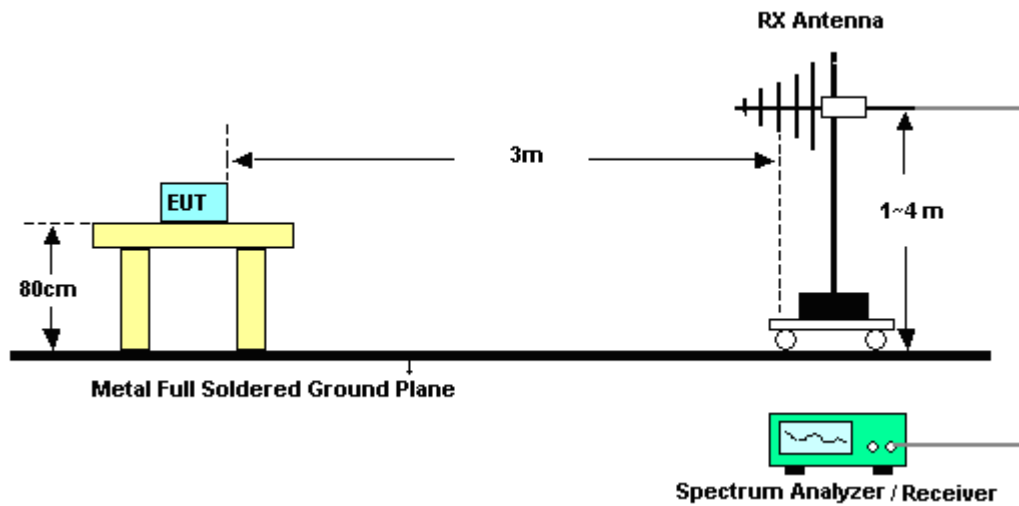

For radiated test from 1GHz to 18GHz

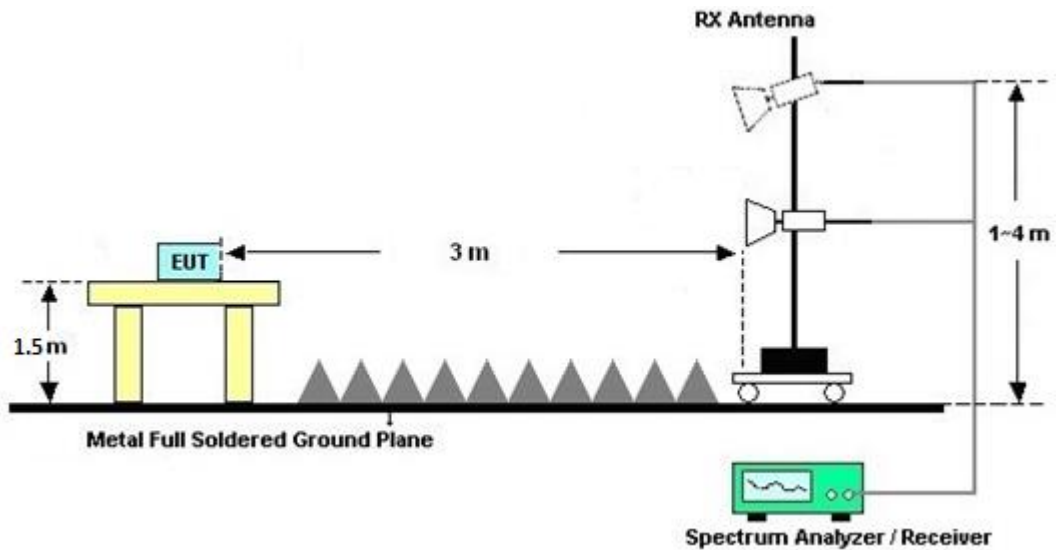

For radiated test above 18GHz



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

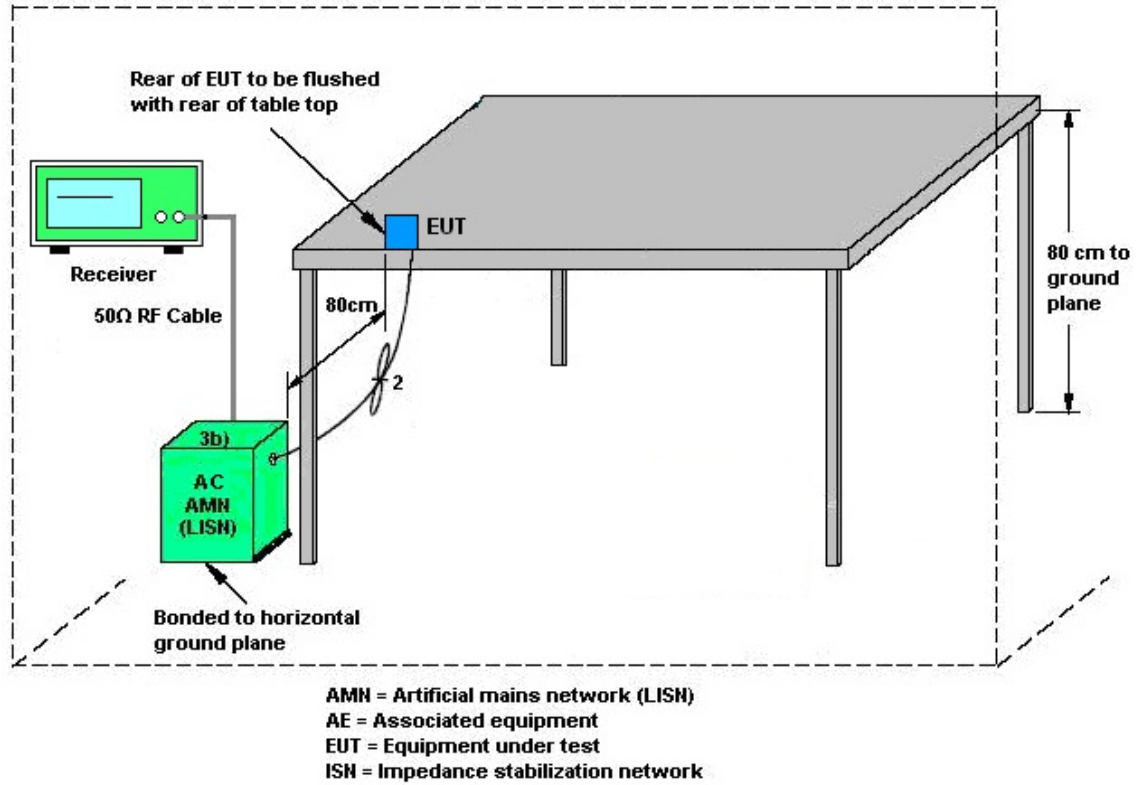

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	May 29, 2025~ Jun. 10, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	May 29, 2025~ Jun. 10, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	May 29, 2025~ Jun. 10, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	May 29, 2025~ Jun. 10, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	May 29, 2025~ Jun. 10, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 16, 2025~ Jun. 19, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 16, 2025~ Jun. 19, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Jun. 16, 2025~ Jun. 19, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Jun. 16, 2025~ Jun. 19, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Jun. 16, 2025~ Jun. 19, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Jun. 16, 2025~ Jun. 19, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Jun. 16, 2025~ Jun. 19, 2025	Sep. 22, 2025	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jun.05, 2025 ~ Jun.21, 2025	Aug. 28, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Jun.05, 2025 ~ Jun.21, 2025	Mar. 04, 2026	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	00993	18GHz~40GHz	Nov. 18, 2024	Jun.05, 2025 ~ Jun.21, 2025	Nov. 17, 2025	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 26, 2024	Jun.05, 2025 ~ Jun.21, 2025	May 25, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18GHz~40GHz	Dec. 31, 2024	Jun.05, 2025 ~ Jun.21, 2025	Dec. 30, 2025	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 12, 2024	Jun.05, 2025 ~ Jun.21, 2025	Dec. 11, 2025	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 13, 2025	Jun.05, 2025 ~ Jun.21, 2025	Apr. 12, 2026	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz~18GHz	Aug. 15, 2024	Jun.05, 2025 ~ Jun.21, 2025	Aug. 14, 2025	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 14, 2025	Jun.05, 2025 ~ Jun.21, 2025	May 13, 2026	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 08, 2025	Jun.05, 2025 ~ Jun.21, 2025	Jan. 07, 2026	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Jan. 11, 2025	Jun.05, 2025 ~ Jun.21, 2025	Jan. 10, 2026	Radiation (03CH13-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 22, 2024	Jun.05, 2025 ~ Jun.21, 2025	Nov. 21, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 06, 2025	Jun.05, 2025 ~ Jun.21, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804616/2	30MHz~40GHz	Feb. 06, 2025	Jun.05, 2025 ~ Jun.21, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 06, 2025	Jun.05, 2025 ~ Jun.21, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
Notch Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 11, 2024	Jun.05, 2025 ~ Jun.21, 2025	Sep. 10, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 09, 2024	Jun.05, 2025 ~ Jun.21, 2025	Jul. 08, 2025	Radiation (03CH13-HY)
Hygrometer	TECPEL	DTM-303A	TP215159	N/A	Sep. 10, 2024	Jun.05, 2025 ~ Jun.21, 2025	Sep. 09, 2025	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jun.05, 2025 ~ Jun.21, 2025	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jun.05, 2025 ~ Jun.21, 2025	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun.05, 2025 ~ Jun.21, 2025	N/A	Radiation (03CH13-HY)
Software	Audix	N/A	RK-001124	N/A	N/A	Jun.05, 2025 ~ Jun.21, 2025	N/A	Radiation (03CH13-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Junyu Jhou / Hank Hsu	Temperature:	21~25	°C
Test Date:	2025/5/29~6/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.024	0.679	0.50	Pass
BLE	1Mbps	1	19	2440	1.025	0.679	0.50	Pass
BLE	1Mbps	1	39	2480	1.026	0.680	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.00	30.00	1.00	9.00	36.00	Pass
BLE	1Mbps	1	19	2440	8.10	30.00	1.00	9.10	36.00	Pass
BLE	1Mbps	1	39	2480	8.00	30.00	1.00	9.00	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.55	-7.13	1.00	8.00	Pass
BLE	1Mbps	1	19	2440	7.62	-7.07	1.00	8.00	Pass
BLE	1Mbps	1	39	2480	7.56	-7.14	1.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.035	1.151	0.50	Pass
BLE	2Mbps	1	19	2440	2.037	1.148	0.50	Pass
BLE	2Mbps	1	39	2480	2.039	1.148	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	8.00	30.00	1.00	9.00	36.00	Pass
BLE	2Mbps	1	19	2440	8.20	30.00	1.00	9.20	36.00	Pass
BLE	2Mbps	1	39	2480	8.00	30.00	1.00	9.00	36.00	Pass




TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	7.63	-9.25	1.00	8.00	Pass
BLE	2Mbps	1	19	2440	7.66	-9.20	1.00	8.00	Pass
BLE	2Mbps	1	39	2480	7.64	-9.28	1.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**6dB Bandwidth**


<1M>

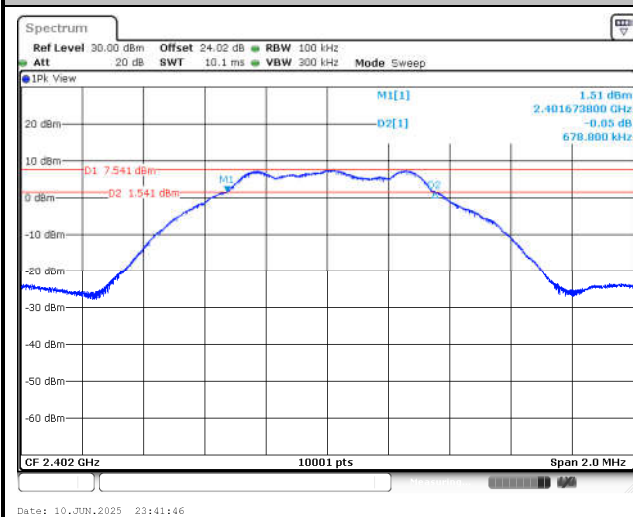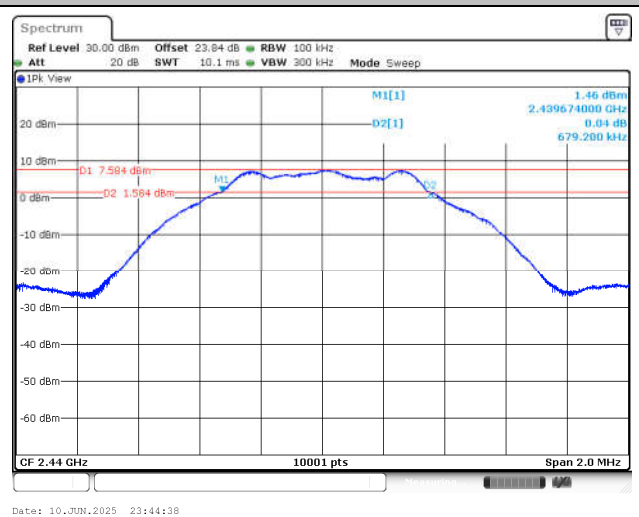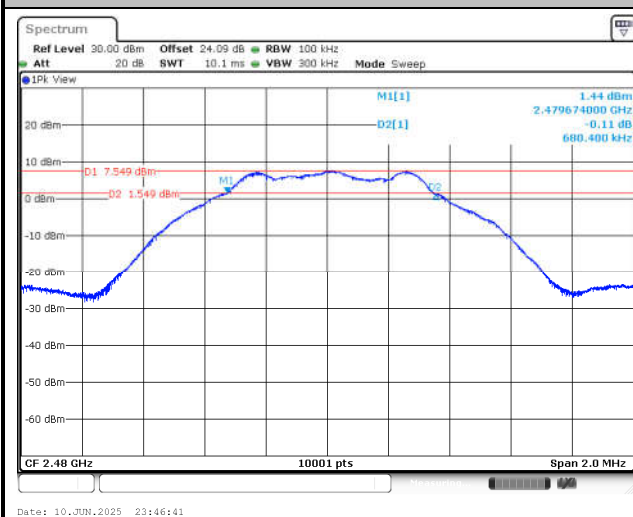6 dB Bandwidth Plot on Channel 0**6 dB Bandwidth Plot on Channel 19****6 dB Bandwidth Plot on Channel 39**




<2M>


6 dB Bandwidth Plot on Channel 0

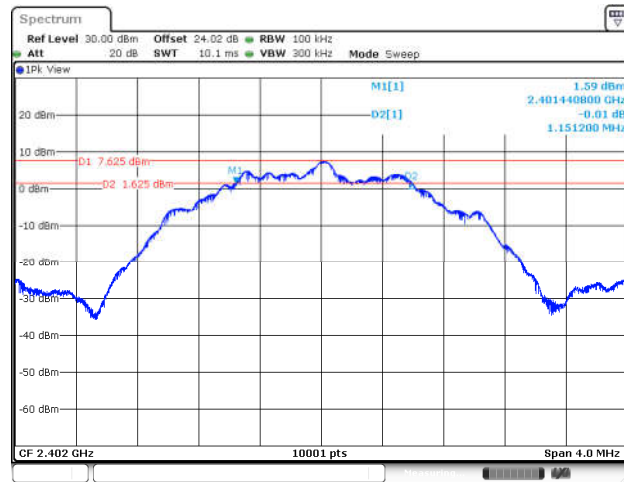

6 dB Bandwidth Plot on Channel 19



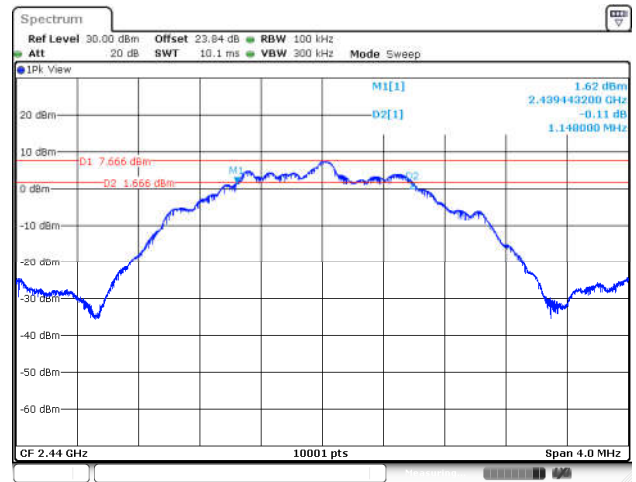


6 dB Bandwidth Plot on Channel 39

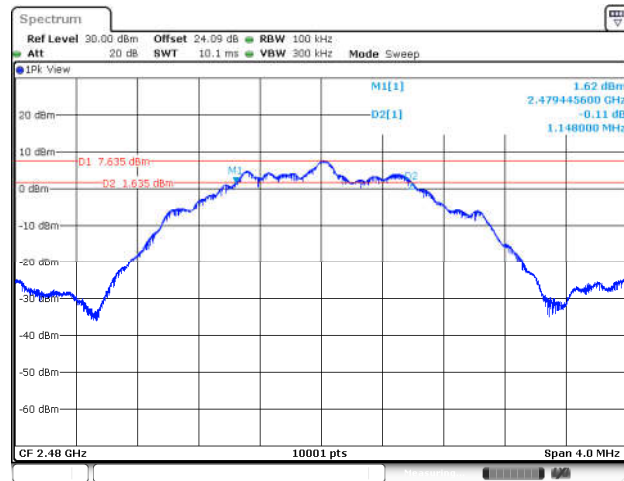

**99% Occupied Bandwidth**


<1M>

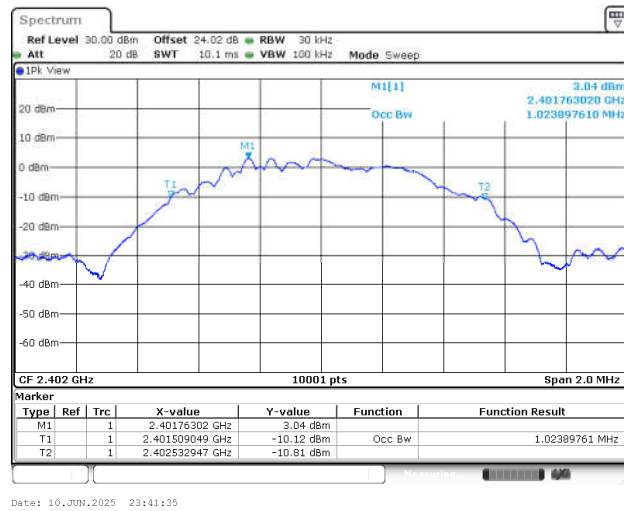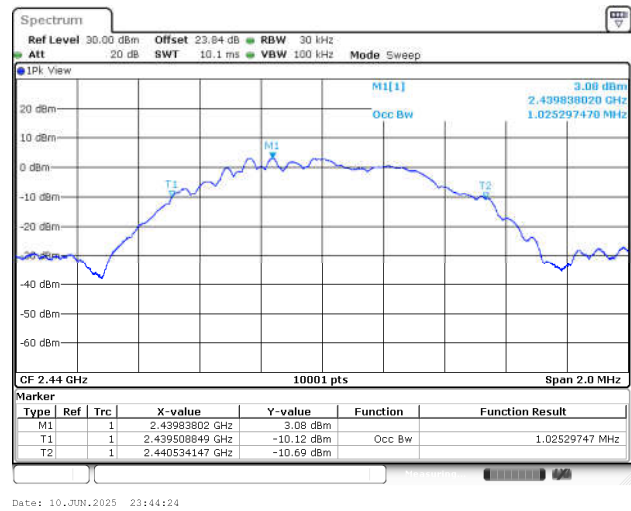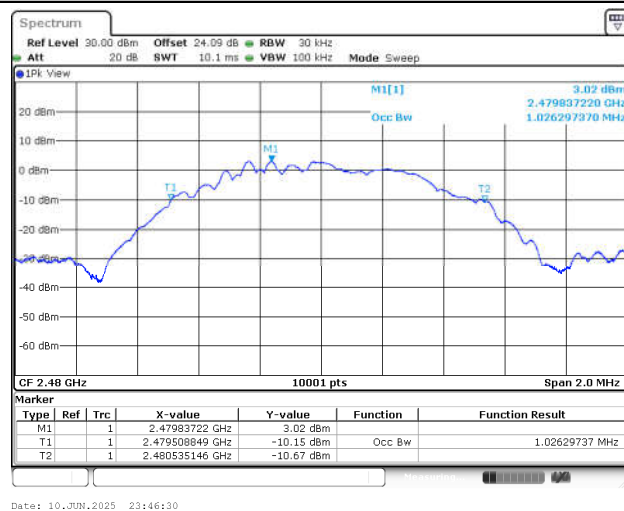99% Occupied Bandwidth Plot on Channel 0**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2M>


99% Occupied Bandwidth Plot on Channel 0

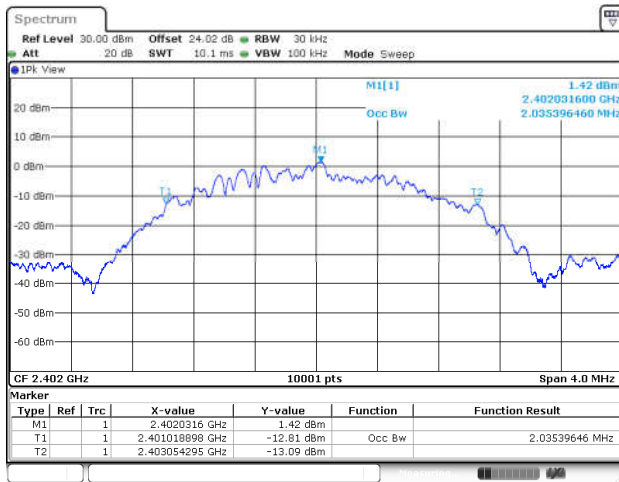

99% Occupied Bandwidth Plot on Channel 19



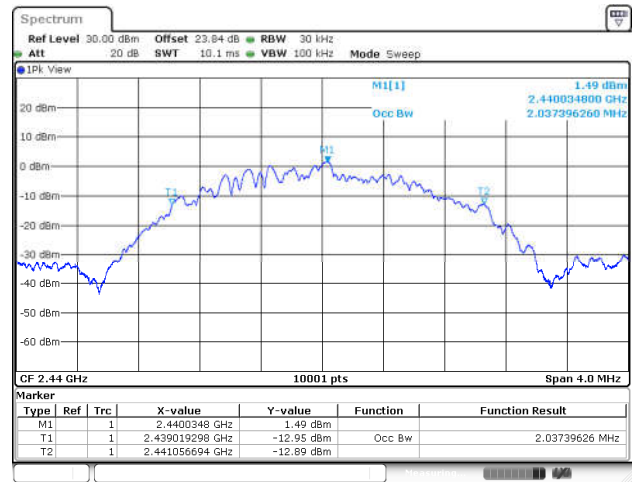


99% Occupied Bandwidth Plot on Channel 39

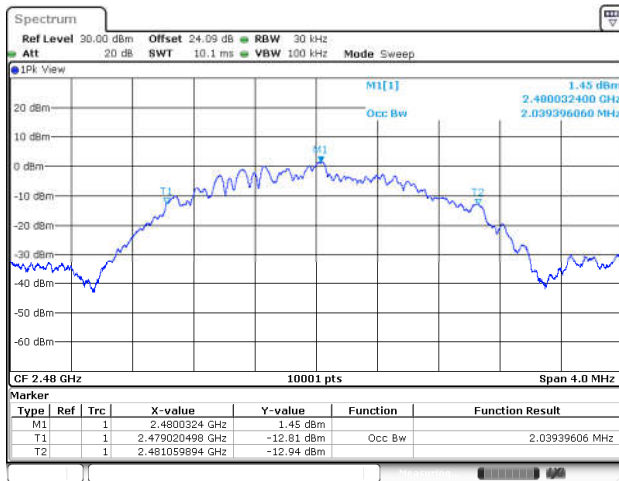

**Power Spectral Density (dBm/3kHz)**


<1M>

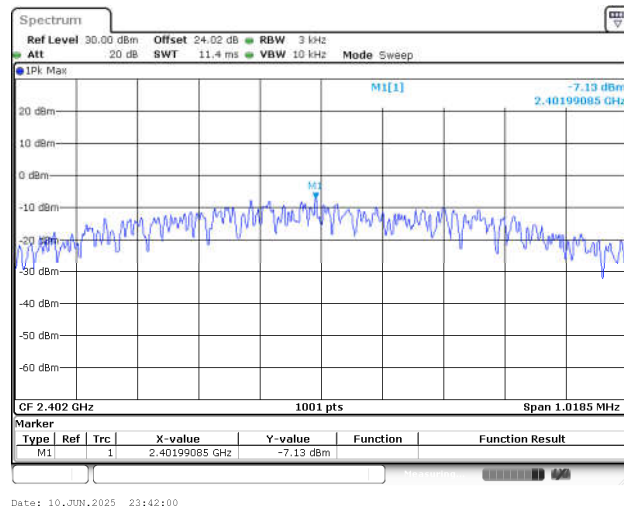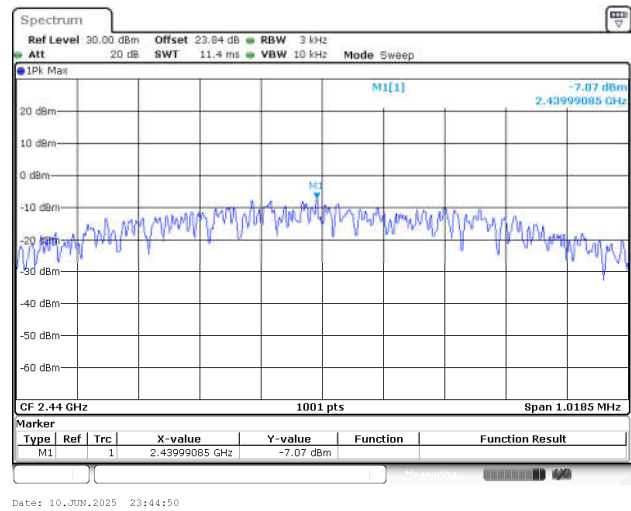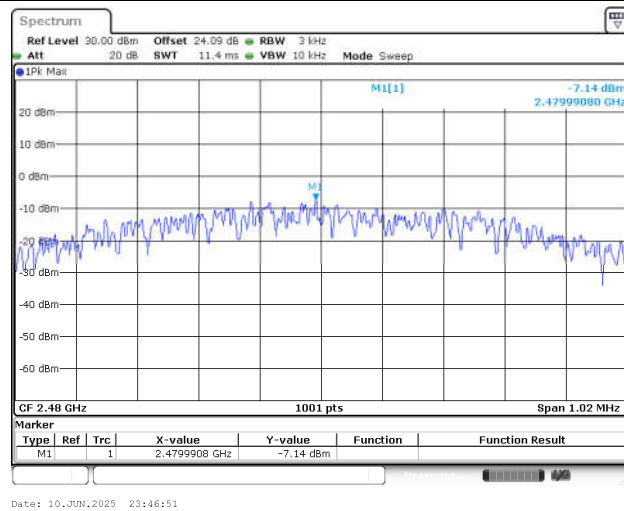Power Density (dBm/3kHz) Plot Channel 0**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2M>


Power Density (dBm/3kHz) Plot Channel 0

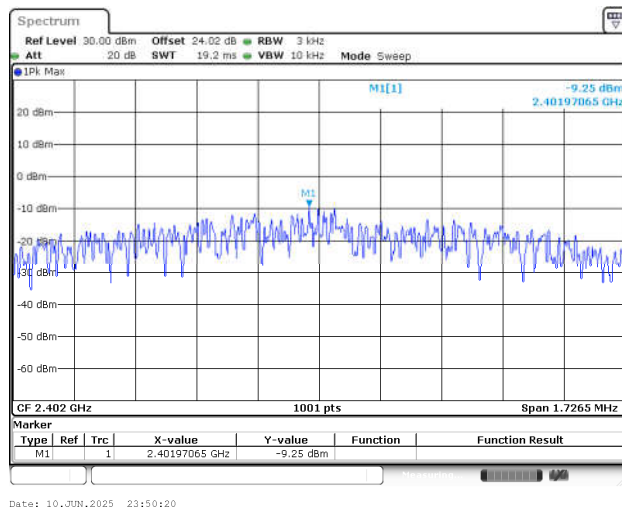

Power Density (dBm/3kHz) Plot Channel 19

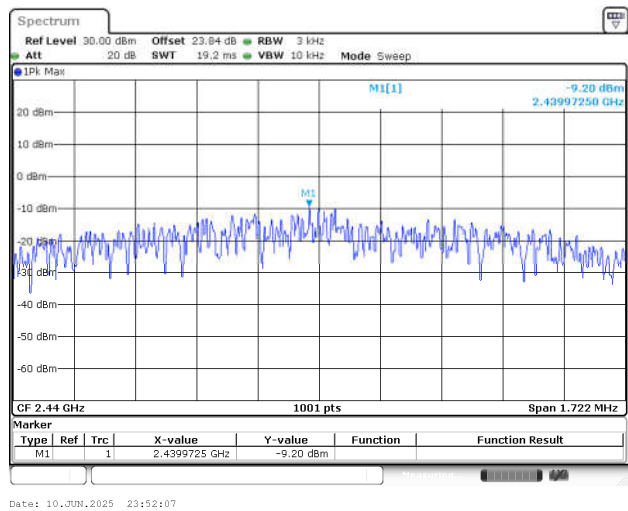


Power Density (dBm/3kHz) Plot Channel 39

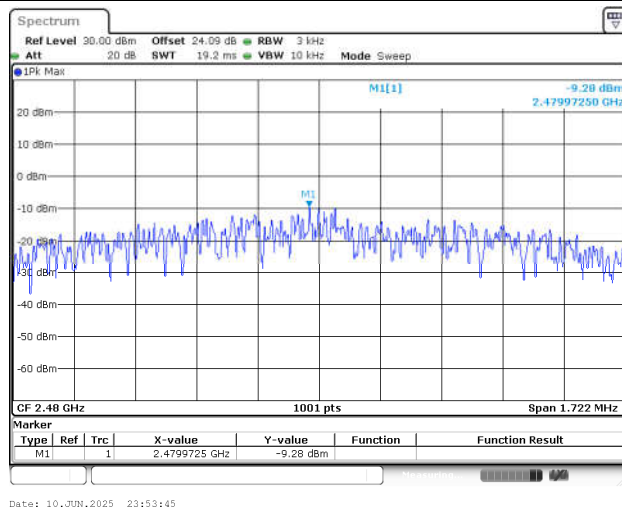

**Band Edge and Conducted Spurious Emission**


<1M>

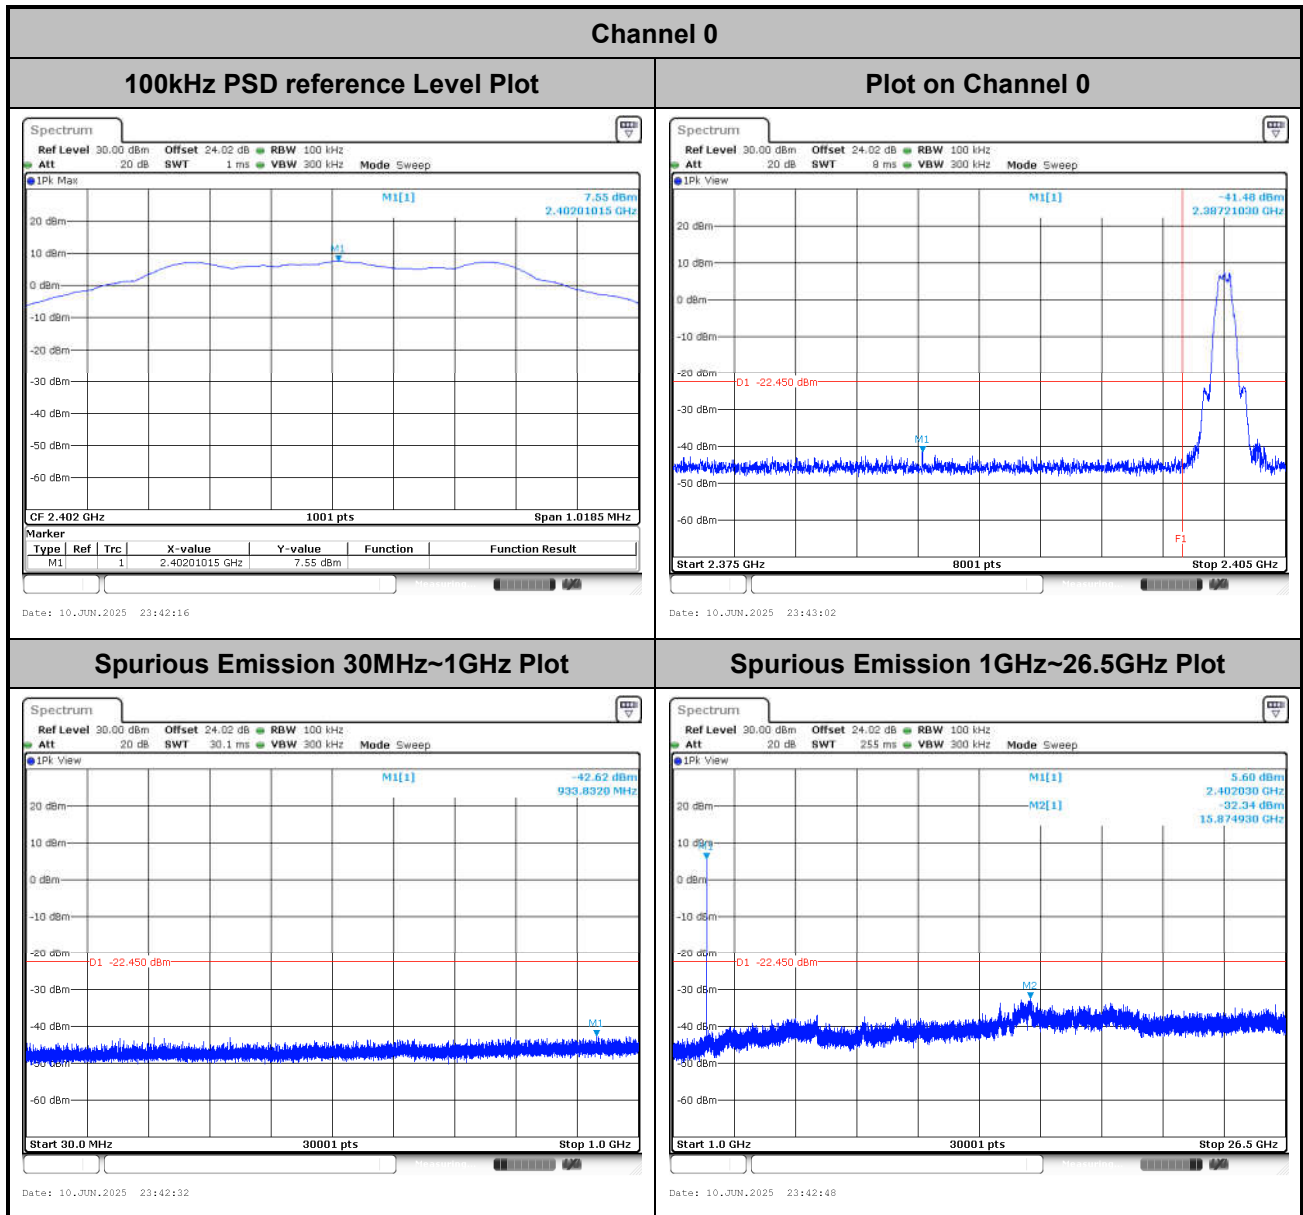




Channel 19

100kHz PSD reference Level Plot

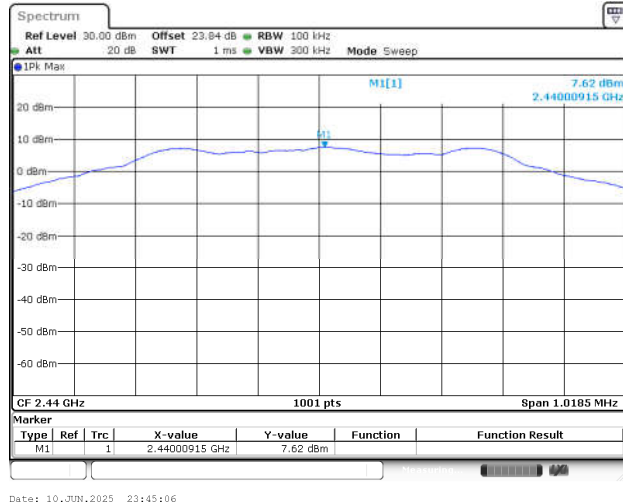


Plot on Channel 19

Spurious Emission 30MHz~1GHz Plot

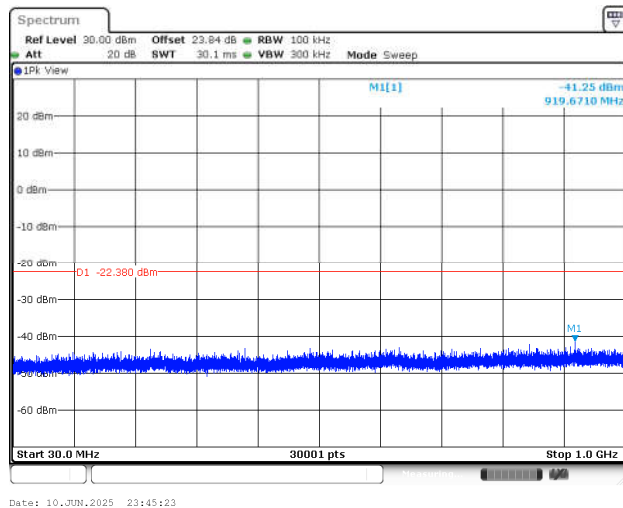


Spurious Emission 1GHz~26.5GHz Plot

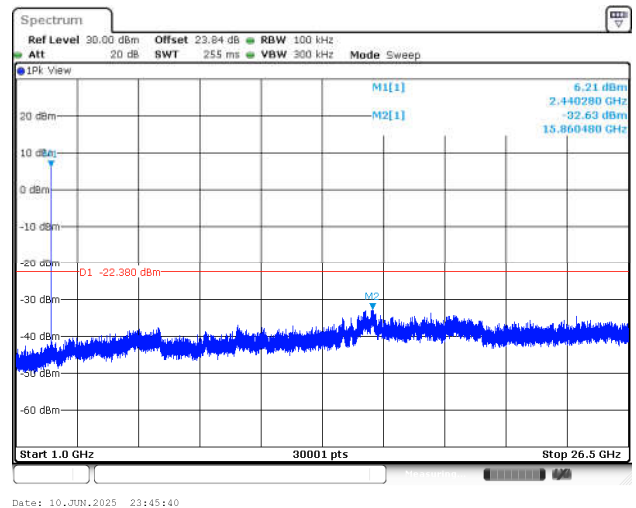




Channel 39


100kHz PSD reference Level Plot

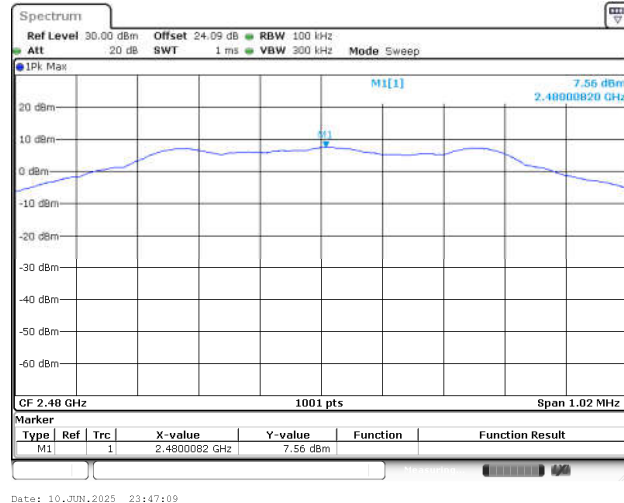


Plot on Channel 39

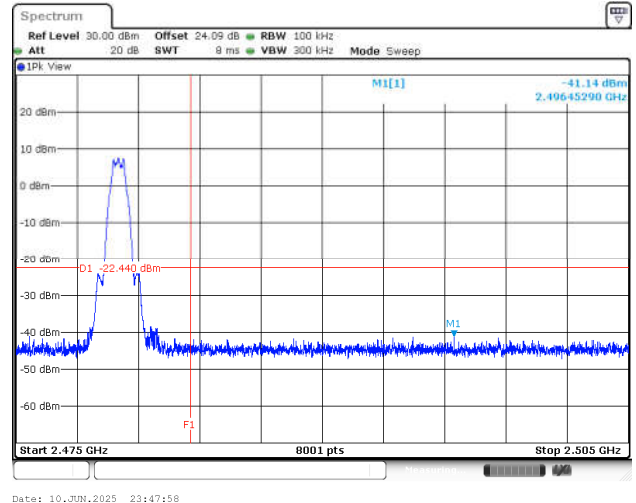

Spurious Emission 30MHz~1GHz Plot

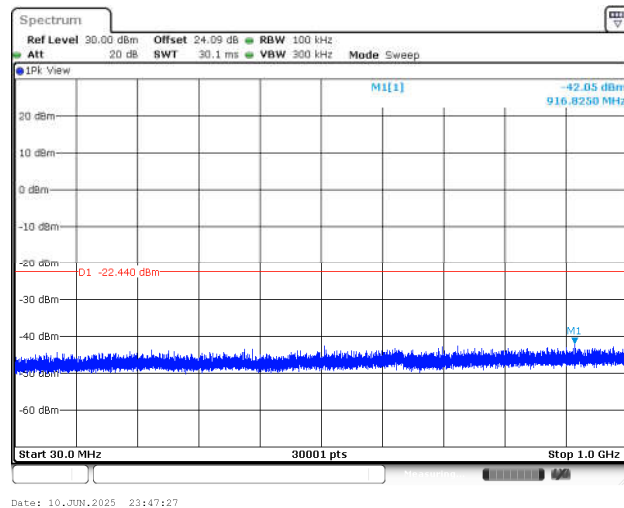


Spurious Emission 1GHz~26.5GHz Plot

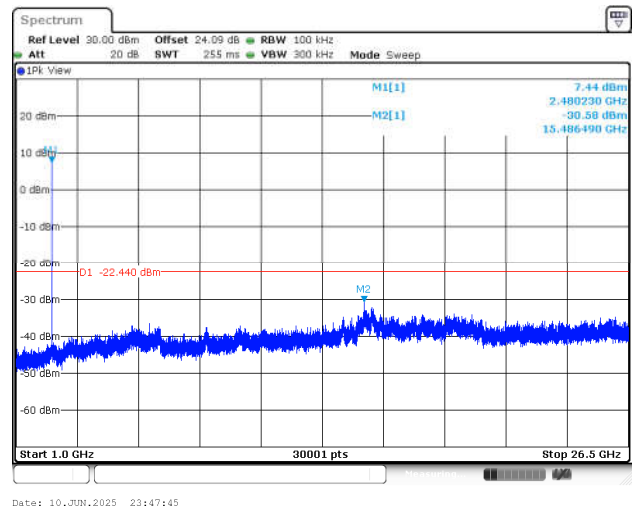




<2M>

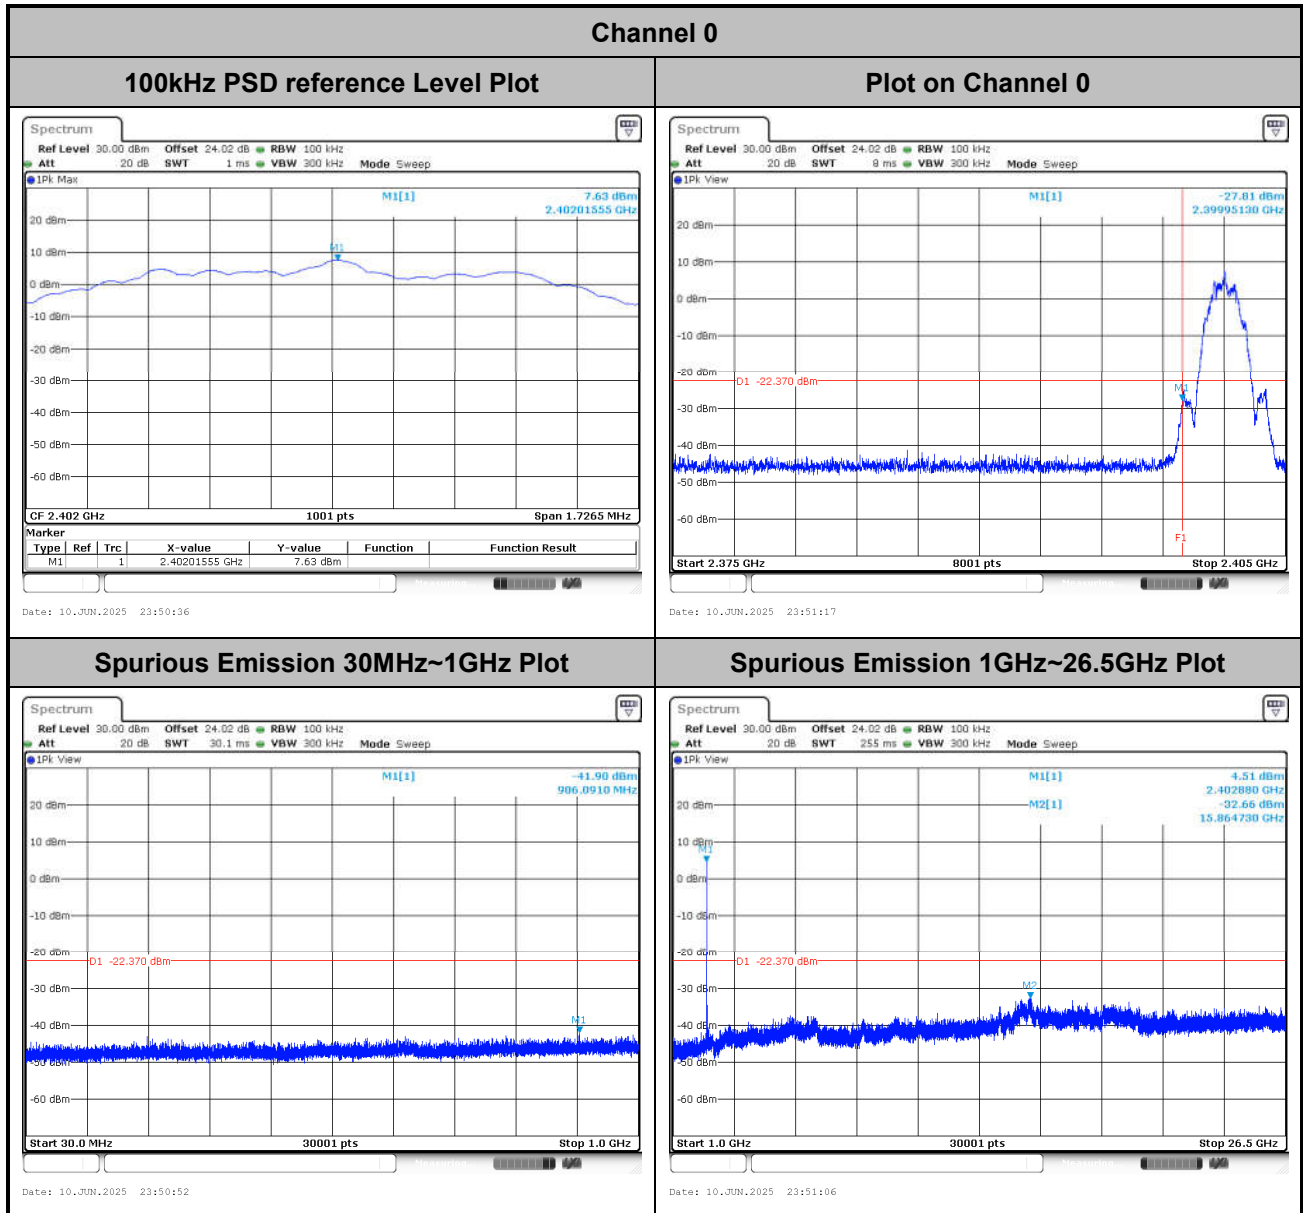




Channel 19

100kHz PSD reference Level Plot

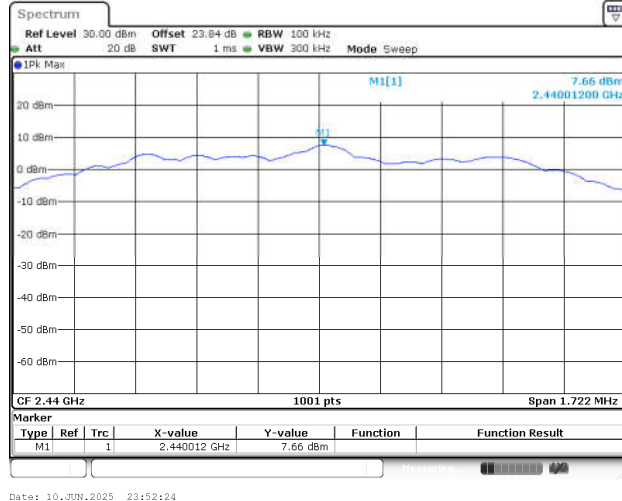


Plot on Channel 19

Spurious Emission 30MHz~1GHz Plot

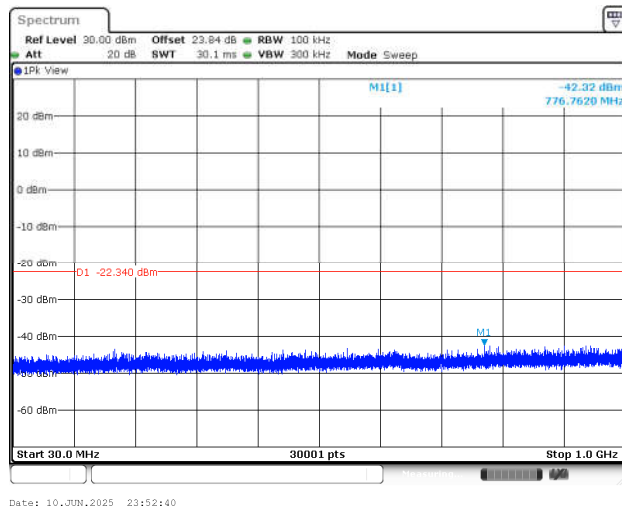


Spurious Emission 1GHz~26.5GHz Plot

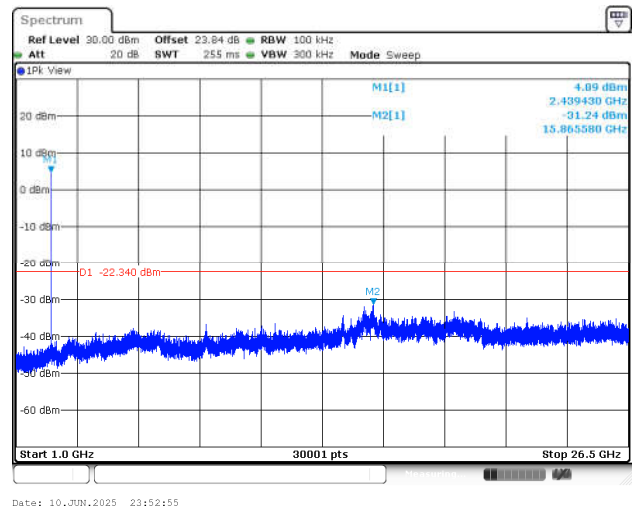




Channel 39


100kHz PSD reference Level Plot

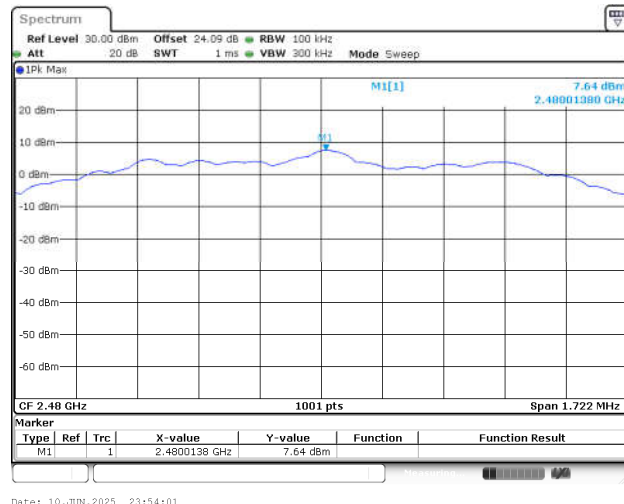


Plot on Channel 39

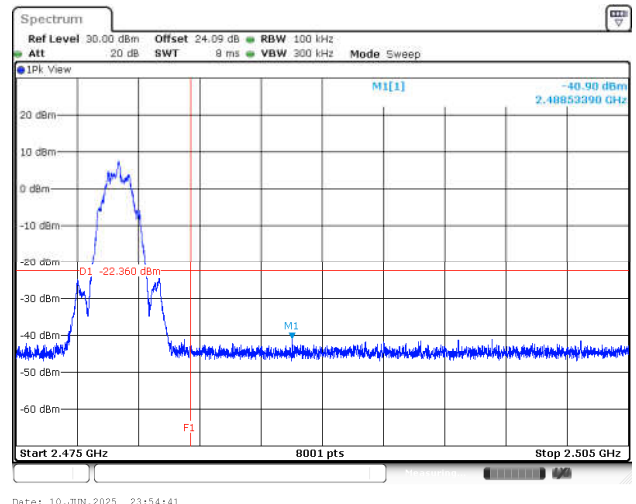

Spurious Emission 30MHz~1GHz Plot

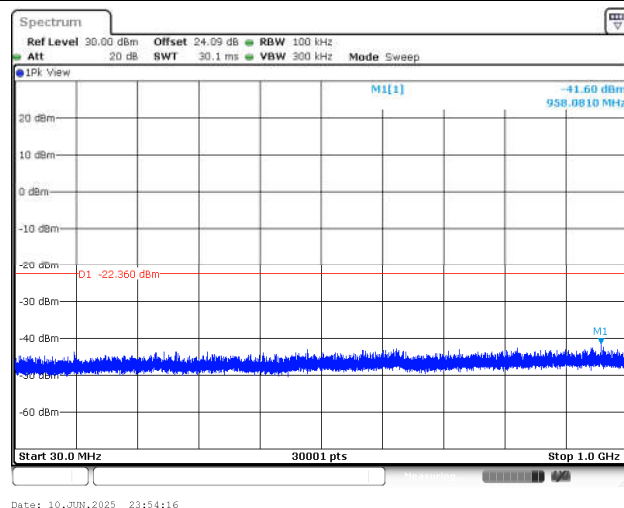

Spurious Emission 1GHz~26.5GHz Plot

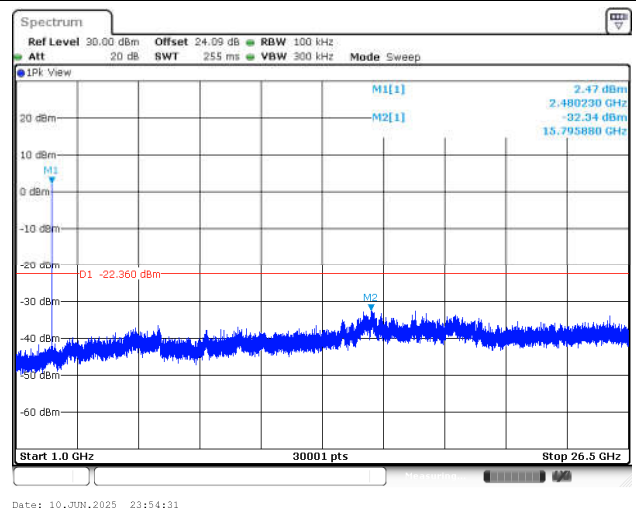




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.3 ~ 25.6°C
		Relative Humidity :	42.1 ~ 48.9%

EUT Information

Report NO : 551226
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

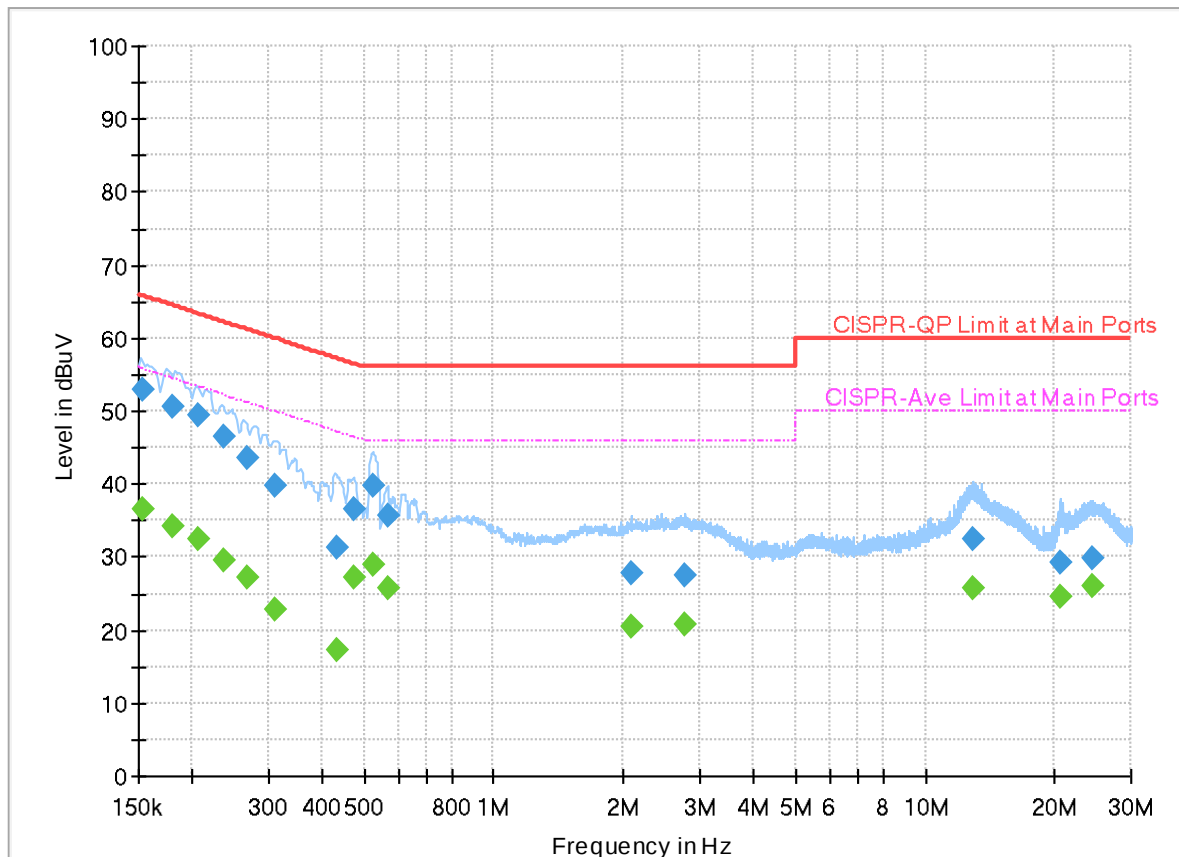

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152700	---	36.52	55.85	19.33	L1	FLO	20.0
0.152700	52.87	---	65.85	12.98	L1	FLO	20.0
0.179520	---	34.27	54.51	20.24	L1	FLO	20.0
0.179520	50.63	---	64.51	13.88	L1	FLO	20.0
0.206880	---	32.39	53.33	20.94	L1	FLO	20.0
0.206880	49.43	---	63.33	13.90	L1	FLO	20.0
0.236850	---	29.60	52.21	22.61	L1	FLO	20.0
0.236850	46.43	---	62.21	15.78	L1	FLO	20.0
0.267000	---	27.09	51.21	24.12	L1	FLO	20.0
0.267000	43.61	---	61.21	17.60	L1	FLO	20.0
0.312000	---	22.69	49.92	27.23	L1	FLO	20.0
0.312000	39.90	---	59.92	20.02	L1	FLO	20.0
0.430710	---	17.26	47.24	29.98	L1	FLO	20.0
0.430710	31.27	---	57.24	25.97	L1	FLO	20.0
0.471750	---	27.24	46.48	19.24	L1	FLO	20.0
0.471750	36.65	---	56.48	19.83	L1	FLO	20.0
0.527640	---	29.01	46.00	16.99	L1	FLO	20.0
0.527640	39.63	---	56.00	16.37	L1	FLO	20.0
0.565710	---	25.69	46.00	20.31	L1	FLO	20.0

0.565710	35.63	---	56.00	20.37	L1	FLO	20.0
2.080500	---	20.61	46.00	25.39	L1	FLO	20.1
2.080500	27.66	---	56.00	28.34	L1	FLO	20.1
2.773950	---	20.65	46.00	25.35	L1	FLO	20.1
2.773950	27.45	---	56.00	28.55	L1	FLO	20.1
12.942420	---	25.72	50.00	24.28	L1	FLO	20.5
12.942420	32.47	---	60.00	27.53	L1	FLO	20.5
20.696460	---	24.47	50.00	25.53	L1	FLO	20.8
20.696460	29.10	---	60.00	30.90	L1	FLO	20.8
24.531000	---	26.07	50.00	23.93	L1	FLO	20.9
24.531000	29.96	---	60.00	30.04	L1	FLO	20.9

EUT Information

Report NO : 551226
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

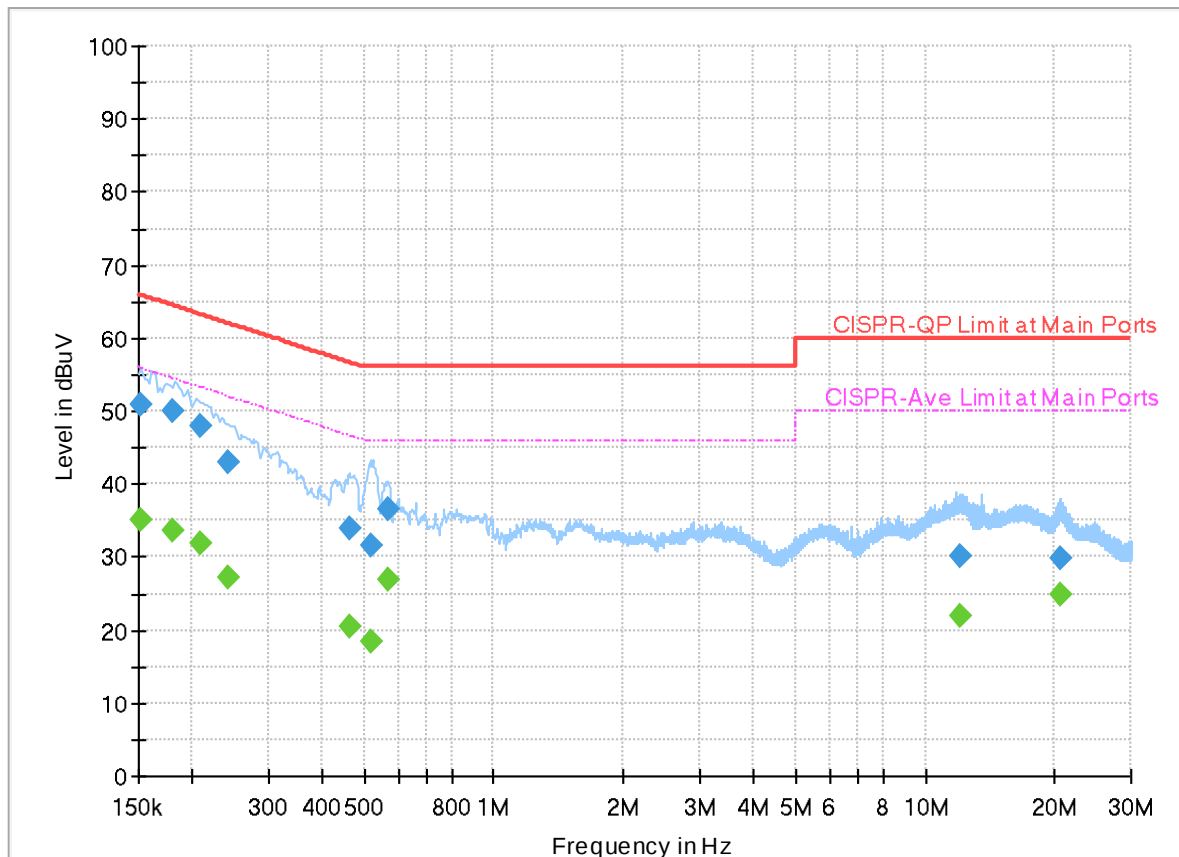

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151890	---	34.99	55.90	20.91	N	FLO	20.0
0.151890	50.94	---	65.90	14.96	N	FLO	20.0
0.179250	---	33.76	54.52	20.76	N	FLO	20.0
0.179250	50.04	---	64.52	14.48	N	FLO	20.0
0.207600	---	31.92	53.30	21.38	N	FLO	20.0
0.207600	48.07	---	63.30	15.23	N	FLO	20.0
0.242250	---	27.09	52.02	24.93	N	FLO	20.0
0.242250	42.97	---	62.02	19.05	N	FLO	20.0
0.465000	---	20.56	46.60	26.04	N	FLO	20.0
0.465000	33.85	---	56.60	22.75	N	FLO	20.0
0.521250	---	18.30	46.00	27.70	N	FLO	20.0
0.521250	31.67	---	56.00	24.33	N	FLO	20.0
0.567420	---	26.98	46.00	19.02	N	FLO	20.0
0.567420	36.51	---	56.00	19.49	N	FLO	20.0
12.054750	---	22.00	50.00	28.00	N	FLO	20.5
12.054750	30.09	---	60.00	29.91	N	FLO	20.5
20.699250	---	24.97	50.00	25.03	N	FLO	20.9
20.699250	29.97	---	60.00	30.03	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Rain Lee 、 Jacky Hong and White Hou	Relative Humidity :	40 ~ 65 %
		Temperature :	20 ~ 26 °C

Note symbol

-L	Low channel location
-R	High channel location

C1-1. Radiated Spurious Emission Test Modes

< sample 1 >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-

**C1-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GSKF	00	2375.94	41.67	54.00	-12.33	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	4804.00	40.06	74.00	-33.94	V	Peak	Pass	-	Harmonic
2	Bluetooth-LE_GSKF	19	2489.80	42.27	54.00	-11.73	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	45.96	74.00	-28.04	V	Peak	Pass	-	Harmonic
3	Bluetooth-LE_GSKF	39	2483.54	42.52	54.00	-11.48	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.91	74.00	-29.09	H	Peak	Pass	-	Harmonic



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2387.47</td><td>51.39</td><td>74.00 -22.61</td><td>44.18</td><td>27.47</td><td>6.78</td><td>36.97</td><td>9.93</td><td>200</td><td>132 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2387.47	51.39	74.00 -22.61	44.18	27.47	6.78	36.97	9.93	200	132 PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>101.29</td><td>-----</td><td>93.93</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>200</td><td>132 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	101.29	-----	93.93	27.60	6.80	36.97	9.93	200	132 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2387.47	51.39	74.00 -22.61	44.18	27.47	6.78	36.97	9.93	200	132 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	101.29	-----	93.93	27.60	6.80	36.97	9.93	200	132 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2375.94</td><td>41.67</td><td>54.00 -12.33</td><td>34.54</td><td>27.40</td><td>6.77</td><td>36.97</td><td>9.93</td><td>200</td><td>132 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2375.94	41.67	54.00 -12.33	34.54	27.40	6.77	36.97	9.93	200	132 AVERAGE	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>100.76</td><td>-----</td><td>93.40</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>200</td><td>132 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2402.00	100.76	-----	93.40	27.60	6.80	36.97	9.93	200	132 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2375.94	41.67	54.00 -12.33	34.54	27.40	6.77	36.97	9.93	200	132 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2402.00	100.76	-----	93.40	27.60	6.80	36.97	9.93	200	132 AVERAGE																																																																									



Mode	1																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2338.64</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>45.07</td><td>27.20</td><td>6.71</td><td>36.97</td><td>9.93</td><td>396</td><td>191</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2338.64	51.94	74.00	-22.06	45.07	27.20	6.71	36.97	9.93	396	191	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>96.41</td><td>-----</td><td>-----</td><td>89.05</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>396</td><td>191</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	96.41	-----	-----	89.05	27.60	6.80	36.97	9.93	396	191	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1	2338.64	51.94	74.00	-22.06	45.07	27.20	6.71	36.97	9.93	396	191	PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2402.00	96.41	-----	-----	89.05	27.60	6.80	36.97	9.93	396	191	PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.19</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>34.40</td><td>27.47</td><td>6.78</td><td>36.97</td><td>9.93</td><td>396</td><td>191</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2387.19	41.61	54.00	-12.39	34.40	27.47	6.78	36.97	9.93	396	191	AVERAGE	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>95.93</td><td>-----</td><td>-----</td><td>88.57</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>396</td><td>191</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2402.00	95.93	-----	-----	88.57	27.60	6.80	36.97	9.93	396	191	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2387.19	41.61	54.00	-12.39	34.40	27.47	6.78	36.97	9.93	396	191	AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	2402.00	95.93	-----	-----	88.57	27.60	6.80	36.97	9.93	396	191	AVERAGE																																																																										



Mode	1																																																																																											
	Harmonic																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>54.36</td><td>32.42</td><td>10.22</td><td>58.39</td><td>0.70</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	39.31	74.00	-34.69	54.36	32.42	10.22	58.39	0.70	--	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>40.06</td><td>74.00</td><td>-33.94</td><td>55.11</td><td>32.42</td><td>10.22</td><td>58.39</td><td>0.70</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	40.06	74.00	-33.94	55.11	32.42	10.22	58.39	0.70	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4804.00	39.31	74.00	-34.69	54.36	32.42	10.22	58.39	0.70	--	--	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1	4804.00	40.06	74.00	-33.94	55.11	32.42	10.22	58.39	0.70	--	--	PEAK																																																																																



Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL







Mode	2																																																																															
	Band Edge - L																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2387.87</td><td>51.58</td><td>74.00</td><td>-22.42</td><td>44.36</td><td>27.48</td><td>6.78</td><td>36.97</td><td>9.93</td><td>200</td><td>138</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2387.87	51.58	74.00	-22.42	44.36	27.48	6.78	36.97	9.93	200	138	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>101.43</td><td>-----</td><td>-----</td><td>94.01</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>200</td><td>138</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2440.00	101.43	-----	-----	94.01	27.60	6.86	36.97	9.93	200	138	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2387.87	51.58	74.00	-22.42	44.36	27.48	6.78	36.97	9.93	200	138	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2440.00	101.43	-----	-----	94.01	27.60	6.86	36.97	9.93	200	138	PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2382.41</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>34.54</td><td>27.42</td><td>6.77</td><td>36.97</td><td>9.93</td><td>200</td><td>138</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2382.41	41.69	54.00	-12.31	34.54	27.42	6.77	36.97	9.93	200	138	AVERAGE	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>100.88</td><td>-----</td><td>-----</td><td>93.46</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>200</td><td>138</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 2440.00	100.88	-----	-----	93.46	27.60	6.86	36.97	9.93	200	138	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2382.41	41.69	54.00	-12.31	34.54	27.42	6.77	36.97	9.93	200	138	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																								
1 2440.00	100.88	-----	-----	93.46	27.60	6.86	36.97	9.93	200	138	AVERAGE																																																																					



Mode	2																																								
	Band Edge - R																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2494.66</td><td>51.84</td><td>74.00</td><td>-22.16</td><td>44.89</td><td>27.85</td><td>6.94</td><td>36.97</td><td>9.93</td><td></td><td>200</td><td>138</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2494.66	51.84	74.00	-22.16	44.89	27.85	6.94	36.97	9.93		200	138	PEAK	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2494.66	51.84	74.00	-22.16	44.89	27.85	6.94	36.97	9.93		200	138	PEAK																													
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2489.88</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>34.58</td><td>27.88</td><td>6.93</td><td>36.97</td><td>9.93</td><td></td><td>200</td><td>138</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2489.88	42.27	54.00	-11.73	34.58	27.88	6.93	36.97	9.93		200	138	AVERAGE	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2489.88	42.27	54.00	-11.73	34.58	27.88	6.93	36.97	9.93		200	138	AVERAGE																													

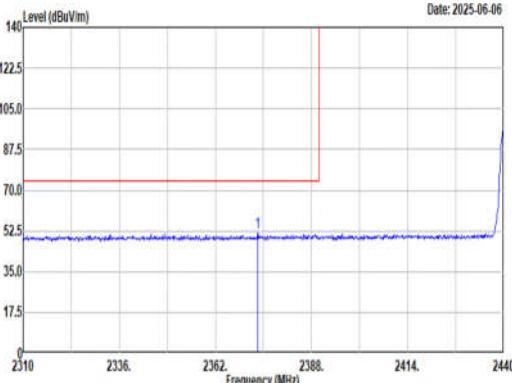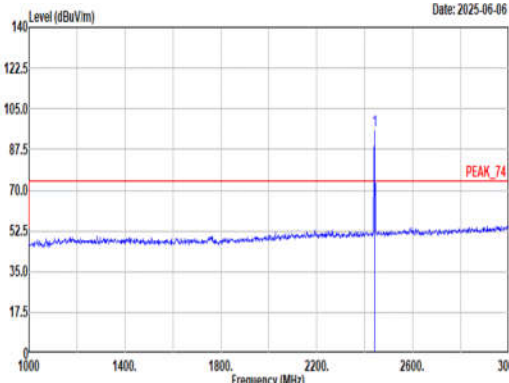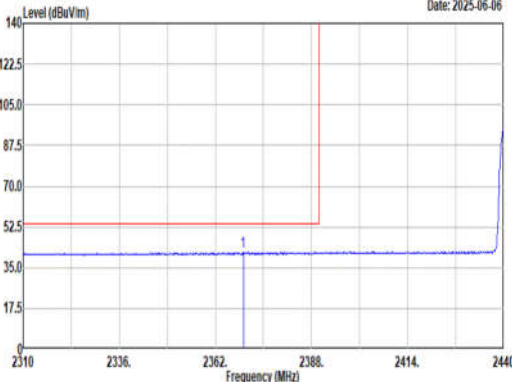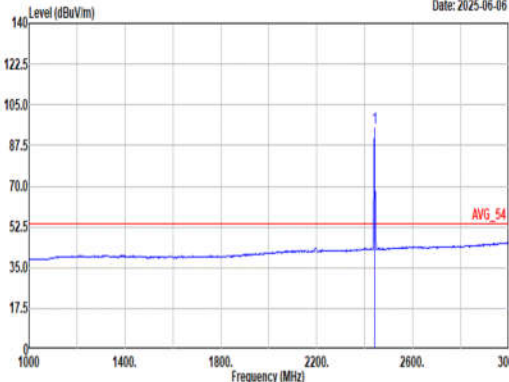

Mode	2																																																																															
	Band Edge - L																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2373.44</td><td>51.80</td><td>74.00</td><td>-22.20</td><td>44.68</td><td>27.40</td><td>6.76</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	1 2373.44	51.80	74.00	-22.20	44.68	27.40	6.76	36.97	9.93	382	189	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>95.67</td><td>-----</td><td>-----</td><td>88.25</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	1 2440.00	95.67	-----	-----	88.25	27.60	6.86	36.97	9.93	382	189	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm																																																																								
1 2373.44	51.80	74.00	-22.20	44.68	27.40	6.76	36.97	9.93	382	189	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm																																																																								
1 2440.00	95.67	-----	-----	88.25	27.60	6.86	36.97	9.93	382	189	PEAK																																																																					
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2369.54</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>34.52</td><td>27.40</td><td>6.76</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	1 2369.54	41.64	54.00	-12.36	34.52	27.40	6.76	36.97	9.93	382	189	AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2440.00</td><td>95.12</td><td>-----</td><td>-----</td><td>87.70</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	1 2440.00	95.12	-----	-----	87.70	27.60	6.86	36.97	9.93	382	189	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm																																																																								
1 2369.54	41.64	54.00	-12.36	34.52	27.40	6.76	36.97	9.93	382	189	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm																																																																								
1 2440.00	95.12	-----	-----	87.70	27.60	6.86	36.97	9.93	382	189	AVERAGE																																																																					







Mode	2																																								
	Band Edge - R																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	Level (dBuV/m) Date: 2025-06-06 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.34</td><td>51.56</td><td>74.00</td><td>-22.44</td><td></td><td>43.87</td><td>27.00</td><td>6.93</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.34	51.56	74.00	-22.44		43.87	27.00	6.93	36.97	9.93	382	189	PEAK	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2487.34	51.56	74.00	-22.44		43.87	27.00	6.93	36.97	9.93	382	189	PEAK																													
Avg	Level (dBuV/m) Date: 2025-06-06 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.34</td><td>42.07</td><td>54.00</td><td>-11.93</td><td></td><td>34.38</td><td>27.00</td><td>6.93</td><td>36.97</td><td>9.93</td><td>382</td><td>189</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.34	42.07	54.00	-11.93		34.38	27.00	6.93	36.97	9.93	382	189	AVERAGE	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1 2487.34	42.07	54.00	-11.93		34.38	27.00	6.93	36.97	9.93	382	189	AVERAGE																													







Mode	2																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4888.00</td><td>41.01</td><td>74.00</td><td>-32.99</td><td>55.43</td><td>32.72</td><td>10.36</td><td>58.21</td><td>0.71</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7328.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>52.61</td><td>37.08</td><td>12.88</td><td>57.69</td><td>0.66</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4888.00	41.01	74.00	-32.99	55.43	32.72	10.36	58.21	0.71	--	PEAK	2	7328.00	45.54	74.00	-28.46	52.61	37.08	12.88	57.69	0.66	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4888.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>56.90</td><td>32.72</td><td>10.36</td><td>58.21</td><td>0.71</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7328.00</td><td>45.96</td><td>74.00</td><td>-28.04</td><td>53.03</td><td>37.08</td><td>12.88</td><td>57.69</td><td>0.66</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4888.00	42.48	74.00	-31.52	56.90	32.72	10.36	58.21	0.71	--	PEAK	2	7328.00	45.96	74.00	-28.04	53.03	37.08	12.88	57.69	0.66	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4888.00	41.01	74.00	-32.99	55.43	32.72	10.36	58.21	0.71	--	PEAK																																																																																																					
2	7328.00	45.54	74.00	-28.46	52.61	37.08	12.88	57.69	0.66	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4888.00	42.48	74.00	-31.52	56.90	32.72	10.36	58.21	0.71	--	PEAK																																																																																																					
2	7328.00	45.96	74.00	-28.04	53.03	37.08	12.88	57.69	0.66	--	PEAK																																																																																																					

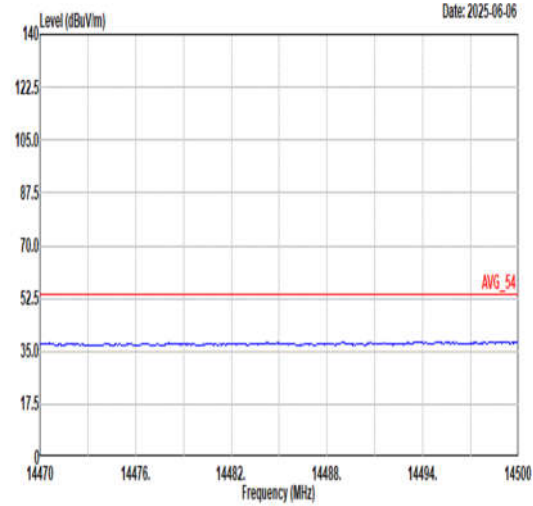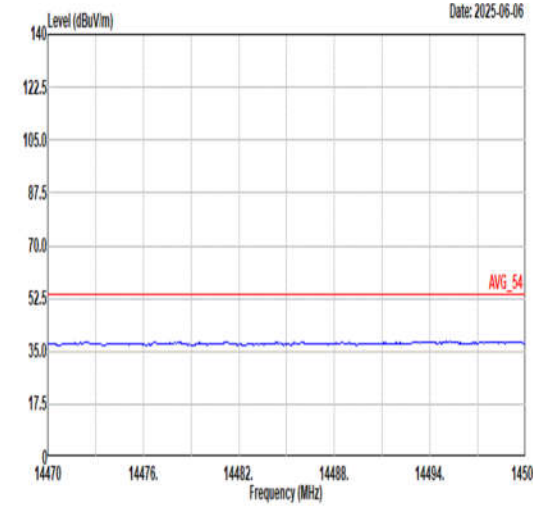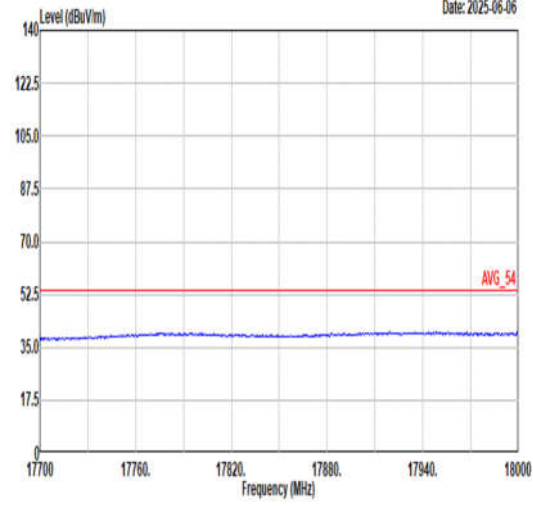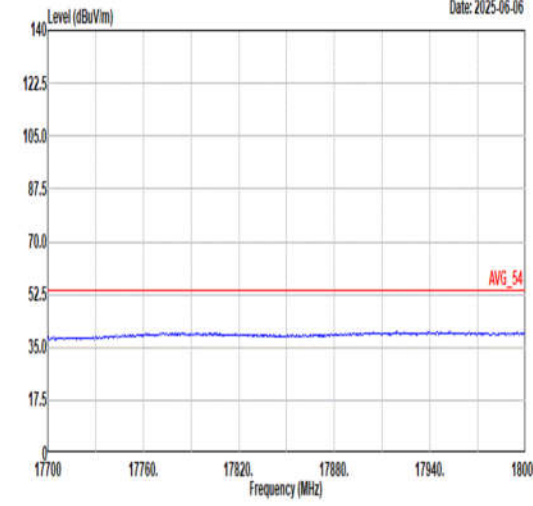

Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL

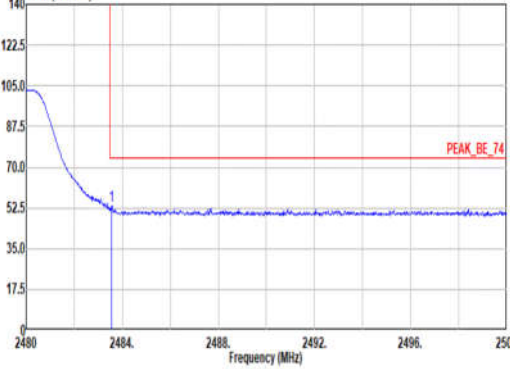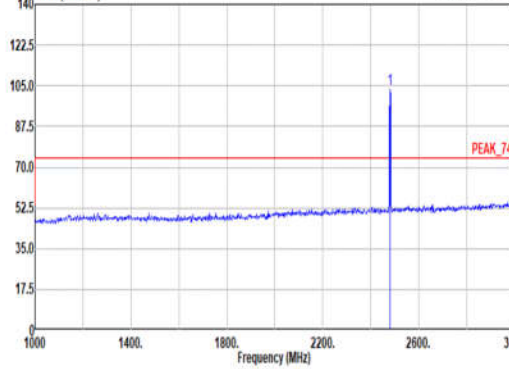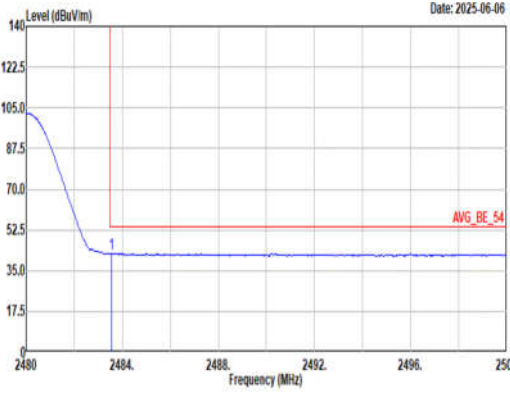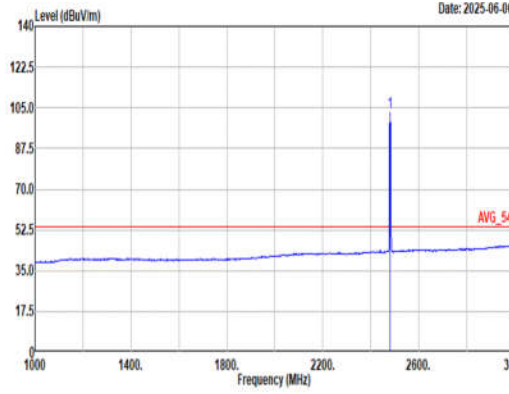

Mode	3																																																																																							
	Band Edge																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	Level (dBuV/m) Date: 2025-06-06  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.56</td><td>53.51</td><td>74.00</td><td>-20.49</td><td>45.82</td><td>27.80</td><td>6.93</td><td>36.97</td><td>9.93</td><td>186</td><td>133</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2025-06-06  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>103.31</td><td>-----</td><td>-----</td><td>95.63</td><td>27.80</td><td>6.92</td><td>36.97</td><td>9.93</td><td>186</td><td>133</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.56	53.51	74.00	-20.49	45.82	27.80	6.93	36.97	9.93	186	133	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	103.31	-----	-----	95.63	27.80	6.92	36.97	9.93	186	133	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 2483.56	53.51	74.00	-20.49	45.82	27.80	6.93	36.97	9.93	186	133	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 2480.00	103.31	-----	-----	95.63	27.80	6.92	36.97	9.93	186	133	PEAK																																																																													
Avg	Level (dBuV/m) Date: 2025-06-06  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.54</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>34.83</td><td>27.80</td><td>6.93</td><td>36.97</td><td>9.93</td><td>186</td><td>133</td><td>AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-06-06  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>102.06</td><td>-----</td><td>-----</td><td>95.18</td><td>27.80</td><td>6.92</td><td>36.97</td><td>9.93</td><td>186</td><td>133</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.54	42.52	54.00	-11.48	34.83	27.80	6.93	36.97	9.93	186	133	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2480.00	102.06	-----	-----	95.18	27.80	6.92	36.97	9.93	186	133	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 2483.54	42.52	54.00	-11.48	34.83	27.80	6.93	36.97	9.93	186	133	AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1 2480.00	102.06	-----	-----	95.18	27.80	6.92	36.97	9.93	186	133	AVERAGE																																																																													



Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.14</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>44.90</td><td>27.88</td><td>6.95</td><td>36.97</td><td>9.93</td><td>100</td><td>227</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.14	52.69	74.00	-21.31	44.90	27.88	6.95	36.97	9.93	100	227	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>95.24</td><td>-----</td><td>-----</td><td>87.56</td><td>27.88</td><td>6.92</td><td>36.97</td><td>9.93</td><td>100</td><td>227</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.24	-----	-----	87.56	27.88	6.92	36.97	9.93	100	227	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2498.14	52.69	74.00	-21.31	44.90	27.88	6.95	36.97	9.93	100	227	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	95.24	-----	-----	87.56	27.88	6.92	36.97	9.93	100	227	PEAK																																																																														
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.36</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>34.72</td><td>27.88</td><td>6.93</td><td>36.97</td><td>9.93</td><td>100</td><td>227</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.36	42.41	54.00	-11.59	34.72	27.88	6.93	36.97	9.93	100	227	AVERAGE	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.75</td><td>-----</td><td>-----</td><td>87.07</td><td>27.88</td><td>6.92</td><td>36.97</td><td>9.93</td><td>100</td><td>227</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.75	-----	-----	87.07	27.88	6.92	36.97	9.93	100	227	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2487.36	42.41	54.00	-11.59	34.72	27.88	6.93	36.97	9.93	100	227	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	94.75	-----	-----	87.07	27.88	6.92	36.97	9.93	100	227	AVERAGE																																																																														



Mode	3																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																	
ANT	1																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.31</td><td>74.00</td><td>-32.69</td><td>54.96</td><td>33.14</td><td>10.51</td><td>58.02</td><td>0.72</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7448.00</td><td>44.91</td><td>74.00</td><td>-29.09</td><td>52.58</td><td>36.52</td><td>13.01</td><td>57.87</td><td>0.67</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	4960.00	41.31	74.00	-32.69	54.96	33.14	10.51	58.02	0.72	--	--	--	PEAK	2	7448.00	44.91	74.00	-29.09	52.58	36.52	13.01	57.87	0.67	--	--	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.16</td><td>74.00</td><td>-32.84</td><td>54.81</td><td>33.14</td><td>10.51</td><td>58.02</td><td>0.72</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7448.00</td><td>44.71</td><td>74.00</td><td>-29.29</td><td>52.38</td><td>36.52</td><td>13.01</td><td>57.87</td><td>0.67</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	4960.00	41.16	74.00	-32.84	54.81	33.14	10.51	58.02	0.72	--	--	--	PEAK	2	7448.00	44.71	74.00	-29.29	52.38	36.52	13.01	57.87	0.67	--	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																					
1	4960.00	41.31	74.00	-32.69	54.96	33.14	10.51	58.02	0.72	--	--	--	PEAK																																																																																																					
2	7448.00	44.91	74.00	-29.09	52.58	36.52	13.01	57.87	0.67	--	--	--	PEAK																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																					
1	4960.00	41.16	74.00	-32.84	54.81	33.14	10.51	58.02	0.72	--	--	--	PEAK																																																																																																					
2	7448.00	44.71	74.00	-29.29	52.38	36.52	13.01	57.87	0.67	--	--	--	PEAK																																																																																																					



Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



C2.1 Radiated Spurious Emission Test Modes





< sample 1 >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	1	LF	-	-	-	-	Below 1GHz
Mode 8	2400-2483.5	1	SHF	-	-	-	-	Above 18GHz





C2-2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE_GSKF	00	2386.63	43.72	54.00	-10.28	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	00	4804.00	39.72	74.00	-34.28	V	Peak	Pass	-	Harmonic
5	Bluetooth-LE_GSKF	19	2494.84	44.24	54.00	-9.76	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	19	7320.00	45.55	74.00	-28.45	V	Peak	Pass	-	Harmonic
6	Bluetooth-LE_GSKF	39	2483.52	49.84	54.00	-4.16	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.98	74.00	-29.02	H	Peak	Pass	-	Harmonic
7	LF		72.68	33.88	40.00	-6.12	V	Peak	Pass	-	Below 1GHz
8	SHF		24876.44	39.65	74.00	-34.35	V	Peak	Pass	-	Above 18GHz

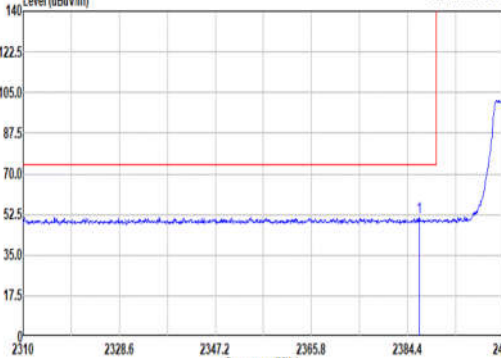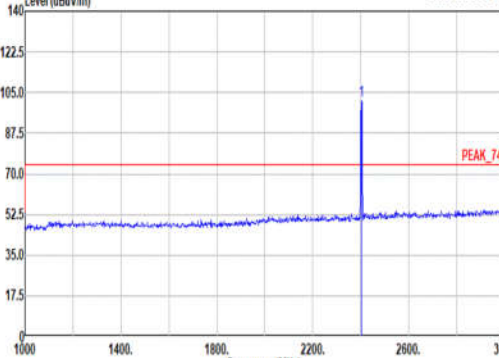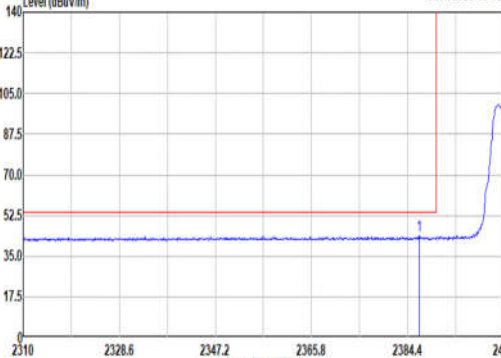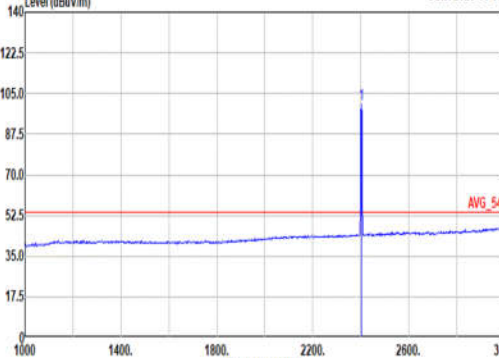

Mode	4																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-06-05  Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.63</td><td>51.41</td><td>74.00</td><td>-22.59</td><td>44.20</td><td>27.47</td><td>6.78</td><td>36.97</td><td>9.93</td><td>200</td><td>144</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.63	51.41	74.00	-22.59	44.20	27.47	6.78	36.97	9.93	200	144	PEAK	Level (dBuV/m) Date: 2025-06-05  Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.58</td><td>-----</td><td>-----</td><td>94.22</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>200</td><td>144</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.58	-----	-----	94.22	27.60	6.80	36.97	9.93	200	144	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.63	51.41	74.00	-22.59	44.20	27.47	6.78	36.97	9.93	200	144	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	101.58	-----	-----	94.22	27.60	6.80	36.97	9.93	200	144	PEAK																																																																																							
Avg	Level (dBuV/m) Date: 2025-06-05  Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.63</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>36.51</td><td>27.47</td><td>6.78</td><td>36.97</td><td>9.93</td><td>200</td><td>144</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.63	43.72	54.00	-10.28	36.51	27.47	6.78	36.97	9.93	200	144	AVERAGE	Level (dBuV/m) Date: 2025-06-05  Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.57</td><td>-----</td><td>-----</td><td>93.21</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>200</td><td>144</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.57	-----	-----	93.21	27.60	6.80	36.97	9.93	200	144	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.63	43.72	54.00	-10.28	36.51	27.47	6.78	36.97	9.93	200	144	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	100.57	-----	-----	93.21	27.60	6.80	36.97	9.93	200	144	AVERAGE																																																																																							

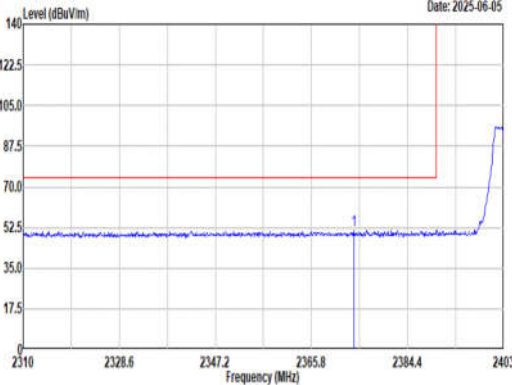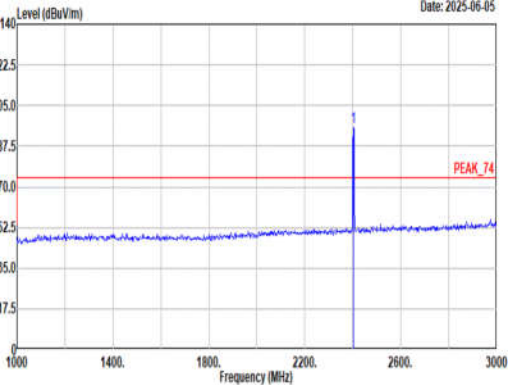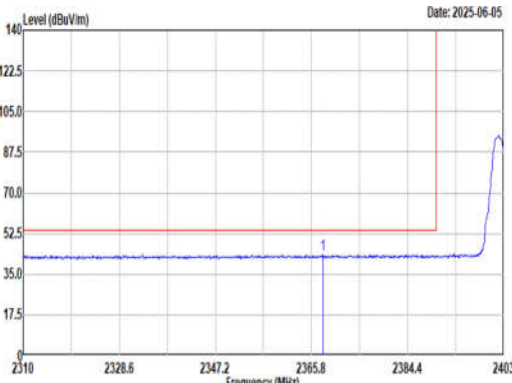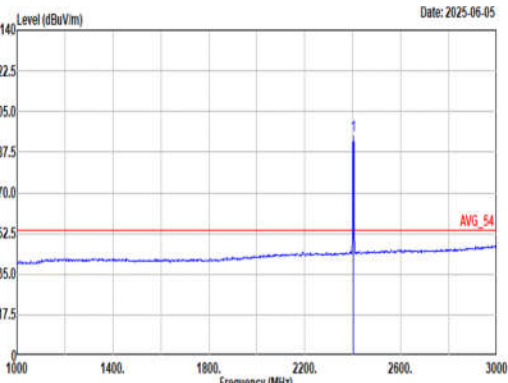

Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>44.38</td><td>27.40</td><td>6.76</td><td>36.97</td><td>9.93</td><td>400</td><td>188</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.00	51.50	74.00	-22.50	44.38	27.40	6.76	36.97	9.93	400	188	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>95.88</td><td>-----</td><td>-----</td><td>88.52</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>400</td><td>188</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	95.88	-----	-----	88.52	27.60	6.80	36.97	9.93	400	188	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2374.00	51.50	74.00	-22.50	44.38	27.40	6.76	36.97	9.93	400	188	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	95.88	-----	-----	88.52	27.60	6.80	36.97	9.93	400	188	PEAK																																																																																								
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.03</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>36.18</td><td>27.38</td><td>6.75</td><td>36.97</td><td>9.93</td><td>400</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2368.03	43.27	54.00	-10.73	36.18	27.38	6.75	36.97	9.93	400	188	AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>94.67</td><td>-----</td><td>-----</td><td>87.31</td><td>27.60</td><td>6.80</td><td>36.97</td><td>9.93</td><td>400</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	94.67	-----	-----	87.31	27.60	6.80	36.97	9.93	400	188	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2368.03	43.27	54.00	-10.73	36.18	27.38	6.75	36.97	9.93	400	188	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	94.67	-----	-----	87.31	27.60	6.80	36.97	9.93	400	188	AVERAGE																																																																																								



Mode	4																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4884.00</td><td>39.19</td><td>74.00</td><td>-34.81</td><td>54.24</td><td>32.42</td><td>10.22</td><td>58.39</td><td>0.70</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4884.00	39.19	74.00	-34.81	54.24	32.42	10.22	58.39	0.70	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91280_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4884.00</td><td>39.72</td><td>74.00</td><td>-34.28</td><td>54.77</td><td>32.42</td><td>10.22</td><td>58.39</td><td>0.70</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4884.00	39.72	74.00	-34.28	54.77	32.42	10.22	58.39	0.70	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4884.00	39.19	74.00	-34.81	54.24	32.42	10.22	58.39	0.70	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4884.00	39.72	74.00	-34.28	54.77	32.42	10.22	58.39	0.70	--	PEAK																																																																																						



Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



FCC RADIO TEST REPORT

Report No. : FR551226B

Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2334.70</td><td>51.00</td><td>74.00</td><td>-22.20</td><td>44.93</td><td>27.20</td><td>6.71</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2334.70	51.00	74.00	-22.20	44.93	27.20	6.71	36.97	9.93	195	142	PEAK	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>102.65</td><td>-----</td><td>-----</td><td>95.23</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	102.65	-----	-----	95.23	27.60	6.86	36.97	9.93	195	142	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2334.70	51.00	74.00	-22.20	44.93	27.20	6.71	36.97	9.93	195	142	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	102.65	-----	-----	95.23	27.60	6.86	36.97	9.93	195	142	PEAK																																																																																								
Avg	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>36.25</td><td>27.47</td><td>6.78</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	43.46	54.00	-10.54	36.25	27.47	6.78	36.97	9.93	195	142	AVERAGE	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.65</td><td>-----</td><td>-----</td><td>94.23</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.65	-----	-----	94.23	27.60	6.86	36.97	9.93	195	142	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.57	43.46	54.00	-10.54	36.25	27.47	6.78	36.97	9.93	195	142	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	101.65	-----	-----	94.23	27.60	6.86	36.97	9.93	195	142	AVERAGE																																																																																								







FCC RADIO TEST REPORT

Report No. : FR551226B

Mode	5																																		
	Band Edge - R																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																		
ANT	1																																		
Pol.	Horizontal	Fundamental																																	
Peak	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.64</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>44.36</td><td>27.80</td><td>6.93</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2484.64	52.05	74.00	-21.95	44.36	27.80	6.93	36.97	9.93	195	142	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																									
1	2484.64	52.05	74.00	-21.95	44.36	27.80	6.93	36.97	9.93	195	142	PEAK																							
Avg	Level (dBuV/m) Date: 2025-06-05 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2494.84</td><td>44.24</td><td>54.00</td><td>-9.76</td><td>36.49</td><td>27.85</td><td>6.94</td><td>36.97</td><td>9.93</td><td>195</td><td>142</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	2494.84	44.24	54.00	-9.76	36.49	27.85	6.94	36.97	9.93	195	142	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																									
1	2494.84	44.24	54.00	-9.76	36.49	27.85	6.94	36.97	9.93	195	142	AVERAGE																							

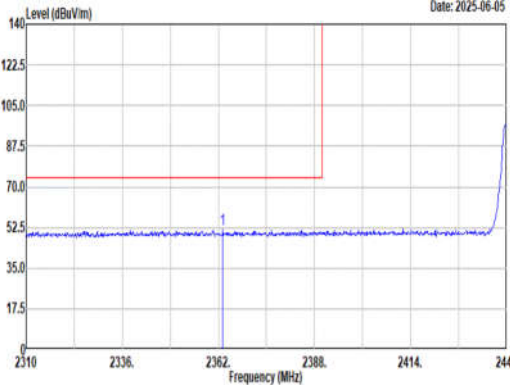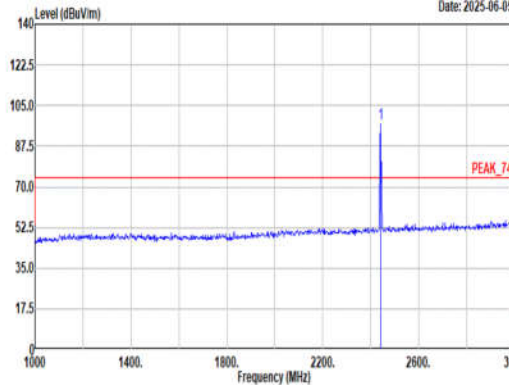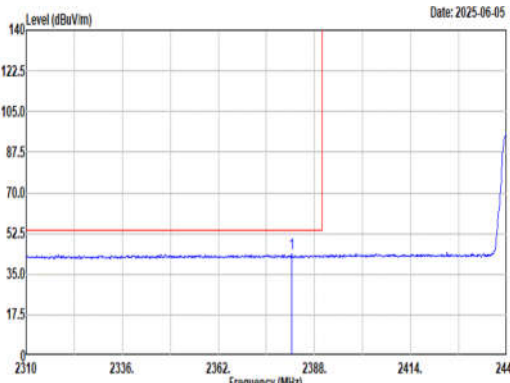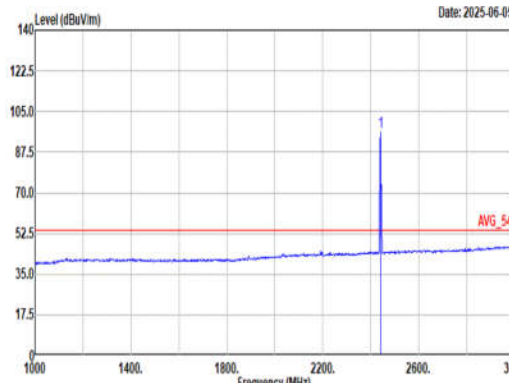

Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.17</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>44.50</td><td>27.33</td><td>6.75</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.17	51.54	74.00	-22.46	44.50	27.33	6.75	36.97	9.93	387	188	PEAK	 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>97.03</td><td>-----</td><td>-----</td><td>89.61</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	97.03	-----	-----	89.61	27.60	6.86	36.97	9.93	387	188	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2363.17	51.54	74.00	-22.46	44.50	27.33	6.75	36.97	9.93	387	188	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	97.03	-----	-----	89.61	27.60	6.86	36.97	9.93	387	188	PEAK																																																																																								
Avg	 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.76</td><td>43.60</td><td>54.00</td><td>-10.40</td><td>36.45</td><td>27.42</td><td>6.77</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.76	43.60	54.00	-10.40	36.45	27.42	6.77	36.97	9.93	387	188	AVERAGE	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>96.05</td><td>-----</td><td>-----</td><td>88.63</td><td>27.60</td><td>6.86</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	96.05	-----	-----	88.63	27.60	6.86	36.97	9.93	387	188	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2381.76	43.60	54.00	-10.40	36.45	27.42	6.77	36.97	9.93	387	188	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	96.05	-----	-----	88.63	27.60	6.86	36.97	9.93	387	188	AVERAGE																																																																																								



FCC RADIO TEST REPORT

Report No. : FR551226B

Mode	5																																																									
	Band Edge - R																																																									
	2400-2483.5_Bluetooth-LE_GSFK_CH19_2440MHz																																																									
ANT	1																																																									
Pol.	Vertical						Fundamental																																																			
Peak	Level (dBuV/m) Date: 2025-06-05 PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>1</th><th>Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.70</td><td>51.06</td><td>74.00</td><td>-22.14</td><td>44.08</td><td>27.87</td><td>6.95</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2496.70	51.06	74.00	-22.14	44.08	27.87	6.95	36.97	9.93	387	188	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																
1	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2496.70	51.06	74.00	-22.14	44.08	27.87	6.95	36.97	9.93	387	188	PEAK																																														
Avg	Level (dBuV/m) Date: 2025-06-05 AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>1</th><th>Hz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.48</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>36.11</td><td>27.80</td><td>6.93</td><td>36.97</td><td>9.93</td><td>387</td><td>188</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.48	43.80	54.00	-10.20	36.11	27.80	6.93	36.97	9.93	387	188	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																
1	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2485.48	43.80	54.00	-10.20	36.11	27.80	6.93	36.97	9.93	387	188	AVERAGE																																														



Mode	5																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4680.00</td><td>40.76</td><td>74.00</td><td>-33.24</td><td>55.18</td><td>32.72</td><td>10.36</td><td>58.21</td><td>0.71</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>44.06</td><td>74.00</td><td>-29.14</td><td>51.93</td><td>37.08</td><td>12.88</td><td>57.69</td><td>0.66</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4680.00	40.76	74.00	-33.24	55.18	32.72	10.36	58.21	0.71	--	PEAK	2	7320.00	44.06	74.00	-29.14	51.93	37.08	12.88	57.69	0.66	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4680.00</td><td>40.75</td><td>74.00</td><td>-33.25</td><td>55.17</td><td>32.72</td><td>10.36</td><td>58.21</td><td>0.71</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>52.62</td><td>37.08</td><td>12.88</td><td>57.69</td><td>0.66</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4680.00	40.75	74.00	-33.25	55.17	32.72	10.36	58.21	0.71	--	PEAK	2	7320.00	45.55	74.00	-28.45	52.62	37.08	12.88	57.69	0.66	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4680.00	40.76	74.00	-33.24	55.18	32.72	10.36	58.21	0.71	--	PEAK																																																																																																					
2	7320.00	44.06	74.00	-29.14	51.93	37.08	12.88	57.69	0.66	--	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4680.00	40.75	74.00	-33.25	55.17	32.72	10.36	58.21	0.71	--	PEAK																																																																																																					
2	7320.00	45.55	74.00	-28.45	52.62	37.08	12.88	57.69	0.66	--	PEAK																																																																																																					



Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



Mode	6																																																																																											
	Band Edge																																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2483.54</td><td>61.70</td><td>74.00</td><td>-12.30</td><td>54.01</td><td>27.00</td><td>6.93</td><td>36.97</td><td>9.93</td><td>222 121 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.54	61.70	74.00	-12.30	54.01	27.00	6.93	36.97	9.93	222 121 PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>103.64</td><td>-----</td><td>-----</td><td>95.96</td><td>27.00</td><td>6.92</td><td>36.97</td><td>9.93</td><td>222 121 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	103.64	-----	-----	95.96	27.00	6.92	36.97	9.93	222 121 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1 2483.54	61.70	74.00	-12.30	54.01	27.00	6.93	36.97	9.93	222 121 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1 2480.00	103.64	-----	-----	95.96	27.00	6.92	36.97	9.93	222 121 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2483.52</td><td>49.84</td><td>54.00</td><td>-4.16</td><td>42.15</td><td>27.00</td><td>6.93</td><td>36.97</td><td>9.93</td><td>222 121 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.52	49.84	54.00	-4.16	42.15	27.00	6.93	36.97	9.93	222 121 AVERAGE	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>102.69</td><td>-----</td><td>-----</td><td>95.01</td><td>27.00</td><td>6.92</td><td>36.97</td><td>9.93</td><td>222 121 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	102.69	-----	-----	95.01	27.00	6.92	36.97	9.93	222 121 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1 2483.52	49.84	54.00	-4.16	42.15	27.00	6.93	36.97	9.93	222 121 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1 2480.00	102.69	-----	-----	95.01	27.00	6.92	36.97	9.93	222 121 AVERAGE																																																																																			



Mode	6																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.60 56.97 74.00 -17.03 49.28 27.00 6.93 36.97 9.93 100 64 PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor						MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2483.60 56.97 74.00 -17.03 49.28 27.00 6.93 36.97 9.93 100 64 PEAK									Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 95.95 ----- 88.27 27.00 6.92 36.97 9.93 100 64 PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor						MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 95.95 ----- 88.27 27.00 6.92 36.97 9.93 100 64 PEAK								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2483.60 56.97 74.00 -17.03 49.28 27.00 6.93 36.97 9.93 100 64 PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 95.95 ----- 88.27 27.00 6.92 36.97 9.93 100 64 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.56 45.98 54.00 -8.02 38.29 27.00 6.93 36.97 9.93 100 64 AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor						MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2483.56 45.98 54.00 -8.02 38.29 27.00 6.93 36.97 9.93 100 64 AVERAGE									Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 94.82 ----- 87.14 27.00 6.92 36.97 9.93 100 64 AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor						MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg									1 2480.00 94.82 ----- 87.14 27.00 6.92 36.97 9.93 100 64 AVERAGE								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2483.56 45.98 54.00 -8.02 38.29 27.00 6.93 36.97 9.93 100 64 AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor	Factor																																																																							
MHz dBuV/m dBuV/m dB dB dB dB dB dB cm deg																																																																										
1 2480.00 94.82 ----- 87.14 27.00 6.92 36.97 9.93 100 64 AVERAGE																																																																										



Mode	6																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.18</td><td>74.00</td><td>-32.90</td><td>54.75</td><td>33.14</td><td>10.51</td><td>58.02</td><td>0.72</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>52.65</td><td>36.52</td><td>13.01</td><td>57.87</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.18	74.00	-32.90	54.75	33.14	10.51	58.02	0.72	--	--	PEAK	2	7440.00	44.98	74.00	-29.02	52.65	36.52	13.01	57.87	0.67	--	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.64</td><td>74.00</td><td>-32.36</td><td>55.29</td><td>33.14</td><td>10.51</td><td>58.02</td><td>0.72</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>52.28</td><td>36.52</td><td>13.01</td><td>57.87</td><td>0.67</td><td>--</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	41.64	74.00	-32.36	55.29	33.14	10.51	58.02	0.72	--	--	PEAK	2	7440.00	44.61	74.00	-29.39	52.28	36.52	13.01	57.87	0.67	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4960.00	41.18	74.00	-32.90	54.75	33.14	10.51	58.02	0.72	--	--	PEAK																																																																																																									
2	7440.00	44.98	74.00	-29.02	52.65	36.52	13.01	57.87	0.67	--	--	PEAK																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	4960.00	41.64	74.00	-32.36	55.29	33.14	10.51	58.02	0.72	--	--	PEAK																																																																																																									
2	7440.00	44.61	74.00	-29.39	52.28	36.52	13.01	57.87	0.67	--	--	PEAK																																																																																																									



Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



FCC RADIO TEST REPORT

Report No. : FR551226B

Mode	7																																																																																																																																																																																					
	LF																																																																																																																																																																																					
ANT	1																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QP/ Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: QP 3m 81L06_40103 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>72.68</td><td>26.21</td><td>40.00</td><td>-13.79</td><td>44.01</td><td>12.79</td><td>1.25</td><td>31.91</td><td>0.07 -- -- Peak</td></tr><tr><td>2</td><td>90.14</td><td>27.05</td><td>43.50</td><td>-16.45</td><td>42.60</td><td>14.94</td><td>1.38</td><td>31.94</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>26.93</td><td>46.00</td><td>-19.07</td><td>36.12</td><td>20.11</td><td>2.33</td><td>31.75</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>311.30</td><td>35.21</td><td>46.00</td><td>-10.79</td><td>44.94</td><td>19.42</td><td>2.53</td><td>31.81</td><td>0.13 -- -- Peak</td></tr><tr><td>5</td><td>718.94</td><td>31.96</td><td>46.00</td><td>-14.04</td><td>32.91</td><td>26.87</td><td>3.76</td><td>31.72</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>954.41</td><td>34.99</td><td>46.00</td><td>-11.01</td><td>30.27</td><td>30.82</td><td>4.33</td><td>30.63</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	72.68	26.21	40.00	-13.79	44.01	12.79	1.25	31.91	0.07 -- -- Peak	2	90.14	27.05	43.50	-16.45	42.60	14.94	1.38	31.94	0.07 -- -- Peak	3	264.74	26.93	46.00	-19.07	36.12	20.11	2.33	31.75	0.12 -- -- Peak	4	311.30	35.21	46.00	-10.79	44.94	19.42	2.53	31.81	0.13 -- -- Peak	5	718.94	31.96	46.00	-14.04	32.91	26.87	3.76	31.72	0.14 -- -- Peak	6	954.41	34.99	46.00	-11.01	30.27	30.82	4.33	30.63	0.20 -- -- Peak	Level (dBuV/m) Date: 2025-06-06 Site : 03CH13-HY Condition: QP 3m 81L06_40103 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>72.68</td><td>33.88</td><td>40.00</td><td>-6.12</td><td>51.68</td><td>12.79</td><td>1.25</td><td>31.91</td><td>0.07 -- -- Peak</td></tr><tr><td>2</td><td>88.20</td><td>25.85</td><td>43.50</td><td>-17.65</td><td>41.69</td><td>14.65</td><td>1.37</td><td>31.93</td><td>0.07 -- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>25.92</td><td>46.00</td><td>-20.00</td><td>35.11</td><td>20.11</td><td>2.33</td><td>31.75</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>311.30</td><td>35.75</td><td>46.00</td><td>-10.25</td><td>45.48</td><td>19.42</td><td>2.53</td><td>31.81</td><td>0.13 -- -- Peak</td></tr><tr><td>5</td><td>750.71</td><td>32.29</td><td>46.00</td><td>-13.71</td><td>31.50</td><td>28.42</td><td>3.84</td><td>31.61</td><td>0.14 -- -- Peak</td></tr><tr><td>6</td><td>953.44</td><td>35.50</td><td>46.00</td><td>-10.42</td><td>30.89</td><td>30.80</td><td>4.33</td><td>30.64</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	72.68	33.88	40.00	-6.12	51.68	12.79	1.25	31.91	0.07 -- -- Peak	2	88.20	25.85	43.50	-17.65	41.69	14.65	1.37	31.93	0.07 -- -- Peak	3	264.74	25.92	46.00	-20.00	35.11	20.11	2.33	31.75	0.12 -- -- Peak	4	311.30	35.75	46.00	-10.25	45.48	19.42	2.53	31.81	0.13 -- -- Peak	5	750.71	32.29	46.00	-13.71	31.50	28.42	3.84	31.61	0.14 -- -- Peak	6	953.44	35.50	46.00	-10.42	30.89	30.80	4.33	30.64	0.20 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	72.68	26.21	40.00	-13.79	44.01	12.79	1.25	31.91	0.07 -- -- Peak																																																																																																																																																																													
2	90.14	27.05	43.50	-16.45	42.60	14.94	1.38	31.94	0.07 -- -- Peak																																																																																																																																																																													
3	264.74	26.93	46.00	-19.07	36.12	20.11	2.33	31.75	0.12 -- -- Peak																																																																																																																																																																													
4	311.30	35.21	46.00	-10.79	44.94	19.42	2.53	31.81	0.13 -- -- Peak																																																																																																																																																																													
5	718.94	31.96	46.00	-14.04	32.91	26.87	3.76	31.72	0.14 -- -- Peak																																																																																																																																																																													
6	954.41	34.99	46.00	-11.01	30.27	30.82	4.33	30.63	0.20 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	72.68	33.88	40.00	-6.12	51.68	12.79	1.25	31.91	0.07 -- -- Peak																																																																																																																																																																													
2	88.20	25.85	43.50	-17.65	41.69	14.65	1.37	31.93	0.07 -- -- Peak																																																																																																																																																																													
3	264.74	25.92	46.00	-20.00	35.11	20.11	2.33	31.75	0.12 -- -- Peak																																																																																																																																																																													
4	311.30	35.75	46.00	-10.25	45.48	19.42	2.53	31.81	0.13 -- -- Peak																																																																																																																																																																													
5	750.71	32.29	46.00	-13.71	31.50	28.42	3.84	31.61	0.14 -- -- Peak																																																																																																																																																																													
6	953.44	35.50	46.00	-10.42	30.89	30.80	4.33	30.64	0.20 -- -- Peak																																																																																																																																																																													



FCC RADIO TEST REPORT

Report No. : FR551226B

Mode	8																																																																																															
	SHF																																																																																															
ANT	1																																																																																															
Pol.	Horizontal					Vertical																																																																																										
Peak	Level (dBuV/m) Date: 2025-06-06 Horizontal Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a blue signal line with a peak at 24118.01 MHz. Red horizontal lines indicate limits: PEAK_74 at 74.00 dBuV/m and AVG_54 at 54.00 dBuV/m. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. Site : 03CH13-HY Condition: PEAK_74 In SHF_00993_231124 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24118.01</td><td>39.18</td><td>74.00</td><td>-34.82</td><td>57.58</td><td>38.78</td><td>6.13</td><td>53.77</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24118.01	39.18	74.00	-34.82	57.58	38.78	6.13	53.77	-9.54	--	PEAK	Level (dBuV/m) Date: 2025-06-06 Vertical Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a blue signal line with a peak at 24876.44 MHz. Red horizontal lines indicate limits: PEAK_74 at 74.00 dBuV/m and AVG_54 at 54.00 dBuV/m. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. Site : 03CH13-HY Condition: PEAK_74 In SHF_00993_231124 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24876.44</td><td>39.65</td><td>74.00</td><td>-34.35</td><td>56.94</td><td>39.25</td><td>6.38</td><td>53.38</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24876.44	39.65	74.00	-34.35	56.94	39.25	6.38	53.38	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	24118.01	39.18	74.00	-34.82	57.58	38.78	6.13	53.77	-9.54	--	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	24876.44	39.65	74.00	-34.35	56.94	39.25	6.38	53.38	-9.54	--	PEAK																																																																																					



C3-1. Radiated Spurious Emission Test Modes

< sample 2 >

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 9	2400-2483.5	1	Bluetooth-LE_GSKF	39	2480	2Mbps	-	-





**C3-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
9	Bluetooth-LE_GSKF	39	2483.60	48.70	54.00	-5.30	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GSKF	39	7440.00	44.77	74.00	-29.23	H	Peak	Pass	-	Harmonic



Mode	9																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.54 68.48 74.00 -13.52 53.03 27.00 6.69 36.97 9.93 217 126 PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB cm deg									1 2483.54 68.48 74.00 -13.52 53.03 27.00 6.69 36.97 9.93 217 126 PEAK									Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 103.07 ----- 95.62 27.00 6.69 36.97 9.93 217 126 PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB cm deg									1 2480.00 103.07 ----- 95.62 27.00 6.69 36.97 9.93 217 126 PEAK								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB cm deg																																																																										
1 2483.54 68.48 74.00 -13.52 53.03 27.00 6.69 36.97 9.93 217 126 PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB cm deg																																																																										
1 2480.00 103.07 ----- 95.62 27.00 6.69 36.97 9.93 217 126 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.68 48.70 54.00 -5.30 41.25 27.00 6.69 36.97 9.93 217 126 AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB cm deg									1 2483.68 48.70 54.00 -5.30 41.25 27.00 6.69 36.97 9.93 217 126 AVERAGE									Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dB dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 102.05 ----- 94.60 27.00 6.69 36.97 9.93 217 126 AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dB dB dB dB cm deg									1 2480.00 102.05 ----- 94.60 27.00 6.69 36.97 9.93 217 126 AVERAGE								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB cm deg																																																																										
1 2483.68 48.70 54.00 -5.30 41.25 27.00 6.69 36.97 9.93 217 126 AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dB dB dB dB cm deg																																																																										
1 2480.00 102.05 ----- 94.60 27.00 6.69 36.97 9.93 217 126 AVERAGE																																																																										

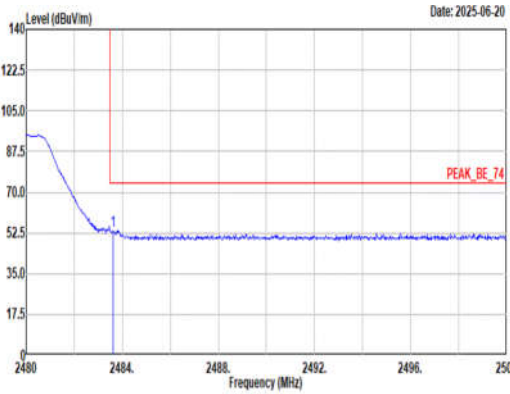
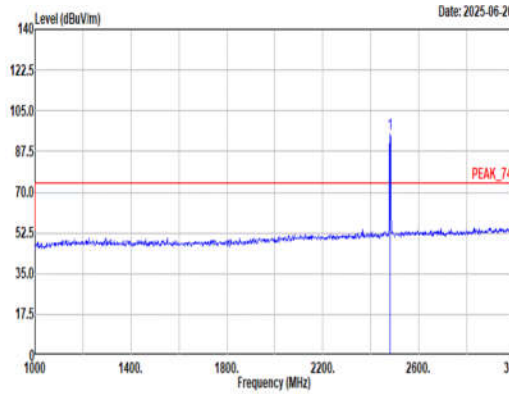
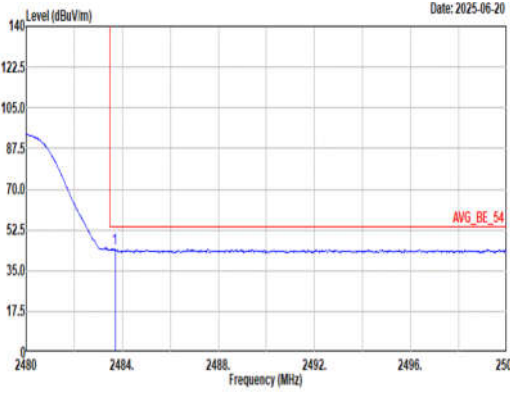
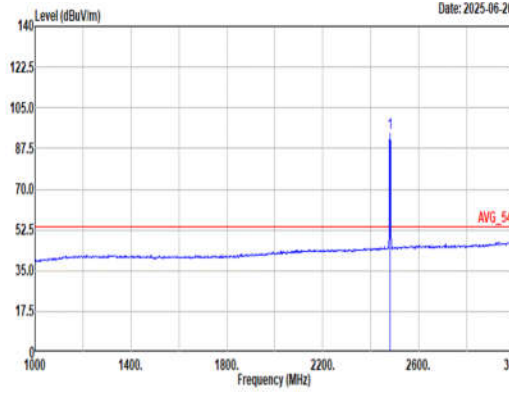


Mode	9																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Peak Vertical. The plot shows a sharp peak at 2483.62 MHz. The limit line is at 74.00 dBuV/m. The peak level is 53.61 dBuV/m. The peak is labeled PEAK_BE_74. Site : 03CH13-HY Condition: PEAK_BE_74 3m HORN_91200_1326 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2483.62</td><td>53.61</td><td>74.00</td><td>-20.39</td><td>46.16</td><td>27.00</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>50</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	1 2483.62	53.61	74.00	-20.39	46.16	27.00	6.69	36.97	9.93	300	50	PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a sharp peak at 2480.00 MHz. The limit line is at 74.00 dBuV/m. The peak level is 95.13 dBuV/m. The peak is labeled PEAK_74. Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2480.00</td><td>95.13</td><td>74.00</td><td>-20.39</td><td>46.16</td><td>27.00</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>50</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	1 2480.00	95.13	74.00	-20.39	46.16	27.00	6.69	36.97	9.93	300	50	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																		
1 2483.62	53.61	74.00	-20.39	46.16	27.00	6.69	36.97	9.93	300	50	PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																		
1 2480.00	95.13	74.00	-20.39	46.16	27.00	6.69	36.97	9.93	300	50	PEAK																																																																															
Avg	 Level (dBuV/m) vs Frequency (MHz) plot for Avg Vertical. The plot shows a sharp peak at 2483.70 MHz. The limit line is at 54.00 dBuV/m. The peak level is 44.57 dBuV/m. The peak is labeled AVG_BE_54. Site : 03CH13-HY Condition: AVG_BE_54 3m HORN_91200_1326 VERTICAL RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2483.70</td><td>44.57</td><td>54.00</td><td>-9.43</td><td>37.12</td><td>27.00</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>50</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	1 2483.70	44.57	54.00	-9.43	37.12	27.00	6.69	36.97	9.93	300	50	AVERAGE	 Level (dBuV/m) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a sharp peak at 2480.00 MHz. The limit line is at 54.00 dBuV/m. The peak level is 94.06 dBuV/m. The peak is labeled AVG_54. Site : 03CH13-HY Condition: AVG_54 3m HORN_91200_1326 VERTICAL RBW:1000.000kHz VBW:10.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 2480.00</td><td>94.06</td><td>54.00</td><td>-40.06</td><td>37.12</td><td>27.00</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>50</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm	1 2480.00	94.06	54.00	-40.06	37.12	27.00	6.69	36.97	9.93	300	50	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																		
1 2483.70	44.57	54.00	-9.43	37.12	27.00	6.69	36.97	9.93	300	50	AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																		
1 2480.00	94.06	54.00	-40.06	37.12	27.00	6.69	36.97	9.93	300	50	AVERAGE																																																																															



Mode	9																																																																																																														
	Harmonic																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>41.10</td><td>74.00</td><td>-32.90</td><td>55.40</td><td>33.14</td><td>9.86</td><td>58.02</td><td>0.72</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7448.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td>53.20</td><td>36.52</td><td>12.25</td><td>57.87</td><td>0.67</td><td>--</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2025-06-20 Site : 03CH13-HY Condition: PEAK_74 3m HORN_91200_1326 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.49</td><td>74.00</td><td>-33.51</td><td>54.79</td><td>33.14</td><td>9.86</td><td>58.02</td><td>0.72</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7448.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>52.26</td><td>36.52</td><td>12.25</td><td>57.87</td><td>0.67</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.10	74.00	-32.90	55.40	33.14	9.86	58.02	0.72	--	PEAK	2	7448.00	44.77	74.00	-29.23	53.20	36.52	12.25	57.87	0.67	--	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.49	74.00	-33.51	54.79	33.14	9.86	58.02	0.72	--	PEAK	2	7448.00	43.83	74.00	-30.17	52.26	36.52	12.25	57.87	0.67	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	41.10	74.00	-32.90	55.40	33.14	9.86	58.02	0.72	--	PEAK																																																																																																				
2	7448.00	44.77	74.00	-29.23	53.20	36.52	12.25	57.87	0.67	--	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	40.49	74.00	-33.51	54.79	33.14	9.86	58.02	0.72	--	PEAK																																																																																																				
2	7448.00	43.83	74.00	-30.17	52.26	36.52	12.25	57.87	0.67	--	PEAK																																																																																																				

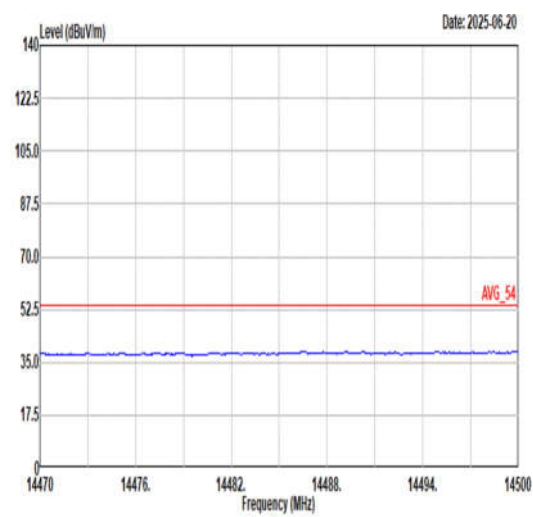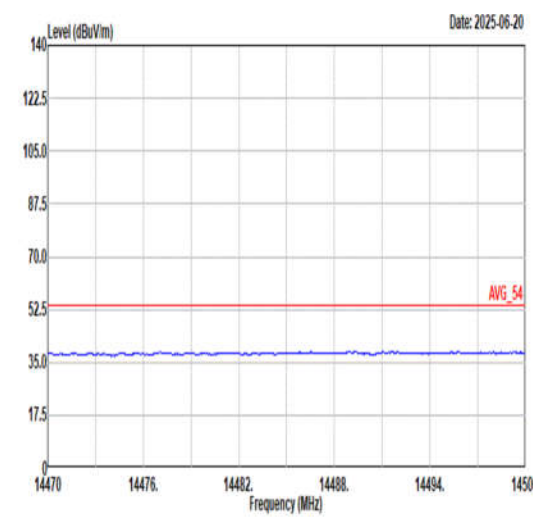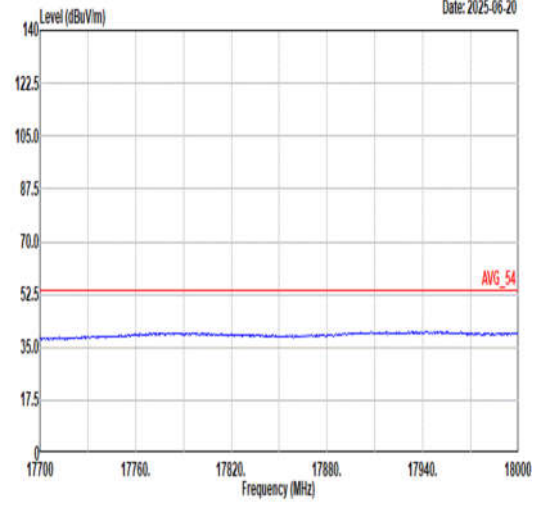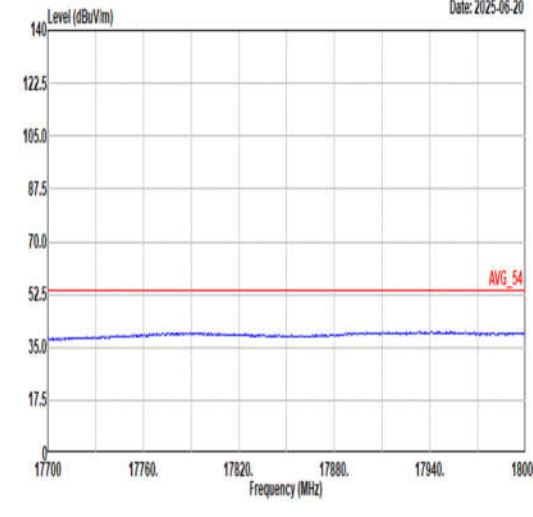

Mode	9	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL
	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 HORIZONTAL	 Site : 03CH13-HY Condition: AVG_54 3m HORN_91280_1326 VERTICAL



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.90	390	2.56	3kHz
Bluetooth - LE for 2Mbps	33.33	210	4.76	10kHz

