

Meas.1 Body Plane with Bottom Side 0mm on 78 Channel in Bluetooth mode with Ant.Aux

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.0, 78	6.98	1.88	38.1	22.2	21.1

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0	Date	2025-06-06	2025-06-06
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.135	0.142
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.063	0.073
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	0.14
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		60.0
			Dist 3dB Peak [mm]		9.5

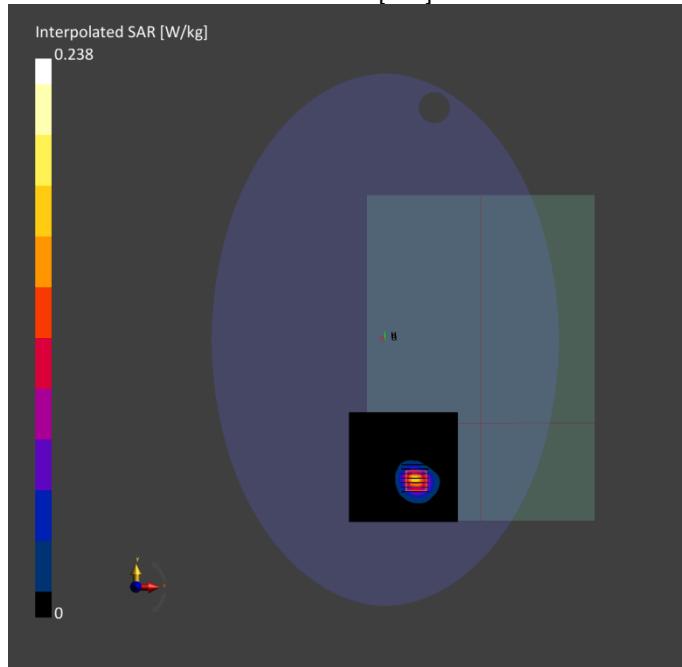

Meas.2 Body Plane with Bottom Side 0mm on 11 Channel in 2.4G WiFi mode with Ant.Main

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 2.4GHZ	WLAN, 10415-AAA	2462.0, 11	6.98	1.86	38.2	22.2	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-06	2025-06-06
psSAR1g [W/kg]	0.567	0.616
psSAR10g [W/kg]	0.283	0.320
Power Drift [dB]	-0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.1
Dist 3dB Peak [mm]		11.2

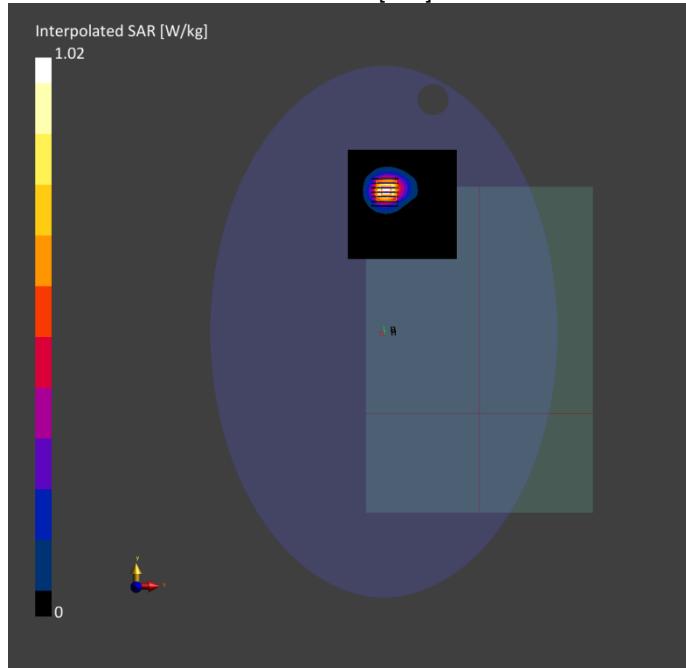

Meas.3 Body Plane with Bottom Side 0mm on 1 Channel in 2.4G WiFi mode with Ant.Aux

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 2.4GHZ	WLAN, 10415-AAA	2412.0, 1	6.98	1.77	40.1	22.2	21.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-06	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid Grading Ratio	Yes 1.5	Yes 1.5
MAIA Surface Detection	N/A	N/A
Scan Method	VMS + 6p	VMS + 6p
	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-06	2025-06-06
psSAR1g [W/kg]	0.694	0.713
psSAR10g [W/kg]	0.316	0.359
Power Drift [dB]	-0.05	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.1
Dist 3dB Peak [mm]		9.8

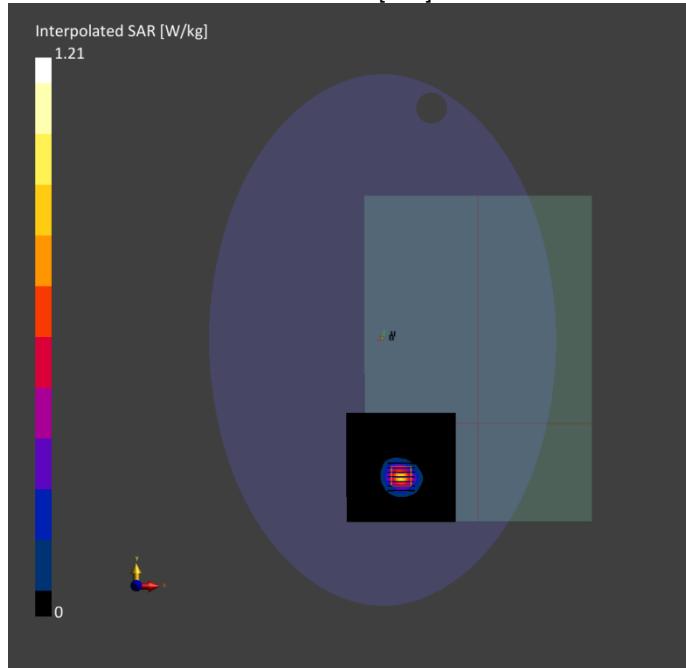

Meas.4 Body Plane with Bottom Side 0mm on 48 Channel in 5.2G WiFi mode with Ant.Main**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 5GHz	WLAN, 10583-AAD	5240.0, 48	5.44	4.84	35.5	22.3	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-07	2025-06-07
psSAR1g [W/kg]	0.272	0.308
psSAR10g [W/kg]	0.109	0.123
Power Drift [dB]	0.16	-0.18
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	No correction	No correction
Dist 3dB Peak [mm]		

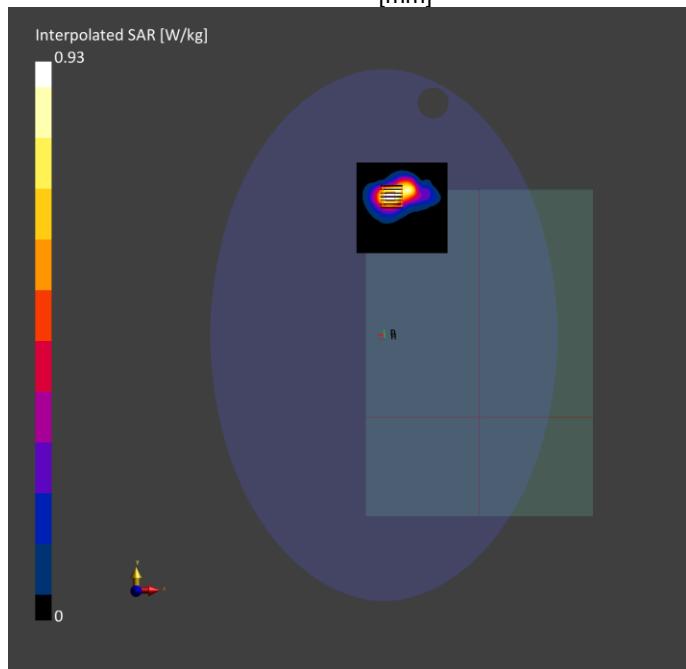

Meas.5 Body Plane with Bottom Side 0mm on 48 Channel in 5.2G WiFi mode with Ant.Aux

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 5GHz	WLAN, 10583-AAD	52640, 48	5.44	4.84	35.5	22.3	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-07	2025-06-07
psSAR1g [W/kg]	0.210	0.215
psSAR10g [W/kg]	0.073	0.075
Power Drift [dB]	-0.09	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	No correction	No correction
Dist 3dB Peak [mm]		

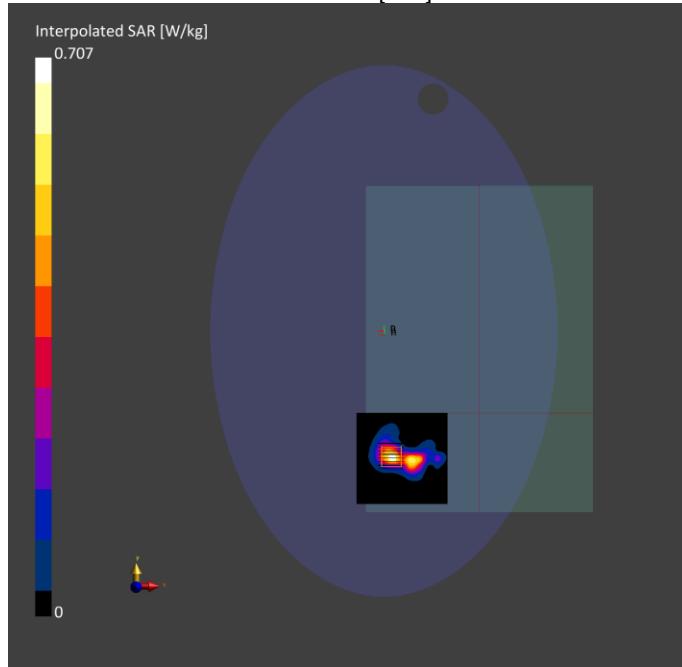

Meas.6 Body Plane with Bottom Side 0mm on 165 Channel in 5.8G WiFi mode with Ant.Main**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 5GHz	WLAN, 10062-CAE	5825.0, 165	4.98	5.46	34.3	22.23	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-07	2025-06-07
psSAR1g [W/kg]	0.318	0.334
psSAR10g [W/kg]	0.117	0.118
Power Drift [dB]	-0.19	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction M2/M1 [%]	No correction	No correction
Dist 3dB Peak [mm]		

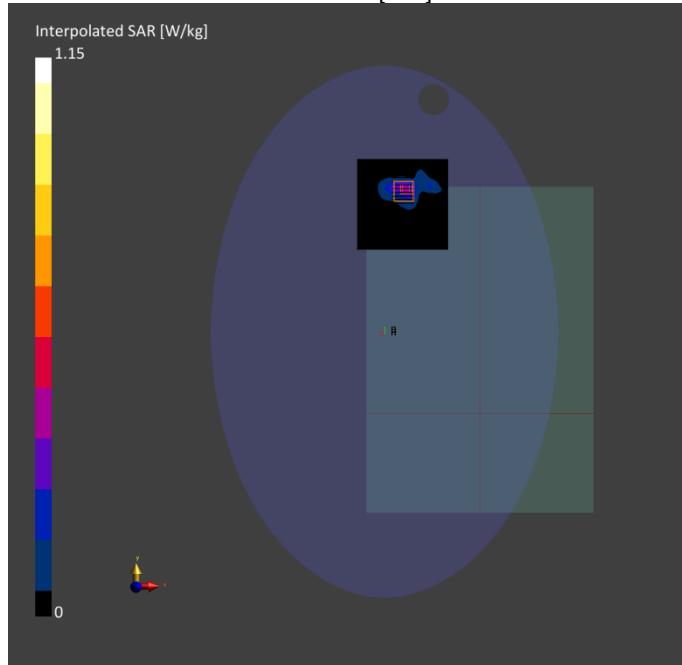

**Meas.7 Body Plane with Bottom Side 0mm on 165 Channel in 5.8G WiFi mode with Ant.Aux
Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 0.00	WLAN 5GHz	WLAN, 10583-AAD	5825.0, 165	4.98	5.46	34.3	22.3	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2159	HBBL-600-10000 2025-06-07	EX3DV4 - SN7893, 2024-09-05	DAE4 Sn1710, 2025-01-20

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA Surface Detection	Y	Y
Scan Method	All points	All points
	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-06-07	2025-06-07
psSAR1g [W/kg]	0.308	0.363
psSAR10g [W/kg]	0.108	0.117
Power Drift [dB]	-0.11	-0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.4
Dist 3dB Peak [mm]		7.2

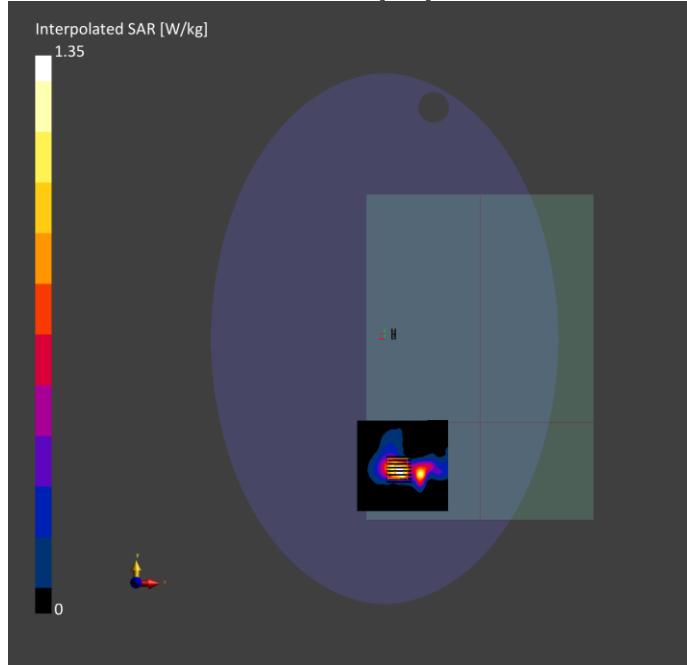

--BLANK BELOW--