




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240100011801

Page: 1 of 21

# TEST REPORT

**Application No.:** SZCR2401000118AT  
**Applicant:** POZYX NV  
**Address of Applicant:** Gaston Crommenlaan 4 bus 410B, 9050, Ledeborg, Belgium  
**Manufacturer:** POZYX NV  
**Address of Manufacturer:** Gaston Crommenlaan 4 bus 410B, 9050, Ledeborg, Belgium  
**Factory:** NOTE Pärnu Oü  
**Address of Factory:** Laki 2, 80010 Pärnu, Estonia  
**Equipment Under Test (EUT):**  
**EUT Name:** Pozyx Anchor V2.2  
**Model No.:** 100020024  
**FCC ID:** 2AYPJ-100224  
**Trade Mark:**   
**Standard(s) :** 47 CFR Part 15 Subpart F  
**Date of Receipt:** 2024-01-11  
**Date of Test:** 2024-01-11 to 2024-01-18  
**Date of Issue:** 2024-01-25

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu  
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240100011801

Page: 2 of 21

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2024-01-25		Original

Authorized for issue by:				
				
		Leo Lai/Project Engineer		
				
		Eric Fu/Reviewer		

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart F	N/A	47 CFR Part 15F Section 15.517(a3) 15.521(b), 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
EIRP	47 CFR Part 15 Subpart F	ANSI C63.10: 2013 section 10.3	47 CFR Part 15, Subpart F Section 15.517 (c) (e), 15.521(g)	Pass
Spurious Emissions Below 1GHz		ANSI C63.10: 2013 section 10.2	47 CFR Part 15, Subpart F Section 15.517 (c), 15.209, 15.521(c)(d) (h)	Pass
Spurious Emissions Above 1GHz		ANSI C63.10: 2013 section 10.3	47 CFR Part 15, Subpart F Section 15.517 (c)(d), 15.521(d)(h)	Pass

### Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Model No.: 100020024

This test report (Ref. No.: SZCR240100011801) is based on the original test report (Ref. No.: GZCR220100009901).

According to the declaration of the applicant and review the sample in report SZCR240100011801 and the report GZCR220100009901, the electrical circuit design, layout, components used and internal wiring were exactly the same, only difference as below:

1. Modification of Ethernet RJ45 shield termination from resistive to capacitive;
2. Removal of the pressure sensor IC.

Considering to the difference, pre-scan was performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report EIRP, Spurious Emissions Below 1GHz and Spurious Emissions Above 1GHz were fully retested and shown the data in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 3 Contents

	Page
1 Cover Page .....	1
2 Test Summary .....	3
3 Contents .....	4
4 General Information .....	5
4.1 Details of E.U.T. ....	5
4.2 Description of Support Units .....	5
4.3 Measurement Uncertainty .....	5
4.4 Test Location .....	6
4.5 Test Facility .....	6
4.6 Deviation from Standards .....	6
4.7 Abnormalities from Standard Conditions .....	6
5 Equipment List .....	7
6 Radio Spectrum Technical Requirement .....	9
6.1 Antenna Requirement .....	9
6.1.1 Test Requirement: .....	9
7 Radio Spectrum Matter Test Results .....	10
7.1 EIRP .....	10
7.1.1 E.U.T. Operation .....	11
7.1.2 Test Mode Description .....	11
7.1.3 Test Setup Diagram .....	11
7.1.4 Measurement Procedure and Data .....	12
7.2 Spurious Emissions Below 1GHz .....	14
7.2.1 E.U.T. Operation .....	14
7.2.2 Test Mode Description .....	14
7.2.3 Test Setup Diagram .....	14
7.2.4 Measurement Procedure and Data .....	15
7.3 Spurious Emissions Above 1GHz .....	18
7.3.1 E.U.T. Operation .....	18
7.3.2 Test Mode Description .....	18
7.3.3 Test Setup Diagram .....	18
7.3.4 Measurement Procedure and Data .....	19
8 Test Setup Photo .....	21
9 EUT Constructional Details (EUT Photos) .....	21



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center EUT Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 4 General Information

### 4.1 Details of E.U.T.

Power supply: DC48V Powered By POE/POE+  
 Operating Frequency: 6489.6MHz  
 Modulation Type: PM  
 Number of Channels: 1  
 Sample Type: Indoor Use  
 Antenna Type: PCB Antenna  
 Antenna Gain: 3.86dBi

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### 4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	X240	N/A
Mouse	Lenovo	MOIUUO	8SSM50L24505AVLC9 9J0AA6
POE Adapter	GlobTek	GT-96300-3656-T3-AP	N/A
Wireless Router	LINKSYS	WRT32X	22C10609709105

### 4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
EIRP	5.08dB
Spurious Emissions Below 1GHz	5.14dB
Spurious Emissions Above 1GHz	5.08dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch Testing Center ETC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

### • VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd.

Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

### • FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

## 4.6 Deviation from Standards

None

## 4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center EMC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 5 Equipment List

EIRP					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2021-03-26	2024-03-25
DC Power Supply	Zhaoxin	PS-3005D	SEM011-10	2023-09-20	2024-09-19
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2023-03-20	2024-03-19
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19	2024-09-18
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07	2024-07-06
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2022-08-10	2024-08-09
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2023-03-20	2024-03-19

Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2023-10-19	2024-10-18
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2023-03-20	2024-03-19
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2023-07-07	2024-07-06

Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2021-03-26	2024-03-25
DC Power Supply	Zhaoxin	PS-3005D	SEM011-10	2023-09-20	2024-09-19
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2023-03-20	2024-03-19
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2023-07-23	2025-07-22
Microwave system amplifier	Agilent	83017A	SEM005-25	2023-09-19	2024-09-18



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240100011801

Page: 8 of 21

Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2023-07-07	2024-07-06
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2022-08-10	2024-08-09
Pre-Amplifier	Compliance Directions Systems Inc.	PAP-2640-50	SEM005-08	2023-03-20	2024-03-19

## General used equipment

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2023-07-28	2024-07-27
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2023-07-28	2024-07-27
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2023-03-23	2024-03-22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Testing Center Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15F Section 15.517(a3) 15.521(b), 15.203

Limit:

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of 15.211, 15.213, 15.217, 15.219, 15.221, or 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.517(a3)

The use of outdoor mounted antennas, e.g., antennas mounted on the outside of a building or on a telephone pole, or any other outdoors infrastructure is prohibited.

15.521(b)

Manufacturers and users are reminded of the provisions of § 15.203.

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.86dBi for 6489.6MHz.

Please refer to internal photos of EUT.

## 7 Radio Spectrum Matter Test Results

### 7.1 EIRP

Test Requirement 47 CFR Part 15, Subpart F Section 15.517 (c) (e), 15.521(g)

Test Method: ANSI C63.10: 2013 section 10.3

Measurement Distance: 3m

Limit:

Frequency	Limit @3m	Detector	Measurement distance (m)
960MHz-1610MHz	-75.3 dBm (EIRP, RBW=1MHz)	AV	3
1610MHz-1990MHz	-53.3 dBm (EIRP, RBW=1MHz)	AV	3
1990MHz-3100MHz	-51.3 dBm (EIRP, RBW=1MHz)	AV	3
3100MHz-10600MHz	-41.3 dBm (EIRP, RBW=1MHz)	AV	3
Above 10600MHz	-51.3 dBm (EIRP, RBW=1MHz)	AV	3
Fundamental	0 dBm (EIRP, RBW=50MHz)	Peak	3

According to ANSI 63.10 Clause 10.3.9, the EIRP to field strength at a specified measurement distance of 3 m is below:

$$E \text{ (dBuV/m)} = \text{EIRP(dBm)} + 95.3$$

Thus, the field strength limit for the test above 1GHz is below:

Frequency	Limit	Detector	Measurement Distance
	Field Strength (dBuV/m)		
960MHz-1610MHz	20.00	AV	3
1610MHz-1990MHz	42.00	AV	3
1990MHz-3100MHz	44.00	AV	3
3100MHz-10600MHz	54.00	AV	3
Above 10600MHz	44.00	AV	3
Fundamental	95.3	Peak	3



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22.3 °C Humidity: 55.3 % RH Atmospheric Pressure: 1015 mbar

### 7.1.2 Test Mode Description

Pre-scan / Mode	Description
Final test Code	
Final test 00	Continuous Tx Mode: Keep the EUT Transmitting with Modulation

### 7.1.3 Test Setup Diagram

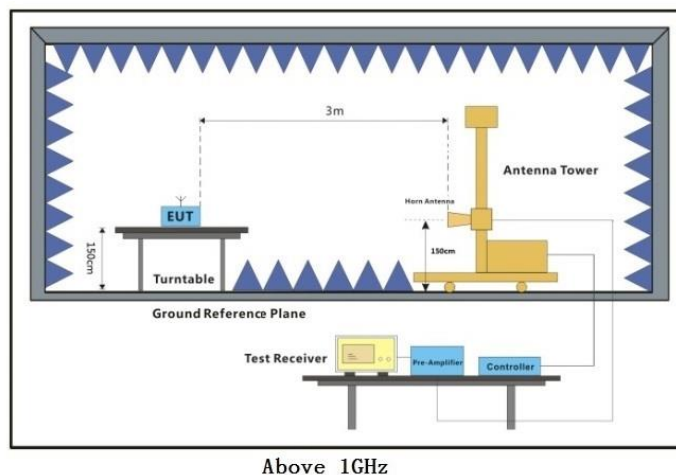

Above 1GHz

## 7.1.4 Measurement Procedure and Data

- 1) The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak detector with Maximum Hold Mode for Max Peak EIRP measurement and AV detector for Average EIRP measurement.
- 7) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- 8) Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240100011801

Page: 13 of 21

Peak Field Strength for fundamental @ RBW=10MHz							
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Level (dBm)	Polarization
6491.323	35.58	8.55	35.24	71.41	80.30	-15.00	Horizontal
6487.315	35.57	8.55	35.24	64.00	72.88	-22.42	Vertical

Note: EIRP(dBm) = E (dBuV/m) - 95.3

Calculated Peak Field Strength of fundamental @ RBW=50MHz					
Frequency (MHz)	Measured Field Strength of fundamental (FS <sub>M</sub> ) (dBm)	Calculated Field Strength of fundamental (FS <sub>C</sub> ) (dBm)	Limit (dBm)	Margin (dB)	Polarization
6491.323	-15.00	-1.02	0	1.02	Horizontal
6487.315	-22.42	-8.44	0	8.44	Vertical

Note: FS<sub>C</sub> = FS<sub>M</sub> + 20log(50MHz/10MHz) = FS<sub>M</sub> + 13.98

Average Field Strength for fundamental @ RBW=1MHz							
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Level (dBm)	Polarization
6499.346	35.58	8.55	35.24	32.58	41.47	-53.83	Horizontal
6488.317	35.57	8.55	35.24	35.51	44.39	-50.91	Vertical

Note: EIRP(dBm) = E (dBuV/m) - 95.3

Average Field Strength for fundamental @ RBW=1MHz				
Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6499.346	-53.83	-41.3	12.53	Horizontal
6488.317	-50.91	-41.3	9.61	Vertical



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 7.2 Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart F Section 15.517 (c),15.209, 15.521(c)(d) (h)

Test Method: ANSI C63.10: 2013 section 10.2

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1000MHz	-	20	RMS/AV	3

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C


Humidity: 55.3 % RH

Atmospheric Pressure: 1015 mbar

#### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Continuous Tx Mode: Keep the EUT Transmitting with Modulation


#### 7.2.3 Test Setup Diagram

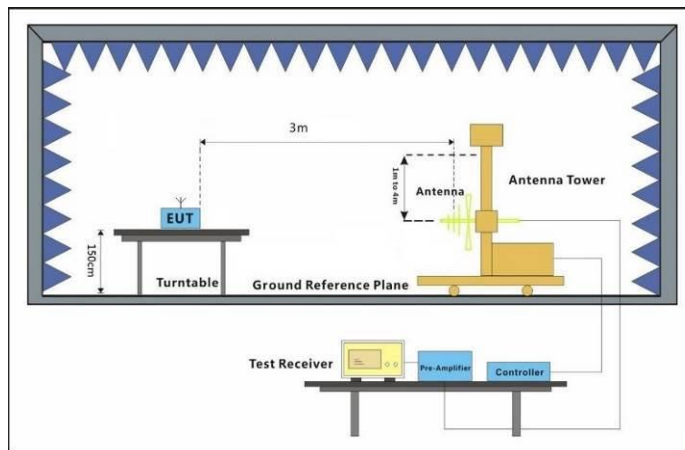

## 7.2.4 Measurement Procedure and Data

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
  - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
  - 5) The test-receiver system was set to Peak detector with Maximum Hold Mode. And use Quasi-Peak to measure the six highest frequencies.
  - 6) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
  - 7) Repeat above procedures until all frequencies measured was complete
- Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 00; Polarity: Horizontal

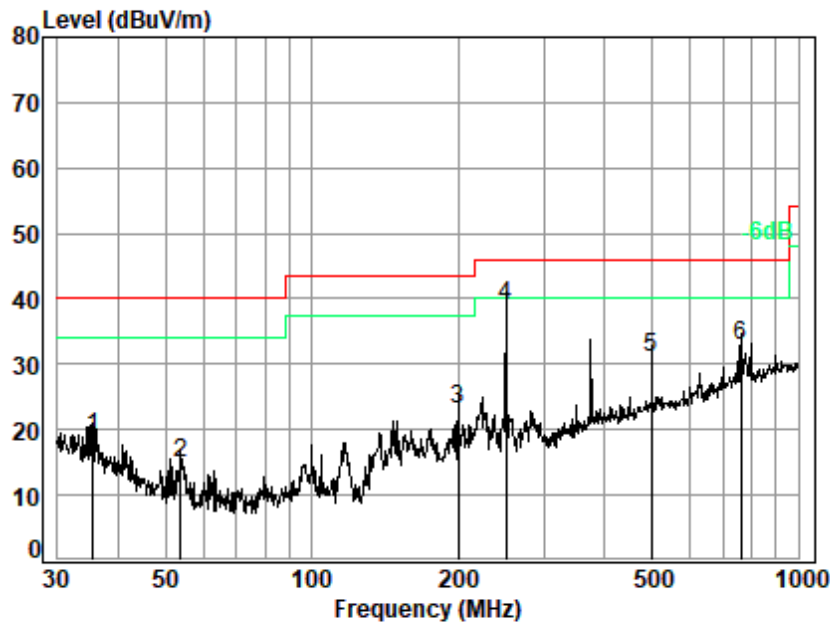


Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : 00118AT  
Test Mode: 00

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	35.50	18.59	0.70	27.79	27.42	18.92	40.00	-21.08 QP
2	53.69	12.18	0.86	27.74	29.52	14.82	40.00	-25.18 QP
3	199.99	14.10	1.73	27.25	34.59	23.17	43.50	-20.33 QP
4 q	250.30	17.24	1.95	27.07	46.93	39.05	46.00	-6.95 QP
5	499.42	22.90	2.89	27.78	32.87	30.88	46.00	-15.12 QP
6	760.70	26.47	3.70	27.73	30.36	32.80	46.00	-13.20 QP



Test Mode: 00; Polarity: Vertical

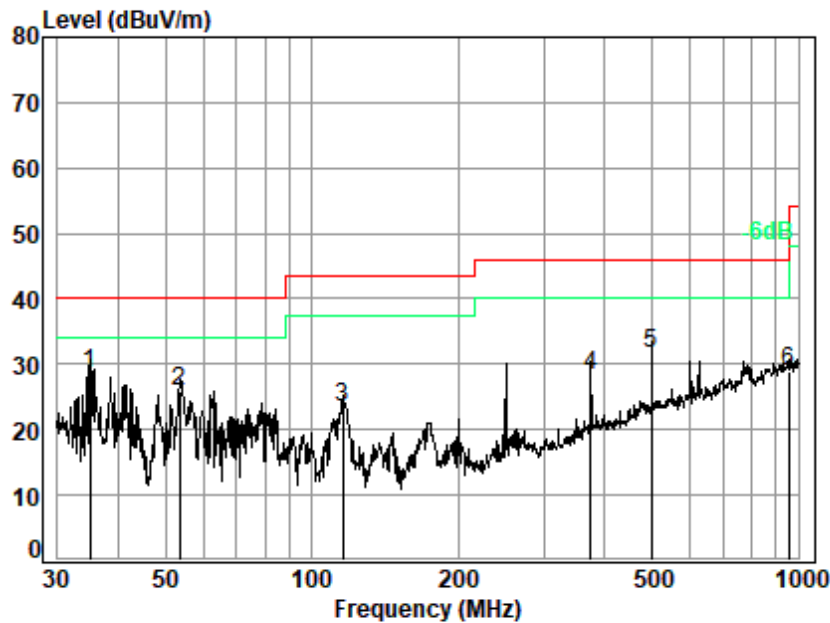

Site : chamber  
Condition: 3m VERTICAL  
Job No. : 00118AT  
Test Mode: 00

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	q	35.00	18.87	0.70	27.79	36.81	28.59	40.00	-11.41 QP
2		53.51	12.21	0.86	27.74	40.41	25.74	40.00	-14.26 QP
3		115.73	11.35	1.27	27.55	38.23	23.30	43.50	-20.20 QP
4		374.62	20.67	2.45	27.22	32.43	28.33	46.00	-17.67 QP
5		499.42	22.90	2.89	27.78	33.48	31.49	46.00	-14.51 QP
6		955.44	28.13	4.23	26.86	23.26	28.76	46.00	-17.24 QP



### 7.3 Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart F Section 15.517 (c)(d), 15.521(d) (h)

Test Method: ANSI C63.10: 2013 section 10.3

Limit:

Frequency	Limit (dBuV/m)@3m	RBW	Detector	Measurement distance (m)
1000MHz-1610MHz	20.0	1MHz	AV	0.5
1610MHz-1990MHz	42.0	1MHz	AV	0.5
1990MHz-3100MHz	44.0	1MHz	AV	0.5
3100MHz-10600MHz	54.0	1MHz	AV	0.5
Above 10600MHz	44.0	1MHz	AV	0.5
1164MHz-1240MHz	10.0	1KHz	AV	3
1559MHz-1610MHz	10.0	1KHz	AV	3

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 55.3 % RH

Atmospheric Pressure: 1003 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Mode


Final test Code

Description

Final test 00

Continuous Tx Mode: Keep the EUT Transmitting with Modulation

#### 7.3.3 Test Setup Diagram

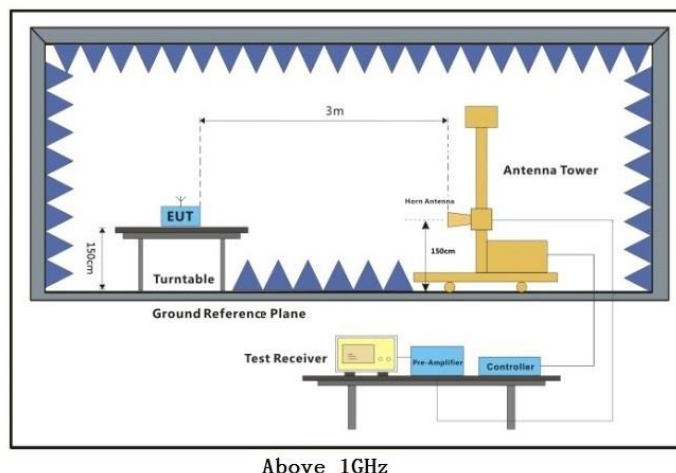

## 7.3.4 Measurement Procedure and Data

- 1) The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 0.5meters / 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to AV detector with Maximum Hold Mode.
- 6) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- 7) Repeat above procedures until all frequencies measured was complete

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor+ Distance Factor - Preamp Factor

Distance factor =  $20 \cdot \log(0.5/3) = -15.56\text{dB}$

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR240100011801

Page: 20 of 21

Average Field Strength within 1164-1240MHz & 1559-1610MHz @ RBW=1KHz								
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin	Polarization
1168.828	23.99	3.51	38.33	12.48	1.65	10	8.35	Horizontal
1583.392	26.87	4.18	38.40	10.35	3.00	10	7.00	Horizontal
1199.726	24.40	3.58	38.34	12.18	1.82	10	8.18	Vertical
1583.392	26.87	4.18	38.40	11.15	3.80	10	6.20	Vertical

Average Field Strength out of 1164-1240MHz & 1559-1610MHz @ RBW=1MHz									
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Distance factor (dBuV)	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin	Polarization
1017.493	25.74	3.23	38.30	-15.56	17.33	8.00	20	12.00	Horizontal
1331.288	24.61	3.81	38.36	-15.56	15.56	5.62	20	14.38	Horizontal
1883.236	27.27	4.55	38.44	-15.56	13.91	7.29	32	24.71	Horizontal
2710.622	29.70	5.35	36.72	-15.56	14.47	12.80	44	31.20	Horizontal
4859.975	34.54	7.35	35.48	-15.56	11.64	18.05	54	35.95	Horizontal
16842.29	43.03	14.53	37.50	-15.56	15.59	35.65	44	8.35	Horizontal
1008.709	26.02	3.21	38.30	-15.56	16.44	7.37	20	12.63	Vertical
1414.597	24.83	3.94	38.38	-15.56	15.14	5.53	20	14.47	Vertical
1899.636	27.40	4.57	38.44	-15.56	14.24	7.77	32	24.23	Vertical
2618.218	30.26	5.28	36.92	-15.56	13.16	11.78	44	32.22	Vertical
4930.721	34.64	7.39	35.43	-15.56	12.03	18.63	54	35.37	Vertical
15134.08	40.87	14.10	37.07	-15.56	15.50	33.40	44	10.60	Vertical



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2401000118AT

## 9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for SZCR2401000118AT

- End of the Report -