



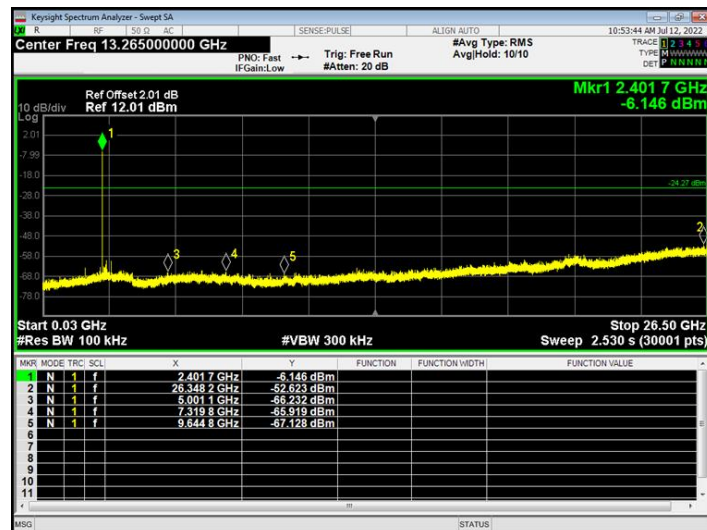

8-DPSK mode:


Test channel:	Lowest channel
---------------	----------------

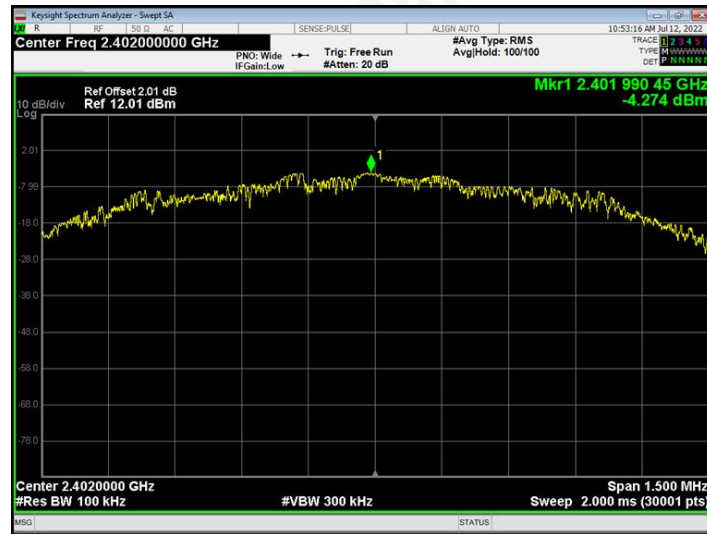

30MHz~26.5GHz




Test channel:	Middle channel
---------------	----------------

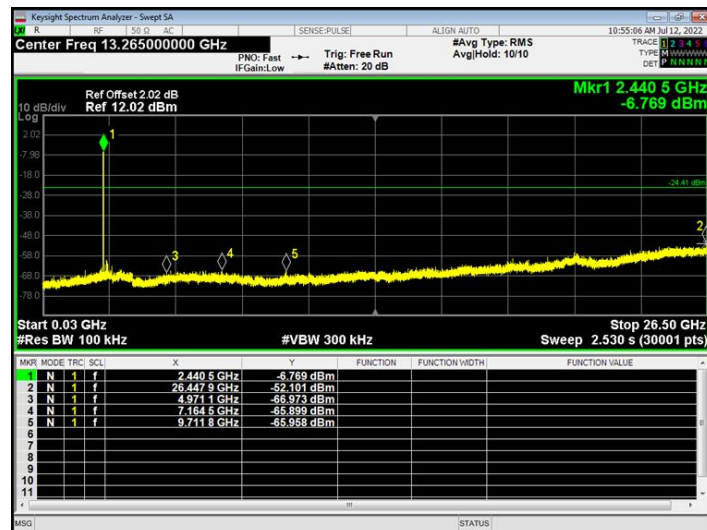

30MHz~26.5GHz




Test channel:	Highest channel
---------------	-----------------

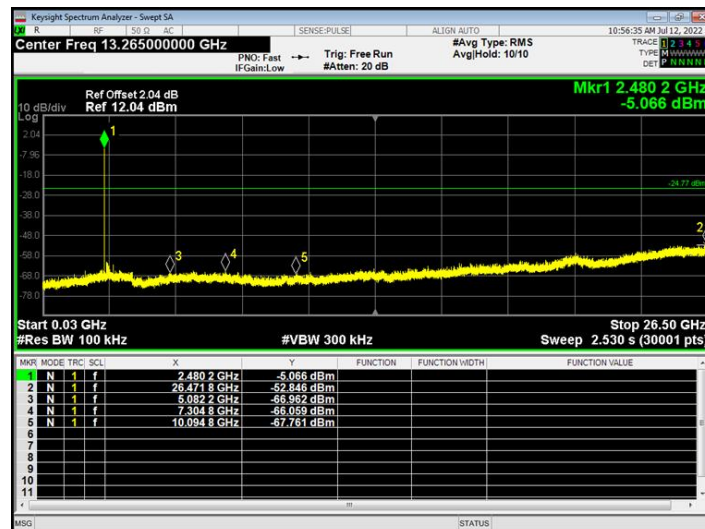


30MHz~26.5GHz



GFSK No-hopping Band edge-left side

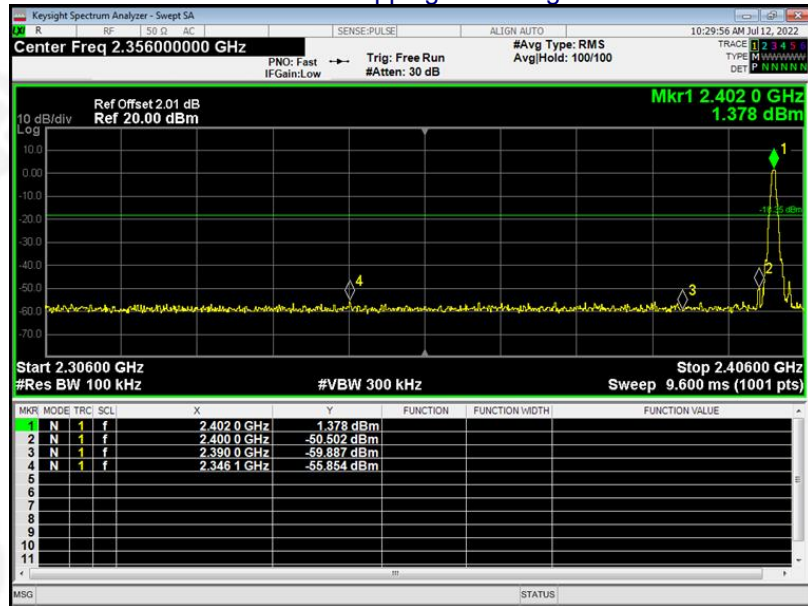


GFSK Hopping Band edge-left side

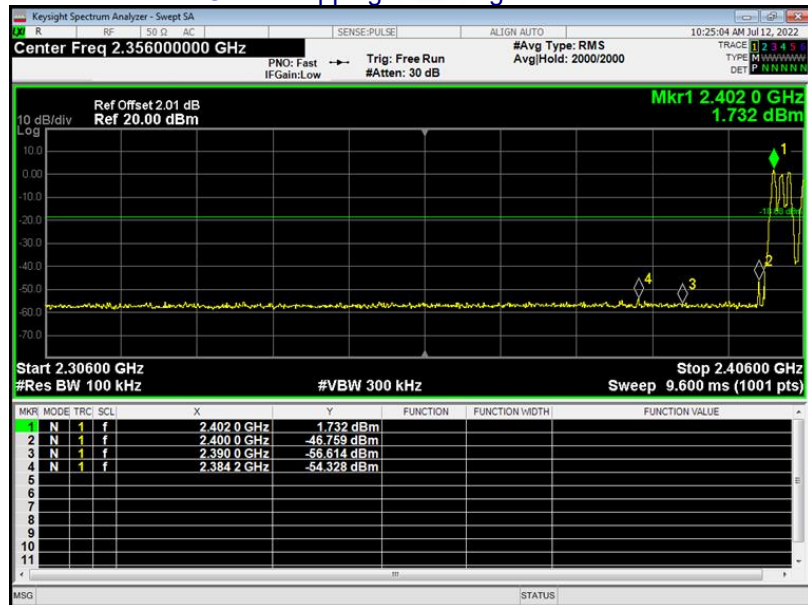




GFSK No-hopping Band edge-right side

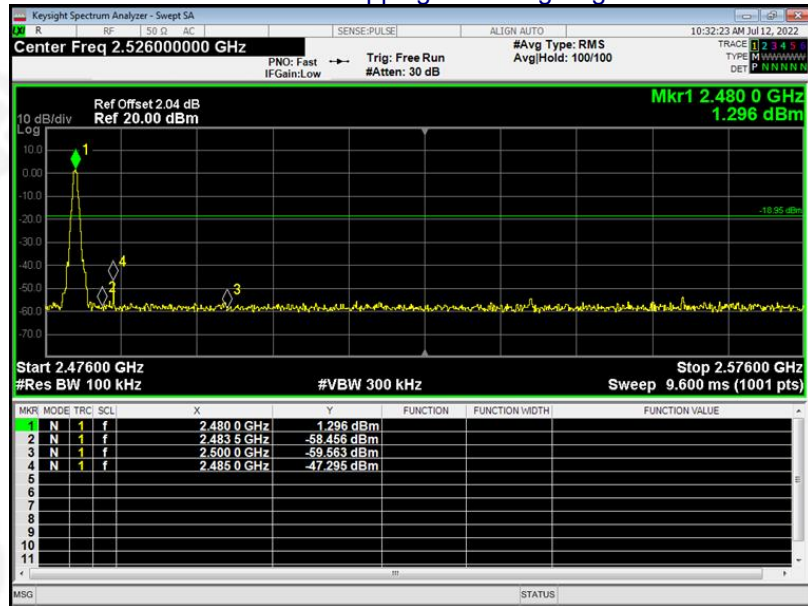


GFSK Hopping Band edge-right side

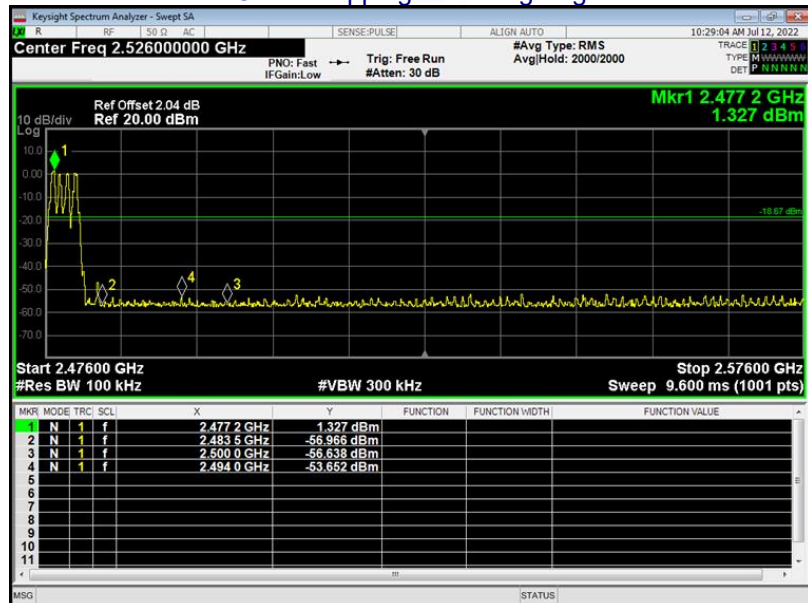




$\pi/4$ -DQPSK No-hopping Band edge-left side

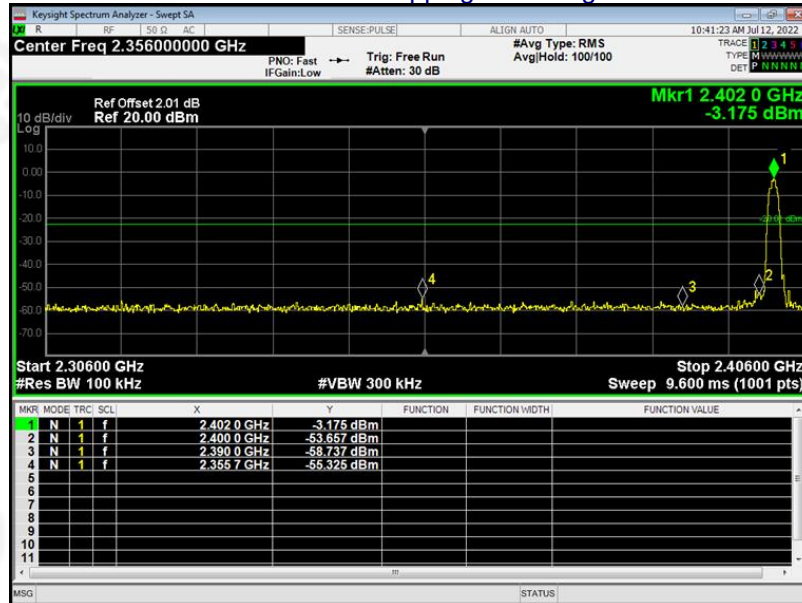


$\pi/4$ -DQPSK Hopping Band edge-left side

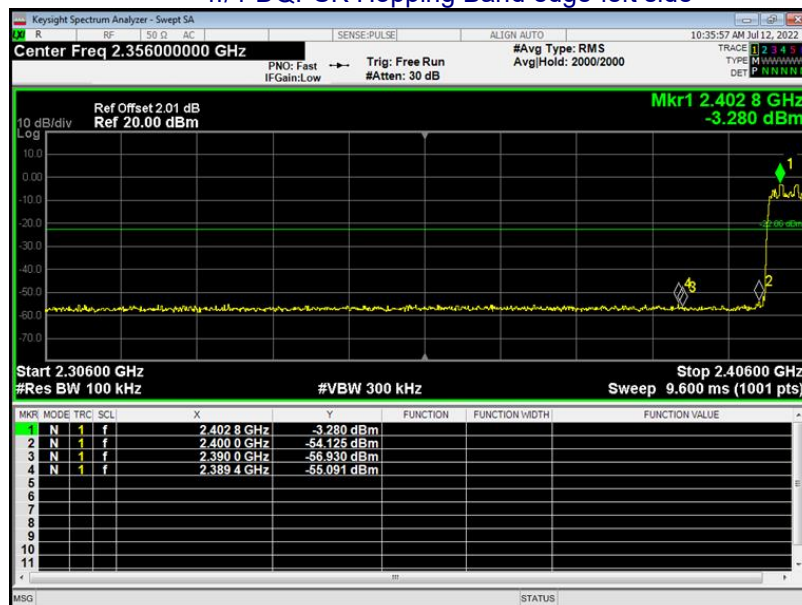




$\pi/4$ -DQPSK No-hopping Band edge-right side

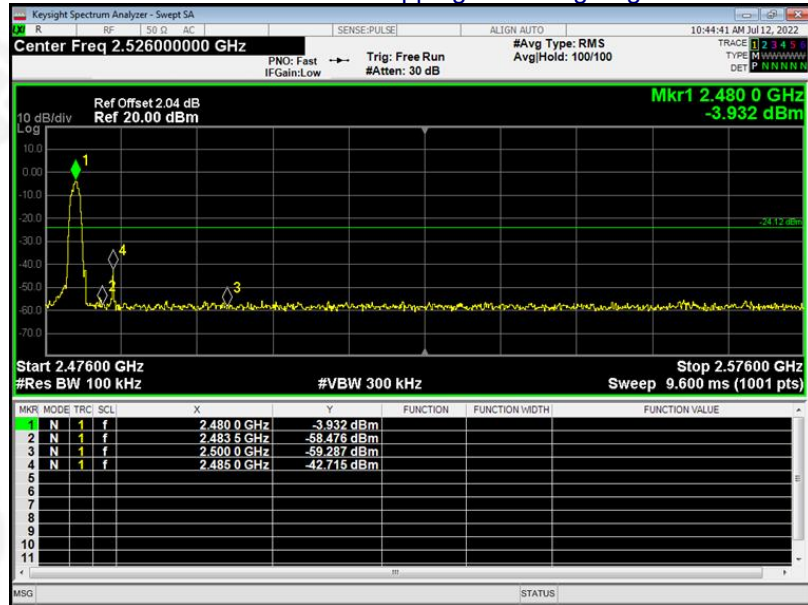


$\pi/4$ -DQPSK Hopping Band edge-right side

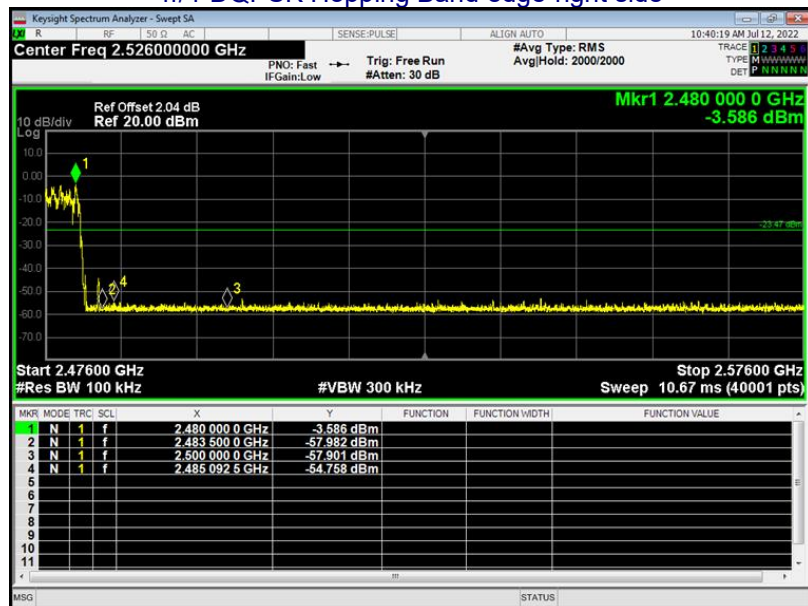




8-DPSK No-hopping Band edge-left side

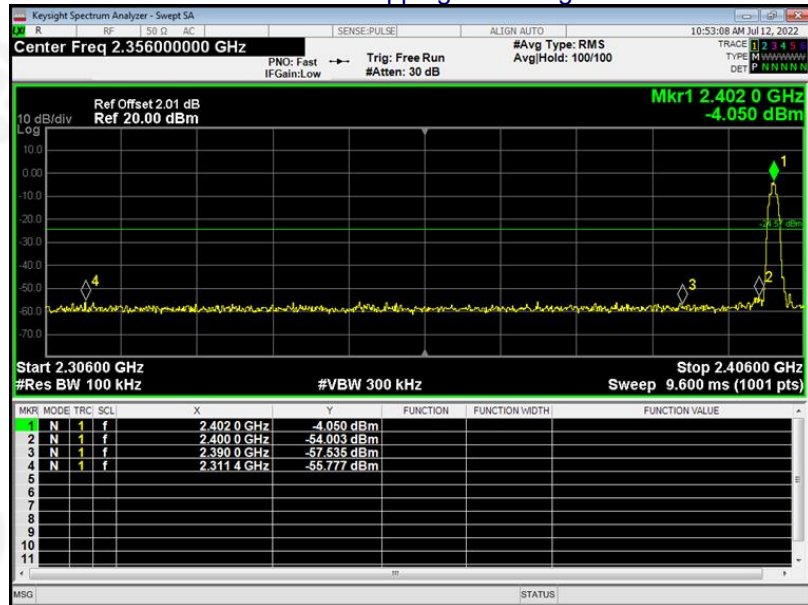


8-DPSK Hopping Band edge-left side

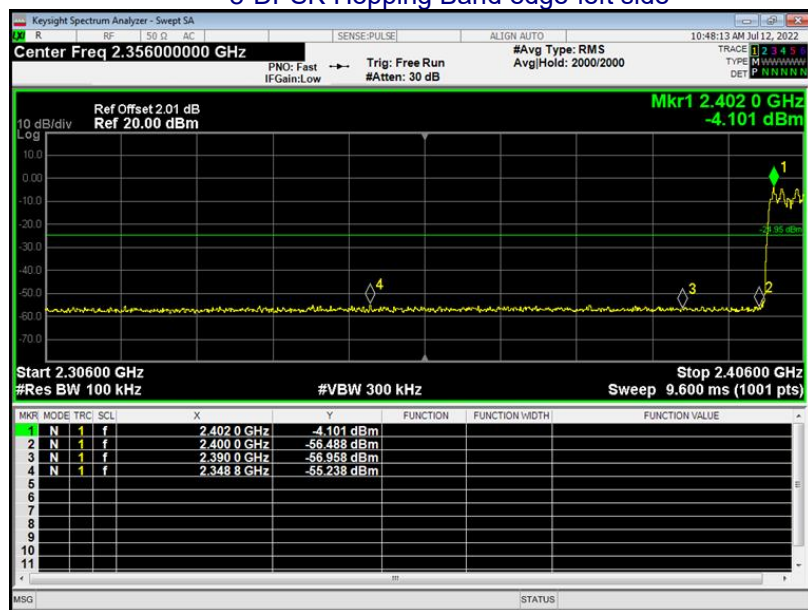




8-DPSK No-hopping Band edge-right side

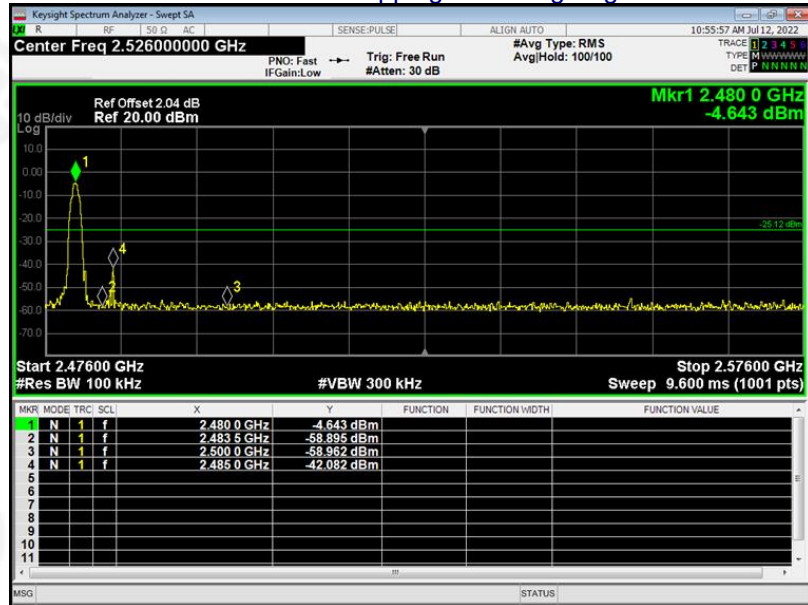

8-DPSK Hopping Band edge-right side

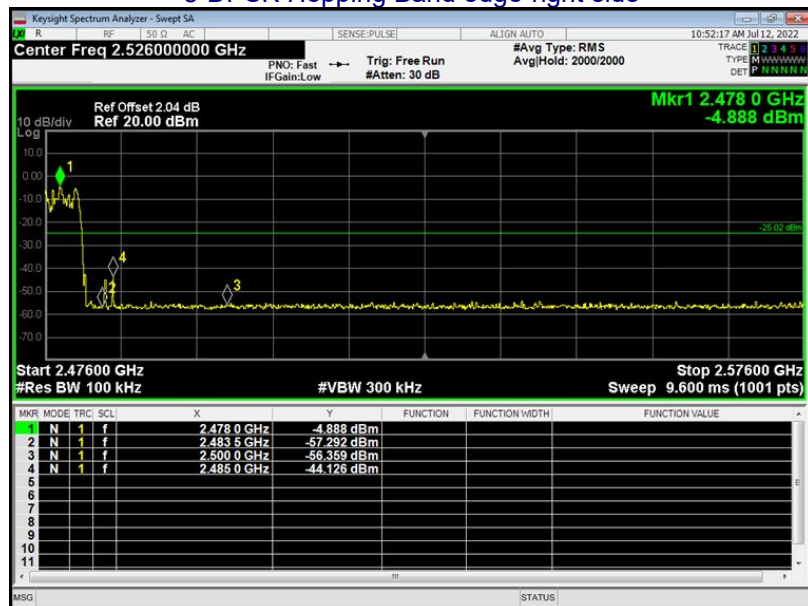



7. 20DB&99% BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013

7.1 Test Setup



7.2 Limit

N/A

7.3 Test procedure

1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 DEVIATION FROM STANDARD

No deviation.

7.5 Test Result

Mode	Test channel	20dB Emission Bandwidth (MHz)	99%Bandwidth (MHz)	Result
GFSK	Lowest	0.871	0.840	Pass
	Middle	0.862	0.821	
	Highest	0.854	0.833	
$\pi/4$ -DQPSK	Lowest	1.425	1.342	Pass
	Middle	1.428	1.339	
	Highest	1.423	1.347	
8-DPSK	Lowest	1.437	1.350	Pass
	Middle	1.427	1.341	
	Highest	1.431	1.345	



Test plots

GFSK Low Channel





GFSK Middle Channel




GFSK High Channel





$\pi/4$ -DQPSK Low Channel

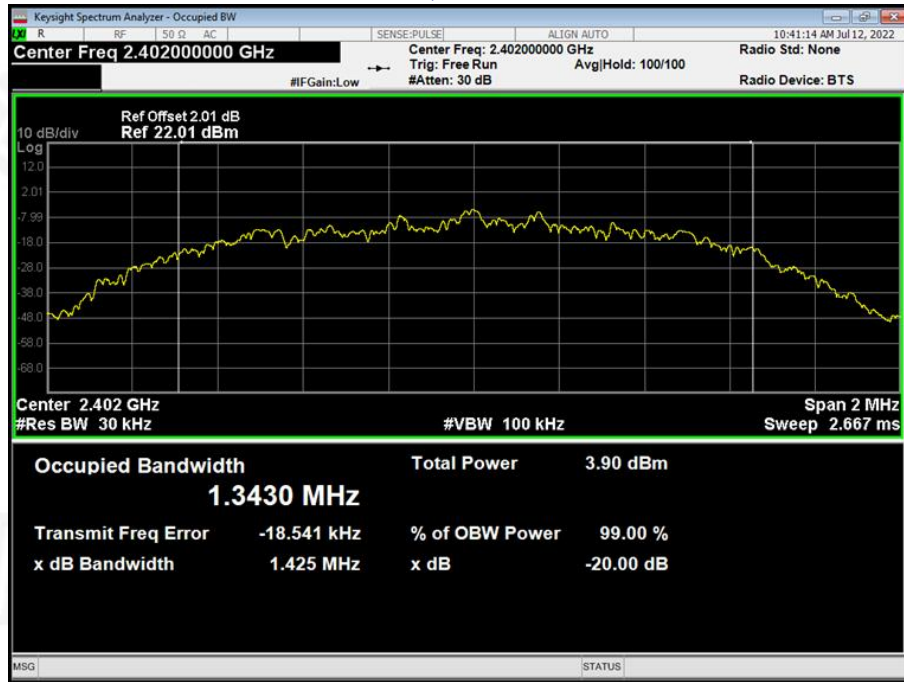


$\pi/4$ -DQPSK Middle Channel






$\pi/4$ -DQPSK High Channel

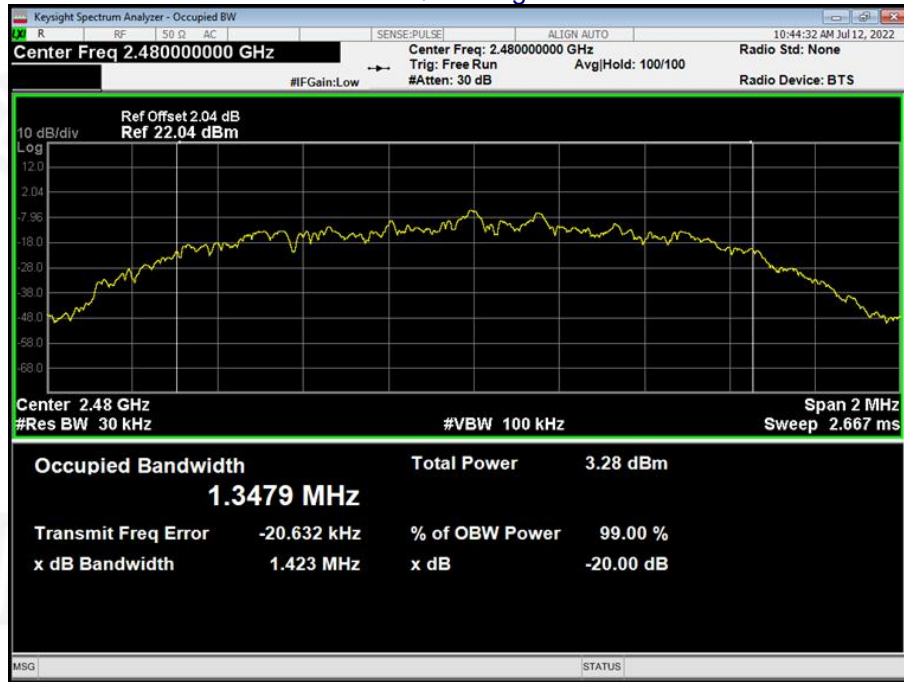




8-DPSK Low Channel

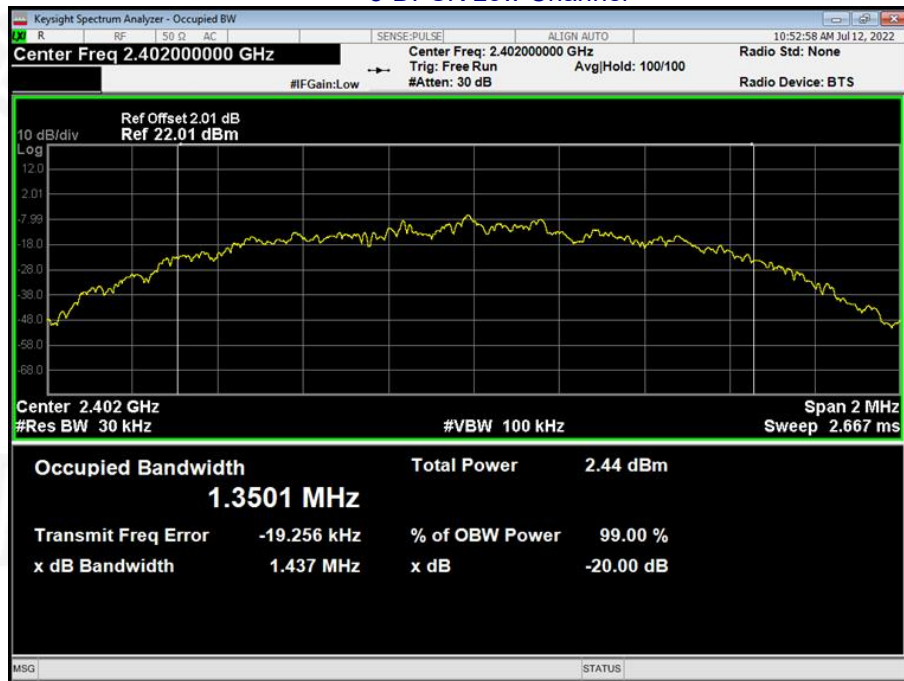




8-DPSK Middle Channel

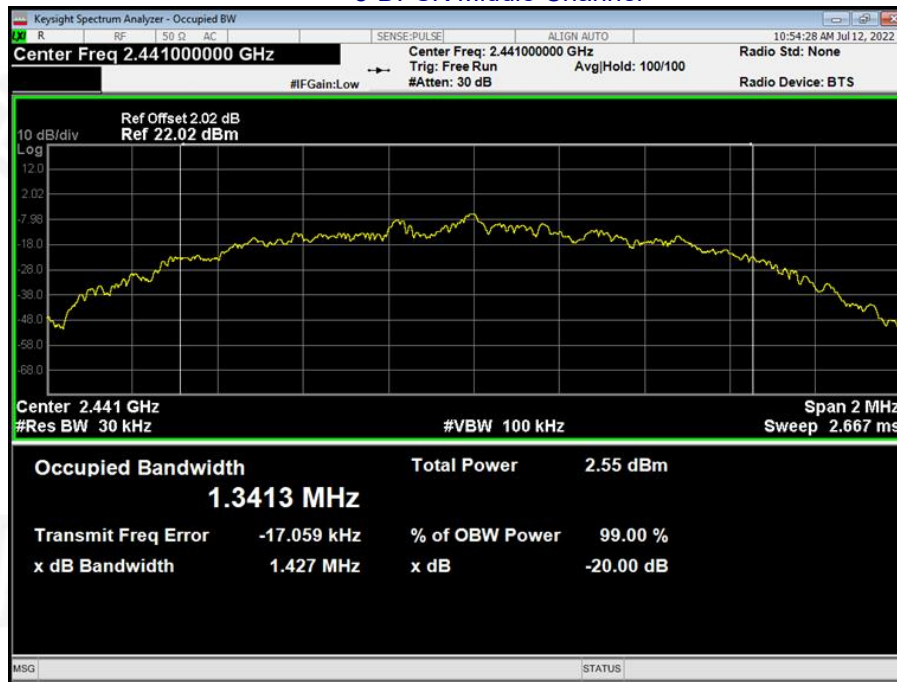

8-DPSK High Channel

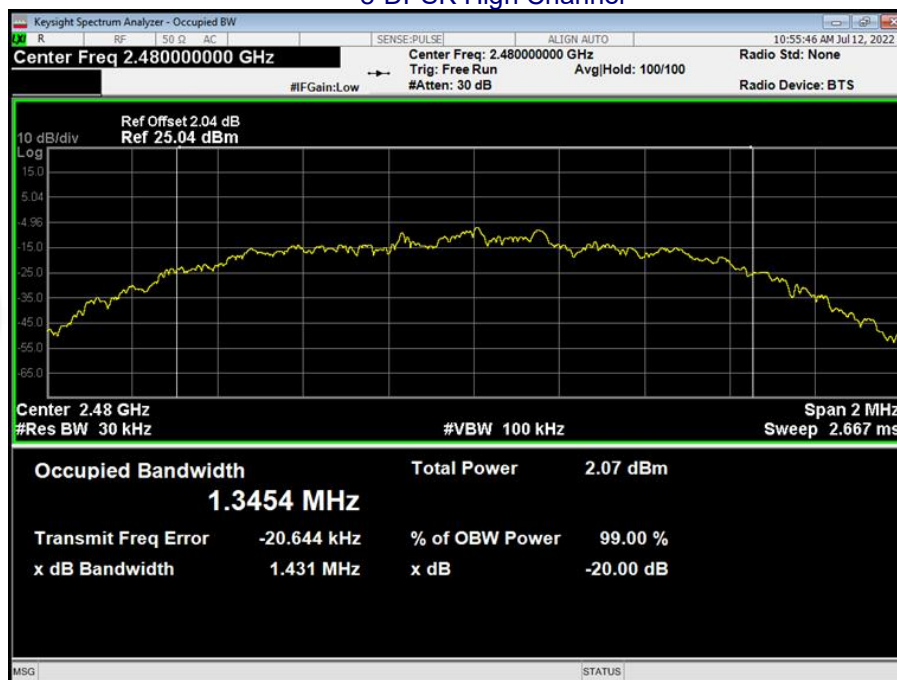



8. Maximum Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	GFSK:30 dBm $\pi/4$ -DQPSK & 8-DPSK:20.97 dBm

8.1 Block Diagram Of Test Setup



8.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW =6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

8.4 DEVIATION FROM STANDARD

No deviation.


8.5 Test Result

Mode	Test channel	Peak Output Power (dBm)	FCC Limit (dBm)	Result
GFSK	Lowest	1.752	30.00	Pass
	Middle	1.615		
	Highest	1.142		
$\pi/4$ -DQPSK	Lowest	-0.993	21.00	Pass
	Middle	-1.126		
	Highest	-1.568		
8-DPSK	Lowest	-1.991	21.00	Pass
	Middle	-2.129		
	Highest	-2.643		




Test plots

GFSK Low Channel

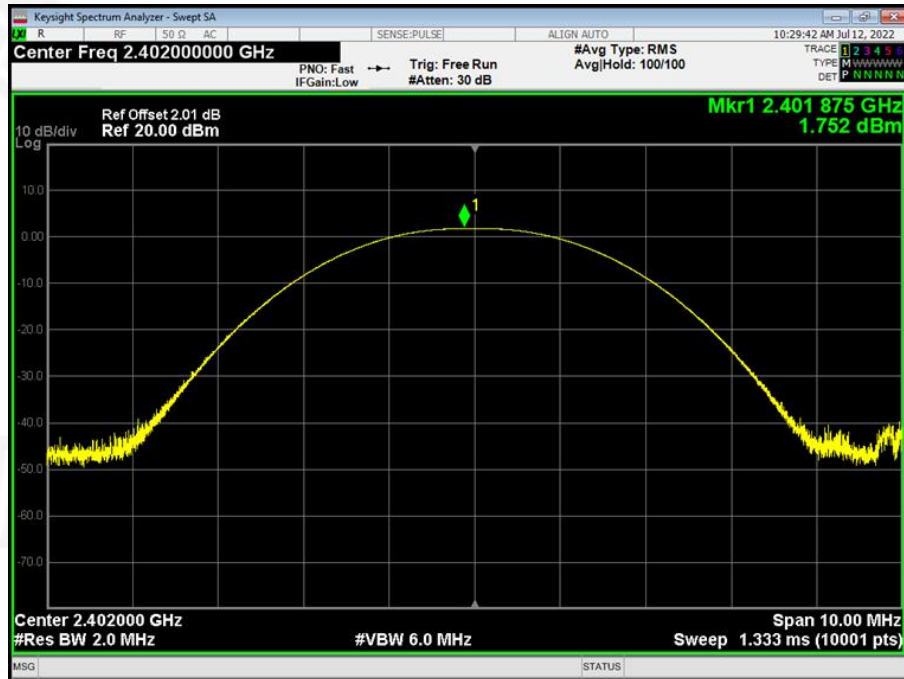


GFSK Middle Channel

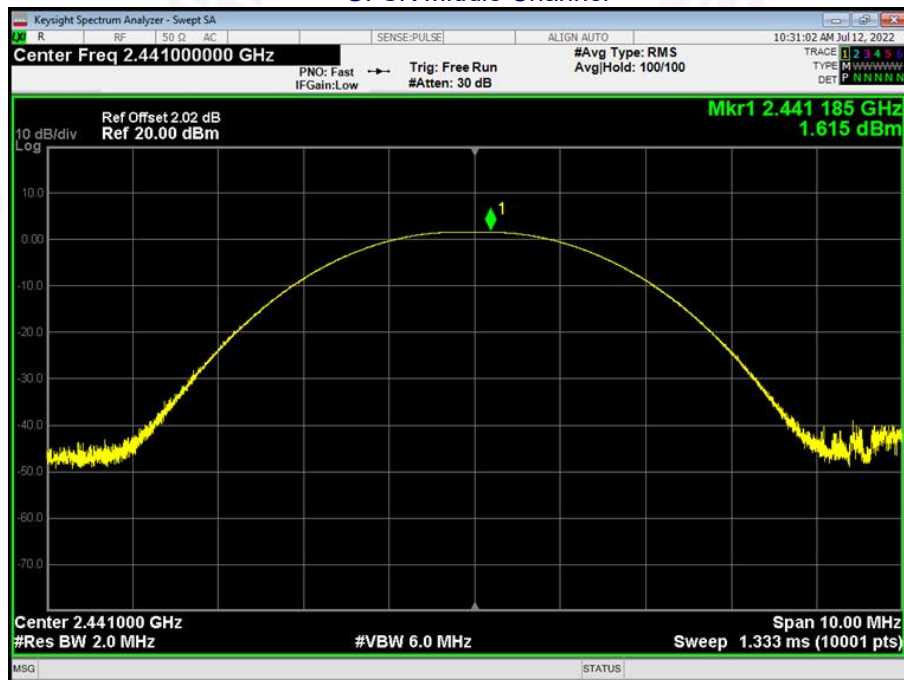




GFSK High Channel

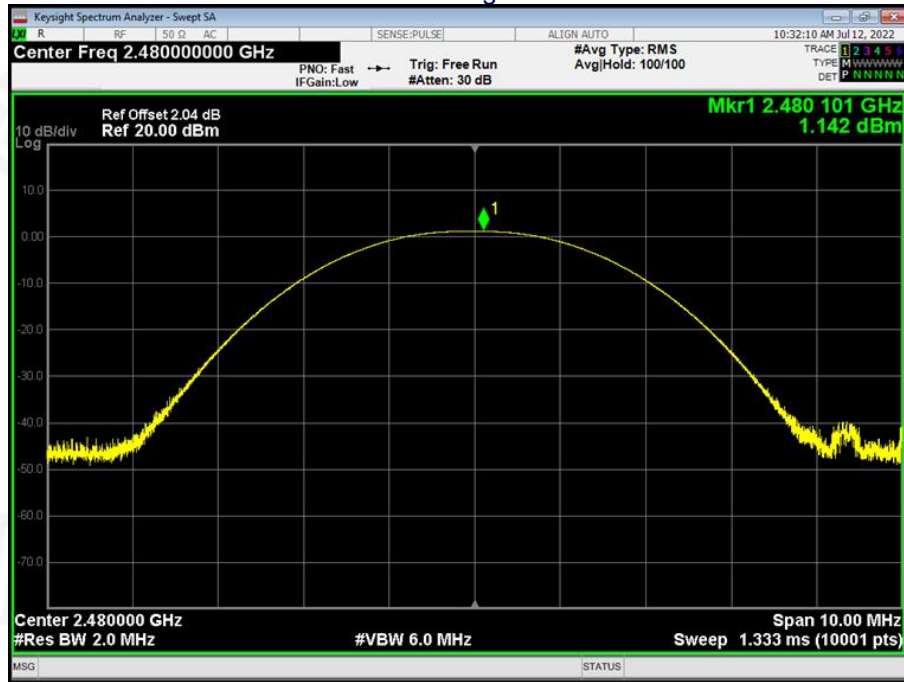


$\pi/4$ -DQPSK Low Channel

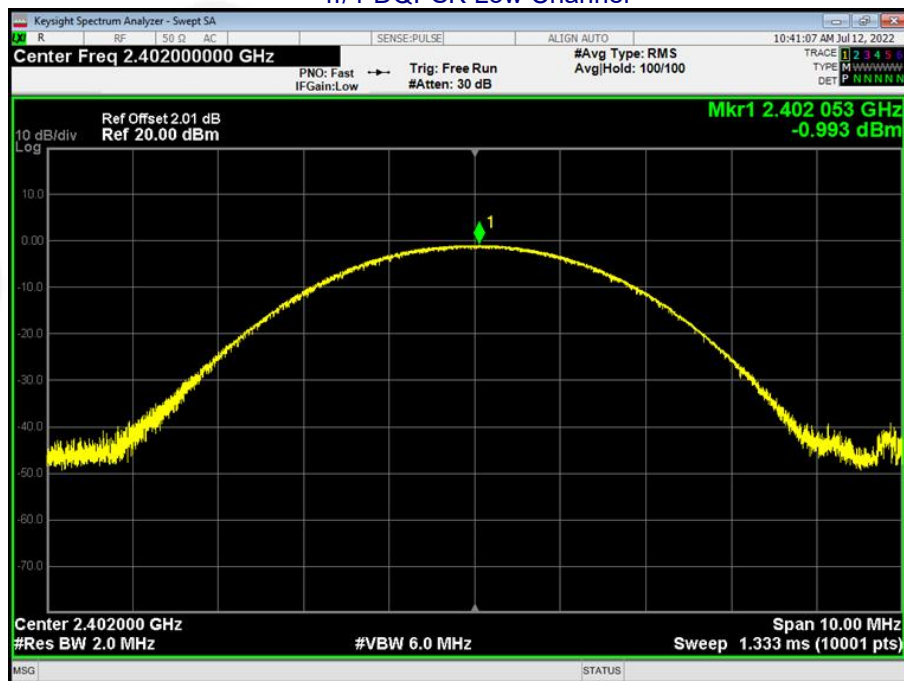




$\pi/4$ -DQPSK Middle Channel

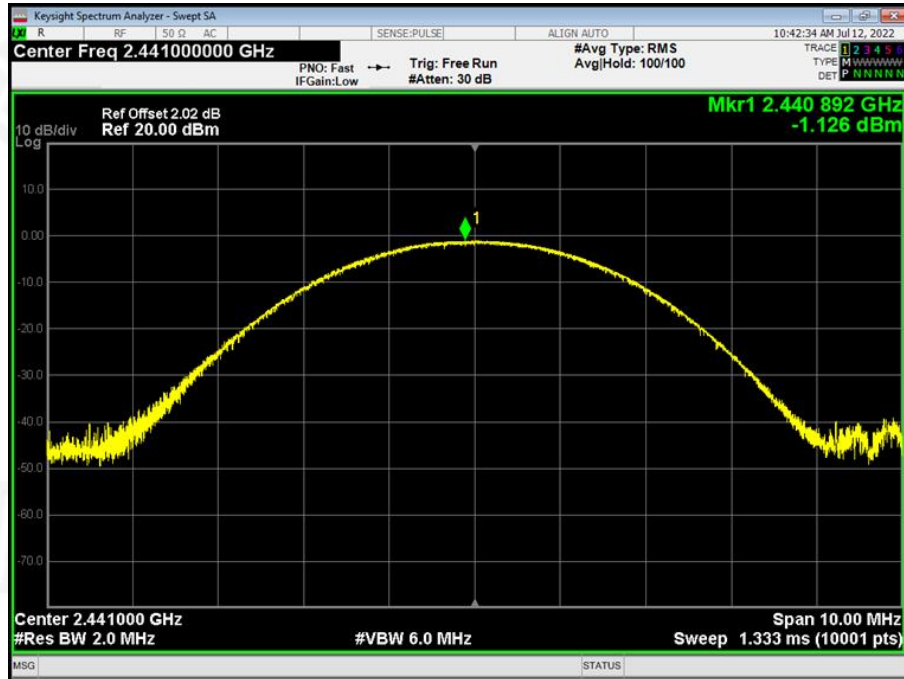


$\pi/4$ -DQPSK High Channel

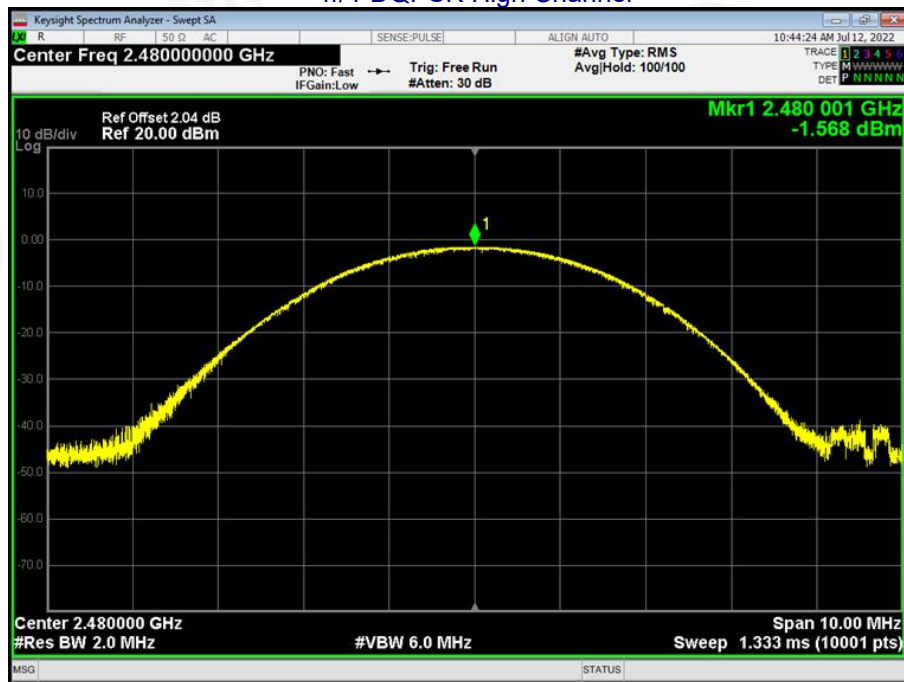




8-DPSK Low Channel

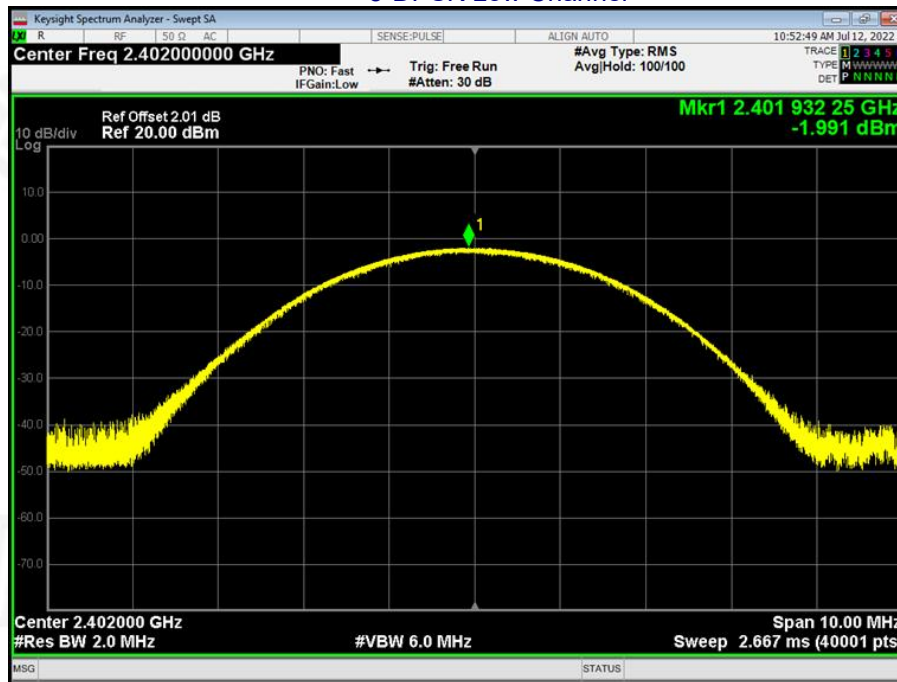

8-DPSK Middle Channel

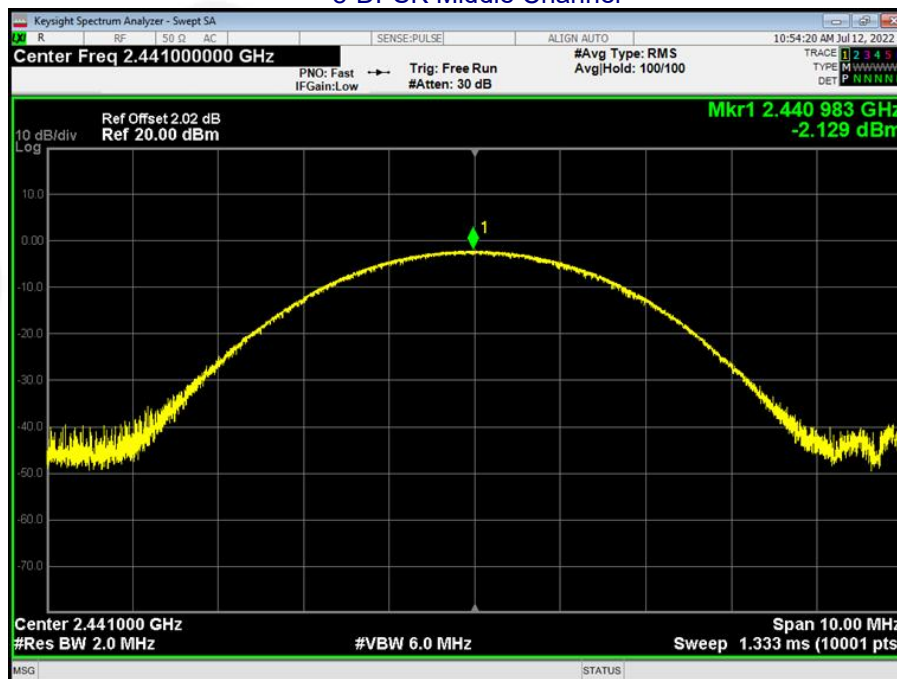



Keysight Spectrum Analyzer - Swept SA

10:55:37 AM Jul 12, 2022

Center Freq 2.48000000 GHz

PNO: Fast IFGain: Low

Trig: Free Run #Atten: 30 dB

#Avg Type: RMS AvgHold: 100/100

TRACE 1 2 3 4 5 6

TYPE M W W W W W W W

DET P N N N N N

Ref Offset 2.04 dB

Ref 20.00 dBm

Mkr1 2.479 974 50 GHz

-2.643 dBm

10 dB/div

Log

Center 2.480000 GHz

#Res BW 2.0 MHz

#VBW 6.0 MHz

Span 10.00 MHz

Sweep 2.667 ms (40001 pts)

MSG STATUS



9. HOPPING CHANNEL SEPARATION

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=30KHz, VBW=100KHz, detector=Peak
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK & 8DSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

9.1 Test Setup



9.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

9.3 DEVIATION FROM STANDARD

No deviation.



9.4 Test Result


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	0.999	0.871	PASS
GFSK	Middle	0.996	0.862	PASS
GFSK	High	0.903	0.854	PASS
$\pi/4$ -DQPSK	Low	0.99	0.950	PASS
$\pi/4$ -DQPSK	Middle	0.993	0.952	PASS
$\pi/4$ -DQPSK	High	0.999	0.948	PASS
8-DPSK	Low	1.029	0.958	PASS
8-DPSK	Middle	1.155	0.951	PASS
8-DPSK	High	1.149	0.954	PASS

Test plots
GFSK Low Channel





GFSK Middle Channel

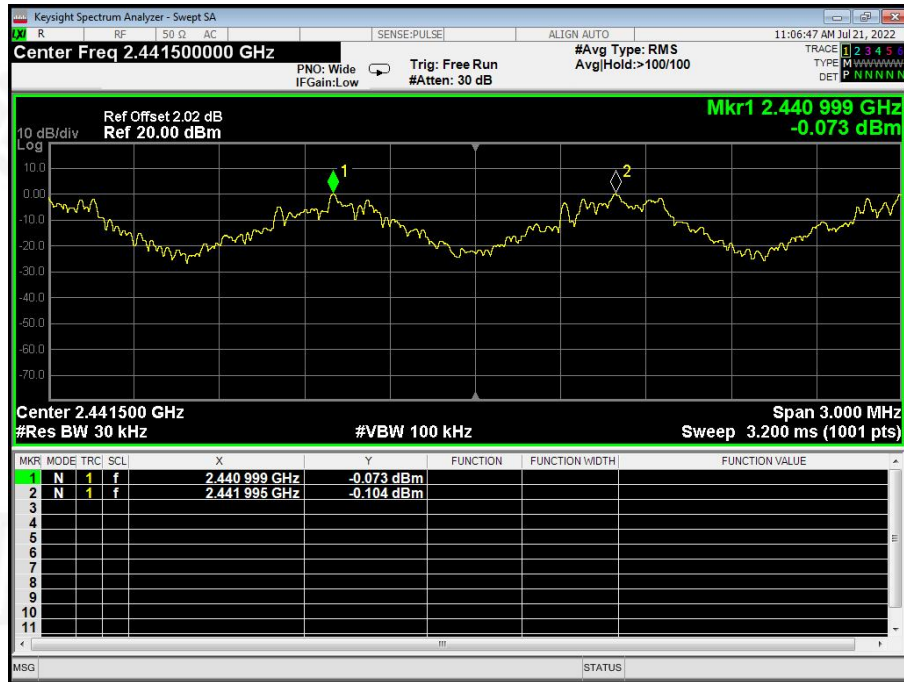


GFSK High Channel






$\pi/4$ -DQPSK Low Channel

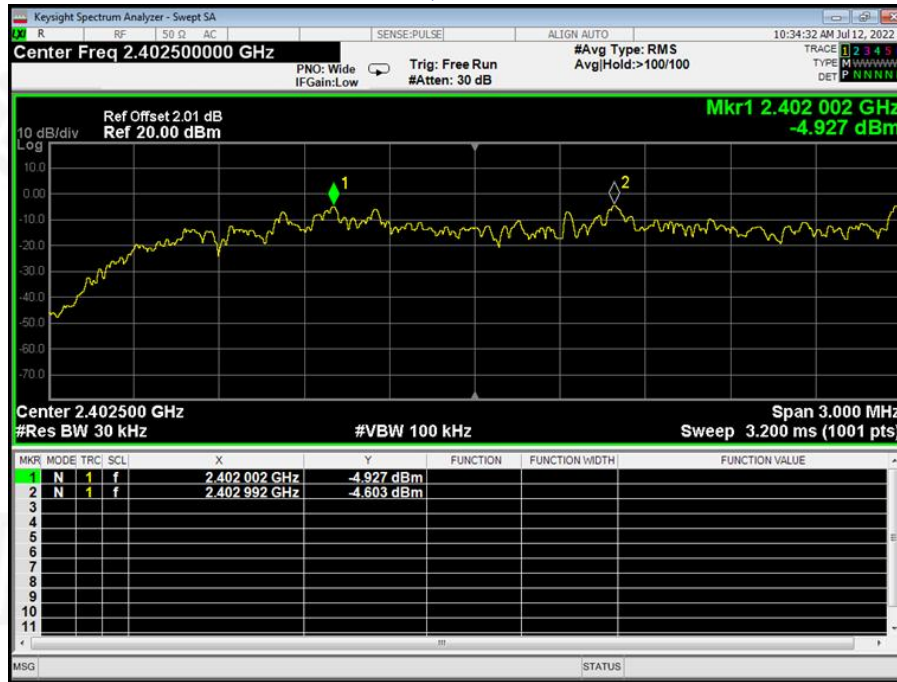


$\pi/4$ -DQPSK Middle Channel

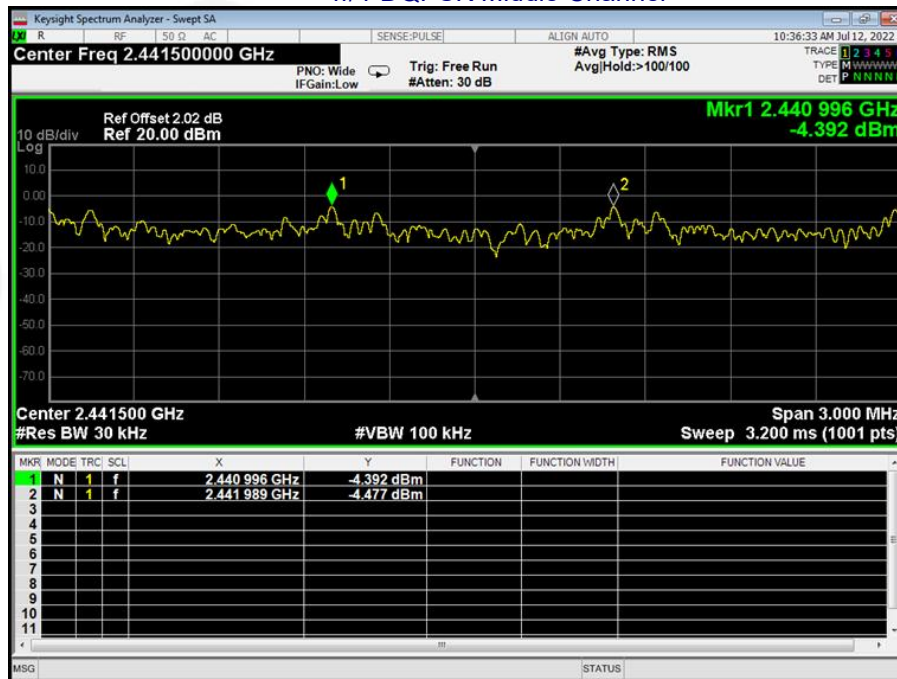




$\pi/4$ -DQPSK High Channel

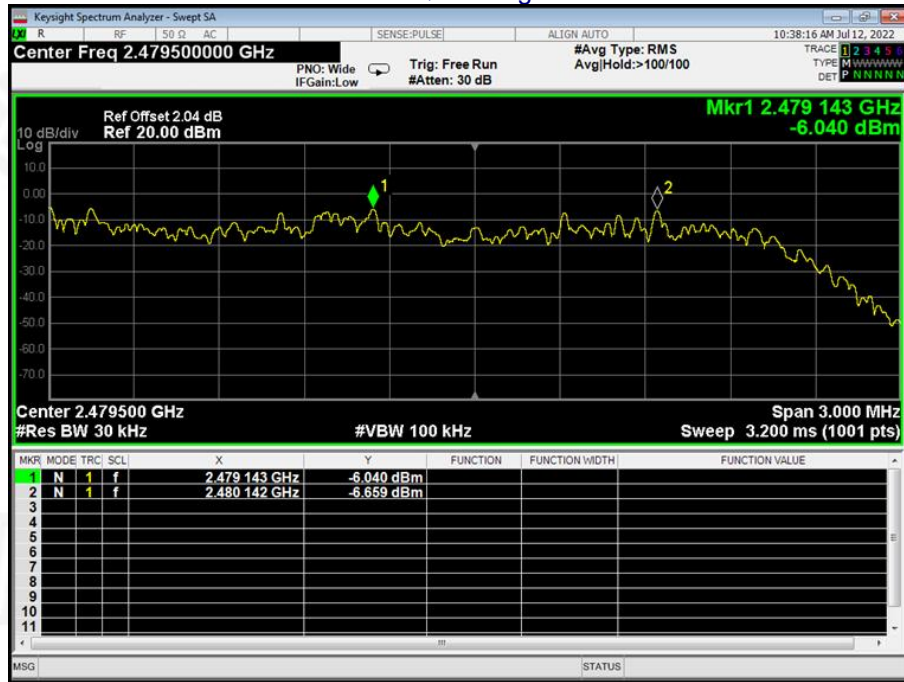


8-DPSK Low Channel

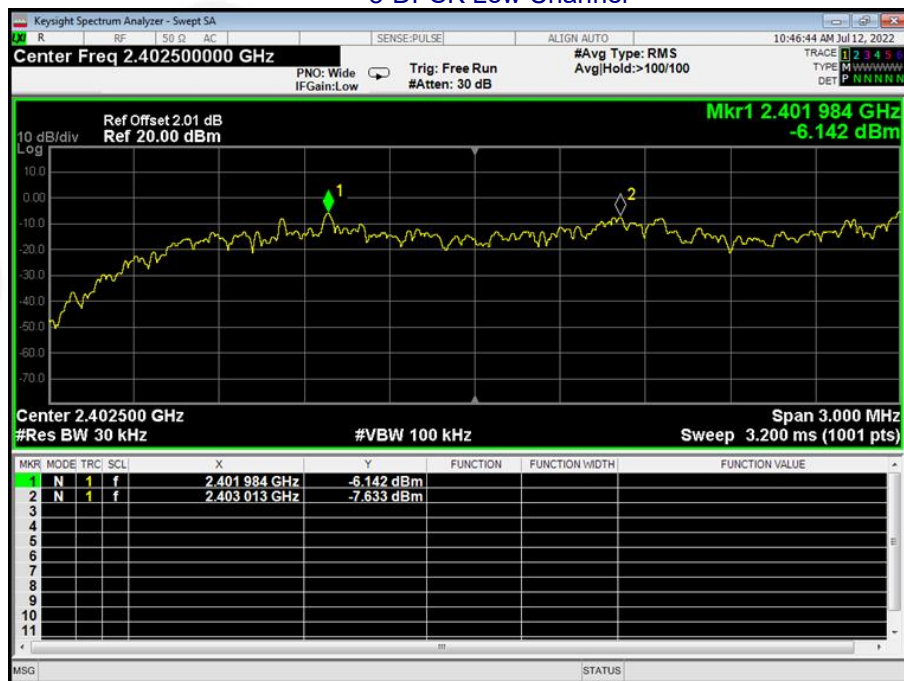




8-DPSK Middle Channel

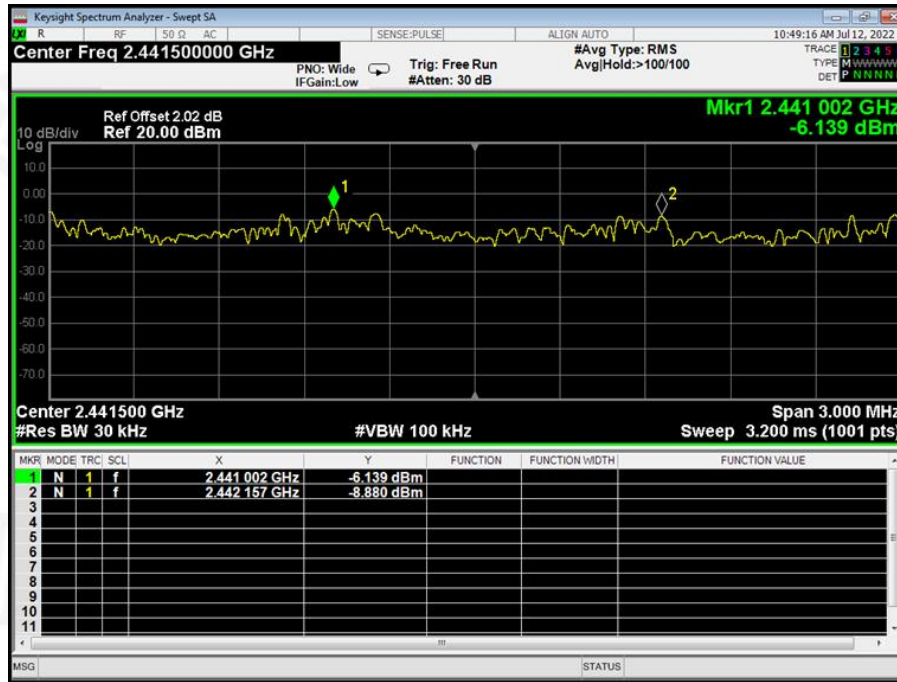

8-DPSK High Channel

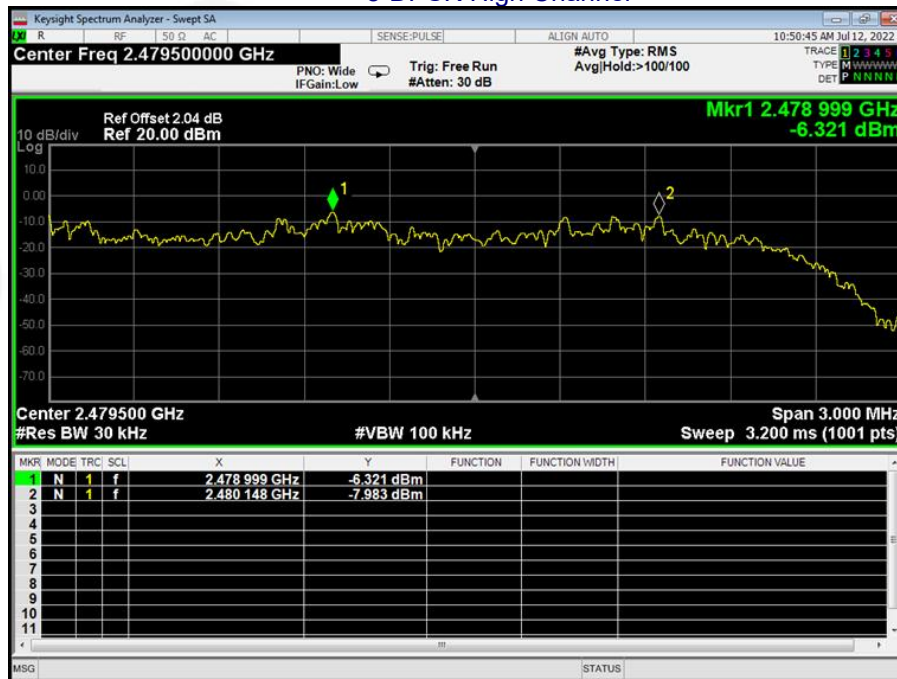



10.NUMBER OF HOPPING FREQUENCY

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels

10.1 Test Setup



10.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


10.3 DEVIATION FROM STANDARD

No deviation.




10.4 Test Result

Test Plots:
79 Channels in total
GFSK

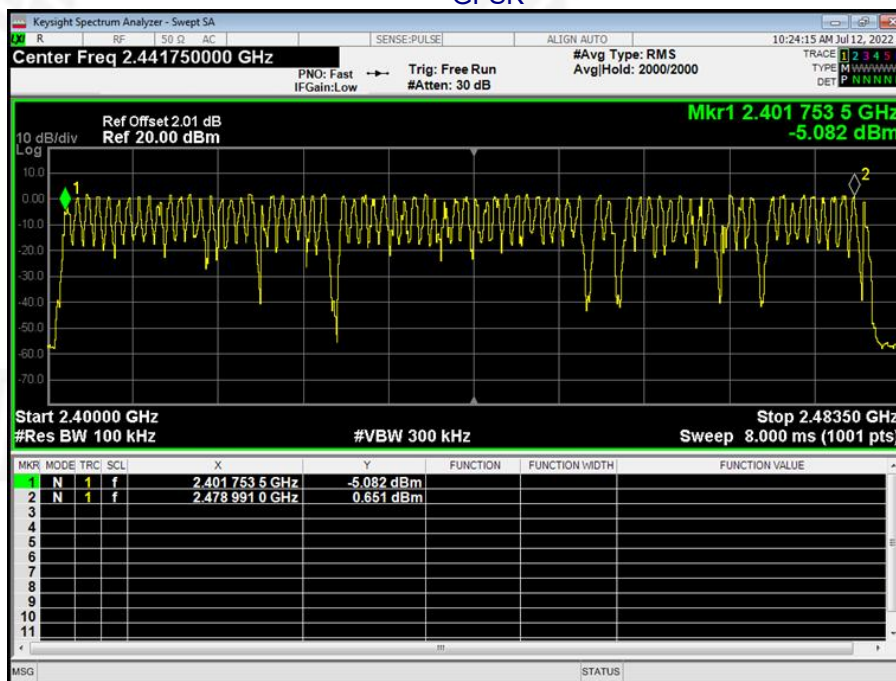




$\pi/4$ -DQPSK

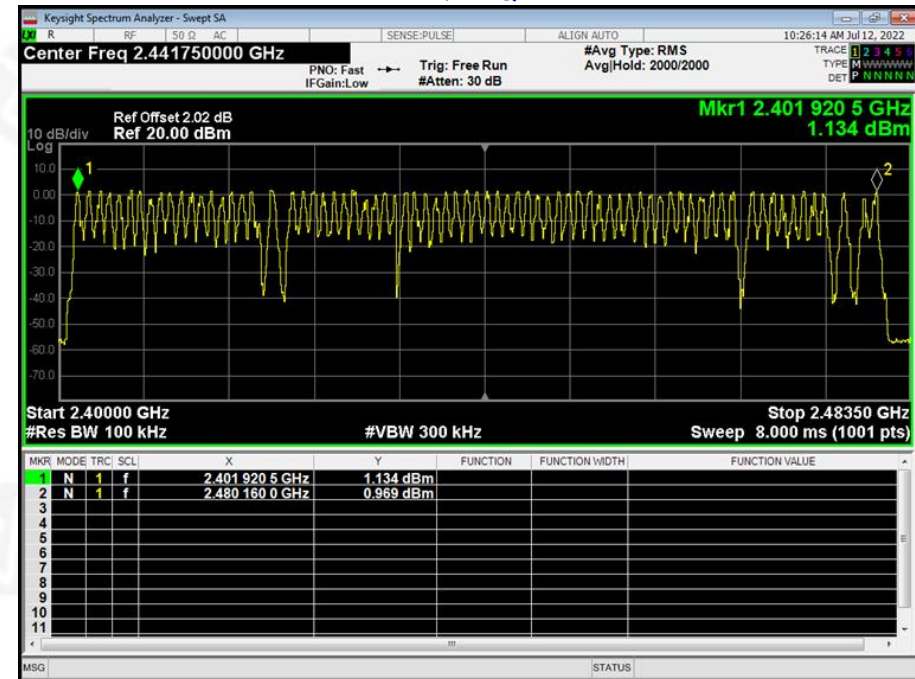

8-DPSK

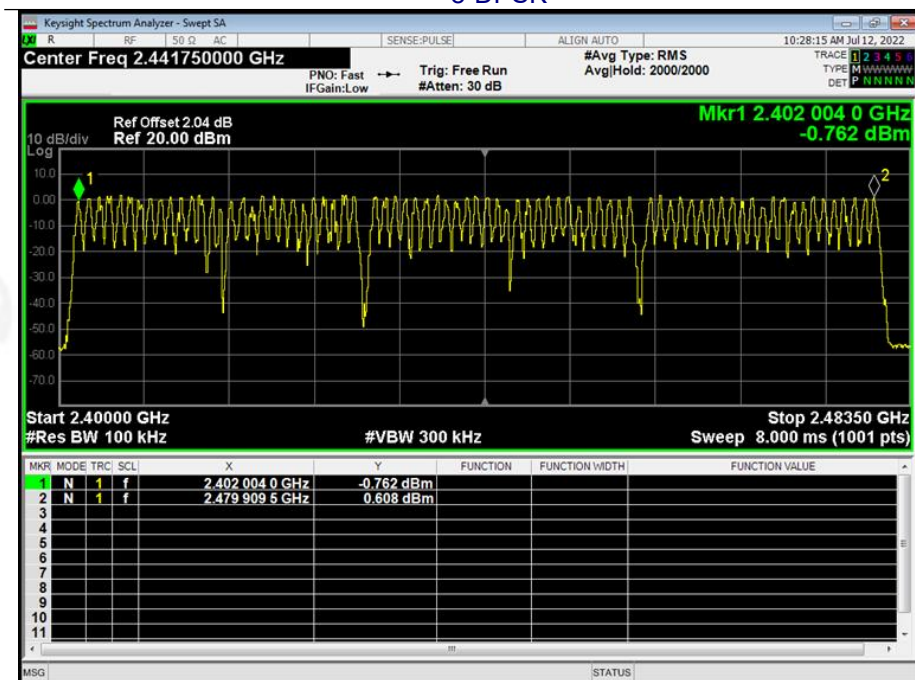



11. DWELL TIME

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second

11.1 Test Setup



11.2 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0Hz;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

11.3 DEVIATION FROM STANDARD

No deviation.



11.4 Test Result

GFSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	121.6	400	Pass
2441MHz	DH3	129.12	400	Pass
2441MHz	DH5	307.627	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.380(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 121.600\text{ms}$

CH:2441MHz time slot= $1.636(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 261.760\text{ms}$

CH:2441MHz time slot= $2.884(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 307.627\text{ms}$

$\pi/4$ -DQPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	2DH1	124.48	400	Pass
2441MHz	2DH3	262.56	400	Pass
2441MHz	2DH5	308.267	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.389(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 124.480\text{ms}$

CH:2441MHz time slot= $1.641(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 262.560\text{ms}$

CH:2441MHz time slot= $2.889(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 308.160\text{ms}$

8-DPSK mode:

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	3DH1	124.48	400	Pass
2441MHz	3DH3	262.4	400	Pass
2441MHz	3DH5	308.373	400	Pass

Remarks:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: as blow

CH:2441MHz time slot= $0.389(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 124.480\text{ms}$


CH:2441MHz time slot= $1.640(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 262.400\text{ms}$

CH:2441MHz time slot= $2.891(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 208.373\text{ms}$




Test Plots

GFSK DH1 2441MHz

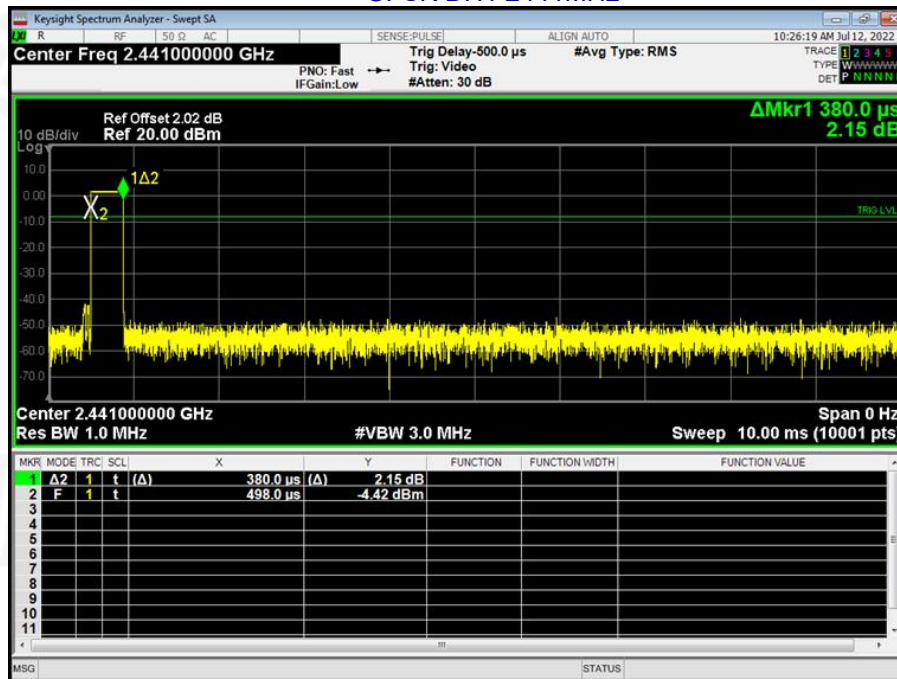


GFSK DH3 2441MHz

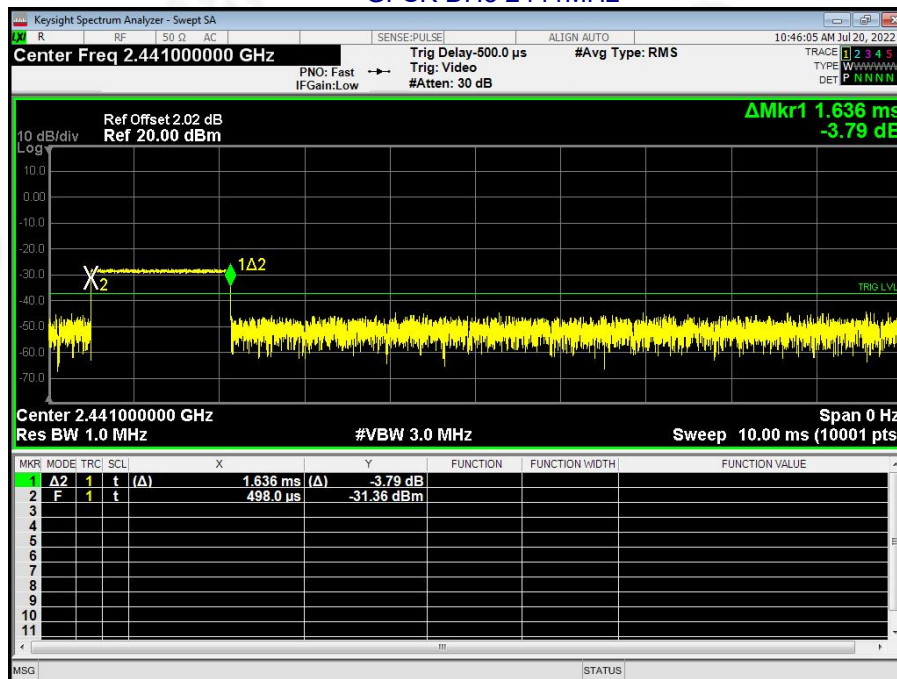




GFSK DH5 2441MHz

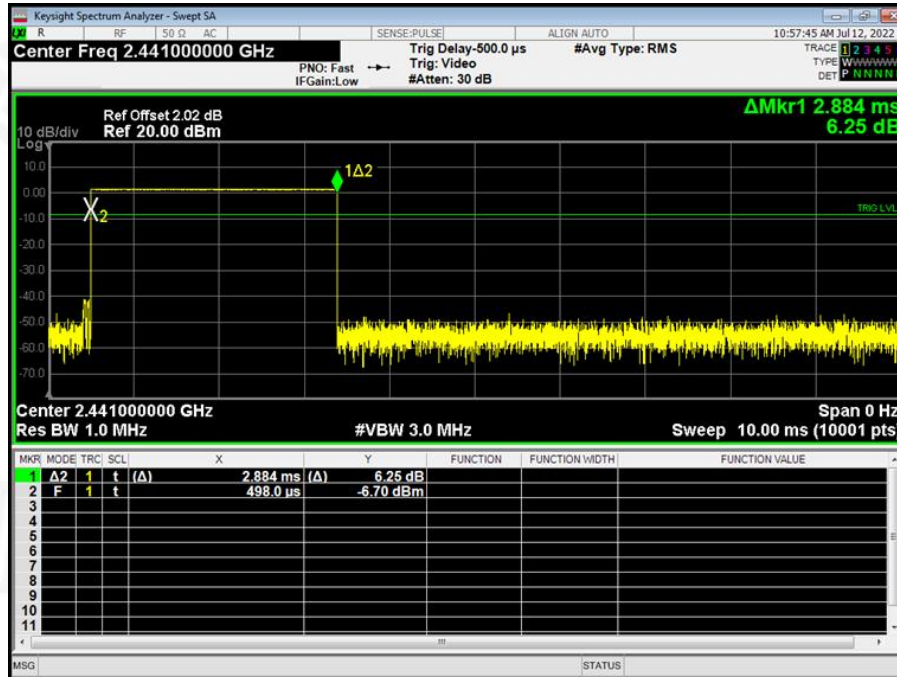


$\pi/4$ -DQPSK 2DH1 2441MHz

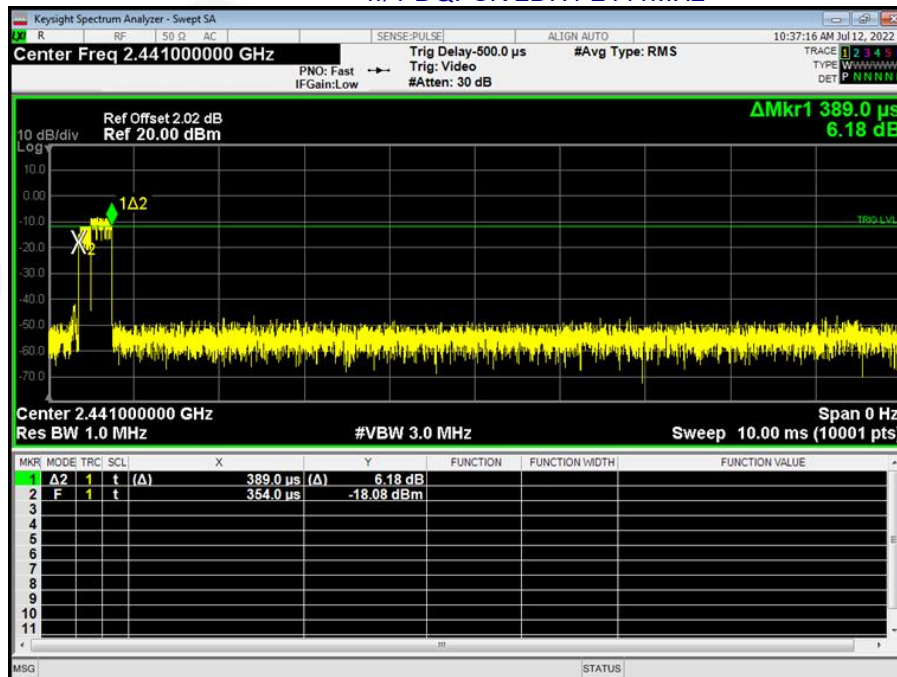




$\pi/4$ -DQPSK 2DH3 2441MHz

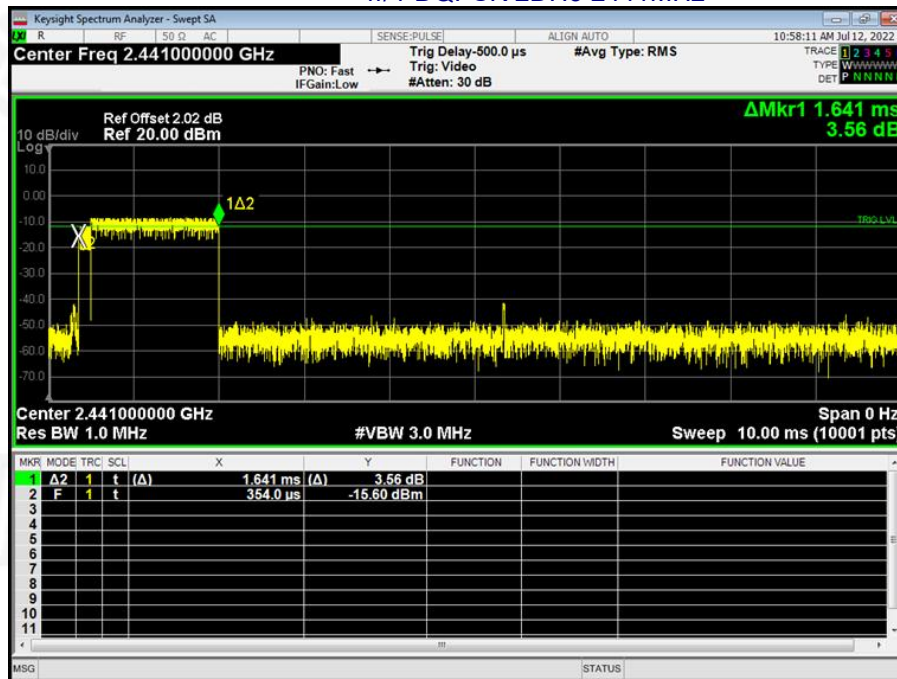


$\pi/4$ -DQPSK 2DH5 2441MHz

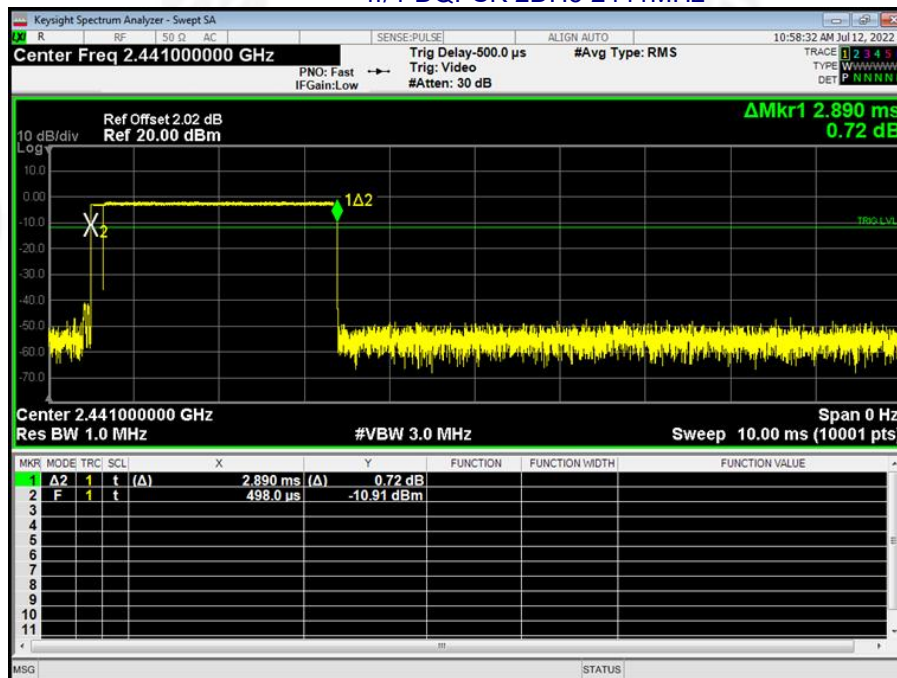




8-DPSK 3DH1 2441MHz

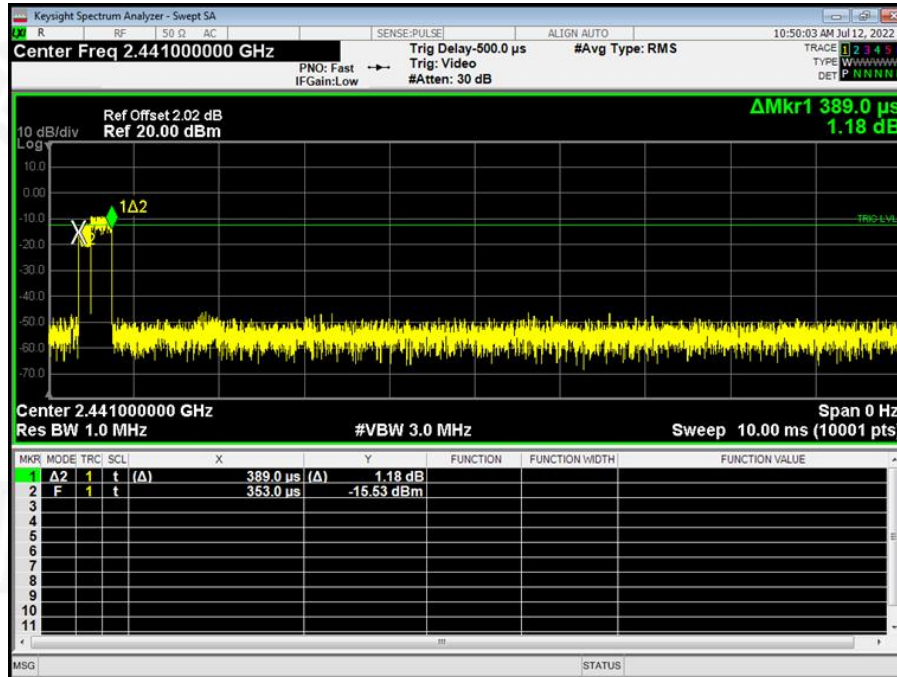


8-DPSK 3DH3 2441MHz

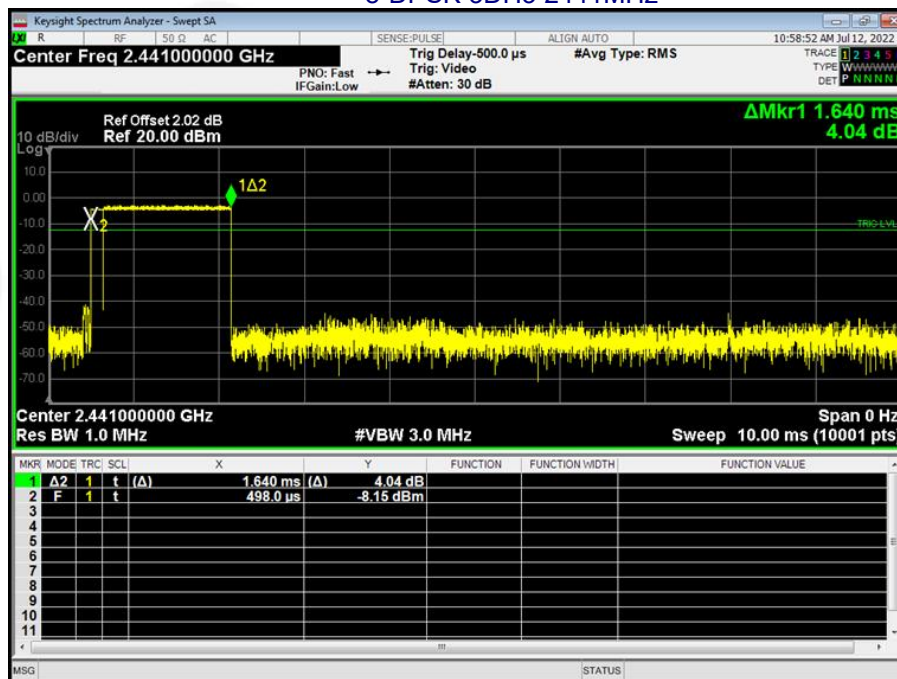



8-DPSK 3DH5 2441MHz

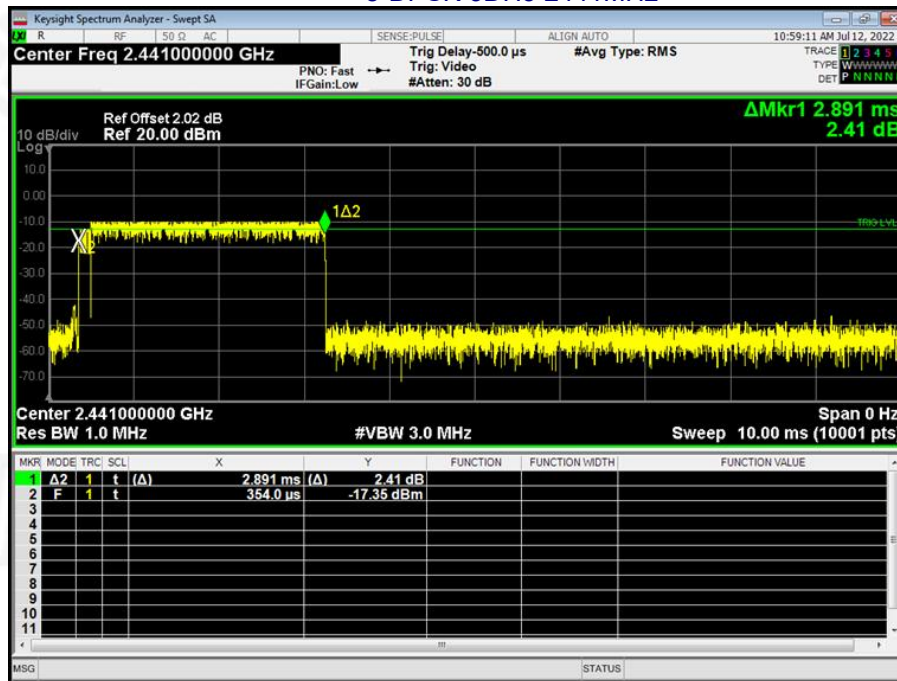



12. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is PCB antenna, the best case gain of the antennas is 0 dBi, reference to the appendix II for details	



13. Test Setup Photo

Reference to the appendix I for details.

14. EUT Constructional Details

Reference to the appendix II for details.

***** END OF REPORT *****