

Prüfbericht-Nr.: <i>Test report no.:</i>	DE21K626 001	Auftrags-Nr.: <i>Order no.:</i>	1084727_50	Seite 1 von 30 Page 1 of 30
Kunden-Referenz-Nr.: <i>Client reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	04.03.2021	
Auftraggeber: <i>Client:</i>	INTERPARFUMS SA, 4 ROND-POINT DES CHAMPS-ELYSEES MARCEL-DASSAULT, 75008 PARIS			
Prüfgegenstand: <i>Test item:</i>	MONCLER POUR HOMME EDP 150ML MONCLER POUR FEMME EDP 150ML			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	MC111 (for men, aluminum look, perfum V1) MC212 (for women, aluminum look, perfum V2)			
Auftrags-Inhalt: <i>Order content:</i>	Prüfung der Funkparameter nach FCC & ISCED <i>Test of radio parameters acc. to FCC & ISCED</i>			
Prüfgrundlage: <i>Test specification:</i>	Teilprüfung / Partial test FCC CFR 47 Part 15 Subpart C- §15.247 ISED RSS-247:2017			
Wareneingangsdatum: <i>Date of sample receipt:</i>	25.03.2021	Photos see Appendix to this report (Appendix to DE21K626 001)		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003022829-002			
Prüfzeitraum: <i>Testing period:</i>	30.03.2021 – 01.04.2020			
Ort der Prüfung: <i>Place of testing:</i>	Nürnberg Nuremberg			
Prüflaboratorium: <i>Testing laboratory:</i>	Wireless Labor Wireless Test Lab			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	genehmigt von: <i>authorized by:</i>			
Datum: <i>Date:</i>	05.05.2021	Datum: <i>Issue date:</i>	05.05.2021	Dipl. -Ing. Melanie Bense
Stellung / Position	Sachverständige(r)/Expert	Stellung / Position	Team Leader Wireless	
Sonstiges / Other:	-			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend 3 = satisfactory	4 = ausreichend N/A = nicht anwendbar 4 = sufficient N/A = not applicable
	5 = mangelhaft N/T = nicht getestet 5 = poor N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 2 von 30
Page 2 of 30

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 3 von 30
Page 3 of 30

Anmerkungen
Remarks

- | | |
|----------|--|
| 4 | <p>Die Messunsicherheit der in diesem Prüfbericht aufgeführten Messverfahren wird nicht unmittelbar in die Bewertung zur Einhaltung der jeweiligen Grenzwerte mit einbezogen. Es gelten die Anforderungen der Spezifikationen TS 103 051 und TS 100 028-1/-2 in aktueller Form, deren Grundlage der „shared risk“ Ansatz ist. Dieser beschreibt für die jeweilige Norm die maximalen zulässigen Unsicherheitsbeträge unter denen der Messwert als „wahr“ angesehen werden kann. Eine zusätzliche Betrachtung der Messunsicherheit bezüglich des gemessenen Wertes findet bei Unterschreitung der maximalen Unsicherheitsbeträge gemäß den Spezifikationen nicht statt.</p> <p><i>The measurement uncertainty of the measurement methods listed in this test report is not directly included in the assessment of compliance with the respective limit values. The requirements of the specifications TS 103 051 and TS 100 028-1/-2 apply in their current form, based on the "shared risk" approach. For the respective standard, this describes the maximum acceptable uncertainty below which the measured value can be regarded as "true". An additional consideration of the measurement uncertainty with regard to the measured value does not take place if the maximum acceptable uncertainties according to the specifications are not reached.</i></p> |
| 5 | <p>Die Aussage zur Konformität des in diesem Prüfbericht geprüften Produktes wird auf Kundenwunsch nach den Kriterien und Anforderungen der angewendeten Normen durchgeführt. Abweichende Bewertungsbedingungen durch den Kunden werden in den jeweiligen Kapiteln gesondert dokumentiert. Grundsätzlich wird eine Konformitätsbewertung auf Basis der angewendeten Normen durchgeführt, sofern mit dem Kunden keine abweichende Regelung getroffen wurde.</p> <p><i>The statement of conformity of the product tested in this test report is carried out according to the criteria and requirements of the applied standards on customer request. Deviating assessment conditions by the customer are documented separately in the respective chapters. In principle, the assessment of conformity is made on the basis of the standards applied, unless otherwise agreed with the customer.</i></p> |

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 4 von 30
Page 4 of 30

Produktbeschreibung
Product description

1	Test item	MONCLER POUR HOMME EDP 150ML MONCLER POUR FEMME EDP 150ML
2	Typ-No.	MC111 (for men, aluminum look, perfum V1) MC212 (for women, aluminum look, perfum V2)
3	Manufacturer details	Jacomo SAS avenue Strassburger 14800 Deauville +33 2 31 14 64 63
4	Test sample obtaining	☒ Sending by customer ☐ Sampling by TÜV Rheinland Group ☐ others:
5	FCC ID	2AYR6-2021TBD1236
6	IC ID	26905-2021TBD1236
7	Description of EUT	Fragrance product composed of an electronical case and a fragrance bottle. There is an electronical LED screen on the case. The LED screen allows the consumer to personalise a message which appears on the screen via Bluetooth Low Energy (BLE), using a specific application developed for this purpose. The fragrance itself does not have an electronical component.
8	Modulation	GFSK
9	Operating Frequency	2402 – 2480 MHz
10	Channel Bandwidth	2 MHz
11	Number of Channels	40
12	Rated Voltage / Frequency	2.0 to 4.2 V / DC
13	Antenna Type	☒ Integral antenna (PCB layout antenna) ☐ Permanent antenna connector
14	Radio Module Type	DIAM-LED1236 FPC 2020
15	Radio Module Test Report Number	CN20VGI8 001
16	Antenna amount of chains	1
17	Antenna Gain	-3 dBi
18	Used Samples	A003022829-002 (MC212 (for women, aluminum look, perfum V2))
19	Firmware Version	V1.0
20	Harware Version	V1

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 5 von 30
Page 5 of 30

Produktbeschreibung
Product description

21	Temperature Range	0°C to 40°C
22	Environment	Indoor

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 6 von 30
Page 6 of 30

Absatz Clause	Anforderungen – Prüfungen / Requirements - Tests	Bemerkungen / Remarks	Ergebnis Result
FCC 15.247 (a)(1) RSS-247 sec. 5.1	20 dB Bandwidth	Does not apply for DTS equipment	P ☐ F ☐ N/A ☒ N/T ☐
FCC 15.247 (a)(1) RSS-247 sec. 5.1	Number of Hopping Frequencies	Does not apply for DTS equipment	P ☐ F ☐ N/A ☒ N/T ☐
FCC 15.247 (a)(1) RSS-247 sec. 5.1	Time of Occupancy	Does not apply for DTS equipment	P ☐ F ☐ N/A ☒ N/T ☐
FCC 15.247 (a)(1) RSS-247 sec. 5.1	Carrier Frequency Separation	Does not apply for DTS equipment	P ☐ F ☐ N/A ☒ N/T ☐
FCC 15.247 (b) RSS-247 sec. 5.4	Maximum Output Power	-	P ☒ F ☐ N/A ☐ N/T ☐
FCC 15.247 (e) RSS-247 sec. 5.2 (b)	Power Spectral Density	-	P ☐ F ☐ N/A ☐ N/T ☒
FCC 15.247 (a)(2) RSS-247 sec. 5.2 (a)	6dB Bandwidth	-	P ☐ F ☐ N/A ☐ N/T ☒
FCC 15.247 (d) RSS-247 sec. 5.5	Band Edge Measurement	-	P ☐ F ☐ N/A ☐ N/T ☒
FCC 15.247 (d) RSS-247 sec. 5.5	Conducted Spurious Emission	-	P ☐ F ☐ N/A ☐ N/T ☒
FCC 15.205, 15.209 RSS-Gen sec. 8.9, 8.10	Radiated Spurious Emission	-	P ☒ F ☐ N/A ☐ N/T ☐

Prüfbericht-Nr.: DE21K626 001

Seite 7 von 30

Test report no.:

Page 7 of 30

Absatz Clause	Anforderungen – Prüfungen / Requirements - Tests	Bemerkungen / Remarks	Ergebnis Result
FCC 15.207 RSS-Gen sec. 8.8	AC Power Conducted Emissions	-	P ☐ F ☐ N/A ☐ N/T ☒

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 8 von 30
Page 8 of 30

Prüfdokumentation
Test documentation

Contents

1	EUT Classification	9
1.1	Wireless technologies and frequencies supported by the EUT	9
1.2	Standard specific classification of the EUT	9
2	General	10
2.1	Registration	10
2.2	Equipment modifications	10
2.3	Test modes	10
2.4	Common operational configuration	11
3	Test conditions	12
3.1	General	12
3.2	Normal test conditions	12
3.3	Antenna assemblies	12
3.4	Measurement Uncertainty	13
4	Test results in detail	14
4.1	Maximum Output Power	14
4.2	Radiated Spurious Emissions	19
5	Test Setup Photo	28
6	Equipment List	29
6.1	Hardware	29
6.2	Software	29
7	Change History	30

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 9 von 30
Page 9 of 30

Prüfdokumentation
Test documentation

1 EUT Classification

1.1 Wireless technologies and frequencies supported by the EUT

The named technologies are only those falling in the specification of the applied standard.

Technology	Frequency Range (TX)	Supported by the EUT	Evaluated in this report
BLE 5.0	2402 – 2480 MHz	☒	☒

1.2 Standard specific classification of the EUT

1.2.1 Applied standards

FCC CFR 47 Part 15 Subpart C - §15.247

ISED RSS-247:2017

1.2.2 Test Methods and Guidance Documents

ANSI C63.10:2013

KDB 558074 D01 DTS Measurement Guidance v05

KDB 662911 D01 Multiple Transmitter Output v02r01

KDB 996369 D04 Module Integration Guide v01

1.2.3 System Type

DTS (Digital Transmission System)

1.2.4 Type of equipment

Equipment that can be used in multiple orientations

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 10 von 30
Page 10 of 30

Prüfdokumentation
Test documentation

2 General

2.1 Registration

The measurement facilities for conducted and radiated disturbance measurements of the TÜV Rheinland LGA Products have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. Measurement data will be accepted in conjunction with applications for Certification under Parts 15 and 18 of the Commission's Rules.

FCC Registration Number: 939976

Canada Company Registration Number: 11235A

Bundesnetzagentur Registration Number: BNetzA-CAB-17/21-16

2.2 Equipment modifications

No modifications were found to be necessary in order to perform the tests or to achieve compliance.

2.3 Test modes

Mode	Description	Mode configuration
1	Normal intended use – Paired mode - Continuous transmission while hopping	The device is paired with a samsung galaxy smartphone. The App «Mini LedShow » with the mode « Rythmus » was used. In this mode the mobile phone plays music and the EUT is displaying a moving bar chart according to the music.
2	Transmission on the three advertising channels	The EUT was turned on and no pairing device was in its range.

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 11 von 30
Page 11 of 30

Prüfdokumentation
Test documentation

2.4 Common operational configuration

The DUT was tested in paired mode as stated in chapter 3.6.2 of the KDB 996369 D04 Module Integration Guide v01.

Following configurations were used for the test cases:

Test case	Common operational configuration
Maximum Output Power	Paired mode
	Advertising mode
Radiated Spurious Emissions < 30 MHz	Paired mode
Radiated Spurious Emissions 30 MHz – 1 GHz	Paired mode
Radiated Spurious Emissions > 1 GHz	Paired mode

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 12 von 30
Page 12 of 30

Prüfdokumentation
Test documentation

3 Test conditions

3.1 General

The DUT was tested standalone on the transmit test mode in normal test conditions.

3.2 Normal test conditions

Environmental condition	Parameter	Range
Temperature	°C	22
Relative humidity	%	18
Supply voltage	Volts DC	3.7 DC (internal battery)

3.3 Antenna assemblies

No antenna connector was prepared so tests were done in radiated mode.

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 13 von 30
Page 13 of 30

Prüfdokumentation
Test documentation

3.4 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device.

Test	Value	Unit	Range
Frequency Error	2,7 *10 ⁻⁸	Hz	-
Frequency Stability under low voltage conditions			
Time	1,1*10 ⁻⁹	s	-
Conducted Carrier Power	1.0	dB	9k-1GHz
	1.7	dB	1GHz-6GHz
Conducted Spurious Emissions (RX/TX)	2.8	dB	6GHz-40GHz
Occupied Bandwidth (OBW)	0.1	%	-
TX Power Spectral Density	4.2	mW	9kHz - 6GHz
	1.6	dB	9kHz - 6GHz
Dwell Time	4,6 *10 ⁻⁷	Hz	-
Frequency Separation			-
Measurement of conducted emissions at the power supply connection to LISN	2.3	dB	9kHz – 150kHz
	2.2	dB	150kHz – 30MHz
Measurement of the field strength at distance 3m	1.6	dB	9k-150kHz
	4.5	dB	30-1000MHz
	5	dB	1-6GHz
	5.3	dB	6-40GHz
Temperature	0.8	K	-
Humidity	4	%	-
Voltage (AC/DC)	1.0	%	-

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 14 von 30
Page 14 of 30

Prüfdokumentation
Test documentation

4 Test results in detail

4.1 Maximum Output Power

4.1.1 Requirements / Limits

The maximum output power limit is expressed in terms of either maximum peak conducted output power or maximum conducted output power.

The maximum peak conducted output power is defined as the maximum power level measured with a peak detector using a filter with width and shape of which is sufficient to accept the full signal bandwidth.

The maximum conducted output power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level.

DTS devices:

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt. Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Frequency Hopping Systems:

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Devices with antenna gain greater than 6 dBi:

FCC Part 15, Subpart C, §15.247 (b) (4)

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3), as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 15 von 30
Page 15 of 30

Prüfdokumentation
Test documentation

4.1.2 Test Method

Radiated method was used to measure the maximum output power. The worst case channel configuration regarding the power measurement is used.

The maximum output power (EIRP) is calculated from the radiated field strength in the far field condition using the following equation (ANSI C63.10:2013 ; Chapter 9.5):

$$\text{EIRP} = E_{\text{Meas}} + 20 \log (d_{\text{Meas}}) - 104.7$$

Where

EIRP: is the equivalent isotropically radiated power, in dBm

E_{Meas} : is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} : is the measurement distance, in m (3m)

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 16 von 30
Page 16 of 30

Prüfdokumentation
Test documentation

4.1.3 Test setup


EUT		A003022829-002 (MC212 (for women, aluminum look, parfum V2))
Test Condition		Normal conditions
Chamber details		☒ 3m Fully Anechoic Chamber (FAC) ☐ 10m Semi Anechoic Chamber (SAC) ☐ Shielded room
Measurement positioning		Distance: EUT height: Antenna height: ☒ 3m ☒ 1.5m ☒ 1.5m ☐ 10m ☐ 0.8m ☐ 1m to 4m – height scan ☐ N/A
Companion device		-
Operation mode		1, 2
Spectrum Analyzer	Frequency	2380MHz to 2500MHz
	Resolution Bandwidth	1MHz
	Video Bandwidth	3MHz
	Measurement Time	10s
Further parameters		It shall be noted that for the measurements in paired mode the companion device (Samsung smartphone) was placed near the EUT in order to keep the connection. An influence of the measurement result can not be excluded. For reference the measurements were additionally conducted in advertising mode
Test engineer		M. Sc. Anna Schönfeld

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 17 von 30
Page 17 of 30

Prüfdokumentation Test documentation

4.1.4 Test results – paired mode

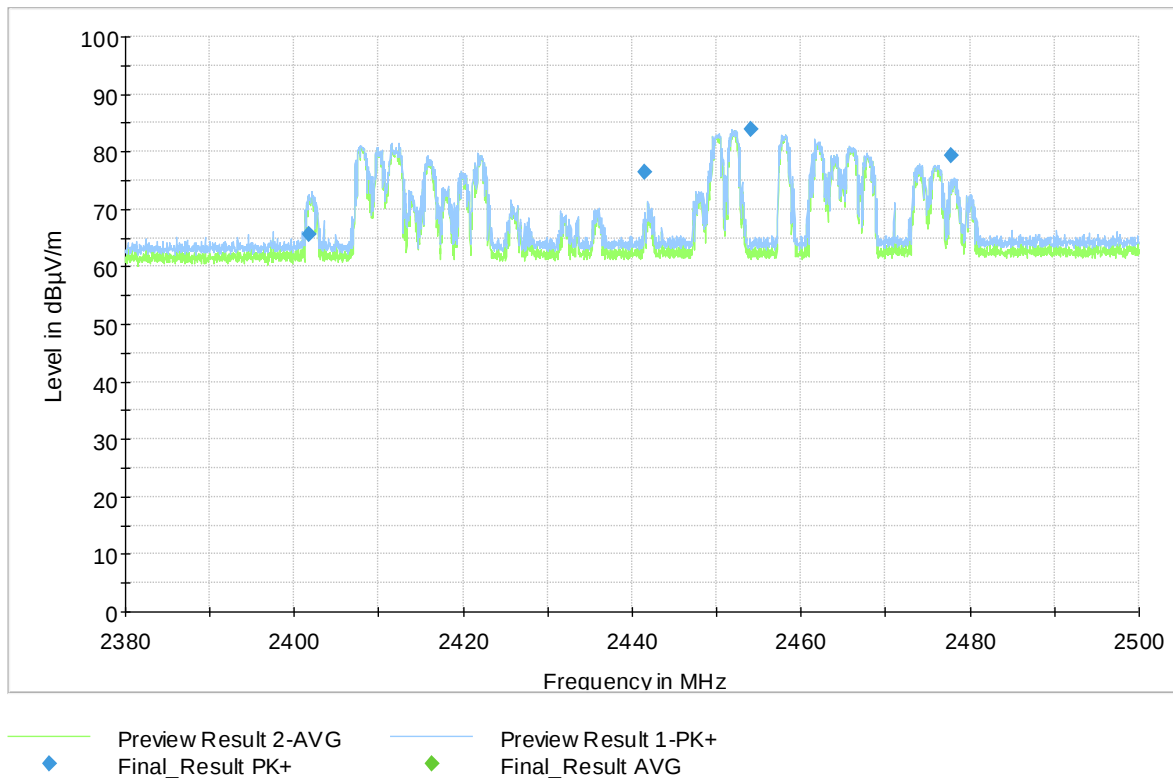

Radiated Measurement result:

Frequency (MHz)	MaxPeak (dBµV/m)	Height (cm)	Pol.	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2401.808750	65.62	150.0	V	210.0	295.0	35.3
2441.398750	76.56	150.0	H	30.0	0.0	35.5
2454.022500	83.85	150.0	H	-26.0	73.0	35.6
2477.806250	79.44	150.0	H	30.0	67.0	35.7

Maximum Output power result – worst case channel 2405MHz:


Channel (MHz)	Field Strenght (dBµV/m)	EIRP (dBm)	Output power (dBm)	Limit (dBm)	Margin (dB)	Test Result
2454.0225	83.85	-11.3	-14.31	30	44.31	Pass

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 18 von 30
Page 18 of 30

Prüfdokumentation Test documentation

4.1.5 Test results – advertising mode

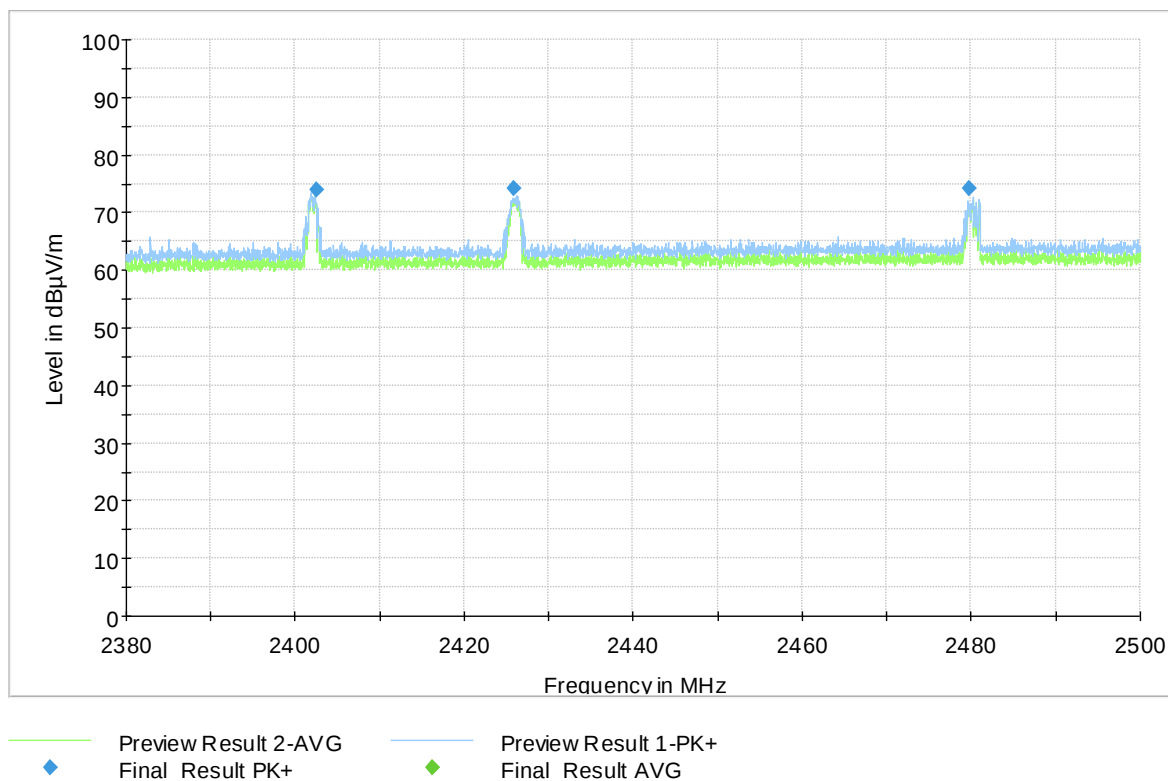

Radiated Measurement result:

Frequency (MHz)	MaxPeak (dBµV/m)	Height (cm)	Pol.	Azimuth (deg)	Elevation (deg)	Corr. (dB/m)
2402.501250	73.91	150.0	V	248.0	350.0	35.3
2425.841250	74.14	150.0	V	241.0	0.0	35.4
2479.728750	74.12	150.0	V	273.0	348.0	35.7

Maximum Output power result – worst case channel 2405MHz:

Channel (MHz)	Field Strength (dBµV/m)	EIRP (dBm)	Output power (dBm)	Limit (dBm)	Margin (dB)	Test Result
2402.5	73.91	-21.25	-24.25	30	54.25	Pass

Final test result

Pass

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 19 von 30
Page 19 of 30

Prüfdokumentation
Test documentation

4.2 Radiated Spurious Emissions

4.2.1 Requirements / Limits

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode. The emissions shall not exceed the values in FCC Part 15, Subpart C §15.205, §15.209, §15.247(d).

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency [MHz]	Limit [$\mu\text{V/m}$]	Measurement distance [m]	Limits [$\text{dB}\mu\text{V/m}$]
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (f)(2).

Frequency [MHz]	Limit [$\mu\text{V/m}$]	Measurement distance [m]	Limits [$\text{dB}\mu\text{V/m}$]
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 - 40000	500@3m	3	54.0@3m

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

$$\text{Limit } [\text{dB}\mu\text{V/m}] = 20 \log (\text{Limit } [\mu\text{V/m}] / 1\mu\text{V/m})$$

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 20 von 30
Page 20 of 30

Prüfdokumentation
Test documentation

4.2.2 Test Method

4.2.2.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. Preliminary emission profile testing was performed inside the anechoic chamber. The receiving antenna was placed at a distance of 3m for all measurements. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT. The different measurement setup for each frequency range are shown below.

9 kHz - 30 MHz

Following Measurement Setup is used:

Test Site	Semi-anechoic chamber
Receiving Antenna	Loop antenna (HFH 2)
Receiving Antenna Height	1 m
Receiving Antenna Polarisation	Parallel – Perpendicular
EUT Table	1.0m x 1.5m non-conductive table 80cm above the floor
EUT Turn Table Step Size	22.5°
Receiver Configurations	Average and peak detectors
	RBW: 200Hz (9 - 150 kHz) and 9 kHz (150 kHz – 30 MHz)
	Step Size: 50Hz (9-150kHz) and 2.25kHz (150k-30MHz)
	Sweep Time: 100ms (FFT)

30 MHz - 1 GHz

Following Measurement Setup is used:


Test Site	Semi-anechoic chamber
Receiving Antenna	Hybrid Antenna VULB 9168
Receiving Antenna height	Varied (1m to 4 m, step size 1m)
Receiving Antenna Polarisation	Horizontal– Vertical
EUT Table	1.0m x 1.5m non-conductive table 80cm above the floor
EUT Turn Table Step Size	45°
Receiver Configurations	Peak detector
	RBW :120 kHz
	Step Size: 30kHz (30-1000MHz)
	Sweep Time : 100 ms (FFT)

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 21 von 30
Page 21 of 30

Prüfdokumentation Test documentation

For Measurements below 1 GHz, the EUT was positioned as shown in the setup photograph:

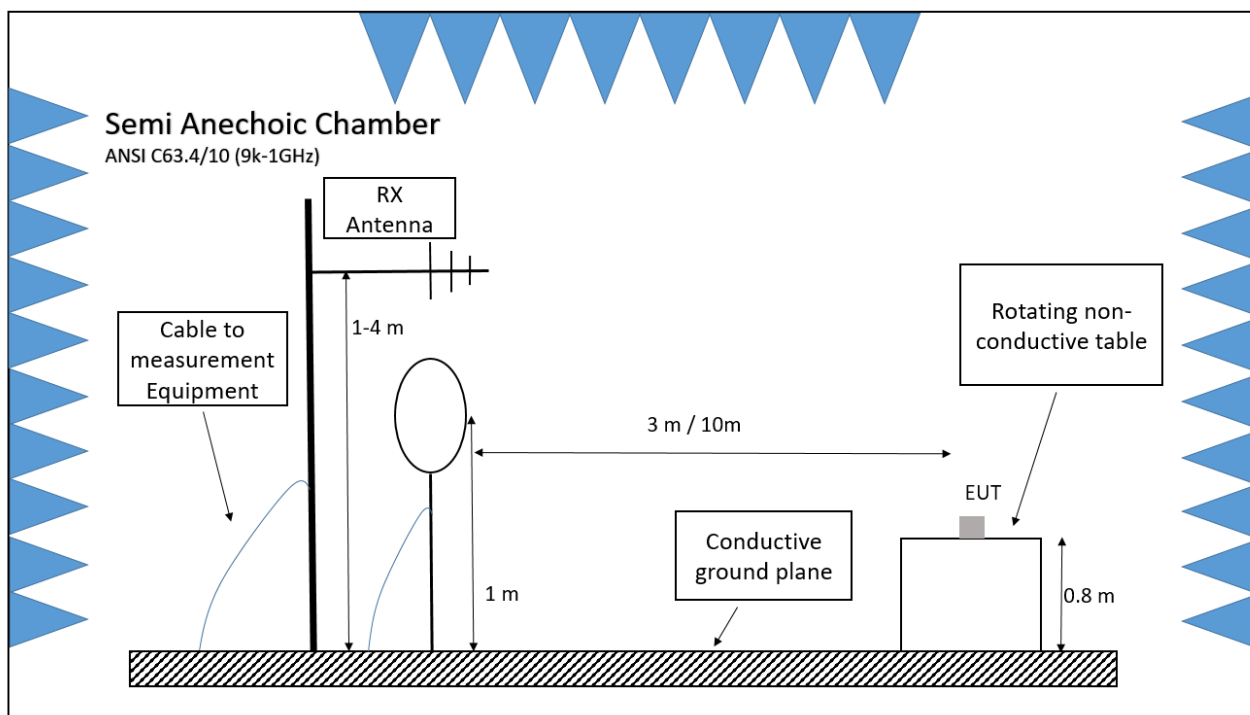


1 GHz - 25 GHz

Following Measurement Setup is used:

Test Site	Fully-anechoic chamber
Receiving Antenna	Horn Antenna HF907 (1-18 GHz), 3116C-PA (18-25 GHz)
Receiving Antenna Height	1.5 m
Receiving Antenna Polarisation	Horizontal– Vertical
EUT Positioner	40 cm x 60 cm non-conductive positioner 1.5 m above the floor / Step size,elevation angle 45°
EUT Turn Table Step Size	45°
Spectrum Analyser	Average and peak detectors
	RBW: 1 MHz
	Sweep Time : 100 ms

Prüfdokumentation Test documentation

For Measurements over 1 GHz, the EUT was positioned as shown in the setup photograph:

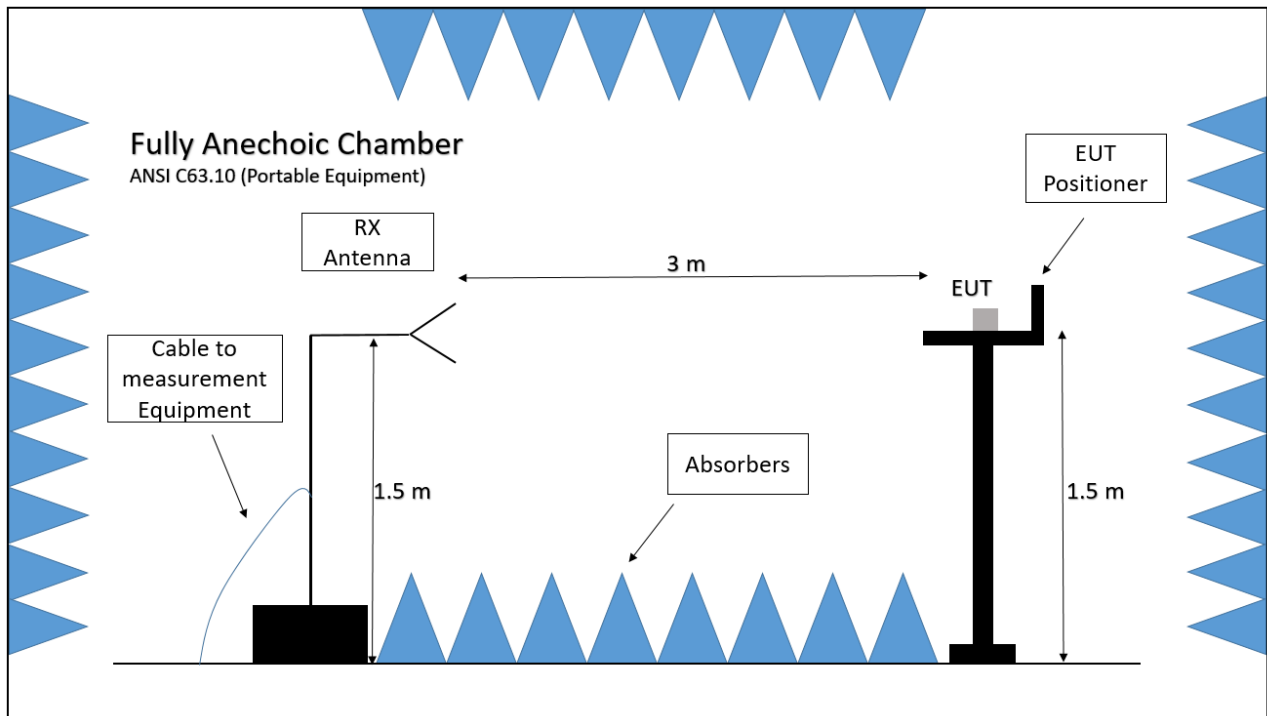

4.2.2.2 Final Test

The placement of EUT and cables were the same as for preliminary testing. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, then the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked. For the measurements in the frequency range 30 MHz to 1 GHz for each measured frequency the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. For measurement above 1 GHz the turntable and positioner step sizes were set to a range of 22° and the antenna height is fixed.

For the measurements in the frequency ranges (90-110kHz, 490 kHz-1 GHz) quasi-peak detector is used, while average and peak detectors are used in other ranges.

Final testing was performed on an SVSWR compliant test site.

The final average electric field value (E_{final}) is calculated in the final measurement table using the following equation:

$$E_{final} = \text{RawRec} + \text{Corr.}$$

While

$$\text{Corr.} = \text{Trd. Corr.} + \text{Sig Path} + \text{Preamp}$$

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 23 von 30
Page 23 of 30

Prüfdokumentation
Test documentation

4.2.3 Test Setup

EUT	A003022829-002 (MC212 (for women, aluminum look, parfum V2))
Test Condition	Normal conditions
Companion device	Samsung smartphone
Operation mode	1
Further parameters	-
Test engineer	M. Sc. Anna Schönfeld

Prüfbericht-Nr.: DE21K626 001
Test report no.:


Seite 24 von 30
Page 24 of 30

Prüfdokumentation Test documentation


4.2.4 Test results

– 9kHz to 30 MHz, Paired Mode

• Perpendicular Polarization

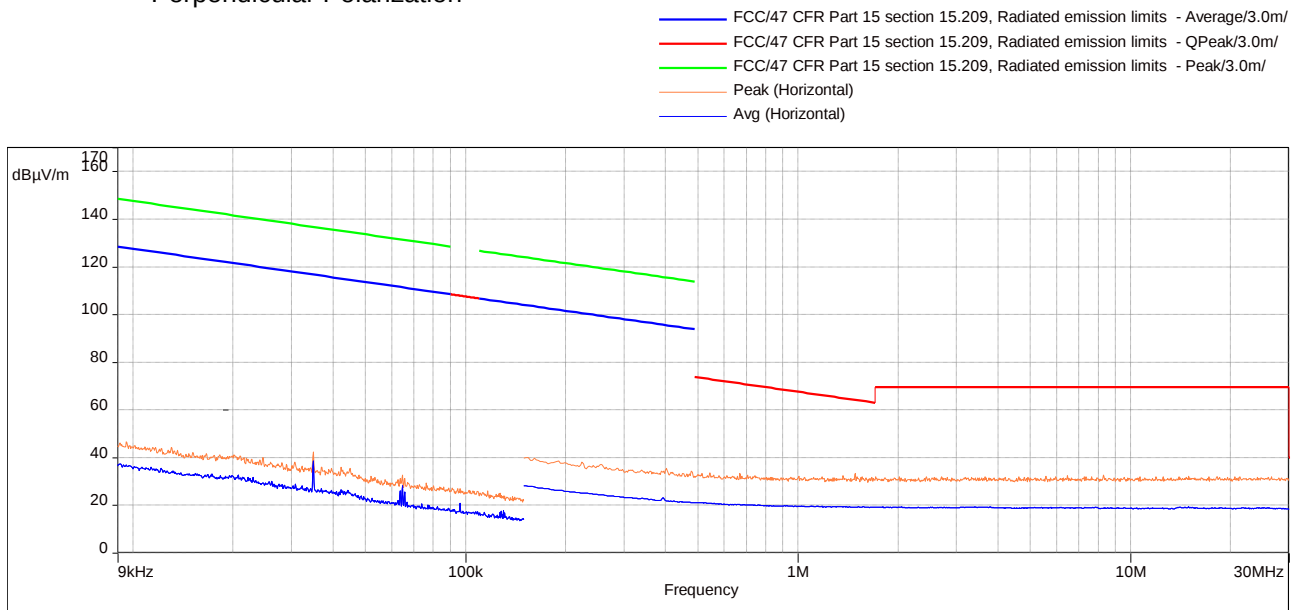

• Parallel Polarization

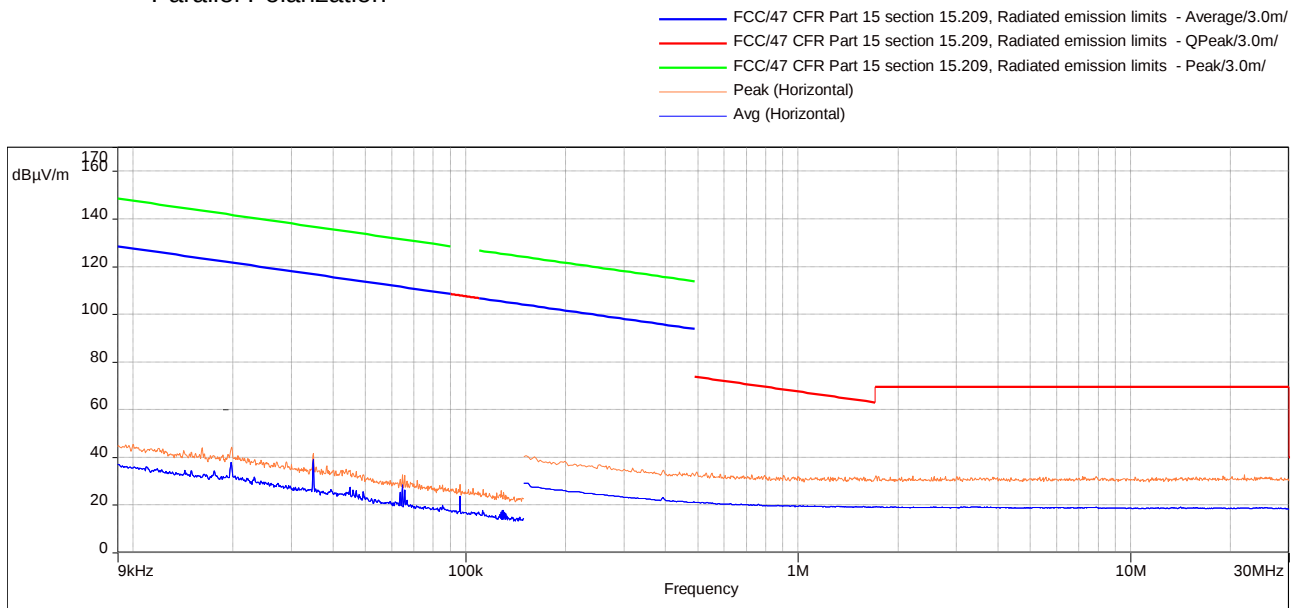


Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 25 von 30
Page 25 of 30


Prüfdokumentation Test documentation

– 30 MHz – 1 GHz, Paired Mode

• Horizontal Polarization

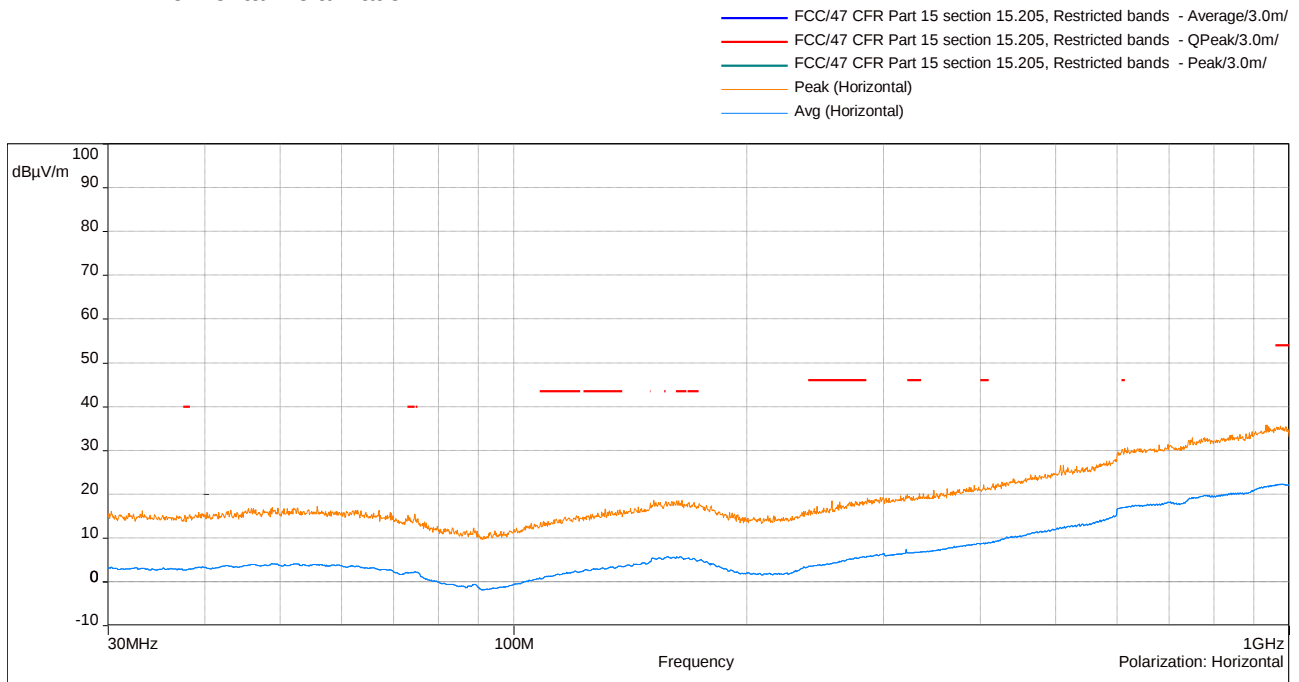

• Vertical Polarization

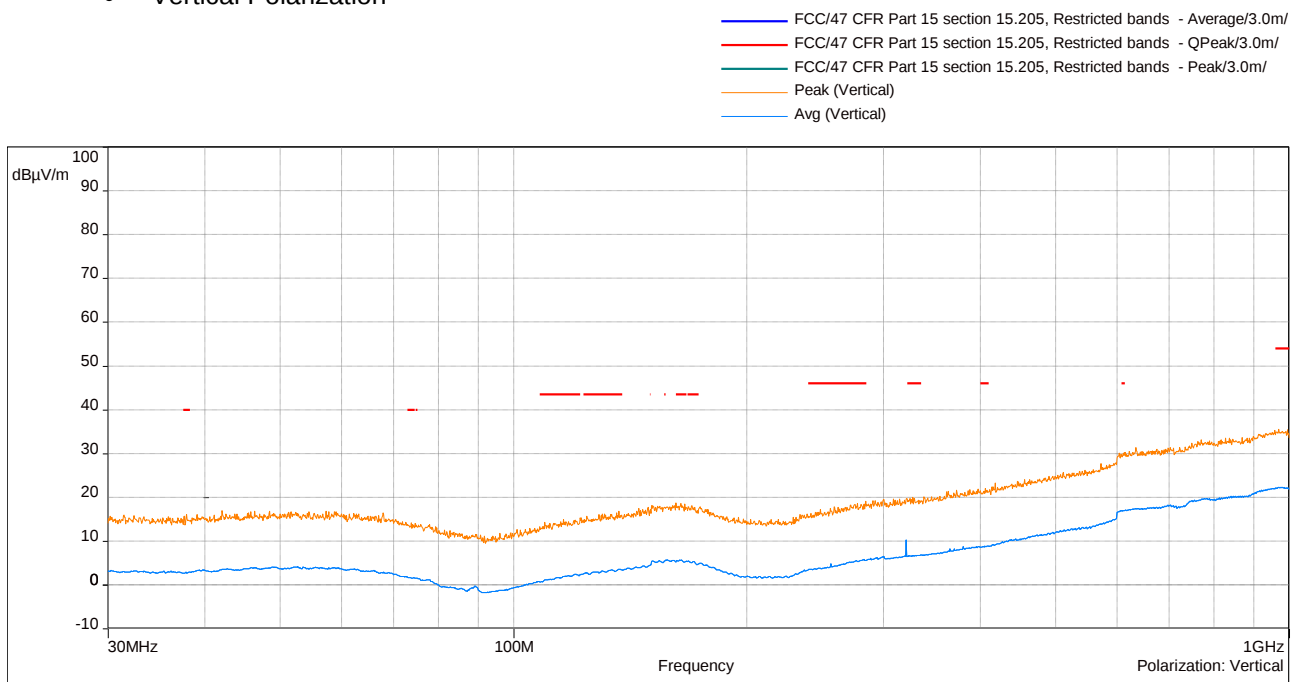


Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 26 von 30
Page 26 of 30

Prüfdokumentation Test documentation

– 1-18 GHz, Paired Mode

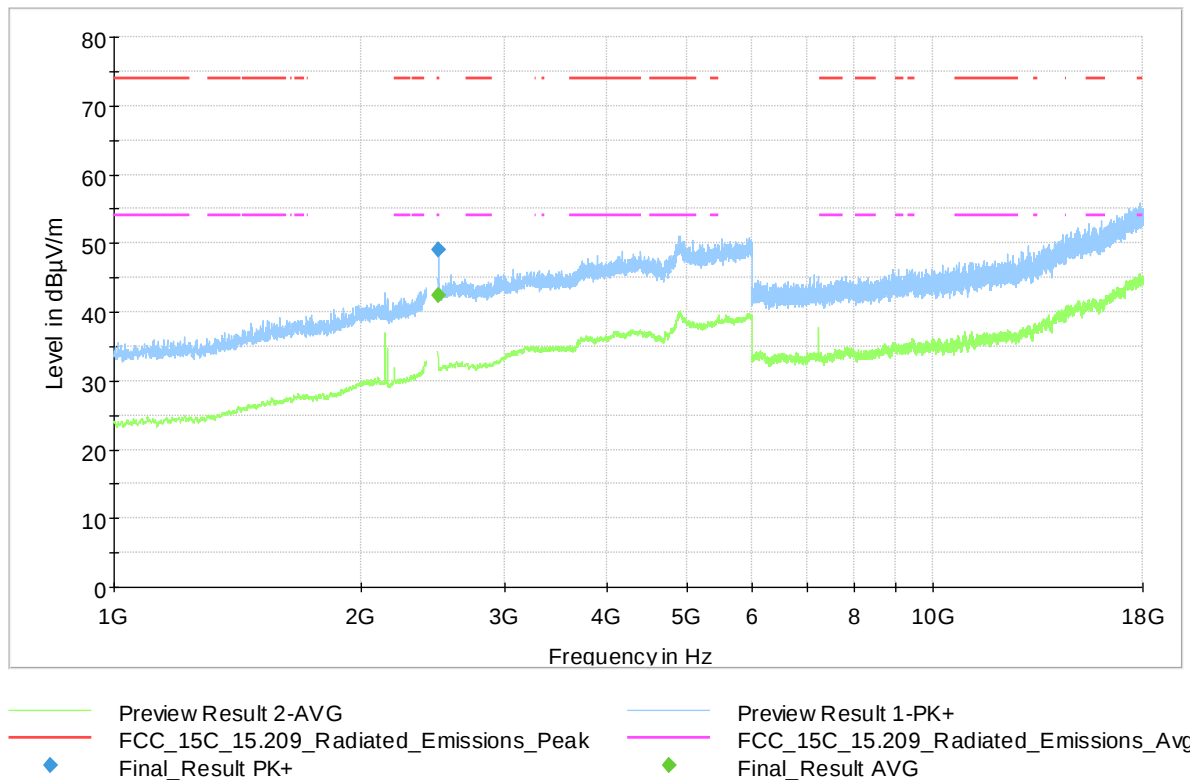


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
2485.2670	49.08	---	74.00	24.92	100.0	1000.000	150.0	V	261.0	16.0	1.0
2485.2670	---	42.33	54.00	11.67	100.0	1000.000	150.0	V	261.0	16.0	1.0

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 27 von 30
Page 27 of 30

Prüfdokumentation Test documentation

– 18-25 GHz, Paired Mode

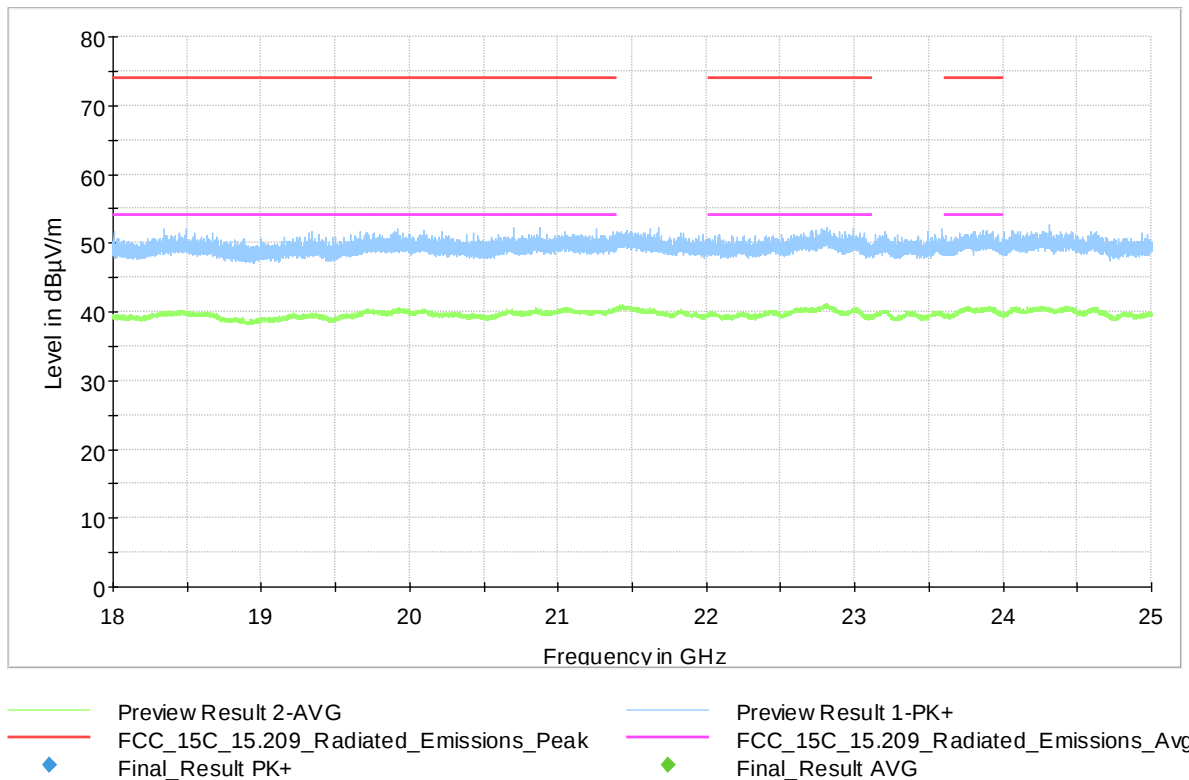

Final test result

Pass

Prüfbericht-Nr.: DE21K626 001
Test report no.:

Seite 28 von 30
Page 28 of 30

Fotodokumentation
Photo documentation

5 Test Setup Photo

Photos see Appendix to this report (Appendix to DE21K626 001).

Prüfbericht-Nr.: DE21K626 001
Test report No.:

Seite 29 von 30
Page 29 of 30

Liste der verwendeten Prüfmittel
List of used test equipment

6 Equipment List

6.1 Hardware

Prüfmittel <i>Test equipment</i>		Prüfmittel-Nr. / ID-Nr. <i>Equipment No. / ID-No.</i>	Letzte Kalibrierung <i>Last calibration</i>	Nächste Kalibrierung <i>Next calibration</i>
Fully Anechoic Room	Albatross Projects GmbH	2959749	10.2018	10.2021
RSE-Filtersystem	Rohde & Schwarz	9002802	12.2019	01.2022
Signal Analyser UXA N9041B	Keysight	2971644	02.2020	03.2022
Antenna HF907	Rohde & Schwarz	2856263	08.2018	08.2021
Antenna, Double Ridged Horn Antenna 3116C-PA	ETS LINDGREN	2900393	10.2020	10.2022
Antenna HFH 2	Rohde & Schwarz	2728893	06.2018	06.2021
Semi-Anechoic Chamber 30-1000 MHz	Siemens	2729645	06.2020	06.2022
Antenna VULB 9168	Schwarzbeck	2728787	09.2019	09.2022
Receiver ESU 8	Rohde & Schwarz	2728844	12.2020	12.2021

6.2 Software

Test Software	Developer	Version
EMC32	Rohde & Schwarz	10.60.20
BAT-EMC	NEXIO	3.20.0.17

Prüfbericht-Nr.: DE21K626 001
Test report No.:

Seite 30 von 30
Page 30 of 30

Änderungsverzeichnis
Change history

7 Change History

Revision Number	List of revisions	Date of issue
DE21K626 001	Initial Release	05.05.2021
Note: Latest revision report will replace all previous reports.		

Ende des Prüfberichts
End of Test Report