

1-Pack

[setup for unconfigured Node to Router]


inside front cover

DRAFT for review only

Step 1

Disconnect your old router from your modem or gateway.

Restart your modem or gateway by unplugging it. Wait 3 minutes and plug it back in.

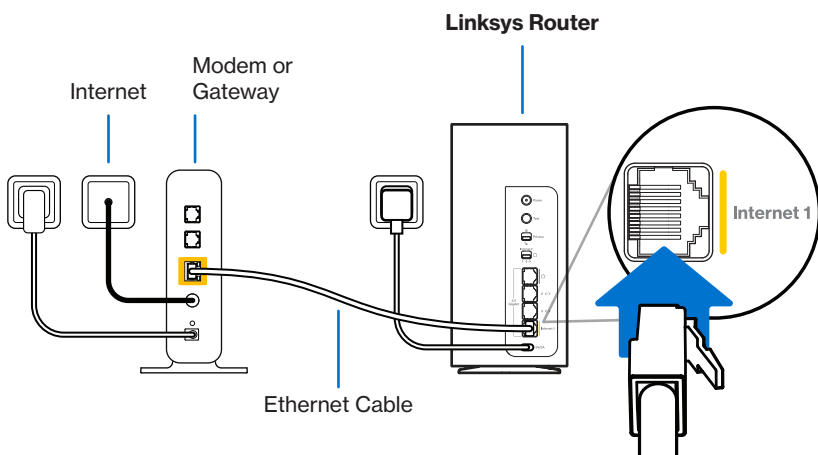

Connect your Router to the modem. Use the provided Ethernet cable to connect the modem to the Internet port on the Router.

Plug your Router into a power outlet. Give it a minute to start up. The Router light will blink blue as it is starting up and turn **solid blue** once ready for setup.

Wait

Ready

Step 2

Scan the QR code to connect to your WiFi.



Setup Wi-Fi
Name Linksys00034
Password F0a0vNkK@k
Router password same as Wi-Fi Password

Save this guide for future reference. Your default WiFi Name and Password are also printed on the bottom of your Router.

Scan the QR code to set up your Router. Follow the on-screen instructions.

Visit www.myrouter.info

- Personalise your WiFi Name
- Enable Guest WiFi

The Router light will blink white as it is being set up and turn **solid white** once setup is complete.

Unable to visit www.myrouter.info?

- Make sure your Router is connected to your modem and internet is available.
- Confirm that you are connected to your new Router's WiFi.

Receive an error message?

Don't be concerned. Your connection is private, secure and encrypted. It's safe to proceed to 192.168.1.1 This error only occurs when accessing a router using an HTTPS connection. For more information visit: <https://support.linksys.com/kb/article/65-en/>

What do the lights mean?


Off	- Not powered ON - Night mode enabled: light turned off from 8:00 PM to 8:00 AM
Blue (blinking)	Starting up
Blue	Ready for setup
White (blinking)	- Setup in progress - Firmware update in progress - Changes to WiFi settings
White	Set up and online
White (breathing)	- WiFi is paused - Press Instant-Pause button to pause or unpause WiFi
Red (blinking)	The Child Node is too far from the Router
Red	- No internet connection - Check your internet connection
Yellow (blinking)	Pairing failed
Yellow	- Instant-Test error - Router restart required

rear cover

front cover

DRAFT for review only


Buttons and Switches

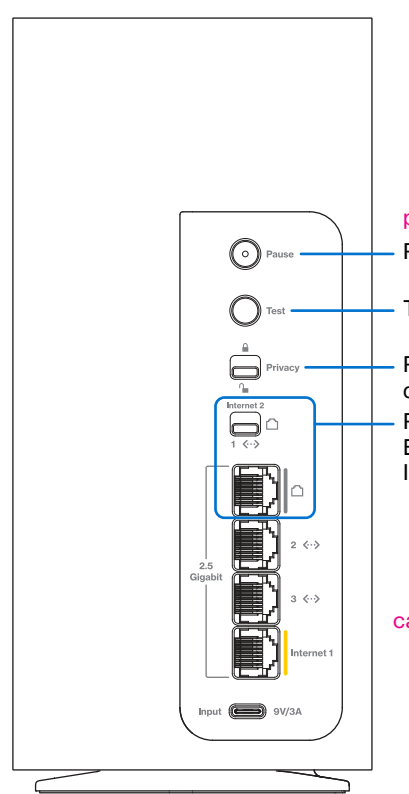

pause WiFi only or WiFi and wired?

- Pause: Pause WiFi network for 30 minutes
- Test: Test the Router and system
- Privacy: Lock to prevent new devices from joining WiFi network
- Port function: Ethernet 1- For wired devices
- Internet 2- For second ISP connection

can drawing be made generic for 2.0 and 2.2?

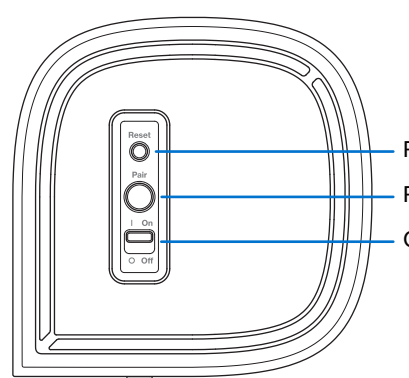

Reset*

Pair: Adds additional Velop Nodes

On | Off

*Factory resetting your Router will restore the default WiFi Name and Password (printed on bottom of Router) and remove any connections to Child Nodes. Visit Linksys.com/support for factory reset instructions. The Linksys Mobile App is not supported by this product.

8820-0xxxx Rev A00

Need help?



Visit Linksys.com/support

Linksys

Quick Start Guide


Pinnacle 2.0 Router

*Factory resetting your Router will restore the default WiFi Name and Password (printed on bottom of Router) and remove any connections to Child Nodes. Visit Linksys.com/support for factory reset instructions.

Linksys

Pinnacle 2.0 QSG, 1-Pack
Part number: 8820-0xxxx
Revision: A00
Accordian brochure
Overall size: 360 x 229.5
Material: 128gsm artwork paper + Matte AQ varnish
Grain: Vertical
Tolerance: +/- 0.8mm
Drawing Scale: 1:1

tri-fold brochure

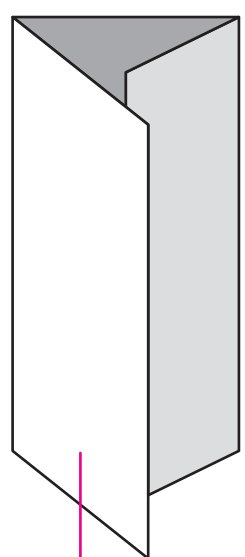

front cover