

TEST REPORT

Reference No..... : WTF21D01002802W001 V1
FCC ID : 2AYSN-DB21
Applicant..... : Duckieworks Ltd.
Address..... : Turnerstrasse 39 8006, Zurich, Switzerland
Manufacturer : The same as above
Address..... : The same as above
Product..... : Duckiebot Founder edition
Model(s) : DB21, DB21-M, DB21-MNoJet, DB21-M-NoBat, DB21-M-NoJetNoBat
Brand Name..... : N/A
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-01-15
Date of Test : 2021-01-18 to 2021-01-27
Date of Issue..... : 2021-03-08
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

levi xiao

levi Xiao / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST	8
6.2	8
6.3 DESCRIPTION OF SUPPORT UNITS	8
6.4 MEASUREMENT UNCERTAINTY	9
6.5 TEST EQUIPMENT CALIBRATION	9
7 RADIATED EMISSIONS.....	10
7.1 EUT OPERATION.....	10
7.2 TEST SETUP	11
7.3 SPECTRUM ANALYZER SETUP	12
7.4 TEST PROCEDURE	13
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.6 SUMMARY OF TEST RESULTS	14
8 CONDUCTED SPURIOUS EMISSIONS.....	17
8.1 TEST PROCEDURE	17
8.2 TEST RESULT	18
9 BAND EDGE MEASUREMENT	30
9.1 TEST PRODUCE.....	30
9.2 TEST RESULT	31
10 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	35
10.1 TEST PROCEDURE:.....	35
10.2 TEST RESULT:	35
11 MAXIMUM PEAK OUTPUT POWER	48
11.1 TEST PROCEDURE:.....	48
11.2 TEST RESULT:	49
12 POWER SPECTRAL DENSITY	56
12.1 TEST PROCEDURE:.....	56
12.2 TEST RESULT:	56
13 ANTENNA REQUIREMENT	63
14 RF EXPOSURE.....	64
15 PHOTOGRAPHS OF TEST SETUP AND EUT.....	65

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTF21D01002 802W001	2021-01-15	2021-01-18 to 2021-01-27	2021-01-28	original	-	Replaced
WTF21D01002 802W001 V1	2021-01-15	2021-01-18 to 2021-01-27	2021-03-08	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Duckiebot Founder edition
Model(s):	DB21, DB21-M, DB21-MNoJet,DB21-M-NoBat, DB21-M-NoJetNoBat
Model Description:	Only different for the model names, DB21 as the main test model
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Hardware Version:	A
Software Version:	V1.0
Highest frequency (Exclude Radio):	40MHz
Storage Location:	Internal Storage
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz
Max. RF output power:	WiFi(2.4G): 15.98dBm
Type of Modulation:	WiFi: CCK, OFDM
Antenna installation:	WiFi: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 2.0dBi
Ratings:	DC 5V from battery

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	N/A
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

6.2

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	2021-04-19
2	Amplifier	Agilent	8447D	2944A10178	2020-04-20	2021-04-19
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	2021-08-21
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2020-04-20	2021-04-19
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25	2021-04-24
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-20	2021-04-19
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-04-20	2021-04-19
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2020-04-20	2021-04-19
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-20	2021-04-19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25	2021-04-24
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2020-05-06	2021-05-05
4	Amplifier	ANRITSU	MH648A	M43381	2020-04-20	2021-04-19
5	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20	2021-04-19
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2020-04-20	2021-04-19
2.	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	2021-04-19
3.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2020-04-20	2021-04-19

6.3 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.4 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	± 3.12 dB (9kHz~30MHz)
	± 4.21 dB (30M~1000MHz)
	± 5.14 dB (1000M~26500MHz)

6.5 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

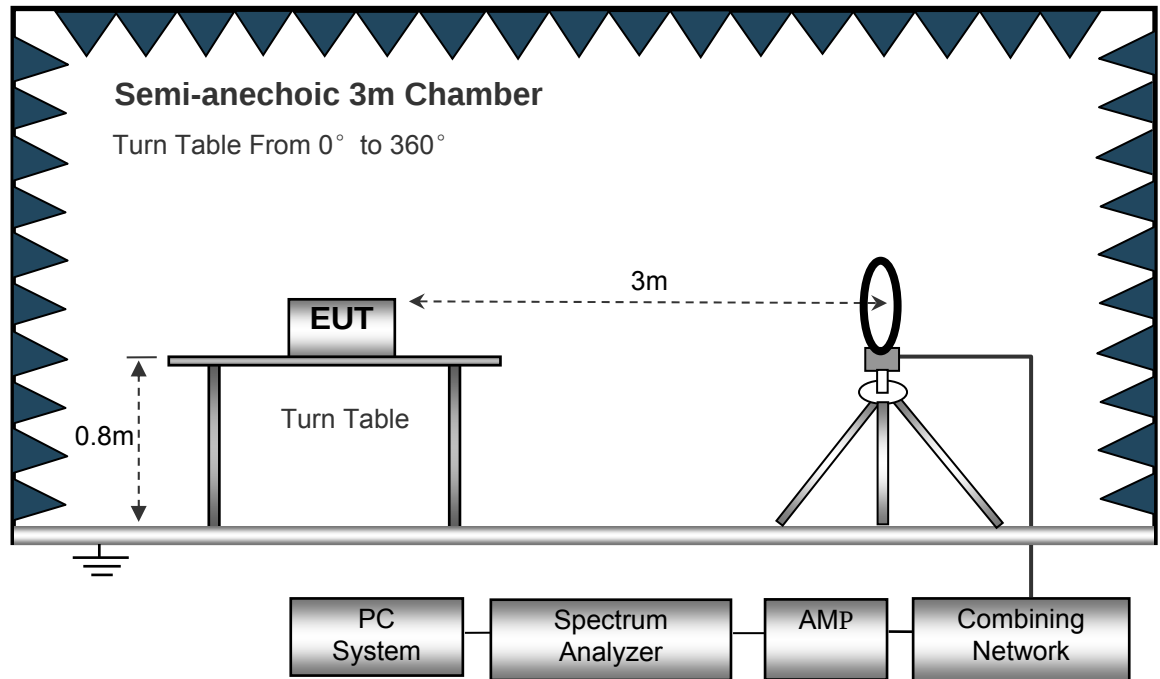

The test setup for emission measurement from 30 MHz to 1 GHz.

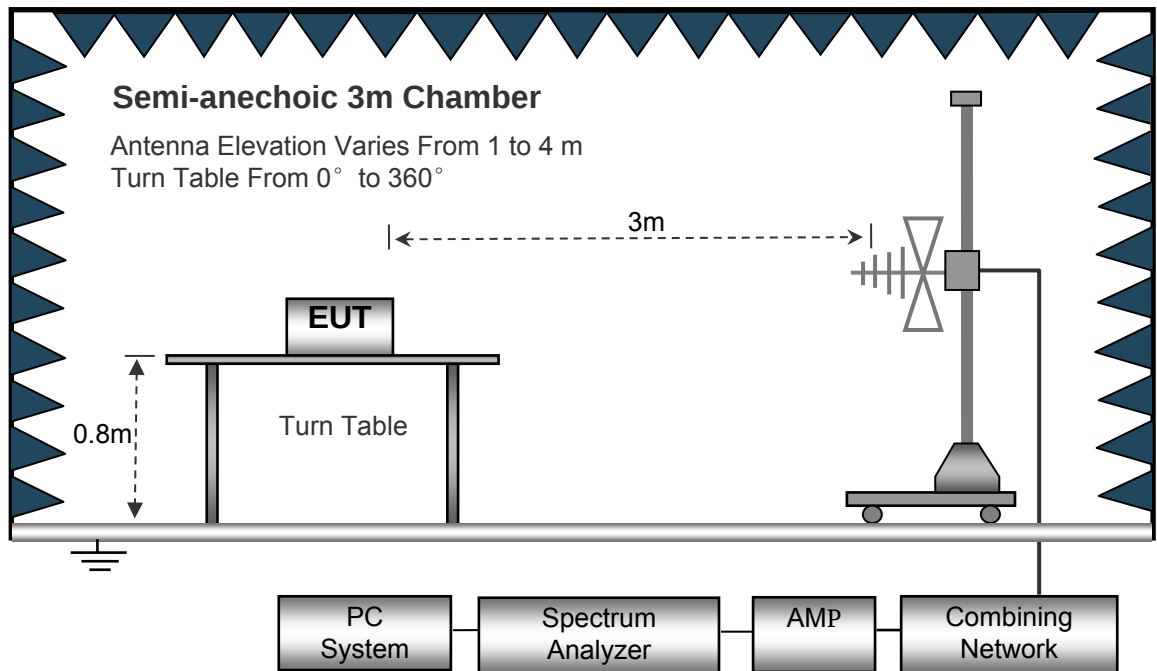

The test setup for emission measurement above 1 GHz.

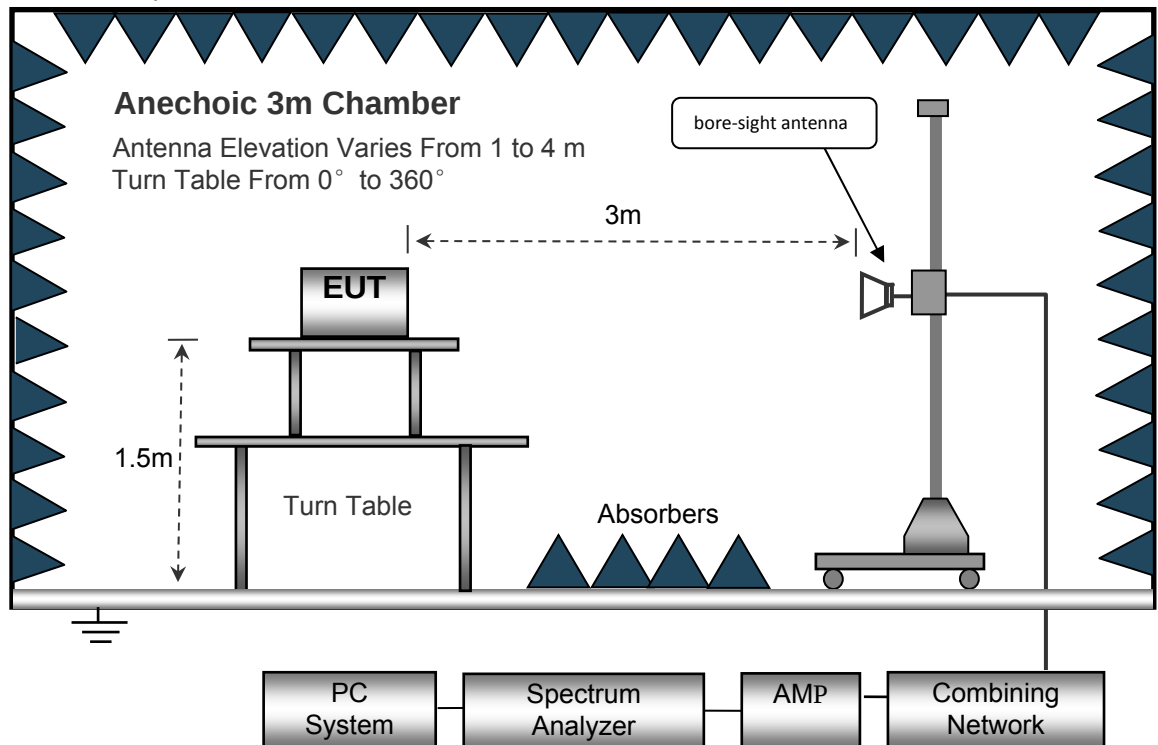

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results


Test Frequency: 9KHz~30MHz

Remark: The measurements were more than 20 dB below the limit and not reported.


Test Frequency : 30MHz ~ 1GHz

Remark: only the worst data (802.11n HT20 Low CH mode) were reported

Low Channel – Horizontal

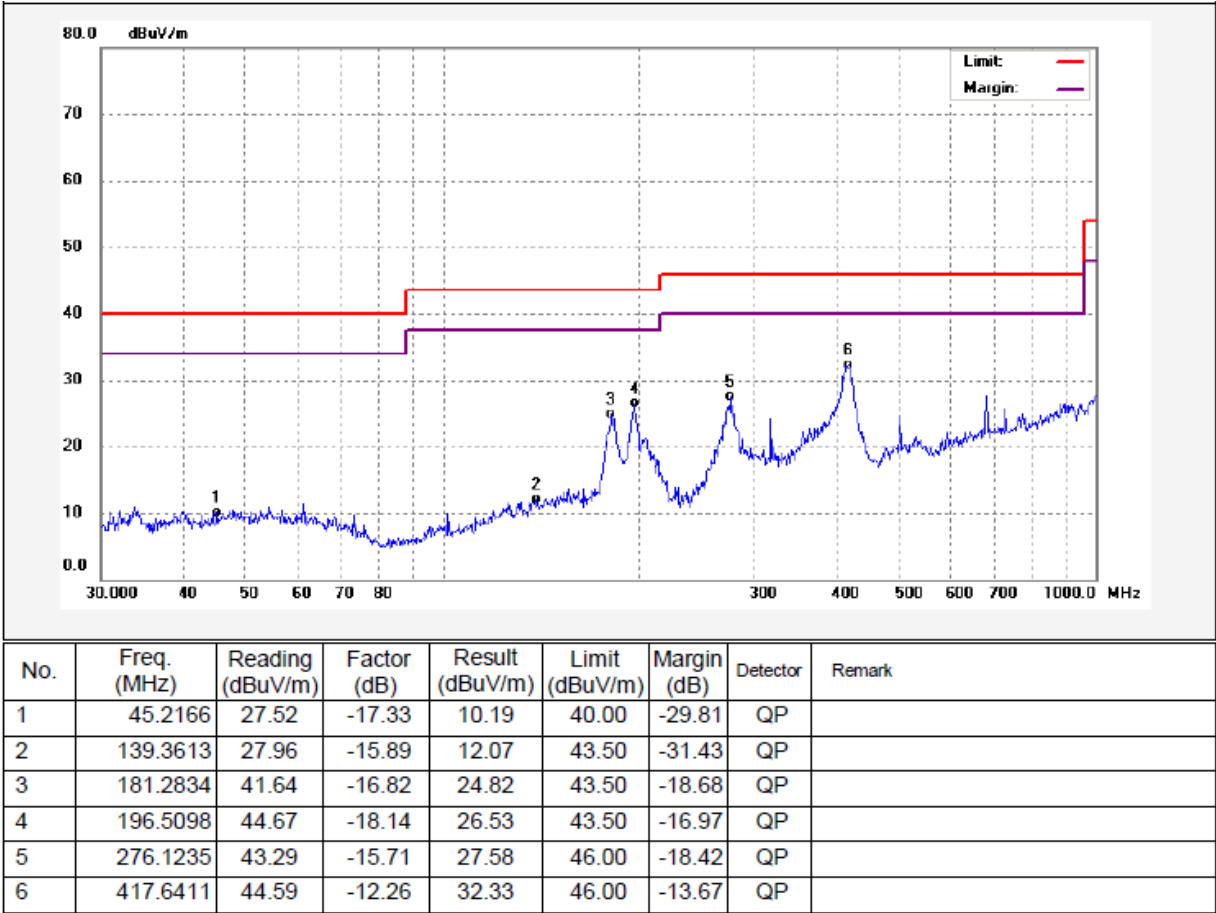


Low Channel – Vertical

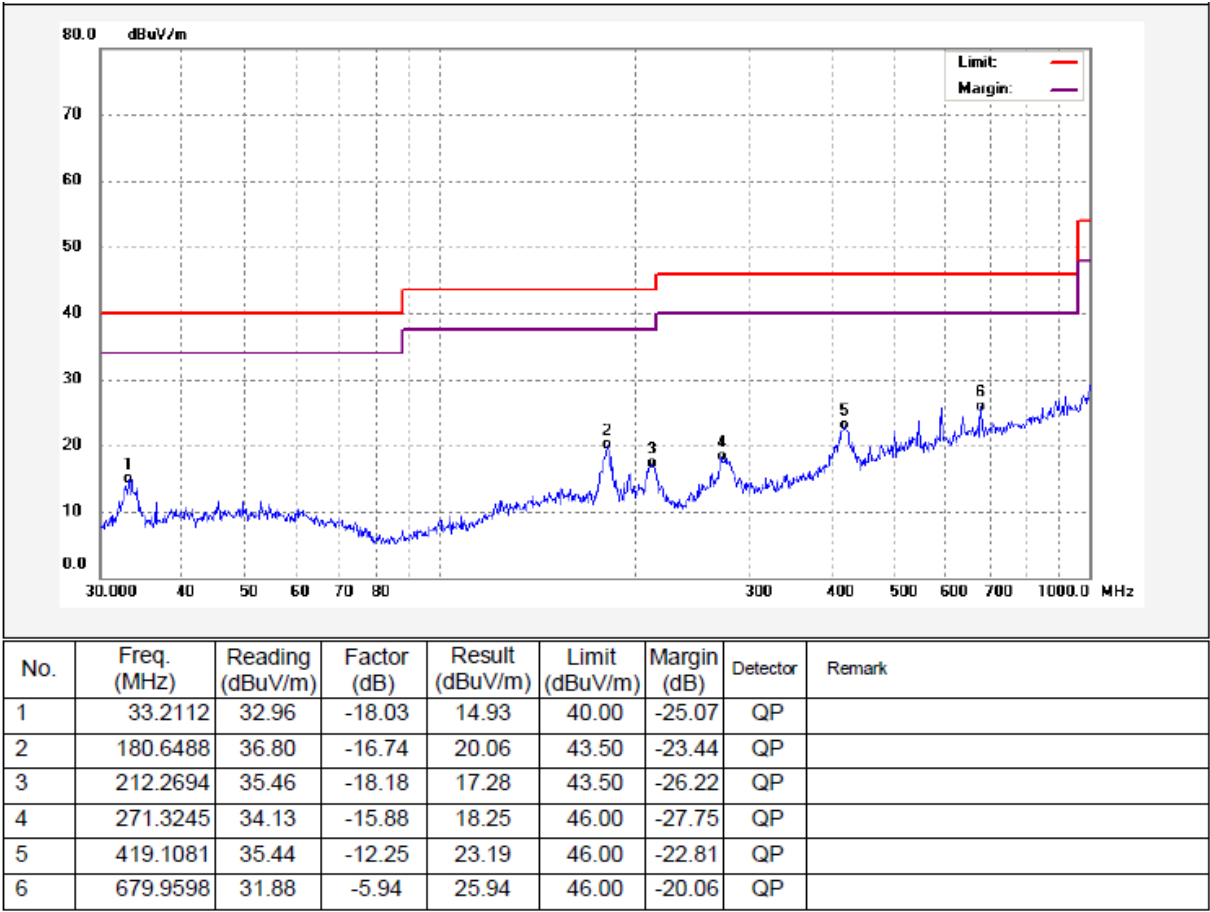


Test Frequency : Above 1GHz Remark: only the worst data (802.11n HT20 Middle CH mode) were reported

Middle Channel – Horizontal

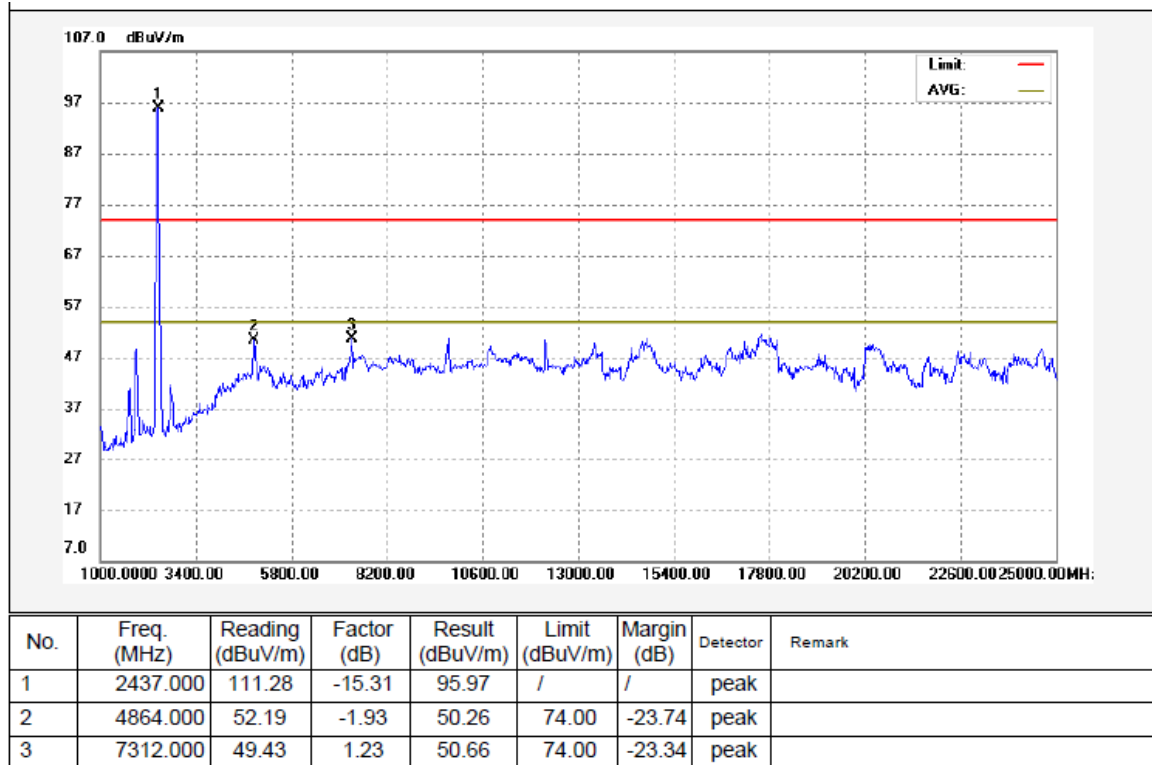

Middle Channel – Vertical

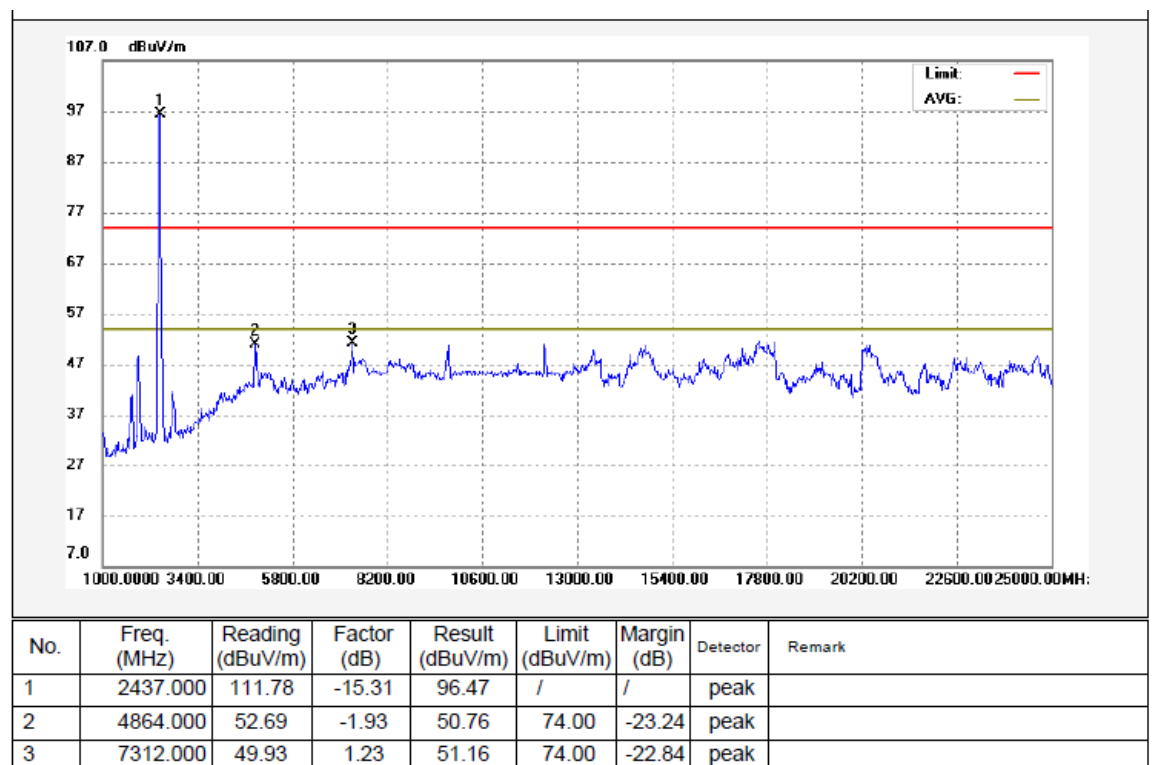

8 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ $[3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

8.2 Test Result


9KHz – 30MHz

802.11b


Low Channel

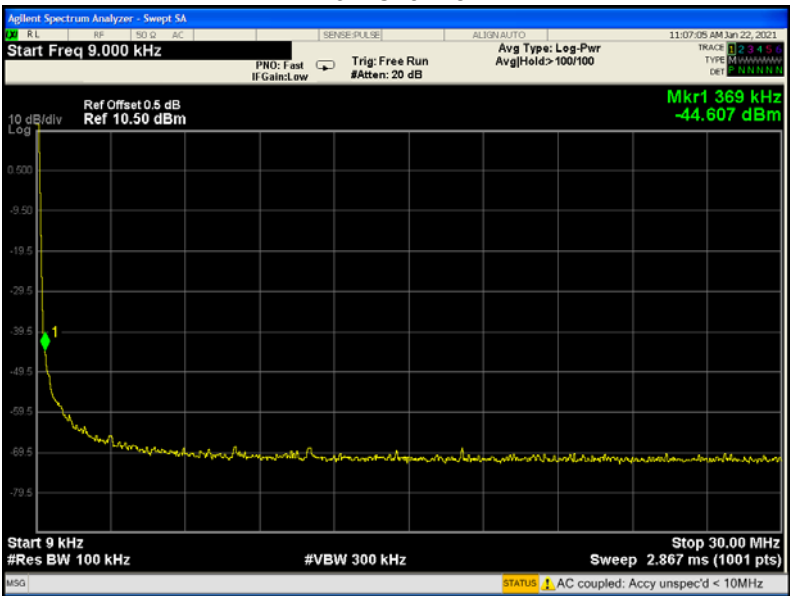

Middle Channel

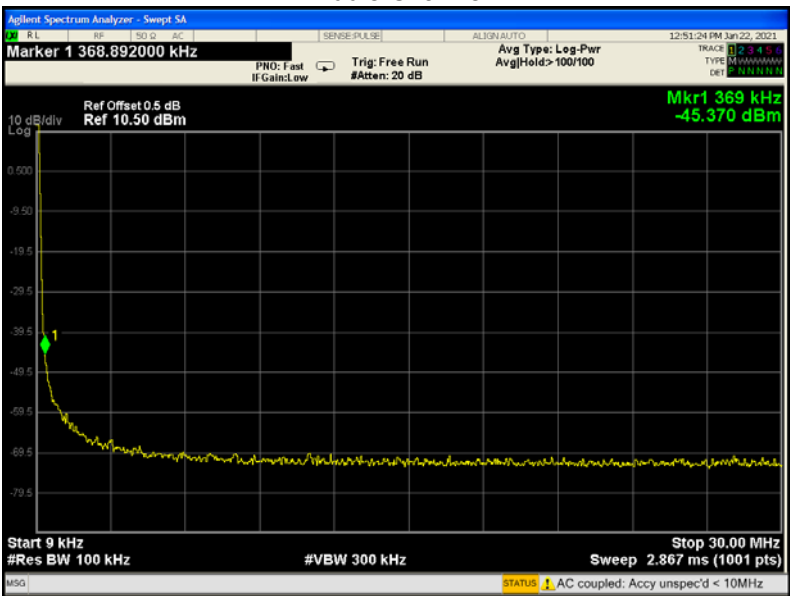


High Channel

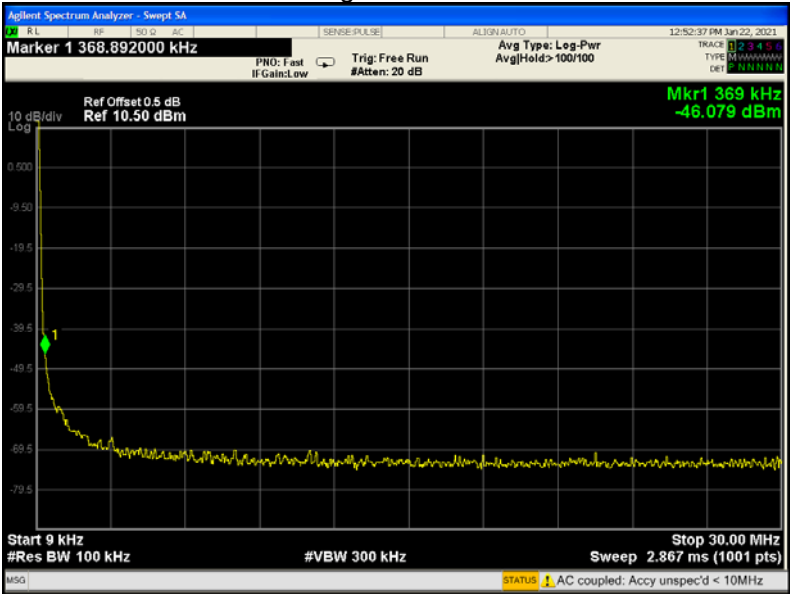


802.11g


Low Channel

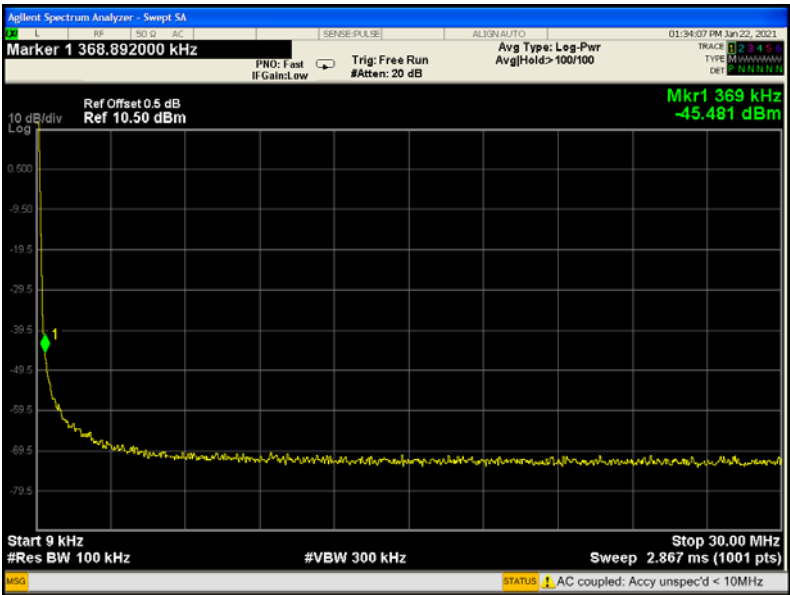

Middle Channel

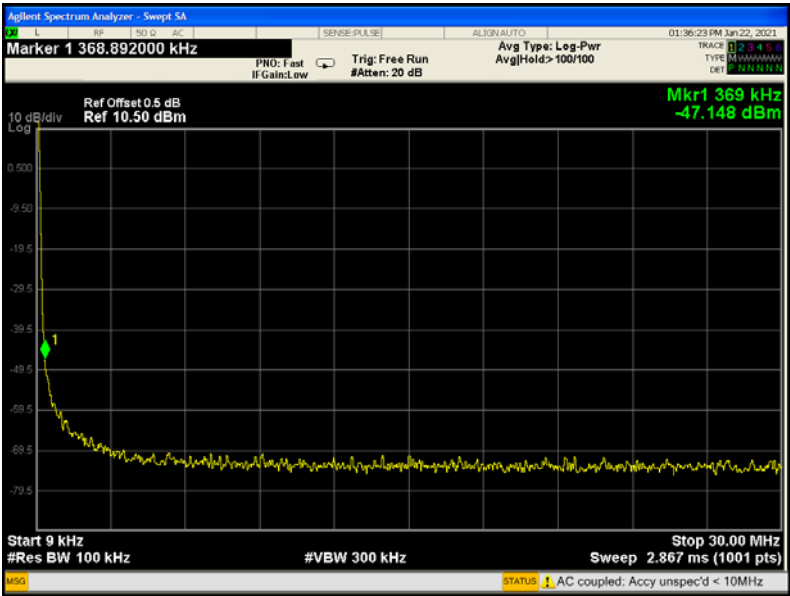


High Channel

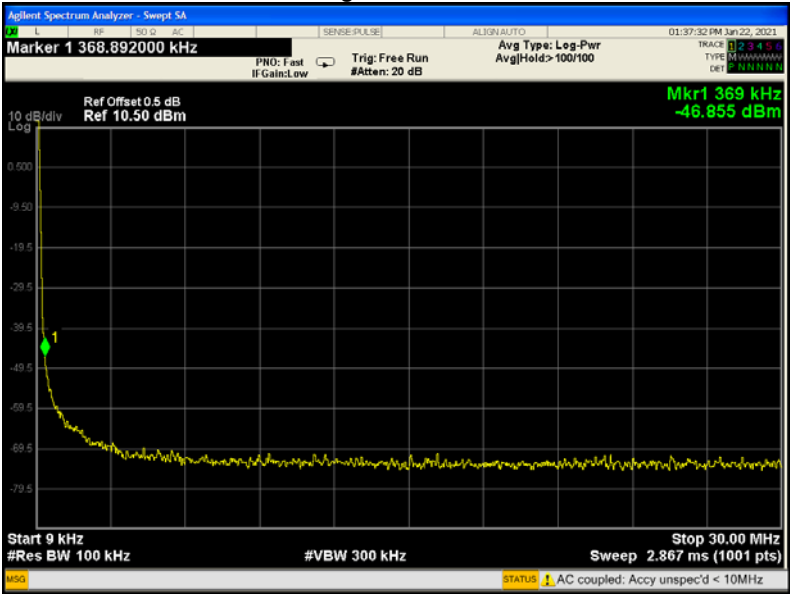


802.11n HT20


Low Channel

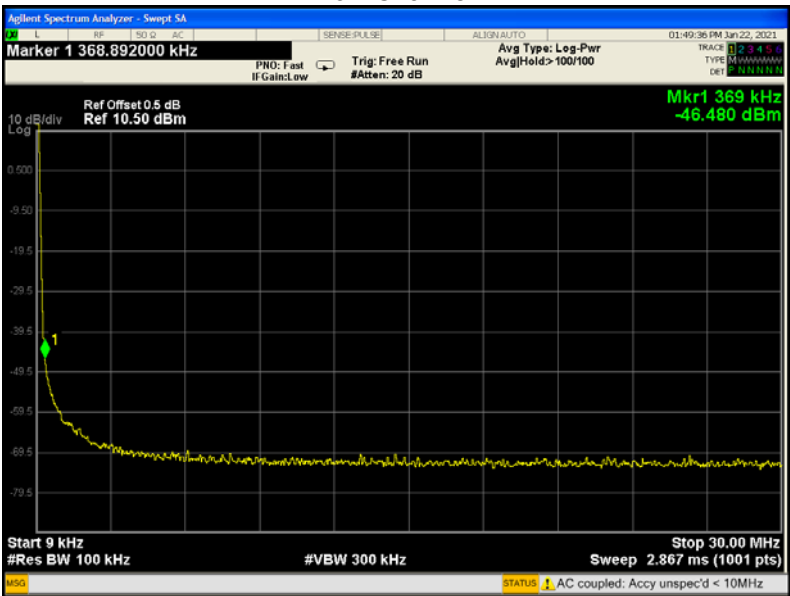

Middle Channel

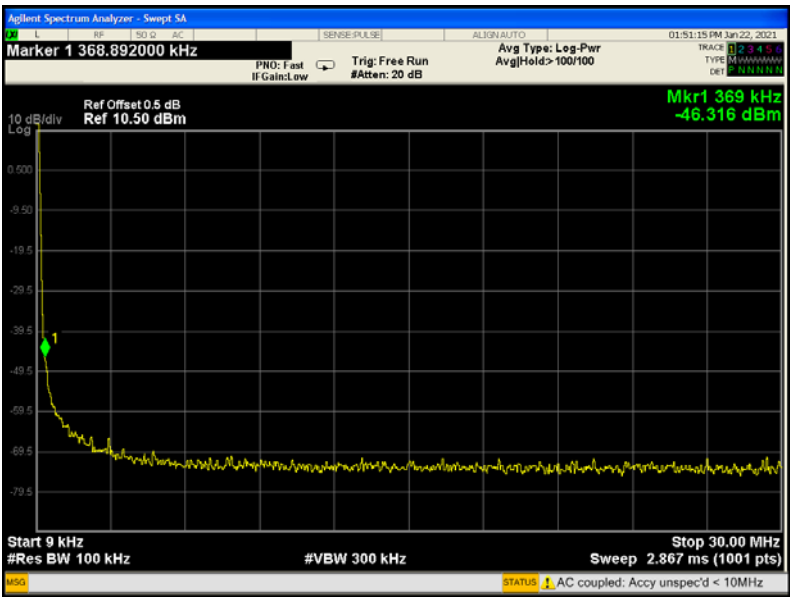


High Channel

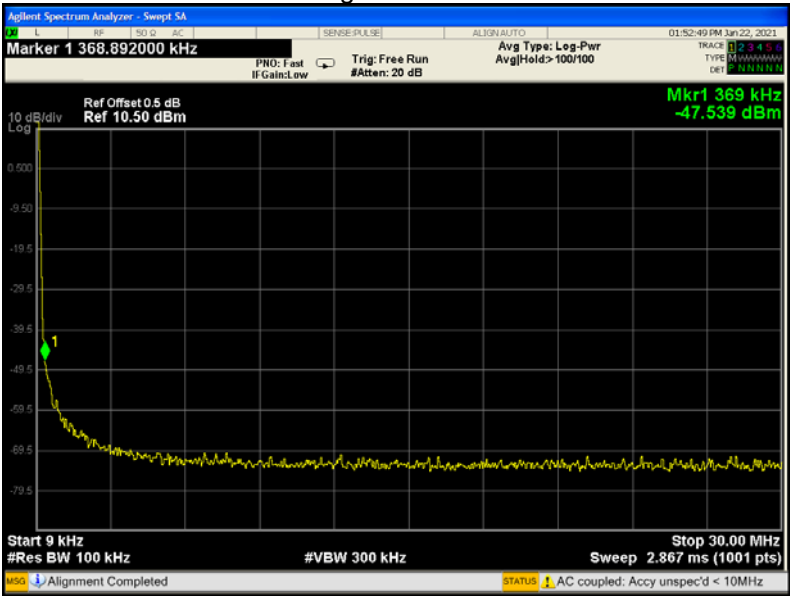


802.11n HT40


Low Channel

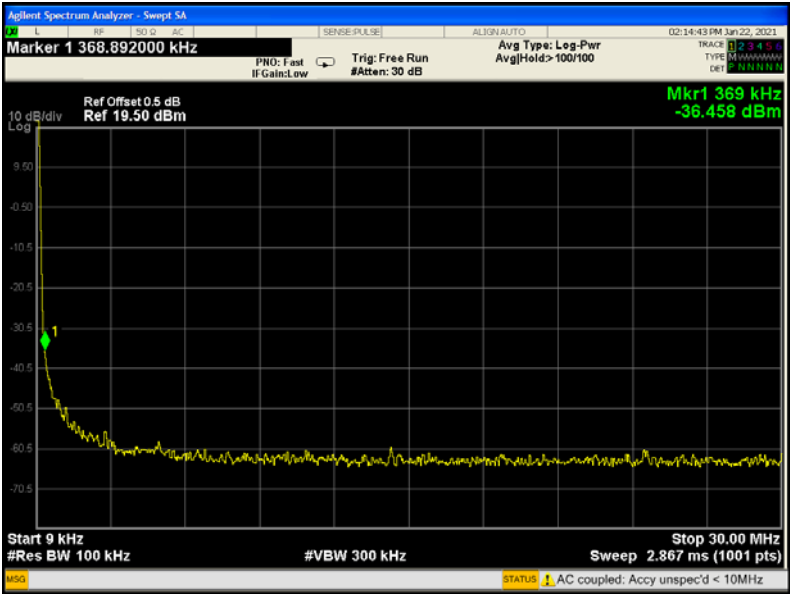

Middle Channel

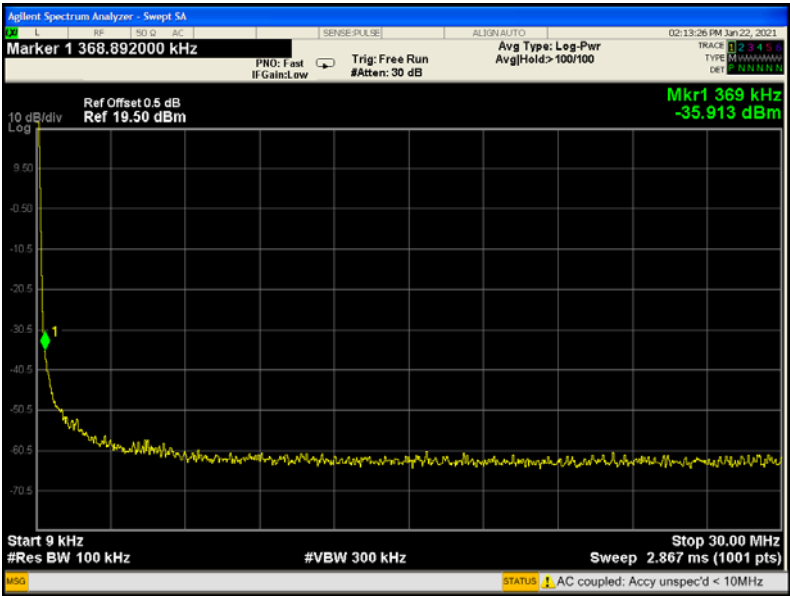

High Channel

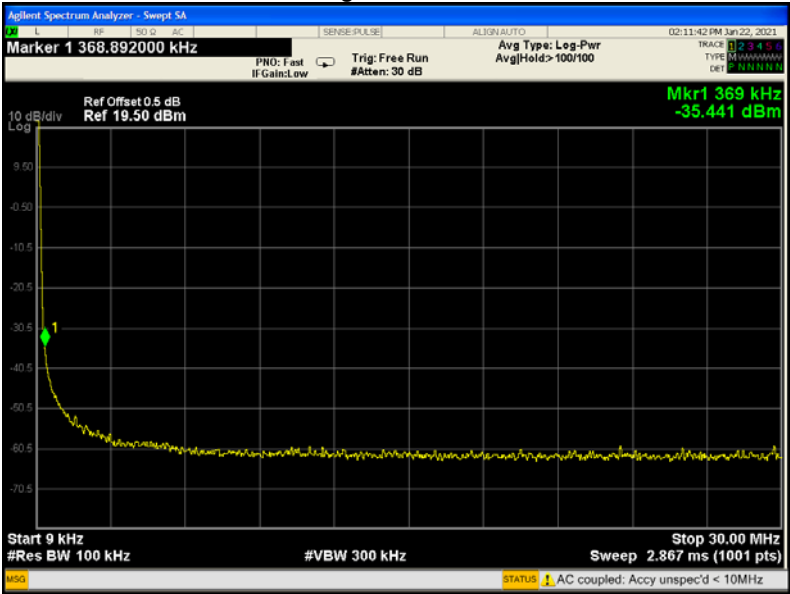


Above 30MHz

802.11b


Low Channel

Fundamental

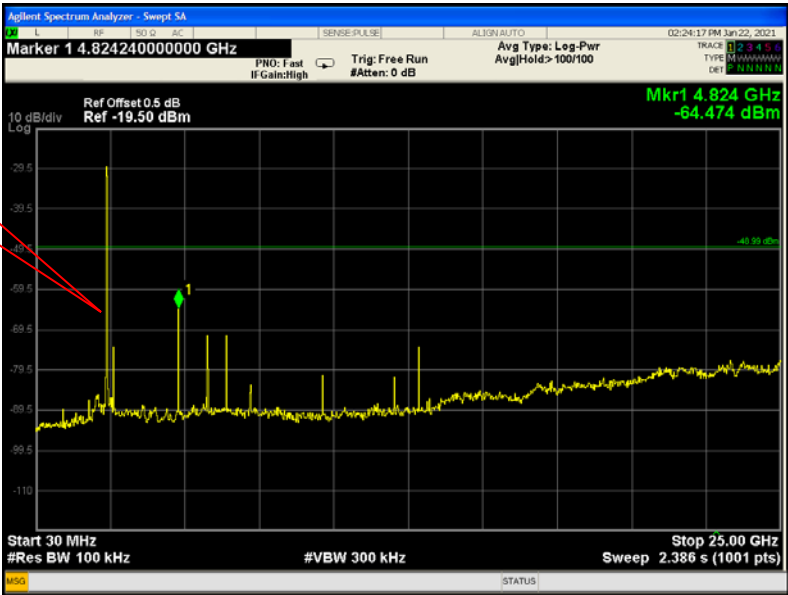


Middle Channel

Fundamental

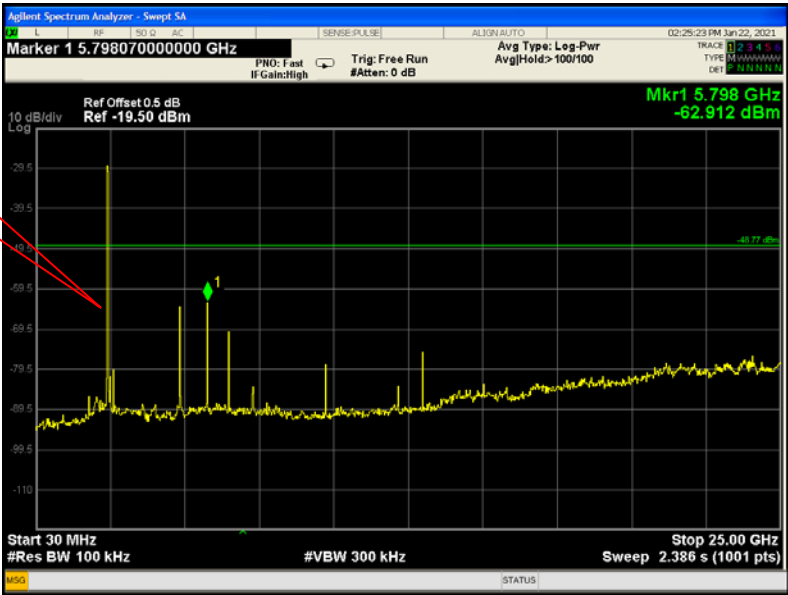

High Channel

Fundamental

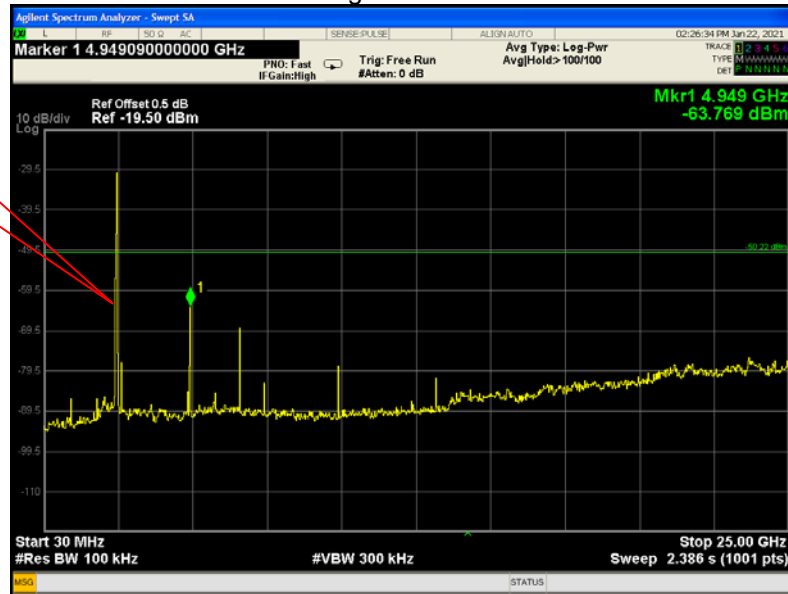

802.11g


Low Channel

Fundamental




Middle Channel

Fundamental

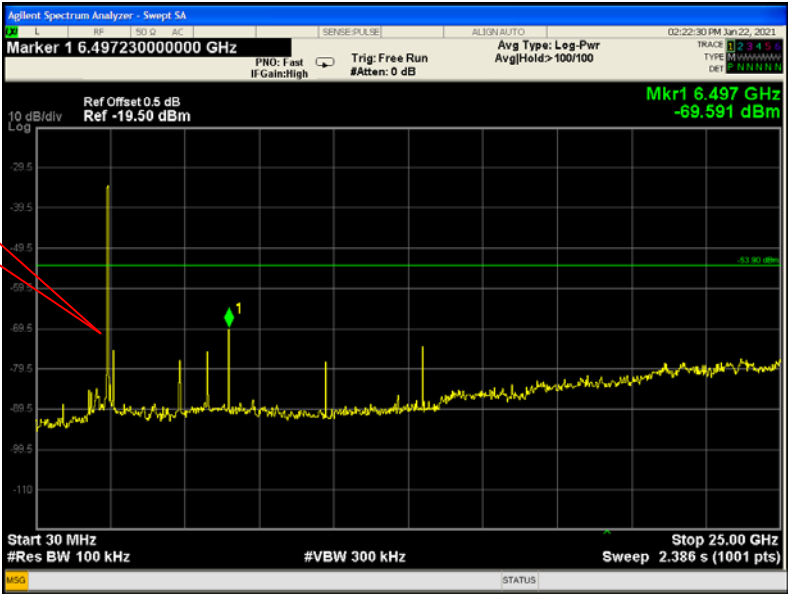

High Channel

Fundamental

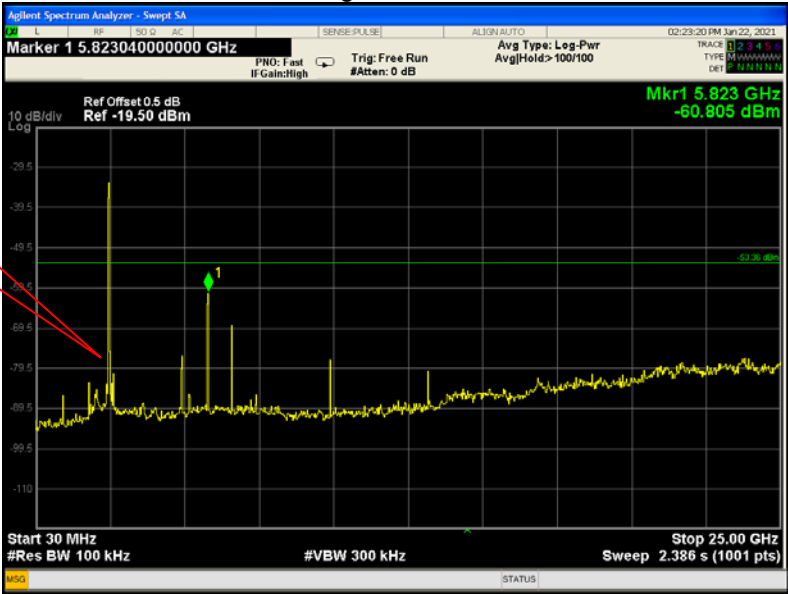

802.11n HT20

Low Channel

Fundamental




Middle Channel

Fundamental




High Channel

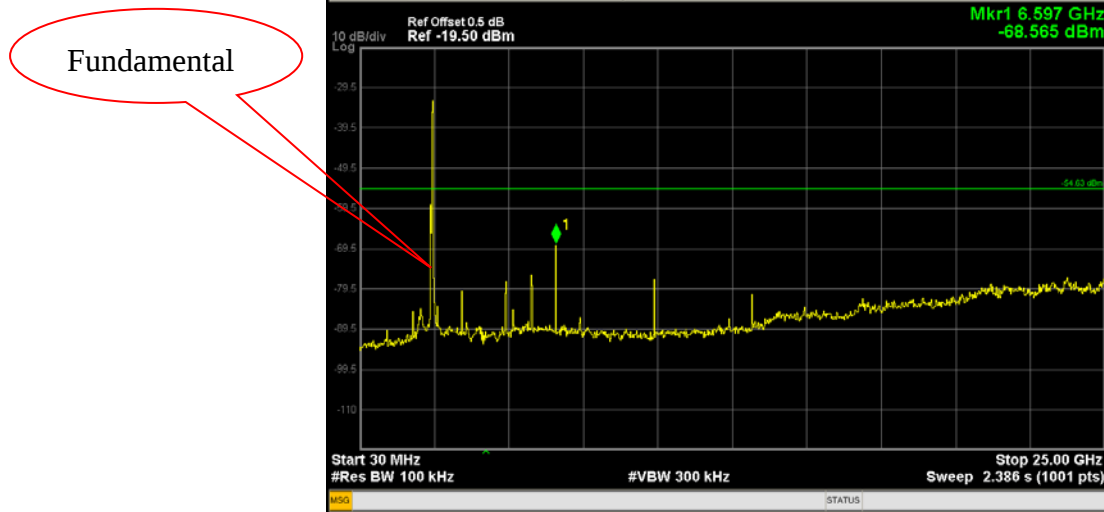


802.11n HT40

Low Channel

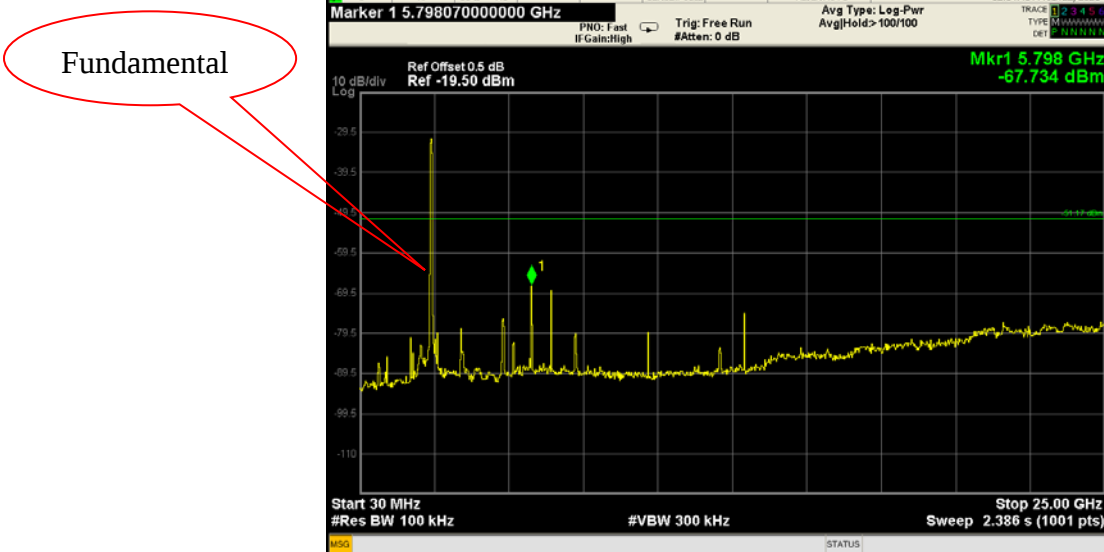


Middle Channel

Fundamental

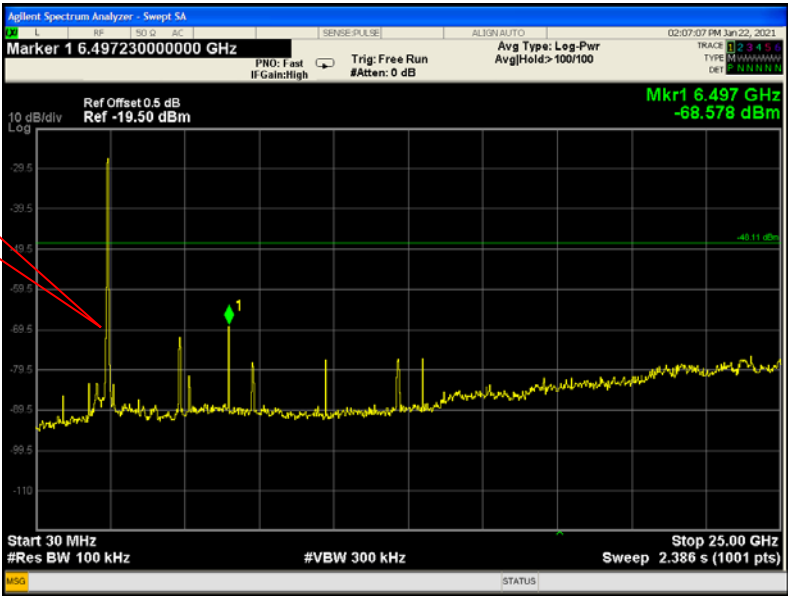

High Channel

Fundamental

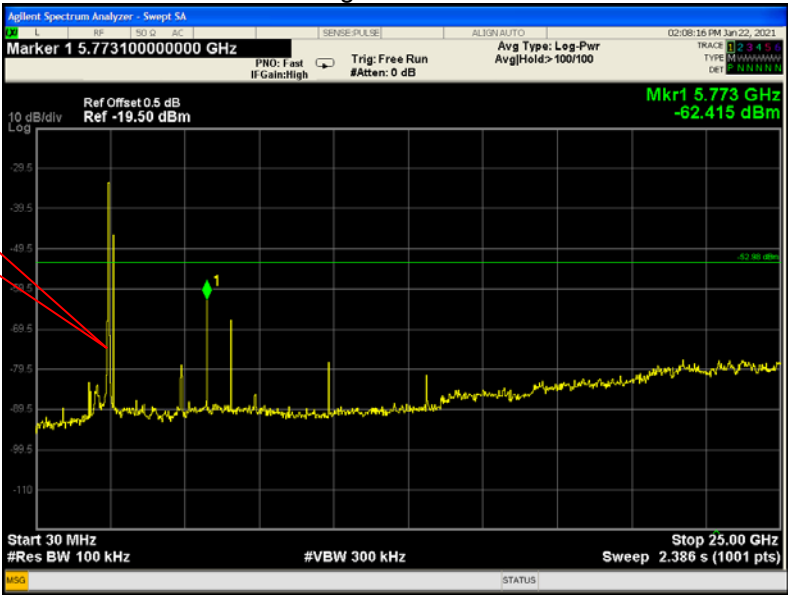

9 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Test Mode: Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

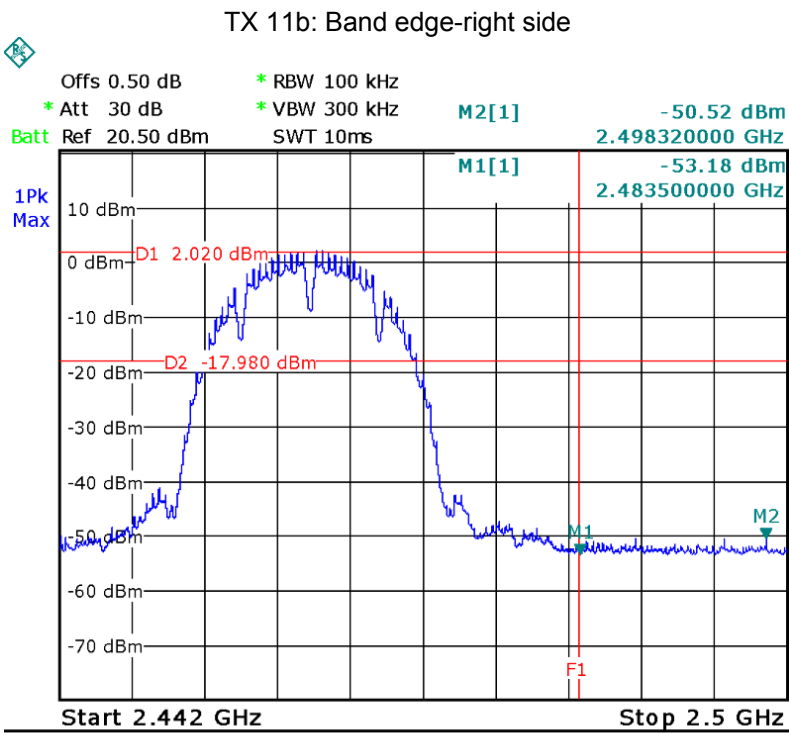
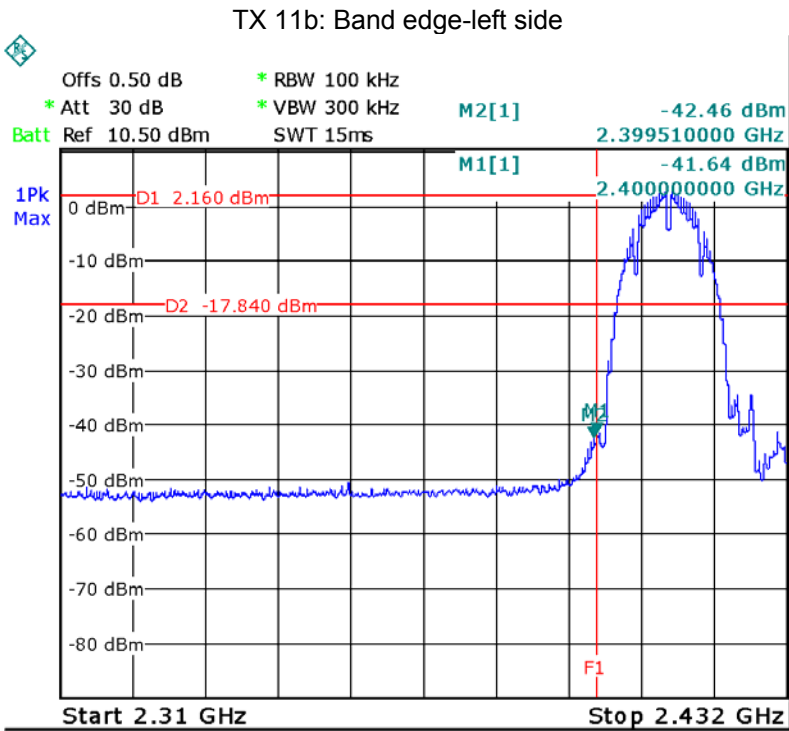




TX 11g: Band edge-left side

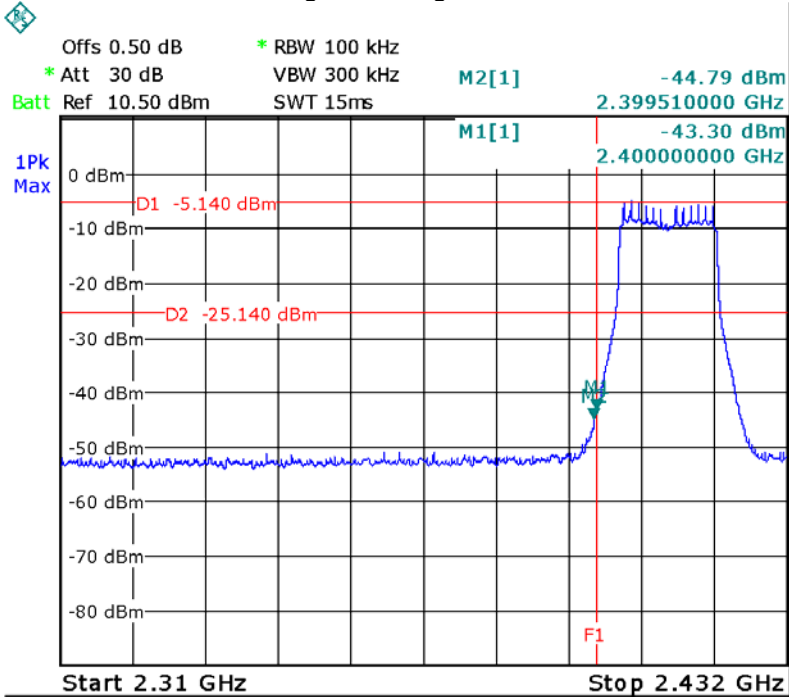

TX 11g: Band edge-right side

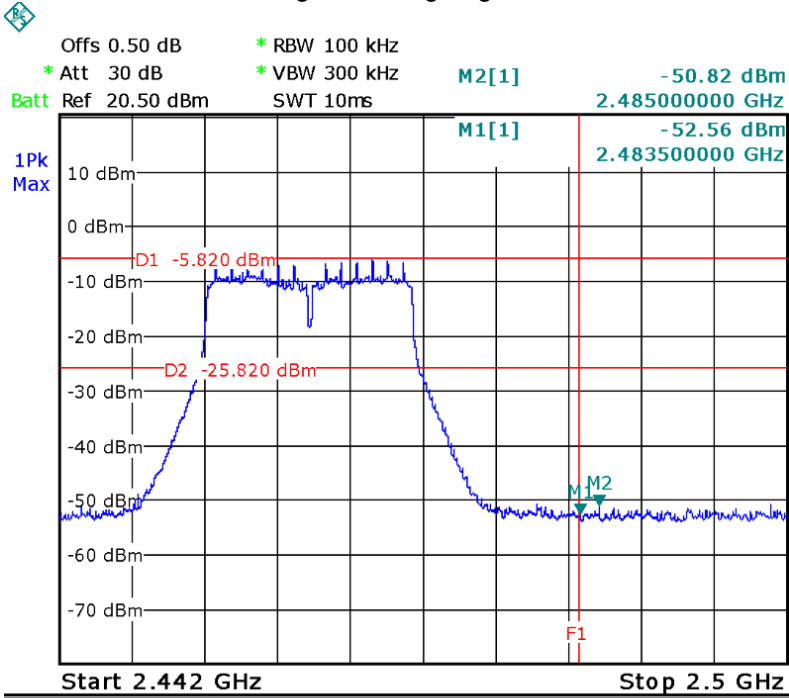

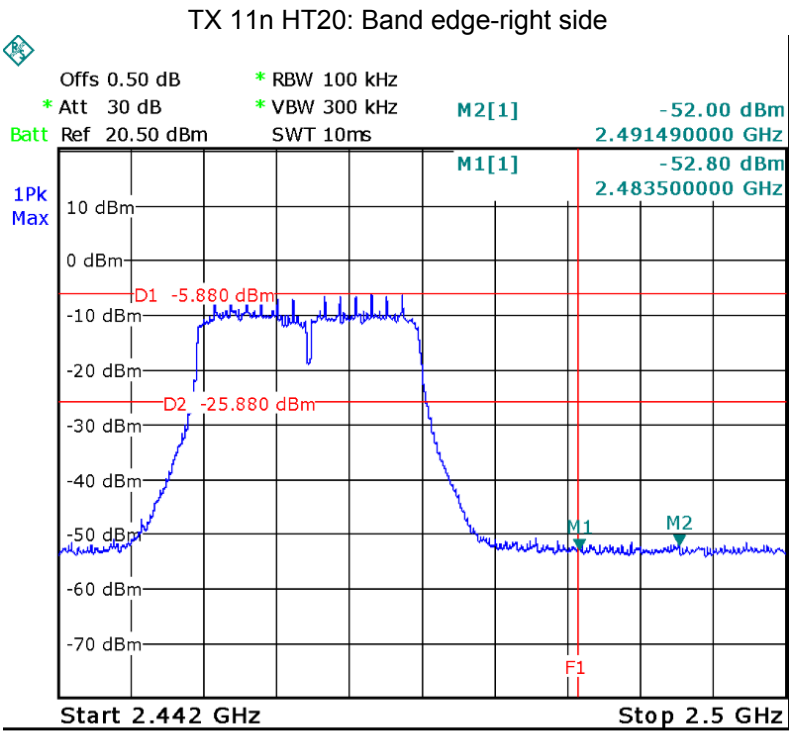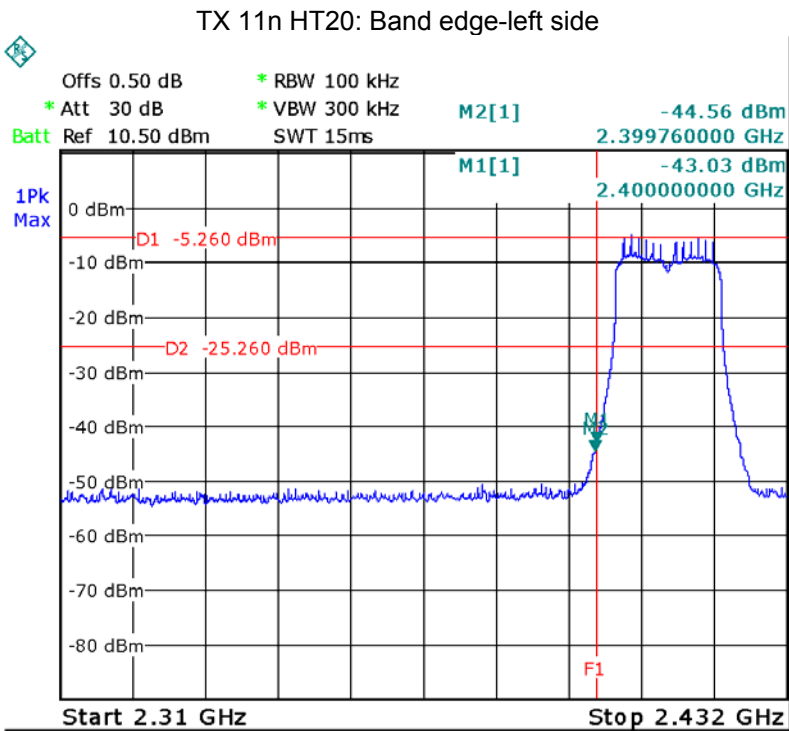

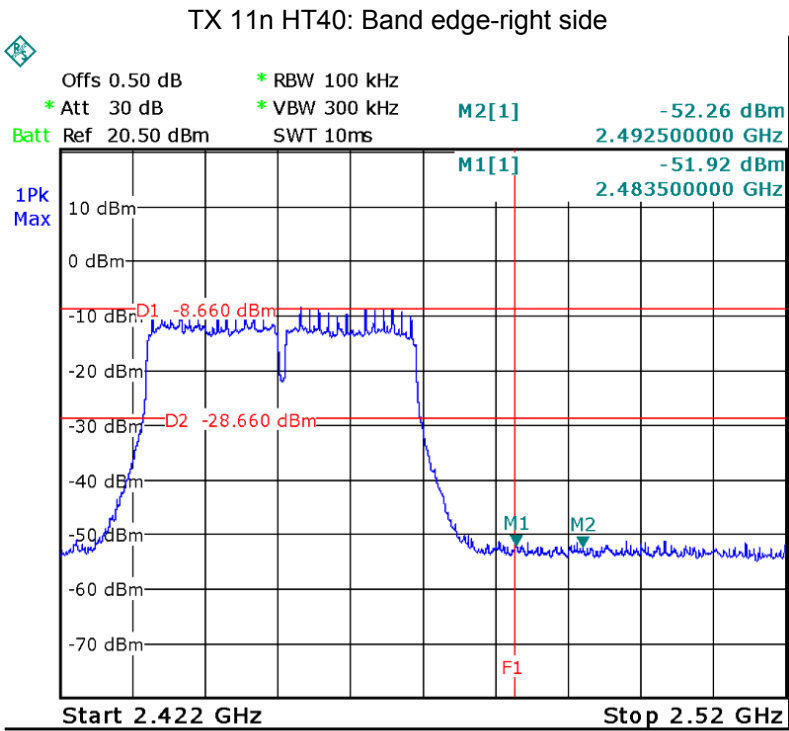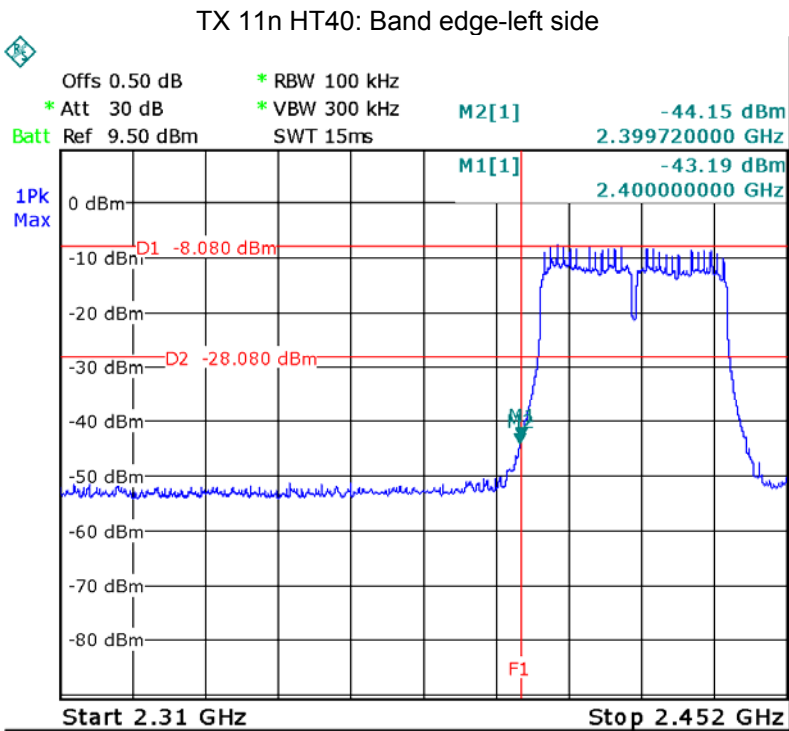

10 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;

ANSI C63.10:2013



10.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



10.2 Test Result:



Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.804	14.371
	Channel 6	9.804	14.403
	Channel 11	10.060	14.435
TX 11g	Channel 1	16.367	16.417
	Channel 6	16.317	16.467
	Channel 11	16.367	16.467
TX 11n HT20	Channel 1	16.868	17.569
	Channel 6	16.922	17.569
	Channel 11	17.022	17.568
TX 11n HT40	Channel 3	35.790	36.008
	Channel 6	35.570	36.118
	Channel 9	35.790	36.008



Test result plot:

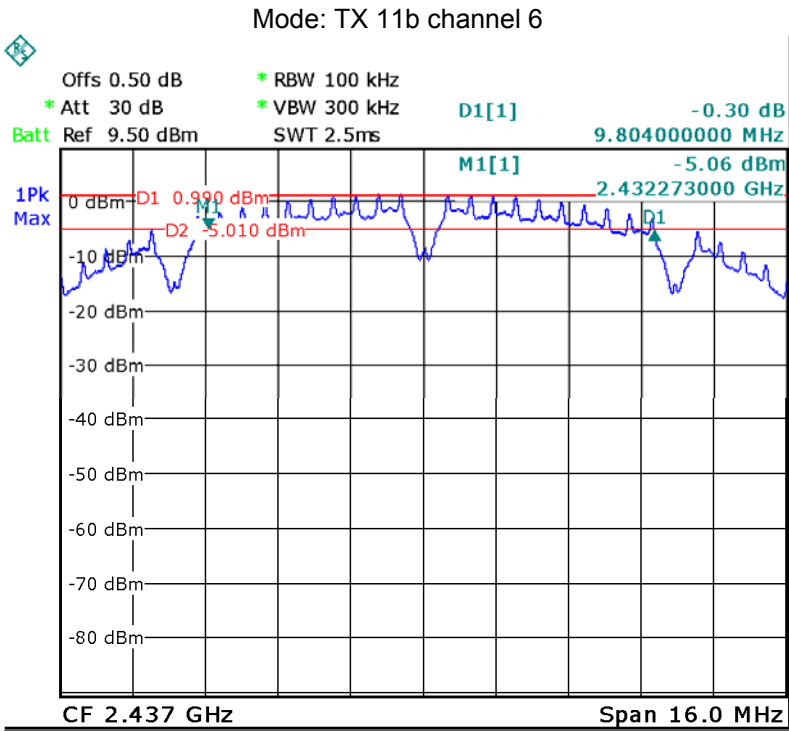
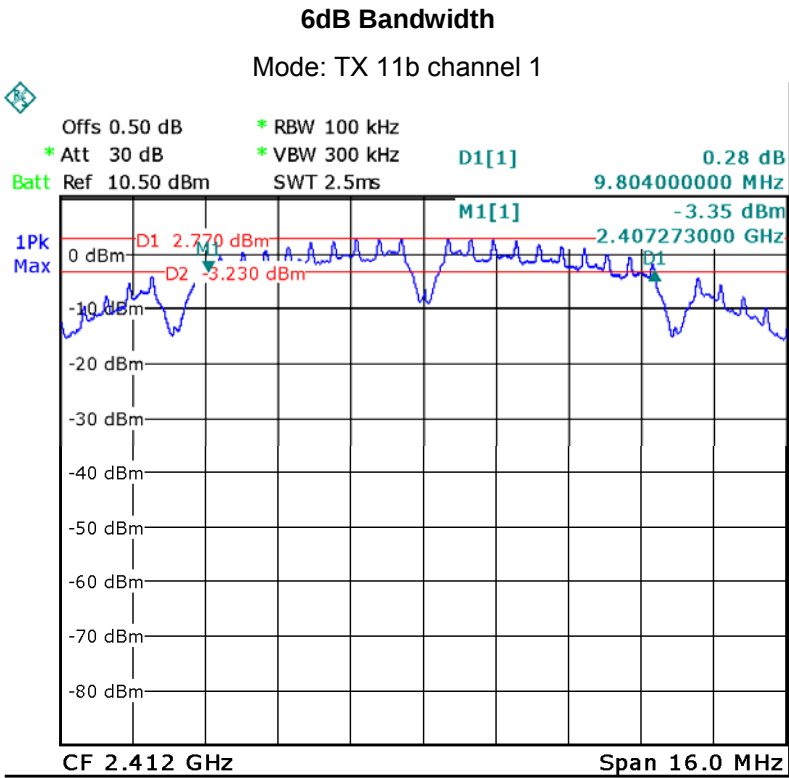


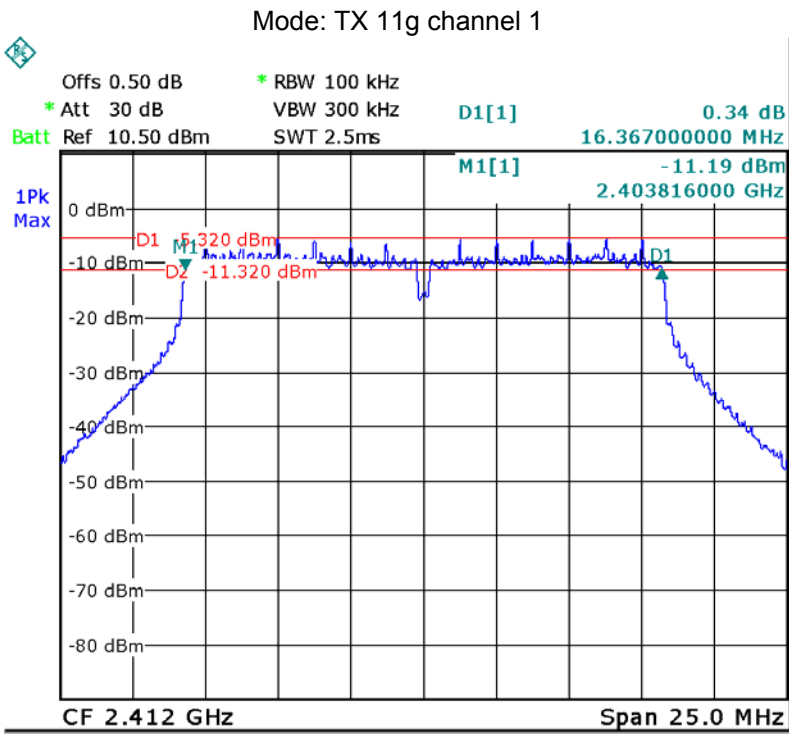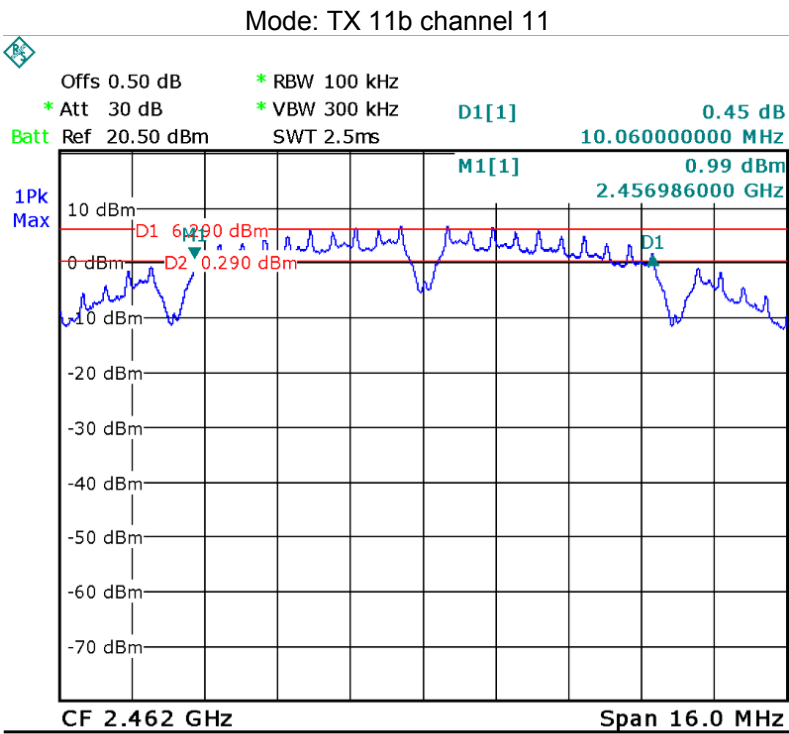

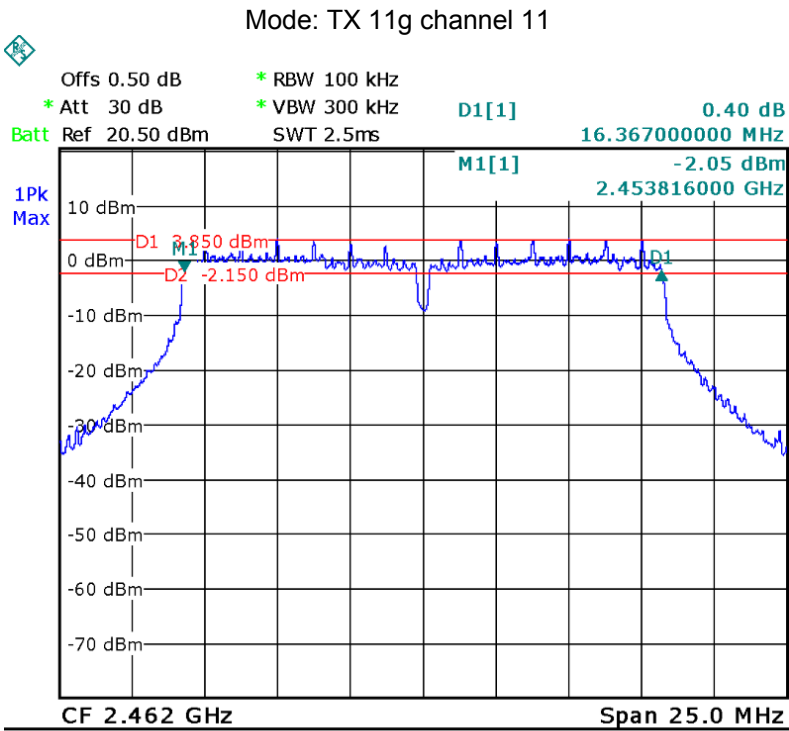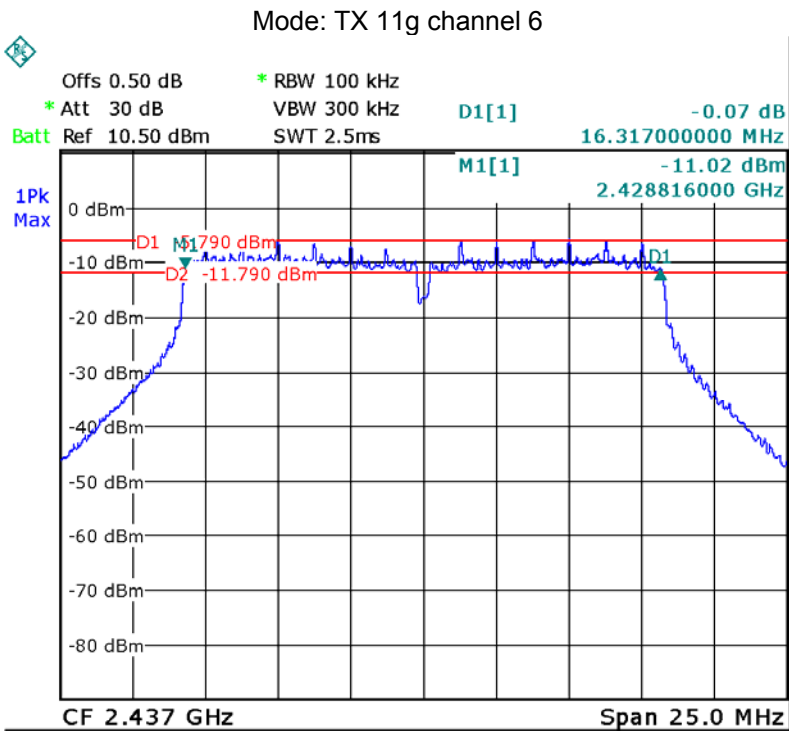

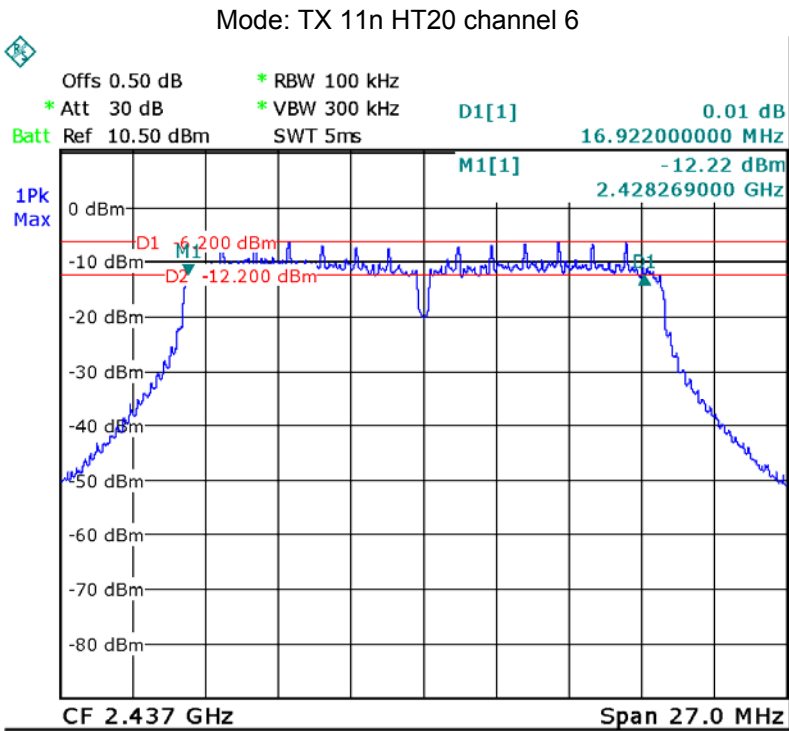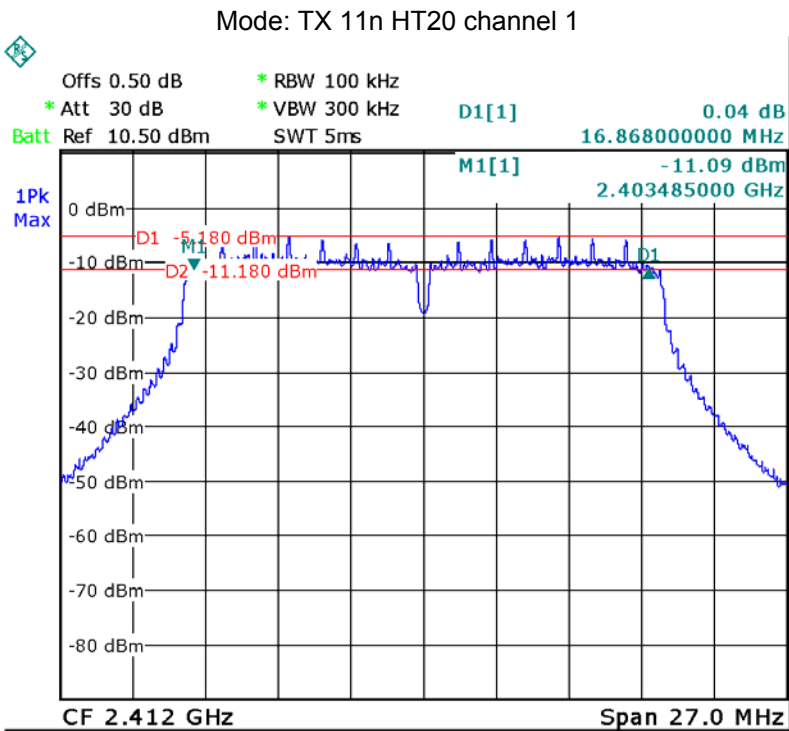


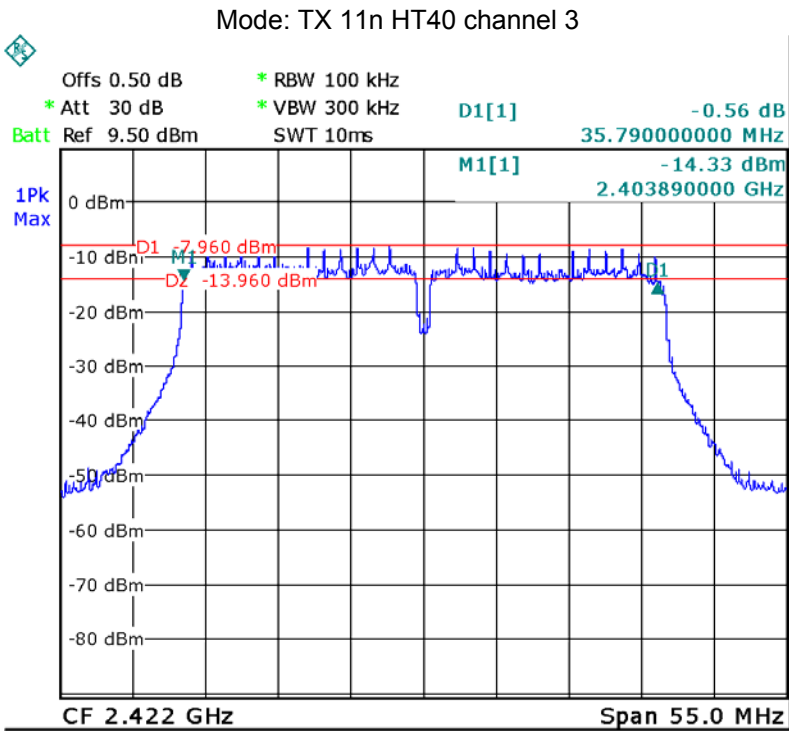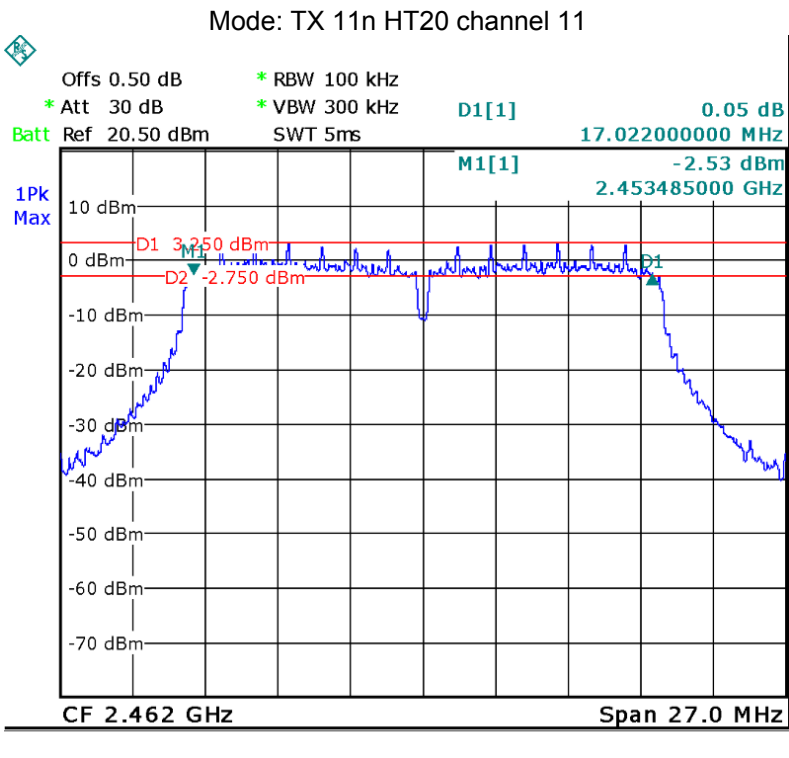

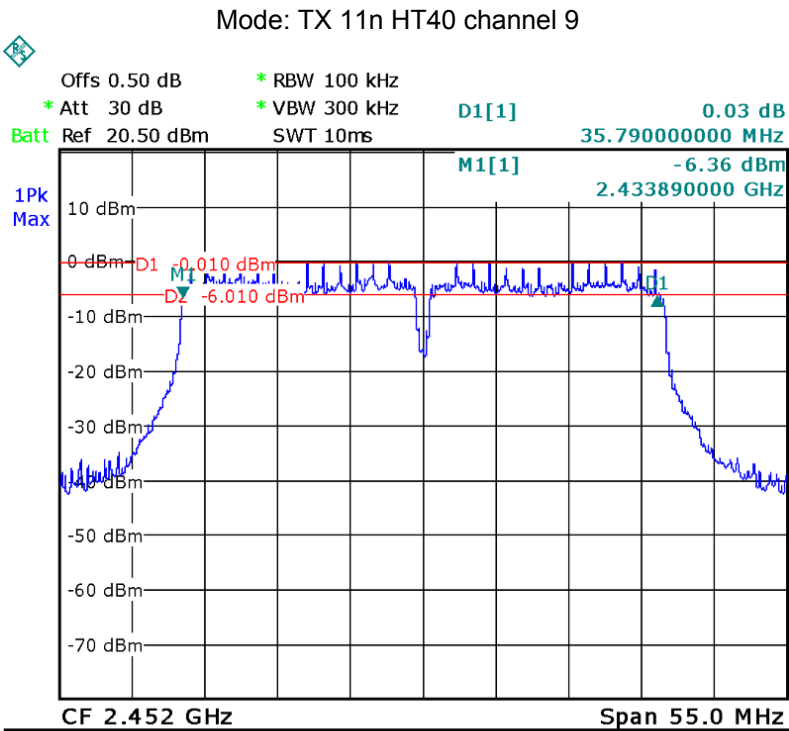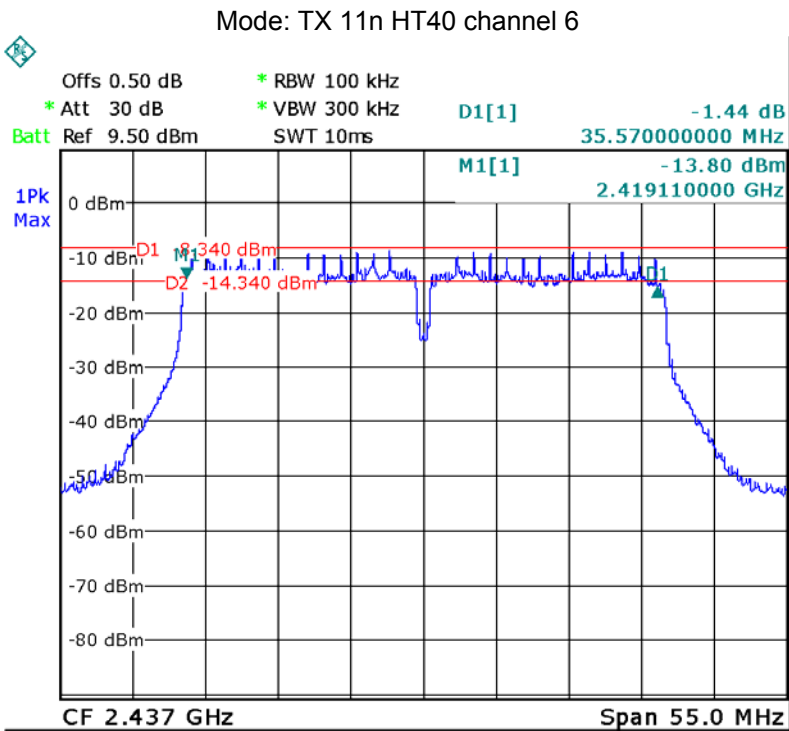




99% Bandwidth



Mode: TX 11b channel 1


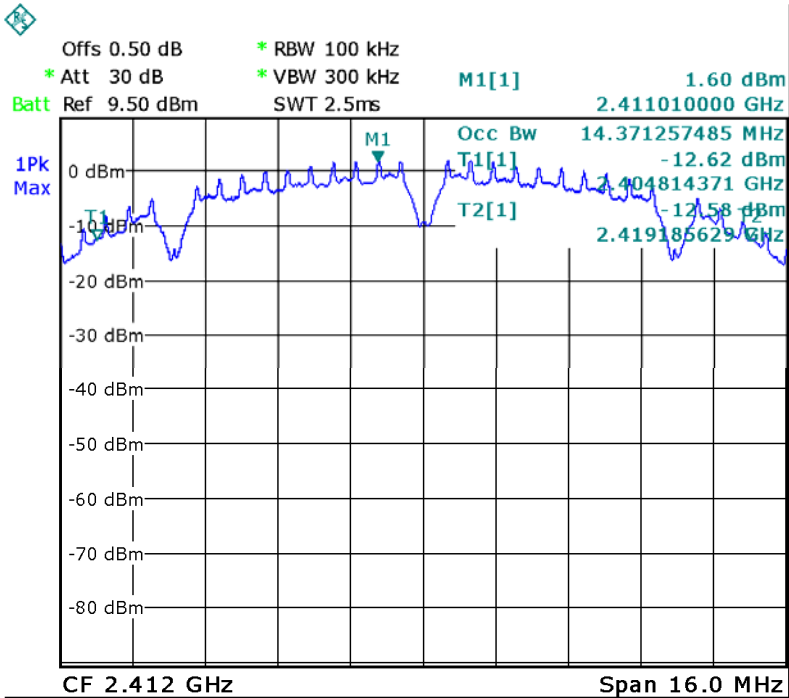




Mode: TX 11b channel 6


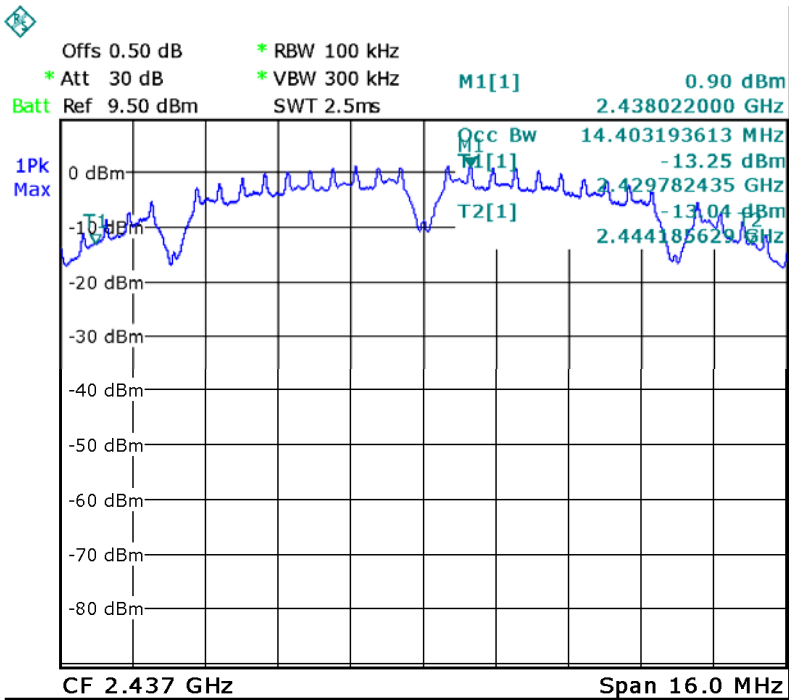


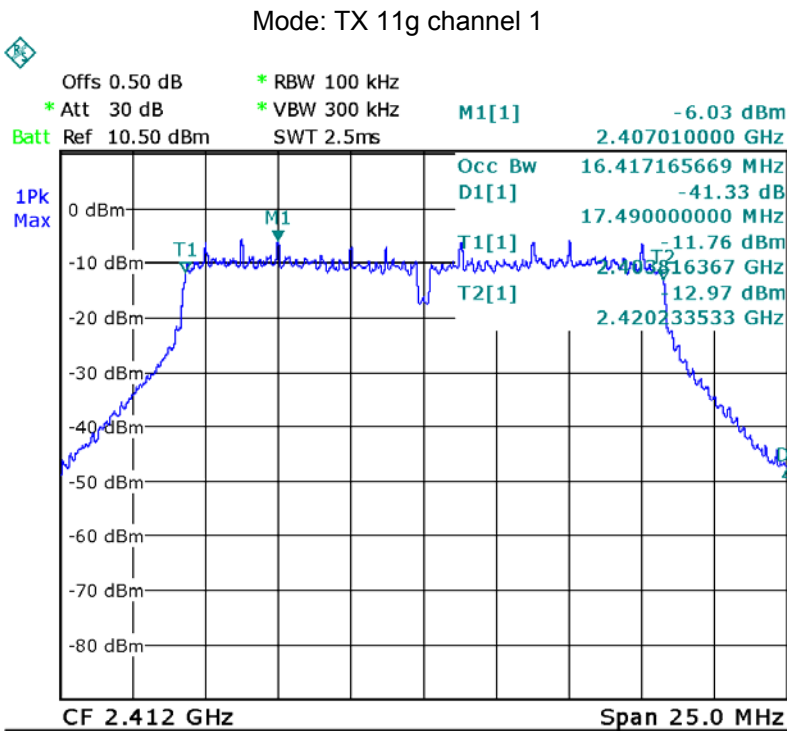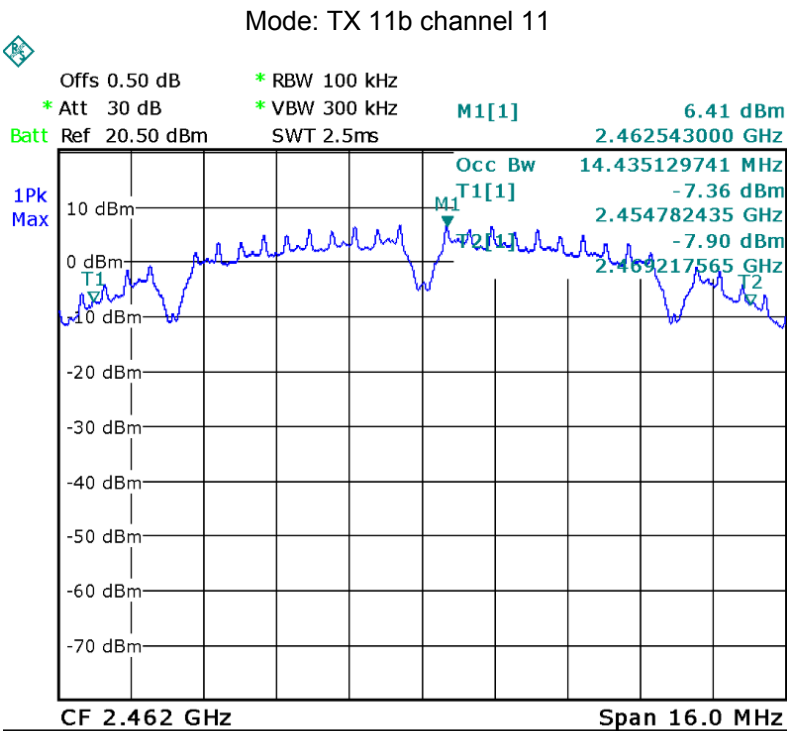

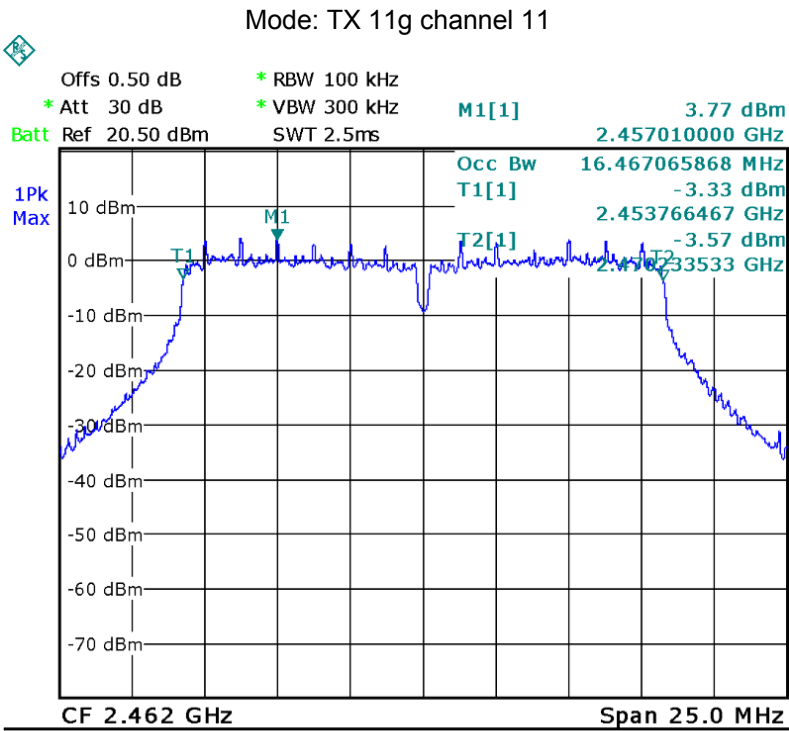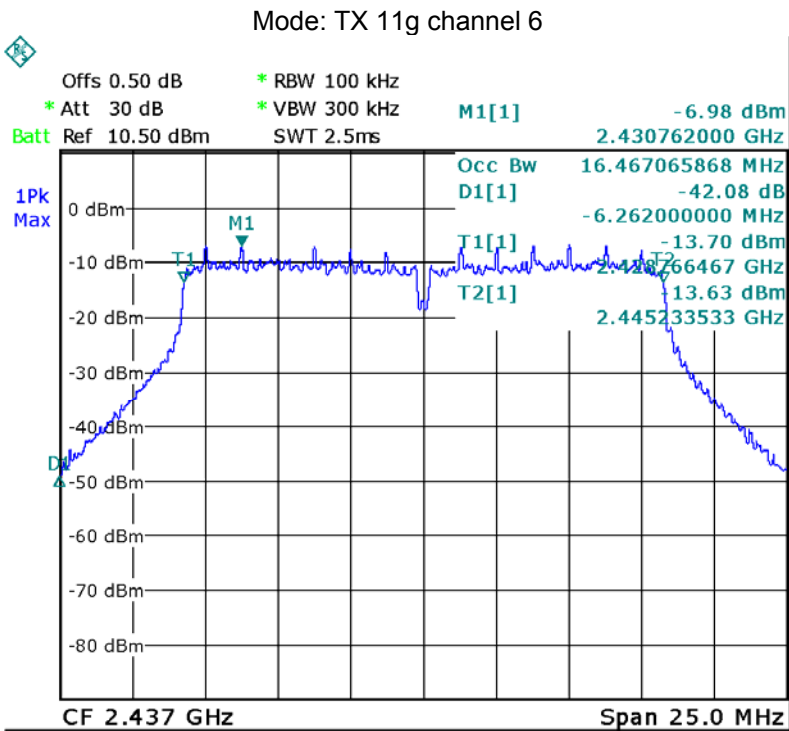

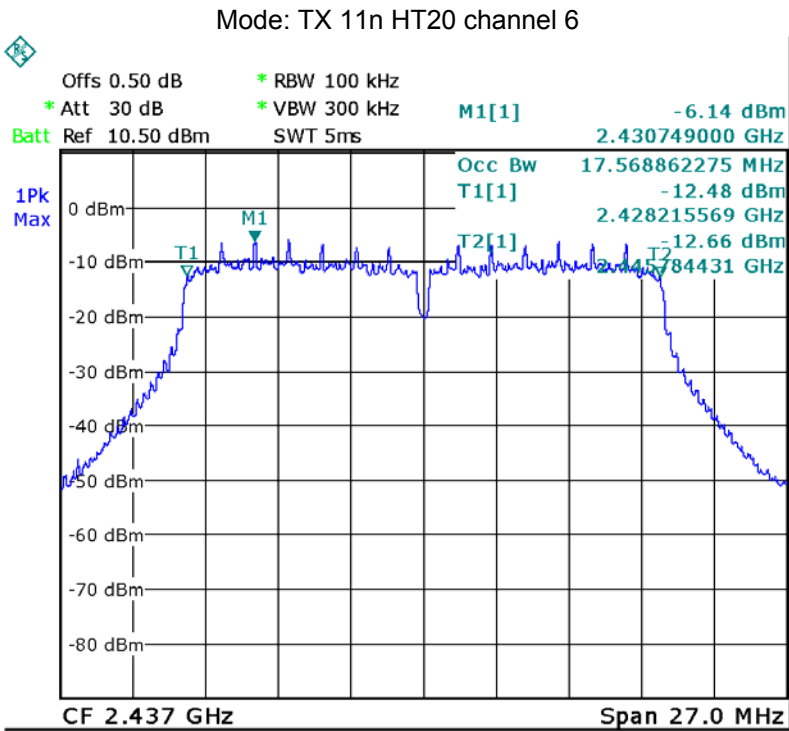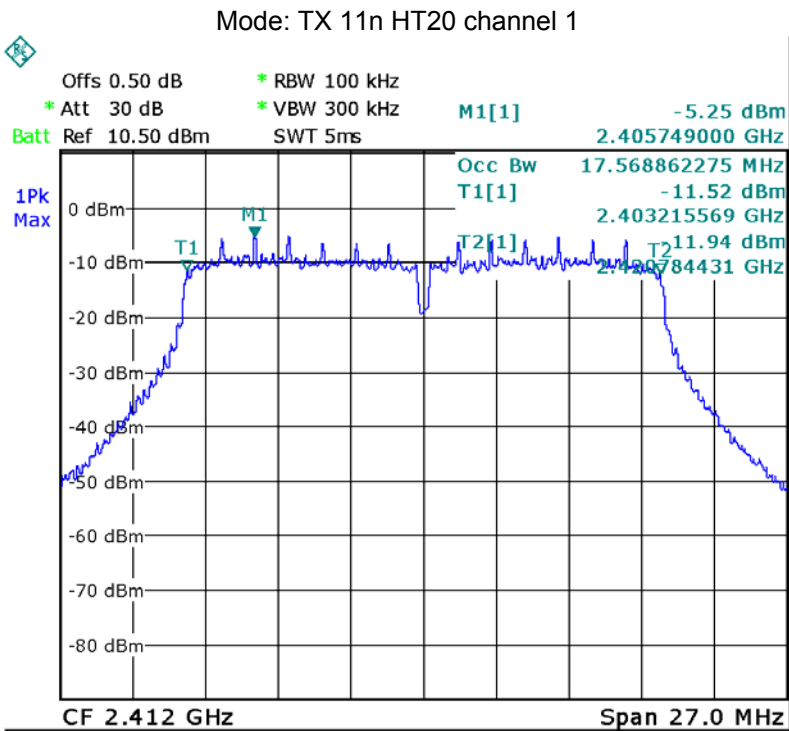

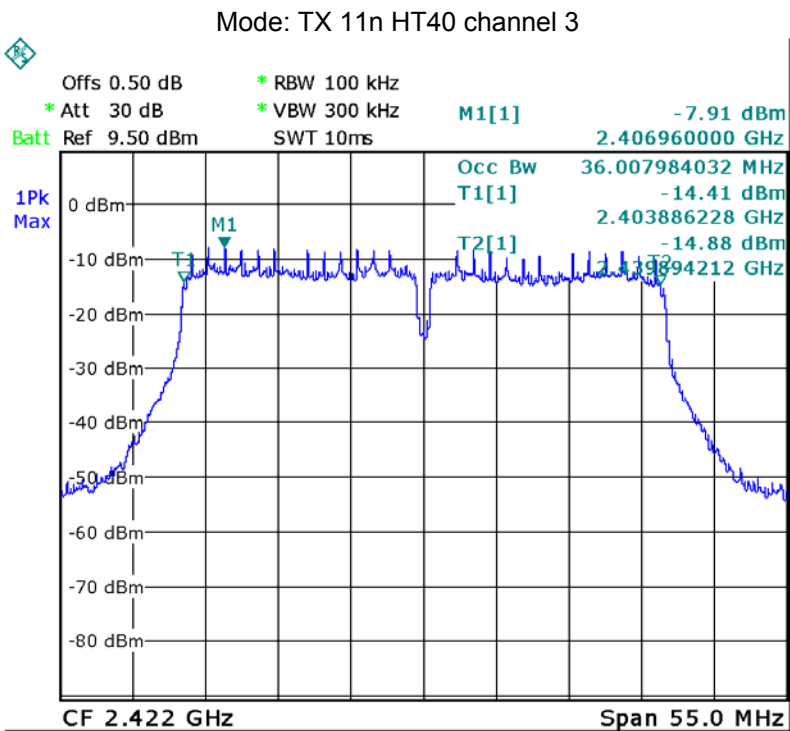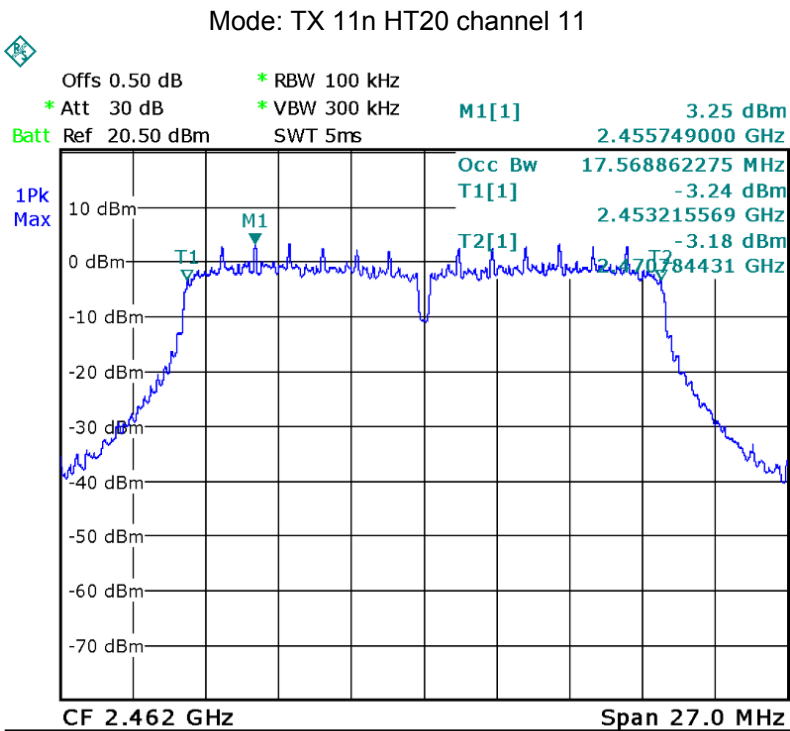

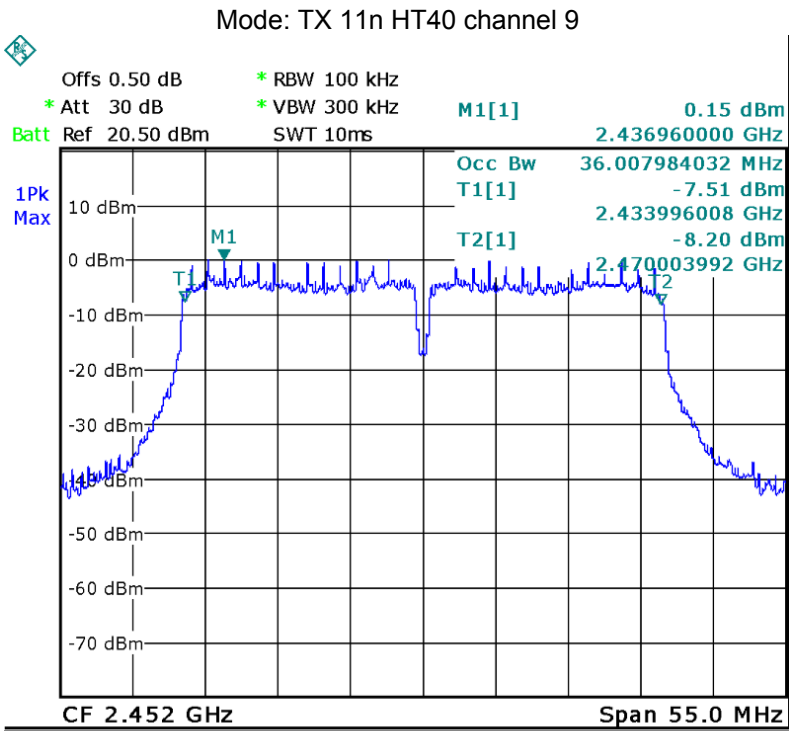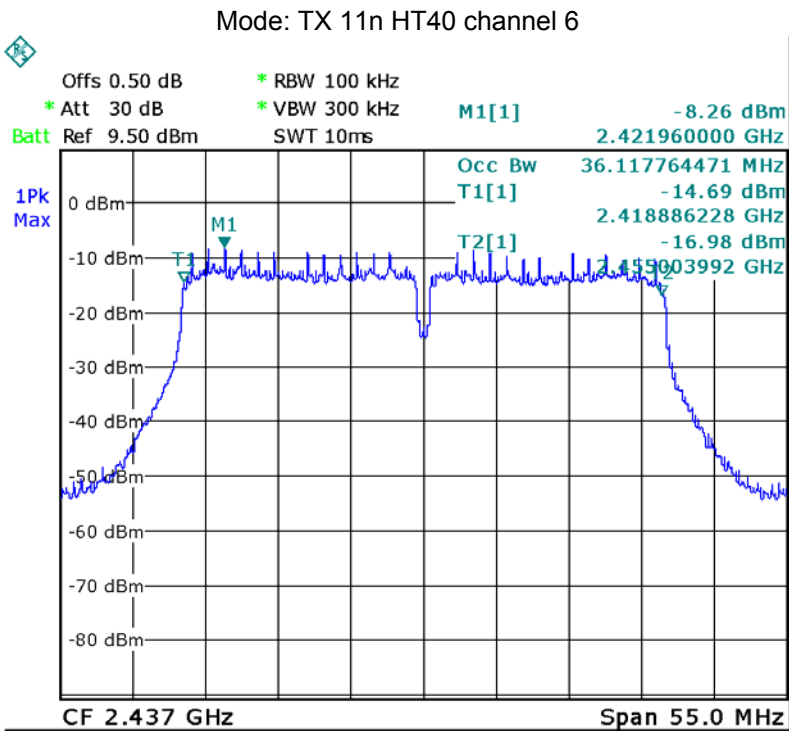

11 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

11.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set span $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1\%$ to 5% of the OBW, not to exceed 1 MHz..
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the span $\geq 1.5 \times OBW$.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / RBW]$. (This gives bin-to-bin spacing $\geq RBW / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

11.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	14.67	1W/30dBm
	Middle-2437	13.59	1W/30dBm
	High-2462	15.98	1W/30dBm
TX 11g	Low-2412	13.49	1W/30dBm
	Middle-2437	12.80	1W/30dBm
	High-2462	12.24	1W/30dBm
TX 11n HT20	Low-2412	12.93	1W/30dBm
	Middle-2437	12.25	1W/30dBm
	High-2462	11.26	1W/30dBm
TX 11n HT40	Low-2422	13.99	1W/30dBm
	Middle-2437	13.41	1W/30dBm
	High-2452	13.08	1W/30dBm



Test Plot



Mode: TX 11b channel 1


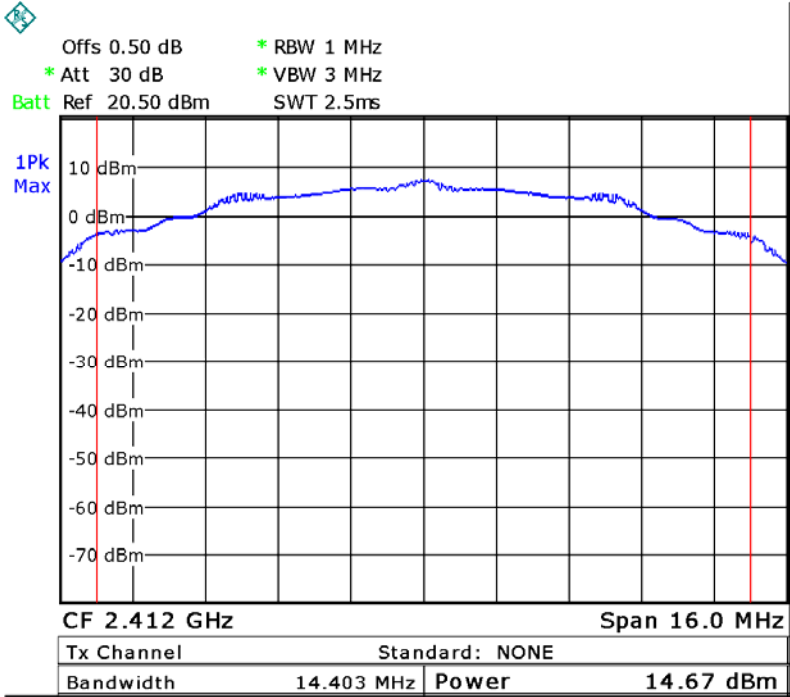




Mode: TX 11b channel 6


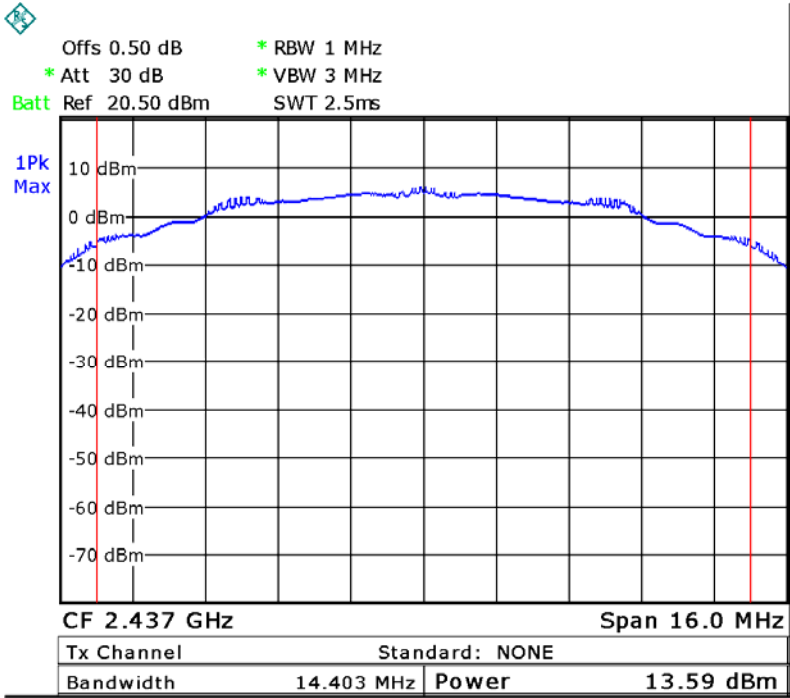


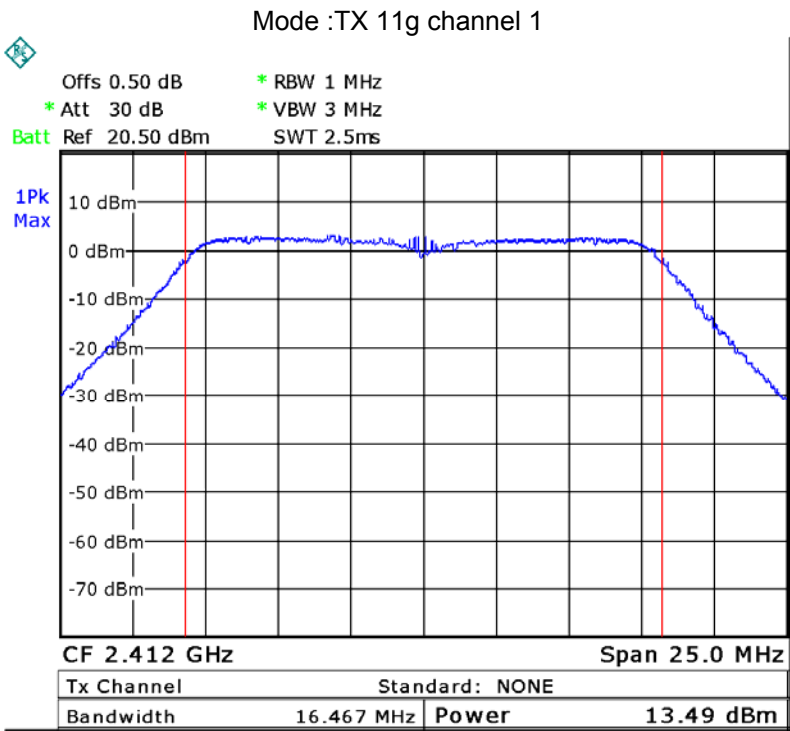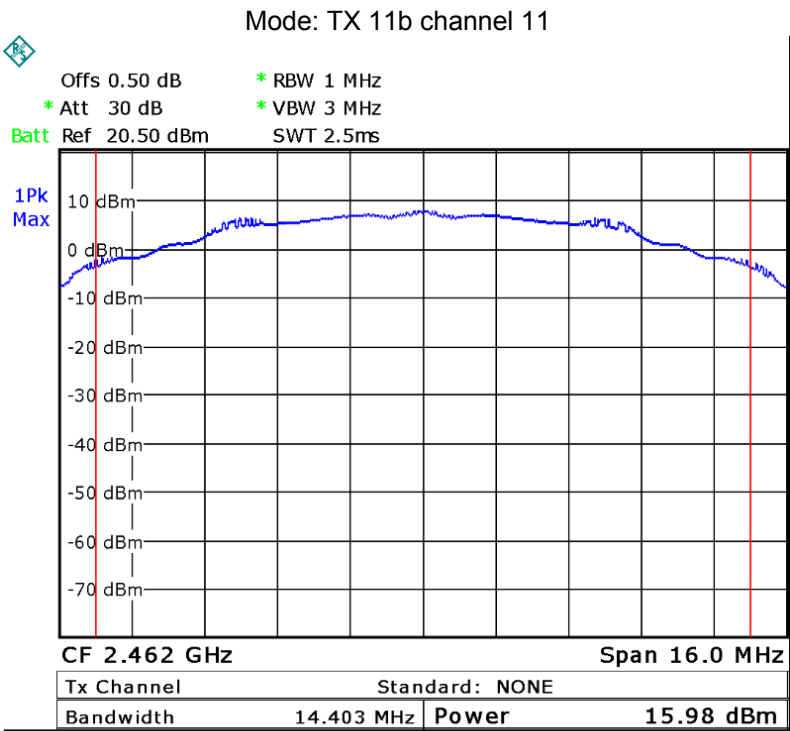

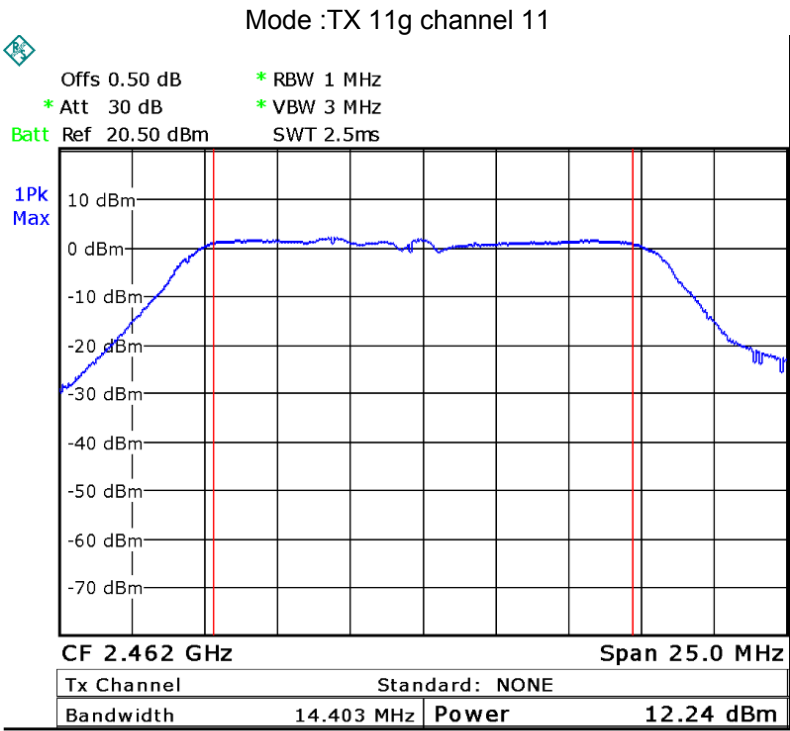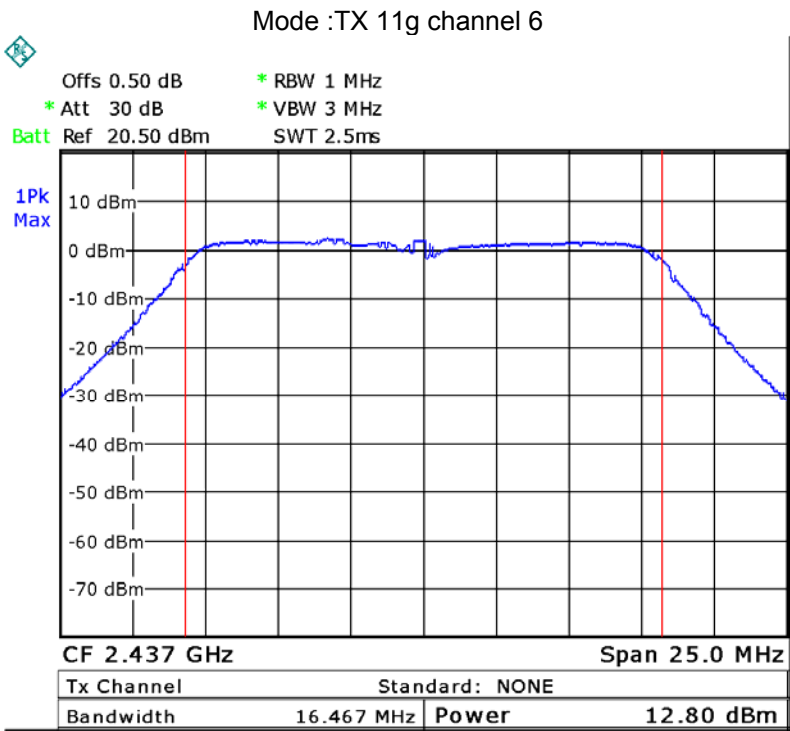

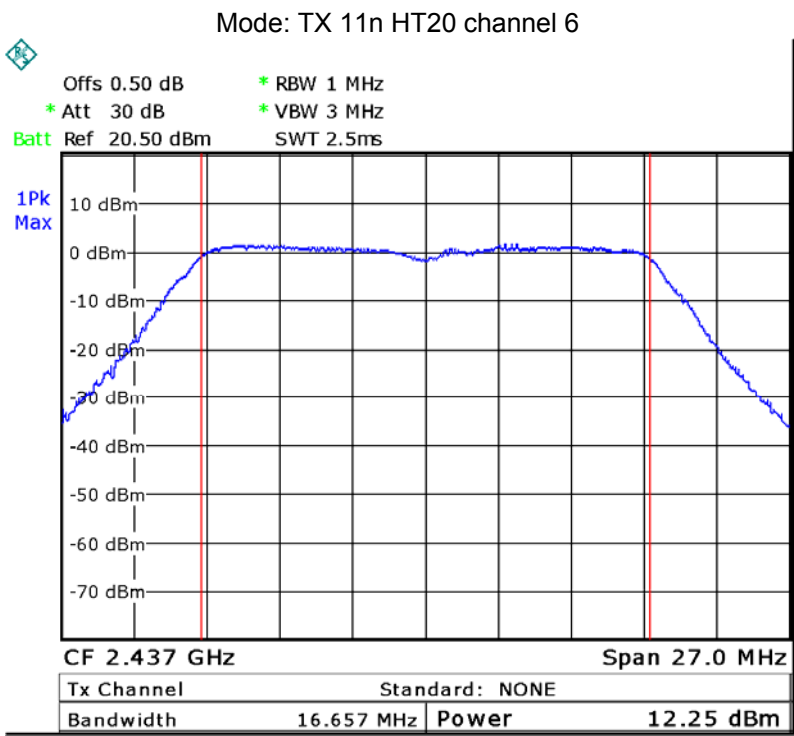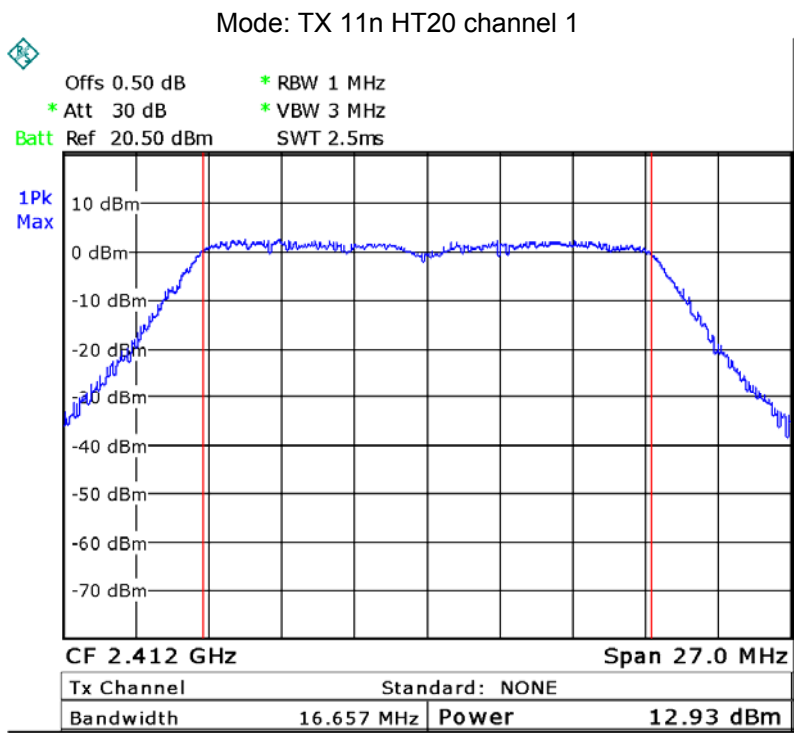

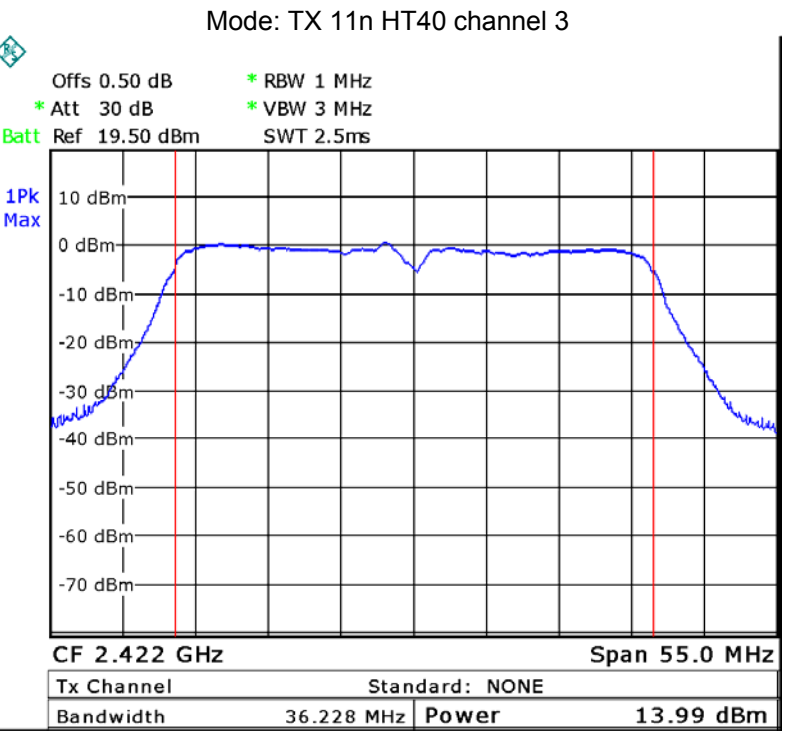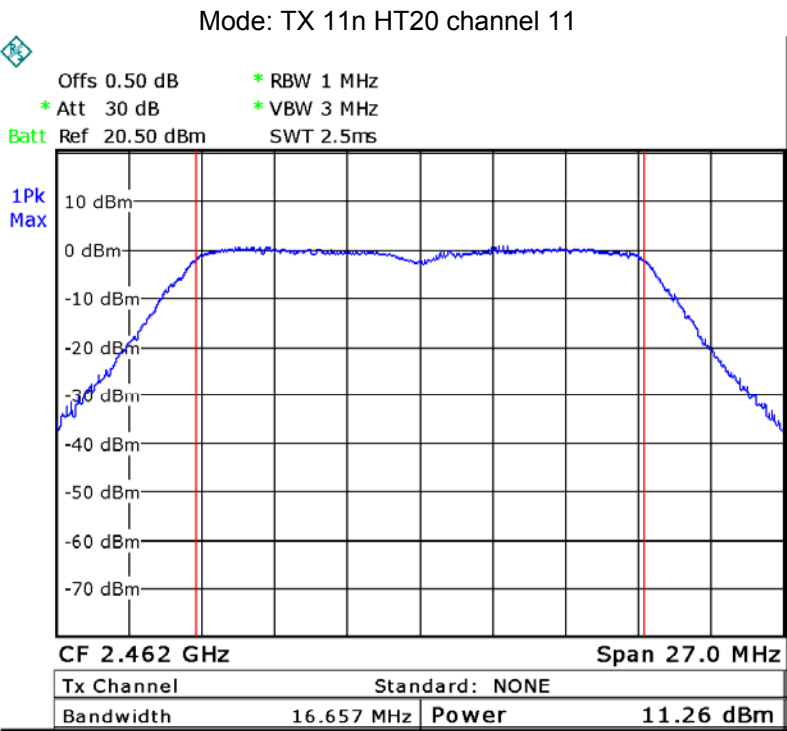

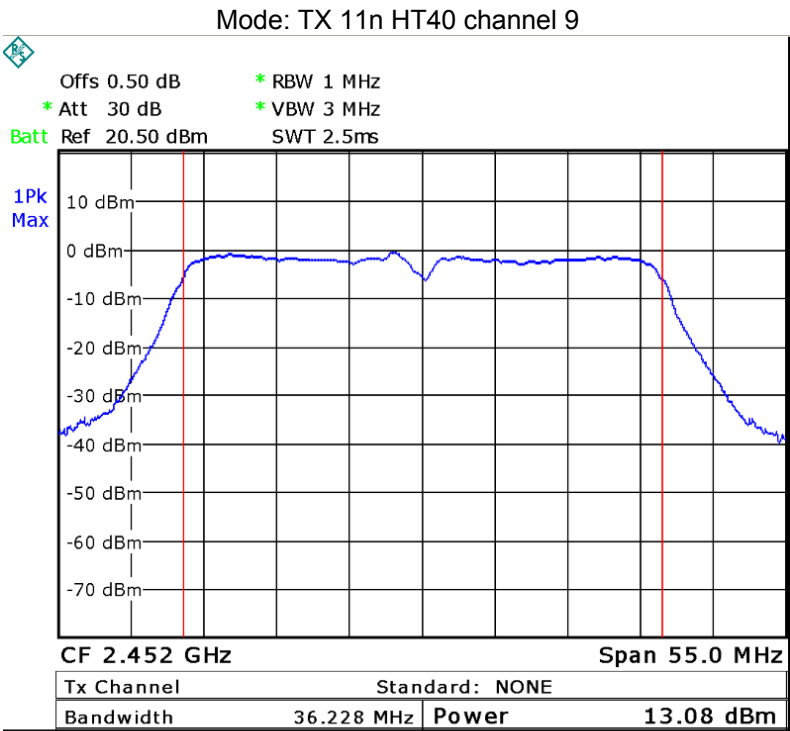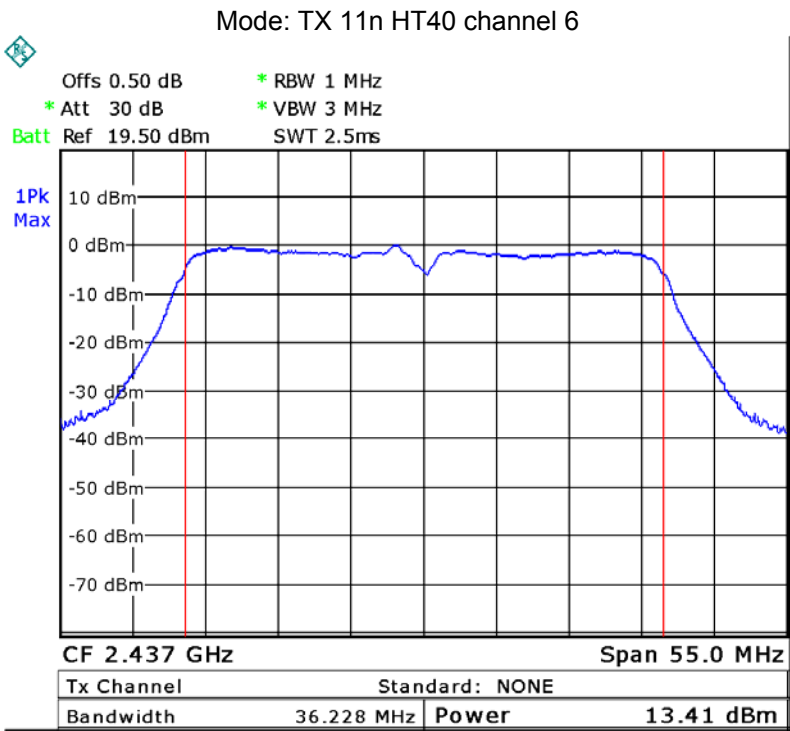

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013



12.1 Test Procedure:



KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017 section 10.2



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



12.2 Test Result:



Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-11.12	8dBm per 3kHz
	Middle-2437	-11.98	8dBm per 3kHz
	High-2462	-13.41	8dBm per 3kHz
TX 11g	Low-2412	-8.06	8dBm per 3kHz
	Middle-2437	-8.88	8dBm per 3kHz
	High-2462	-10.70	8dBm per 3kHz
TX 11n HT20	Low-2412	-10.70	8dBm per 3kHz
	Middle-2437	-9.80	8dBm per 3kHz
	High-2462	-10.66	8dBm per 3kHz
TX 11n HT40	Low-2422	-14.18	8dBm per 3kHz
	Middle-2437	-12.27	8dBm per 3kHz
	High-2452	-14.00	8dBm per 3kHz

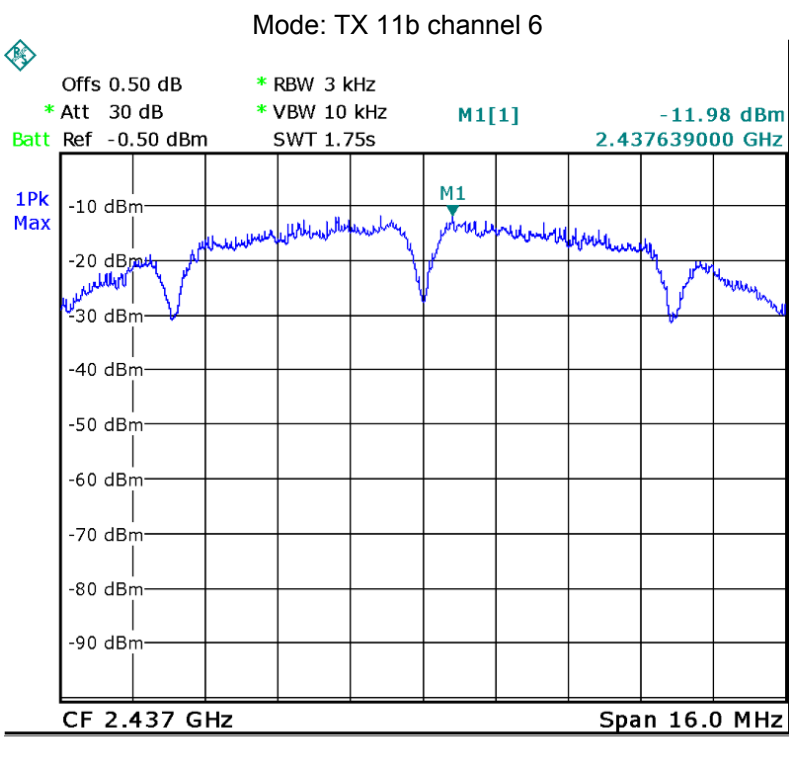
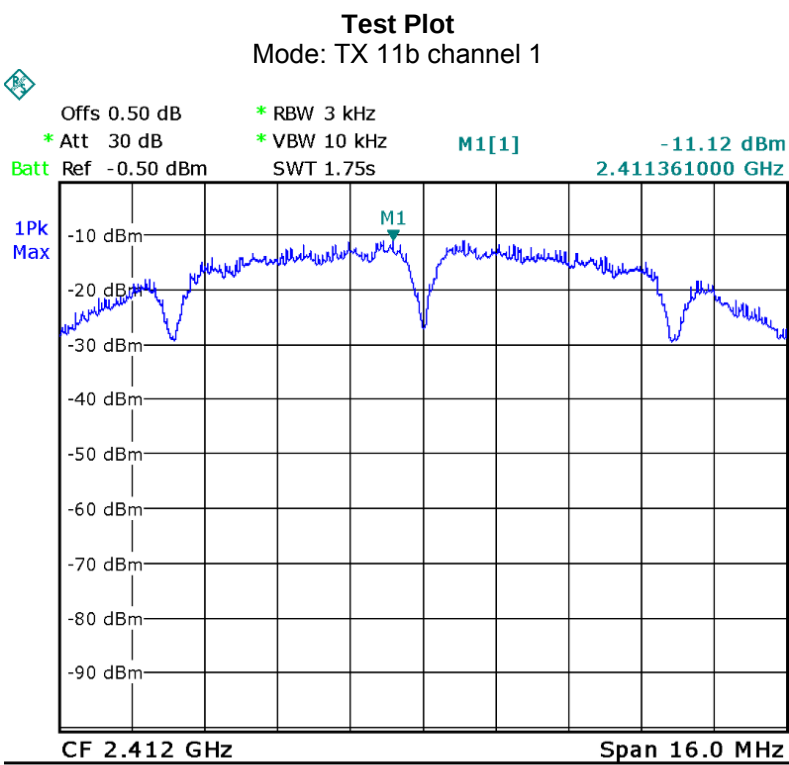


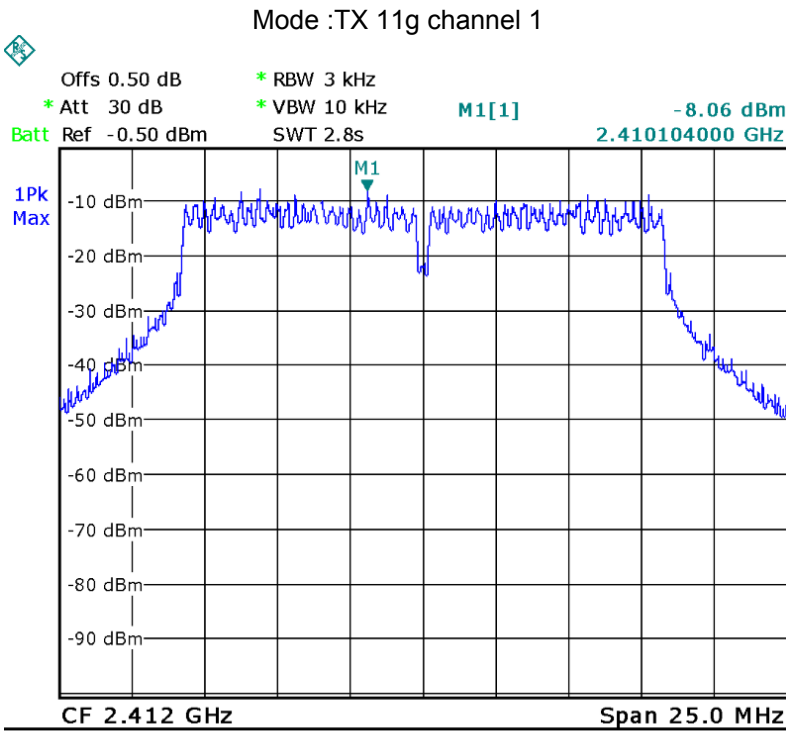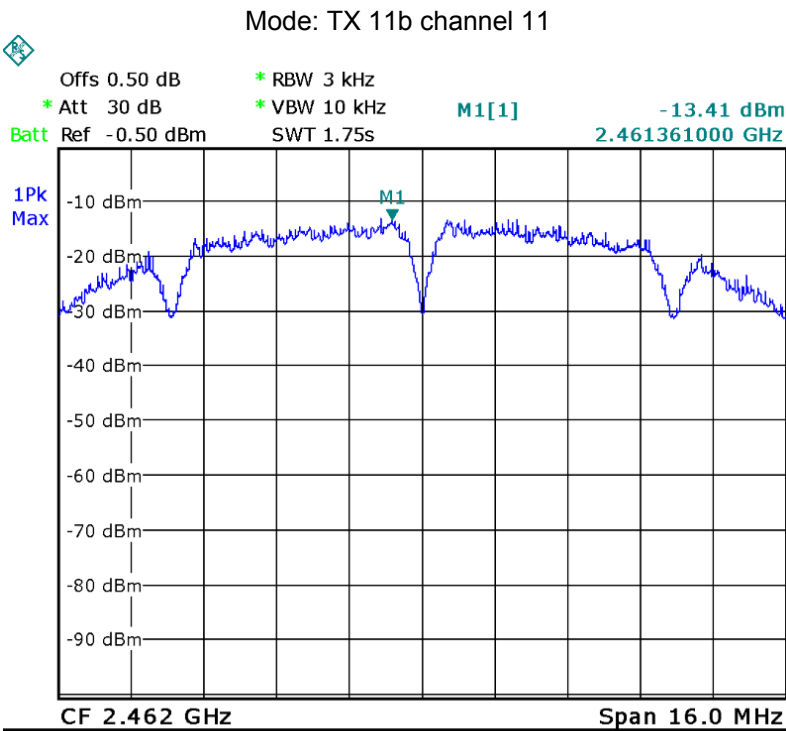

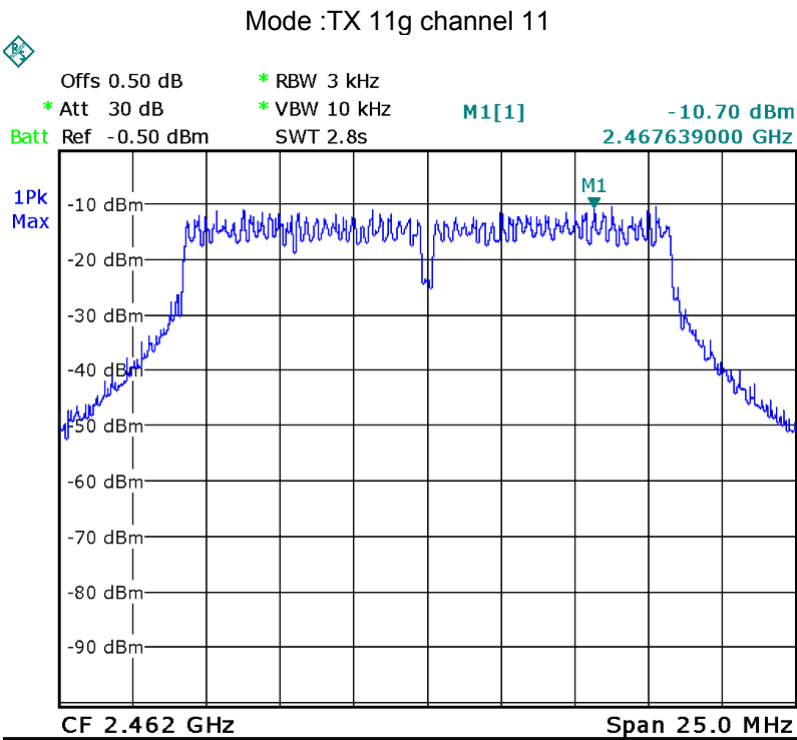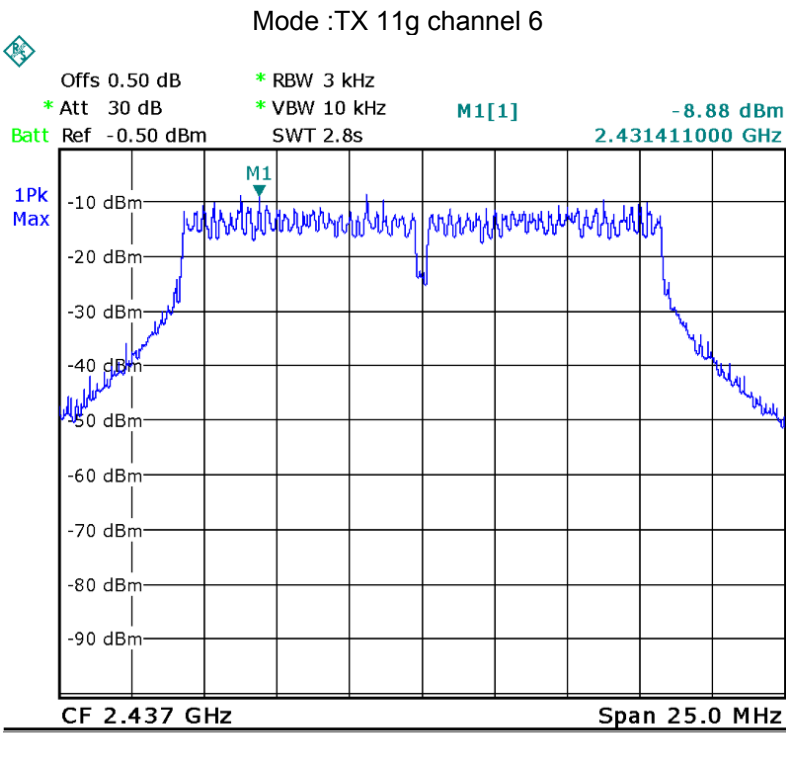

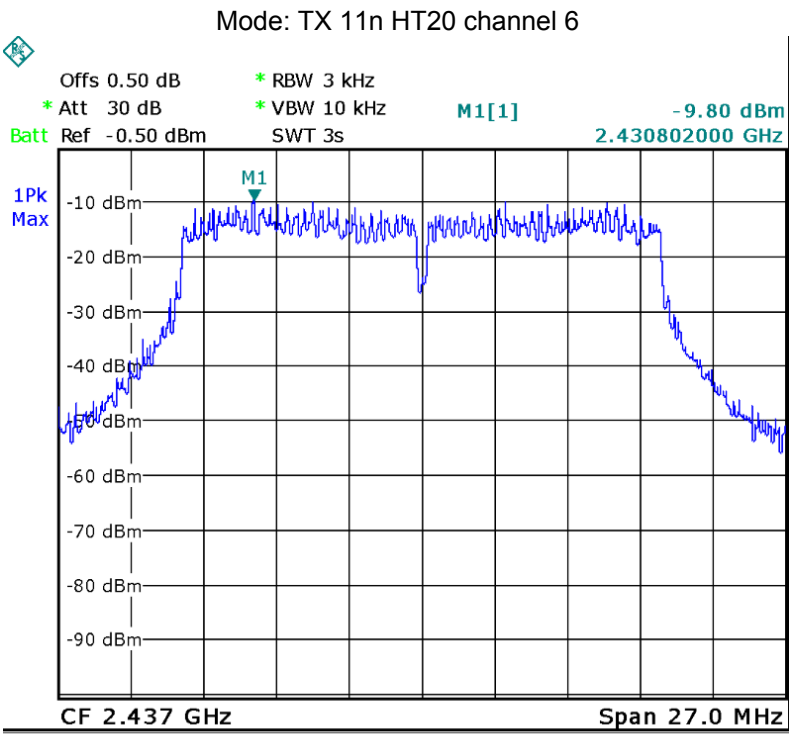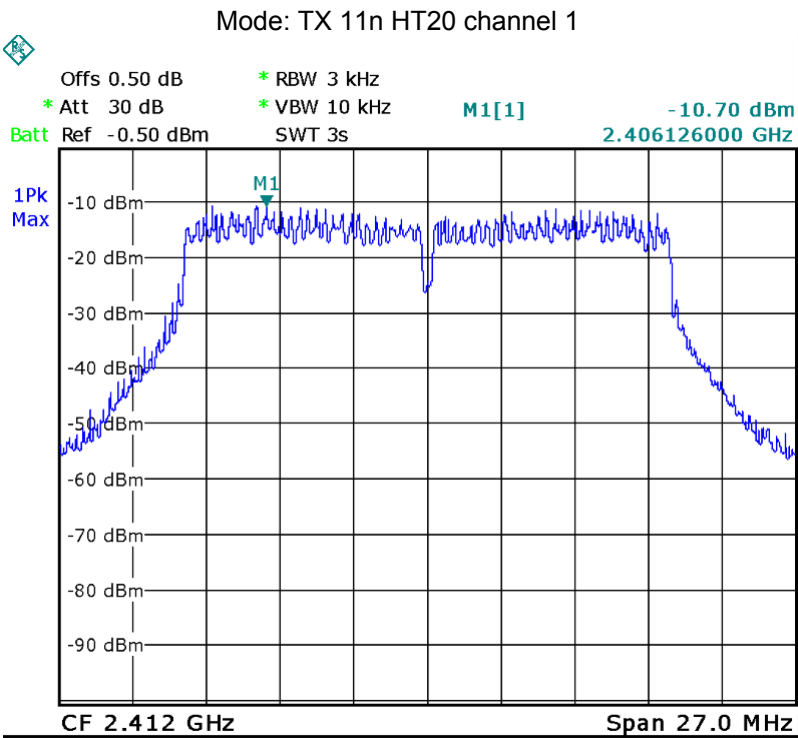


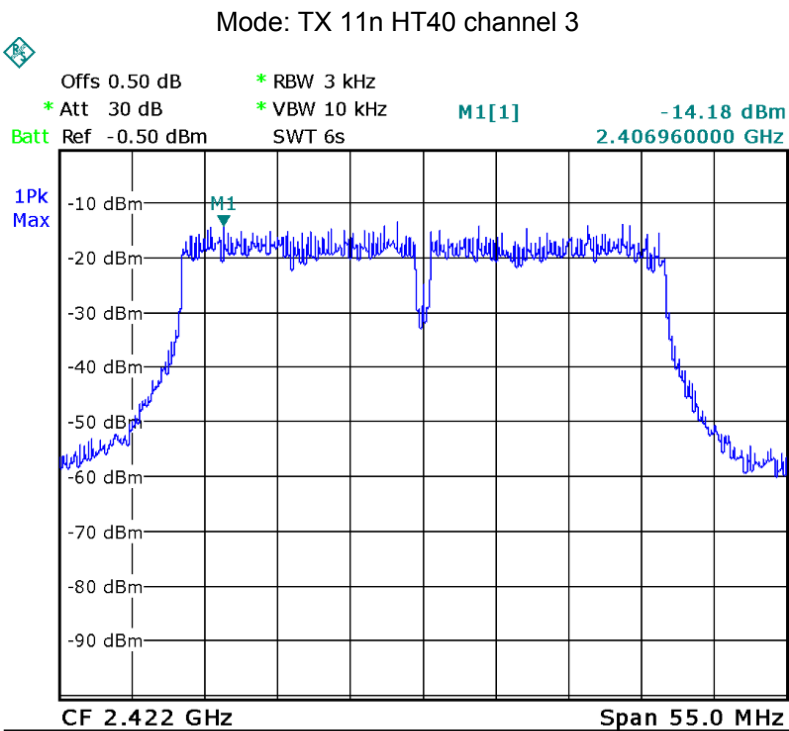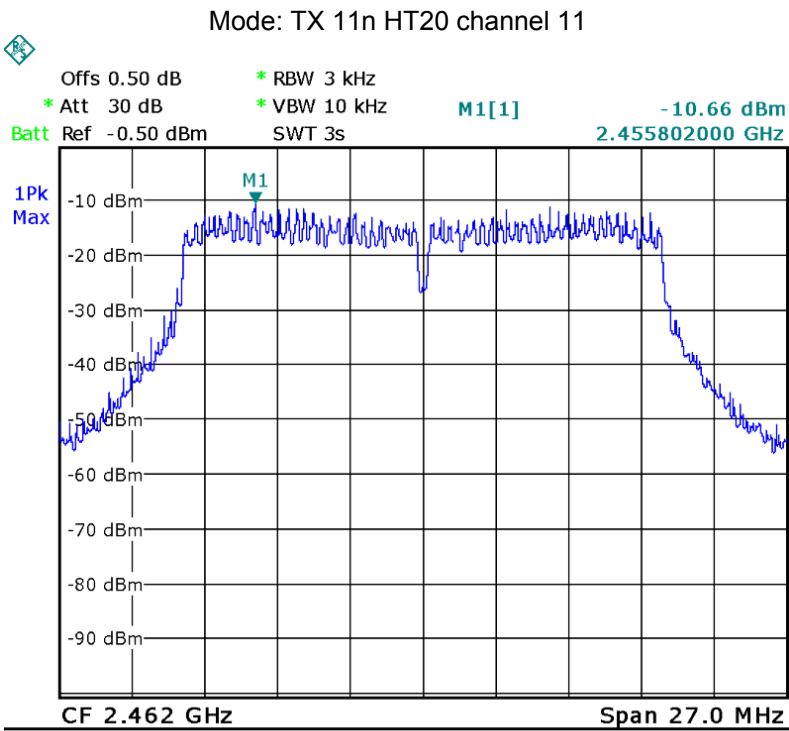

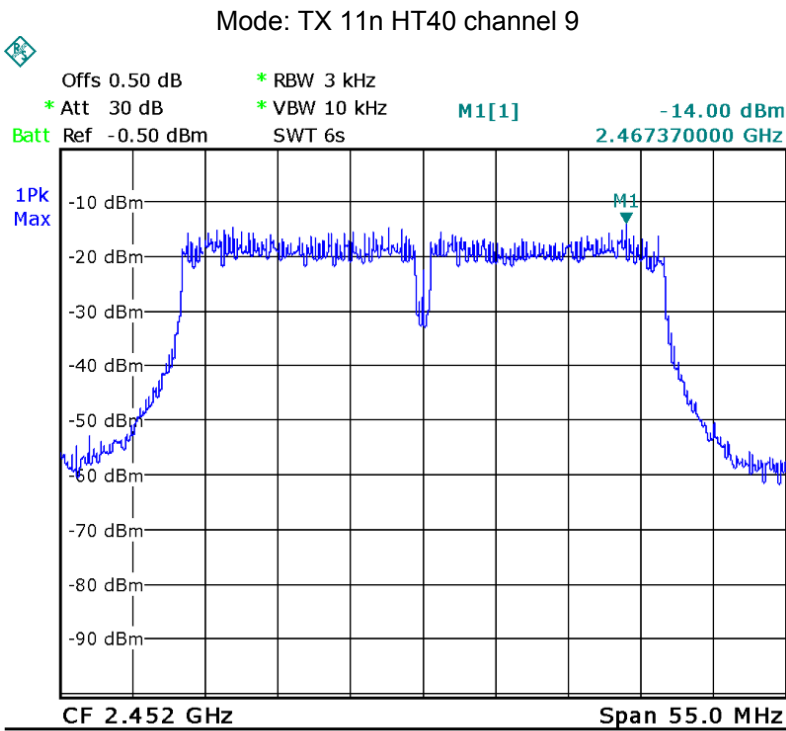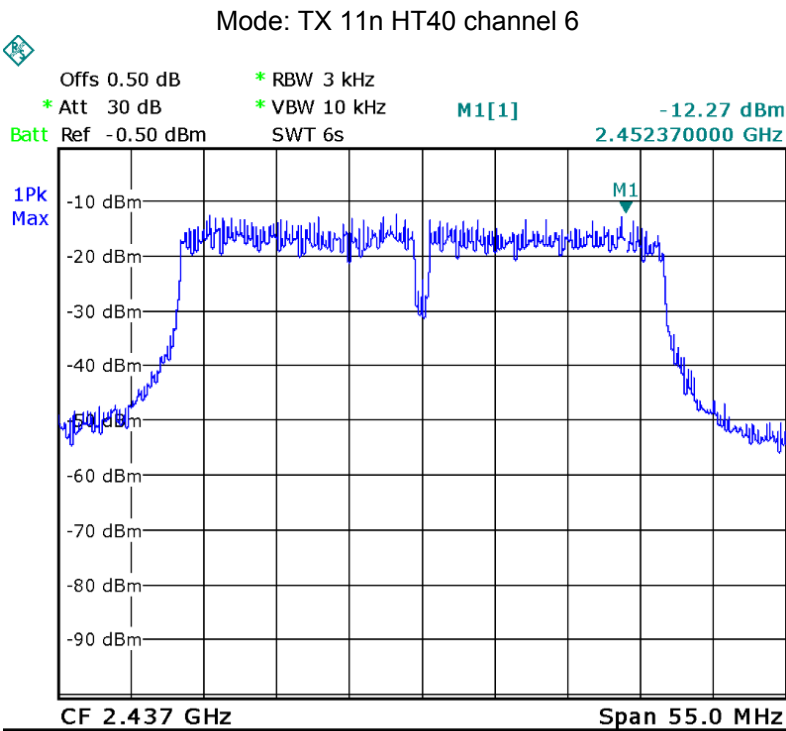

13 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

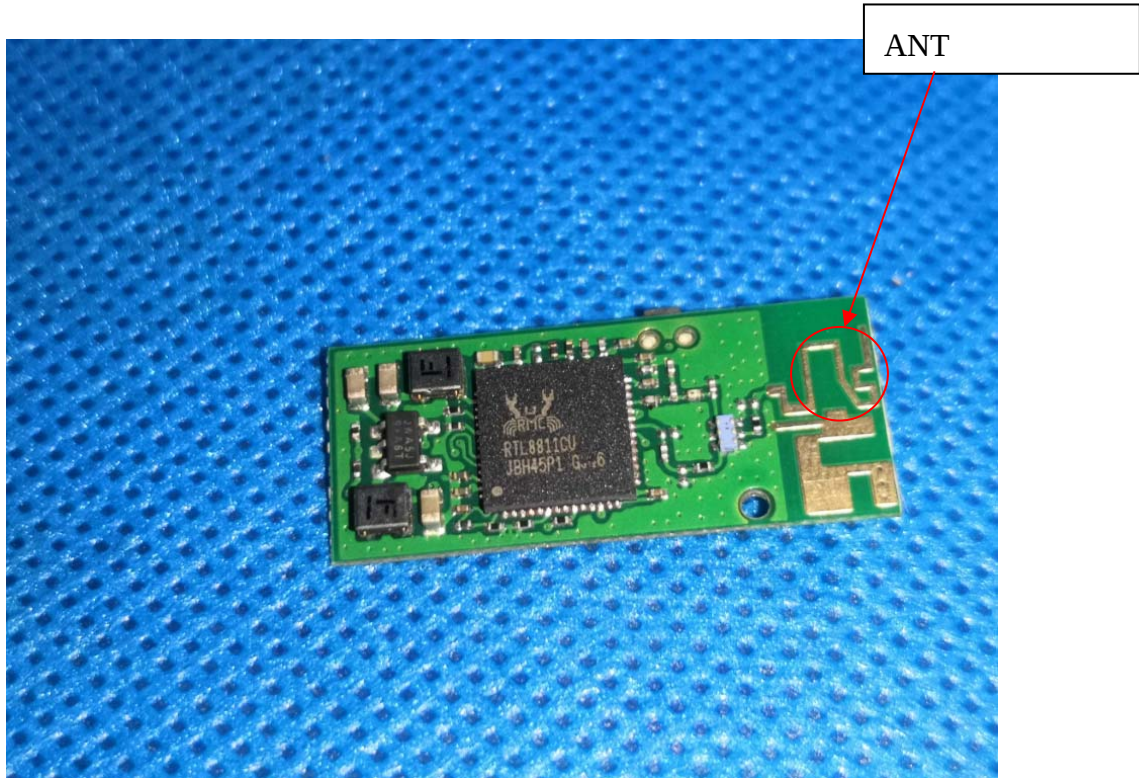

14 RF Exposure

Remark: refer to MPE test report: WTF21D01002802W003.

15 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-DB21-Photos.

=====End of Report=====