


# Certificate of Test

NCT Co., Ltd. 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, 18511, Korea (Tel: +82-31-323-6070 / Fax: +82-31-323-6071)	Report No.: NW2101-F003-1 Page (1) / (22)	
<b>1. Client</b> <ul style="list-style-type: none"><li>○ Name : Cubicon. INC</li><li>○ Address : 527, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13216 Republic of Korea</li><li>○ Date of Receipt : 2020-12-17</li></ul>		
<b>2. Use of Report : FCC Approval</b>		
<b>3. Test Sample</b> <ul style="list-style-type: none"><li>○ Description / Model Name : NFC BOARD / F803-0049</li><li>○ FCC ID : 2AYSO-F803-0049</li></ul>		
<b>4. Date of Test : 2021-01-13 ~ 2021-02-09</b>		
<b>5. Test method used : FCC Part 15 Subpart C 15.225</b>		
<b>6. Testing Environment :</b> <ul style="list-style-type: none"><li>○ Temperature: <math>(25 \pm 5) ^\circ\text{C}</math>, Humidity: Less than 75 % R.H. * Unless specified otherwise in the individual methods, the tests were conducted on ambient conditions.</li></ul>		
<b>7. Test Results : Refer to the test results</b>		
<p>The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full This test report is prepared according to the requirements of ISO / IEC 17025.</p>		
Affirmation	Tested by Jong-Myoung, Shin (signature)	Technical Manager Changmin, Kim 
<b>Feb 09, 2020</b>		
<b>NCT CO., LTD.</b>		
 NCT.CO., LTD.		

## Table of contents

<b>1. General Information -----</b>	<b>3</b>
<b>2. Information's about Test Item -----</b>	<b>3</b>
<b>3. Test Report -----</b>	<b>5</b>
<b>3.1 Test Summary -----</b>	<b>5</b>
<b>3.2 Test Report Version -----</b>	<b>6</b>
<b>3.3 Transmitter Requirements</b>	
3.3.1 Antenna Requirement -----	7
3.3.2 20 dB Bandwidth -----	8
3.3.3 In-Band Emissions -----	9
3.3.4 Out-of-Band Emissions -----	12
3.3.5 Frequency Stability -----	15
3.3.6 Conducted Emission -----	16

## APPENDIX

<b>APPENDIX I TEST SETUP -----</b>	<b>19</b>
<b>APPENDIX II TEST EQUIPMENT USED FOR TESTS -----</b>	<b>21</b>



## 1. General Information's

### 1.1 Test Performed

Laboratory : NCT Co., Ltd.  
Address : 211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, 18511, Korea  
Telephone : +82-31-323-6070  
Facsimile : +82-31-323-6071  
FCC Designation No. : KR0166  
FCC Registration Number : 409631

## 2. Information's about Test Item

### 2.1 Applicant Information

Company name : Cubicon. INC  
Address : 527, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13216  
Republic of Korea  
Telephone / Facsimile : +82-1661-4371 / +82-070-8228-4966

### 2.2 Equipment Under Test (EUT) description

Test item particulars : NFC BOARD  
Model and/or type reference : F803-0049  
Additional model name : -  
Serial number : Identification  
Antenna type and gain : PCB Pattern Antenna  
Date (s) of performance of tests: : 2021-01-13 ~ 2021-02-09  
Date of receipt of test item : 2020-12-17  
EUT condition : Pre-production, not damaged  
Number of channel : 1  
EUT Power Source : DC 5.0 V  
Type of Modulation : ASK  
FirmWare version : 1.0  
Hardware version : 1.0  
Test software name(version) : -

---

Test Report No.: NW2101-F003-1

---

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



### **2.3 Tested Frequency**

Test Mode	Test frequency (MHz)
RFID	13.56

---

**Test Report No.: NW2101-F003-1**

---

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

### 3. Test Report

#### 3.1 Test Summary

Applied	Test Items	Clause	Test Condition	Result
<input checked="" type="checkbox"/>	Antenna Requirement	15.203	Radiated	C
<input checked="" type="checkbox"/>	20 dB Bandwidth	2.1049		C
<input checked="" type="checkbox"/>	In-Band Emissions (13.553 – 13.567 MHz)	15.225(a)		C
<input checked="" type="checkbox"/>	In-Band Emissions (13.410 – 13.553 MHz, 13.567 – 13.710 MHz)	15.225(b)		C
<input checked="" type="checkbox"/>	In-Band Emissions (13.110 – 13.410 MHz, 13.710 – 14.010 MHz)	15.225(c)		C
<input checked="" type="checkbox"/>	Out-of-Band Emissions	15.225(d) 15.209		C
<input checked="" type="checkbox"/>	Frequency Stability	15.225(e)	Temp & Humid Test Chamber	C
<input checked="" type="checkbox"/>	Conducted Emissions	15.207	AC Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: This test item was performed in each axis and the worst case data was reported.

The sample was tested according to the following specification: ANSI C63.10:2013

Compliance was determined by specification limits of the applicable standard according to customer requirements.

### 3.2 Test Report Version

Test Report No.	Date	Description
NW2101-F003	2021-01-27	Initial issue
NW2101-F003-1	2021-02-09	Added conducted emission test

---

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



### 3.3 Transmitter Requirements

#### 3.3.1 Antenna Requirement

According to §15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to §15.247(b)(4) the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

##### 3.3.1.1 Result

Complies

(The transmitter has a PCB Pattern Antenna.)

---

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 7 of 22

### 3.3.2 20 dB Bandwidth

#### 3.3.2.1 Test Setup

Refer to the APPENDIX I.

#### 3.3.2.2 Limit

N/A


#### 3.3.2.3 Test Procedure

1. The 20 dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.
2. Spectrum analyzer setting use following test procedure  
RBW = 1 % ~ 5 % OBW  
VBW  $\geq$  3  $\times$  RBW  
Span = Span = 2 ~ 5 times the OBW  
Sweep = Auto  
Detector = Peak  
Trace = Max hold
3. The trace was allowed to stabilize
4. Determine the reference value = Set the spectrum analyzer marker to the highest level of the displayed trace
5. Using the marker-delta function of the instrument, determine the “-xx dB down amplitude” using [(reference value) - xx].
6. Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

### 3.3.2.4 Test Result

Test Mode	20 dB Bandwidth (kHz)
RFID	280.0

### 3.3.2.5 Test Plot

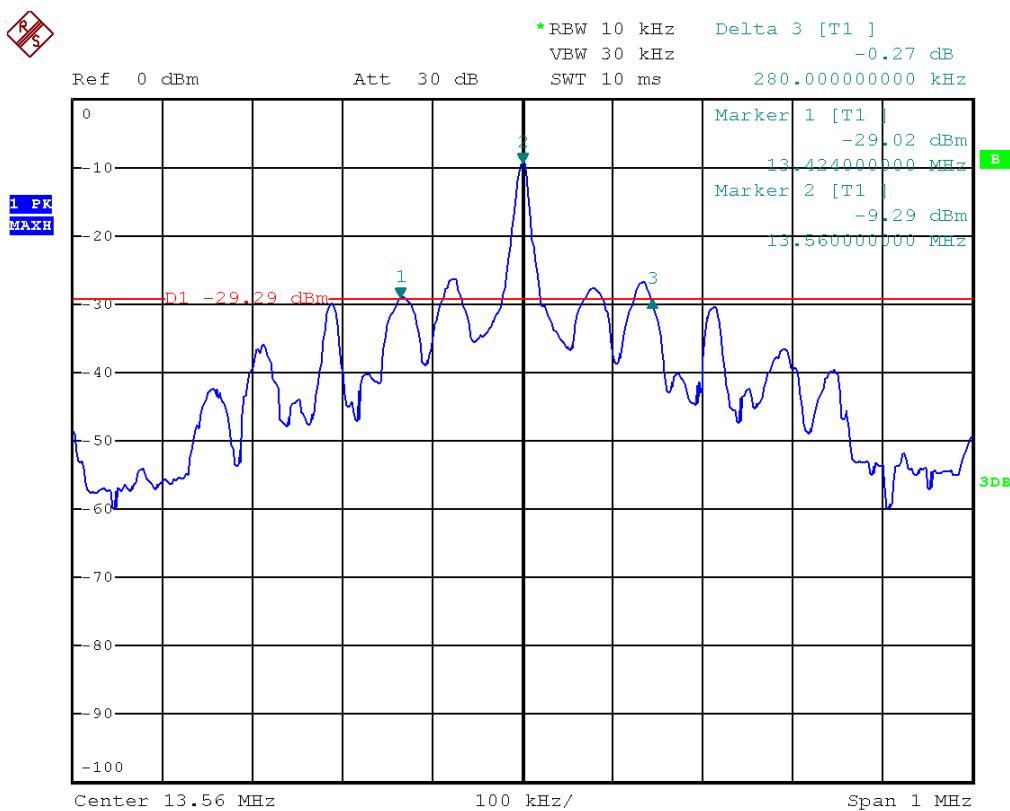

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
 www.nct.re.kr    TEL: +82-31-323-6070    FAX: +82-31-323-6071

### 3.3.3 In-Band Emissions

#### 3.3.3.1 Test Setup

Refer to the APPENDIX I.

#### 3.3.3.2 Limit

Frequency Band (MHz)	Limit at 30 m measurement distance	
	( $\mu$ V/m)	(dB $\mu$ V/m)
13.553-13.567	15,848	84.00
13.410-13.553	334	50.47
13.567-13.710		
13.110-13.410	106	40.51
13.710-14.010		

#### 3.3.3.3 Test Procedure

The radiated emission was tested according to the section 6.4 of the ANSI C63.10-2013.

The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna.

Measurements were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel)

Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table

VBW  $\geq$  3 x RBW

Sweep = Auto

Detector = Peak

Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
>1 000 MHz	1 MHz

### 3.3.3.4 Test Result

- Test Frequency: **13.56 MHz**
- Measurement Distance: **3 m**

Test Frequency Band (MHz)	Freq. (MHz)	Ant	Reading Value (dB $\mu$ /m)	T.F (dB/m)	Field Strength @3m (dB $\mu$ /m)	Field Strength @30m (dB $\mu$ /m)	Limit (dB $\mu$ /m)	Margin (dB)
13.110-13.410	13.347	P	23.61	20.30	43.91	3.91	40.51	36.60
13.410-13.553	13.553	P	39.58	20.30	59.88	19.88	50.47	30.59
13.553-13.567	13.559	P	44.49	20.30	64.79	24.79	84.00	59.21
13.567-13.710	13.567	P	37.21	20.30	57.51	17.51	50.47	32.96
13.710-14.010	13.774	P	24.26	20.30	44.56	4.56	40.51	35.95

Note 1: Loop antenna orientation

"P": Parallel, "V": Perpendicular, "G": Ground-parallel

Note 2: This test item was performed at 3 m and the data were extrapolated to the specified measurement distance of 30 m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

▪ Extrapolation Factor =  $20 \log_{10}(30/3)^2 = 40$  dB

Note 3: All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4: Sample Calculation.

Margin = Limit – Field Strength @ 30 m / Field Strength @ 30 m = Field Strength @ 3 m – 40 dB

Field Strength @ 3 m = Reading + T.F / T.F = AF + CL

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss



### 3.3.4 Out-of-Band Emissions

#### 3.3.4.1 Test Setup

Refer to the APPENDIX I.

#### 3.3.4.2 Limit

##### Part 15.209, 225(d)

FCC Part 15.209(a):

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1705	24000/F (kHz)	30
1705 ~ 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 - 72 MHz, 76 - 88 MHz, 174 - 216 MHz or 470 - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

FCC Part 15.209(b): In the emission table above, the tighter limit applies at the band edges.

---

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

Page 12 of 22



### 3.3.4.3 Test Procedure

The radiated emission was tested according to the section 6.4 of the ANSI C63.10-2013.

The EUT was tested from 9 kHz up to the 1 GHz excluding the band 13.110-14.010 MHz.

The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna.

For measurements below 30MHz were performed for each of the three antenna orientations.(ie. parallel, perpendicular, and ground-parallel)

For measurements above 30MHz were performed for each of the both horizontal and vertical polarizations. Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table

VBW  $\geq$  3 x RBW

Sweep = Auto

Detector = Peak

Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
>1 000 MHz	1 MHz

### 3.3.4.4 Test Result

- Test Frequency: **13.56 MHz**
- Measurement Distance: **3 m**

Frequency (MHz)	Ant	Reading Value (dB $\mu$ V)	T.F (dB/m)	Distance Factor (dB $\mu$ V/m)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
128.46	H	23.89	13.00	0.00	36.89	43.50	6.61
230.50	H	25.49	13.00	0.00	38.49	46.00	7.51
257.64	H	22.27	14.20	0.00	36.47	46.00	9.53
284.76	H	21.08	15.10	0.00	36.18	46.00	9.82
311.88	H	23.34	15.90	0.00	39.24	46.00	6.76
338.99	H	22.03	16.60	0.00	38.63	46.00	7.37
366.11	H	18.90	17.30	0.00	36.20	46.00	9.80

Note 1: The radiated emissions were investigated 9 kHz to 1 GHz. And no other spurious and harmonic emissions were found above listed frequencies.

Note 2: Loop antenna orientation (below 30 MHz)

"P": Parallel, "V": Perpendicular, "G": Ground-parallel

Bilog antenna polarization (above 30 MHz)

"H": Horizontal, "V": Vertical

Note 3: All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4: Sample Calculation.

Margin = Limit – Field Strength

Field Strength = Reading + T.F – Distance factor

Distance factor =  $20\log(\text{Measurement distance} / \text{The measured distance})^2 = 20\log(30/3)^2 = 40$  dB

T.F = AF + CL -AG

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

### 3.3.5 Frequency Stability

#### 3.3.5.1 Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

#### 3.3.5.2 Test Procedure

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01 % of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

#### 3.3.5.3 Test Result

Voltage		Temp	Frequency	Deviation	
(%)	(Vdc)	(°C)	(Hz)	(Hz)	(%)
100	5.00	-20	13559552	448	0.003 3
100		-10	13559546	454	0.003 4
100		0	13559536	465	0.003 4
100		+10	13559520	480	0.003 5
100		+20(Ref)	13559522	478	0.003 5
100		+30	13559511	489	0.003 6
100		+40	13559509	491	0.003 6
100		+50	13559505	495	0.003 7
115		+20	13559521	479	0.003 5
85	4.25	+20	13559521	479	0.003 5

### 3.3.6 Conducted Emission

#### 3.3.6.1 Test Setup

See test photographs for the actual connections between EUT and support equipment.

#### 3.3.6.2 Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150  $\text{kHz}$  to 30  $\text{MHz}$ , shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

#### 3.3.6.3 Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10.

1. The test procedure is performed in a  $6.5 \text{ m} \times 3.5 \text{ m} \times 3.5 \text{ m}$  ( $L \times W \times H$ ) shielded room. The EUT along with its peripherals were placed on a  $1.0 \text{ m}$  ( $W$ )  $\times$   $1.5 \text{ m}$  ( $L$ ) and  $0.8 \text{ m}$  in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.


### 3.3.6.4 Test Result

- AC Line Conducted Emission (Graph)

## Test Report

### Common Information

Test Model: F803-0049  
 Test Standard: FCC Part 15 Subpart B  
 Test Mode: RFID  
 Test Conditions: AC 120 V, 60 Hz / 20.3 °C, 43.3 % R. H.  
 Operator Name: JongMyoung, Shin  
 Comment: LINE  
 Order Number: -

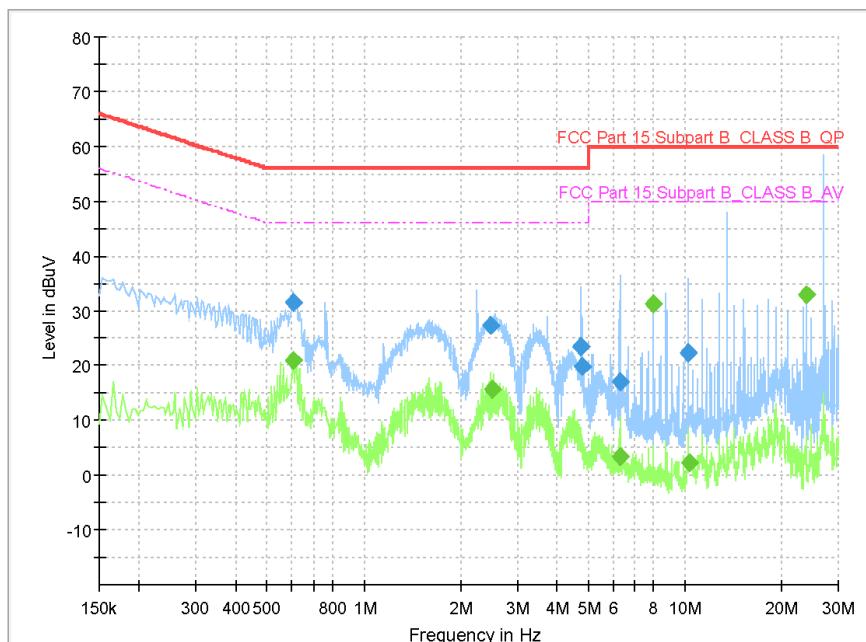

### Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.604000	31.66	—	56.00	24.34	1000.0	9.000	L1	10.5
0.604000	---	20.92	46.00	25.08	1000.0	9.000	L1	10.5
2.484000	27.22	—	56.00	28.78	1000.0	9.000	L1	10.6
2.520000	---	15.71	46.00	30.29	1000.0	9.000	L1	10.6
4.760000	23.50	—	56.00	32.50	1000.0	9.000	L1	10.7
4.780000	19.78	—	56.00	36.22	1000.0	9.000	L1	10.7
6.284000	---	3.35	50.00	46.65	1000.0	9.000	L1	10.7
6.288000	17.05	—	60.00	42.95	1000.0	9.000	L1	10.7
8.000000	---	31.21	50.00	18.79	1000.0	9.000	L1	10.8
10.268000	22.24	—	60.00	37.76	1000.0	9.000	L1	10.9
10.348000	---	2.25	50.00	47.75	1000.0	9.000	L1	10.9
24.000000	---	32.79	50.00	17.21	1000.0	9.000	L1	11.2


Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
 www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

# Test Report

## Common Information

Test Model: F803-0049  
 Test Standard: FCC Part 15 Subpart B  
 Test Mode: RFID  
 Test Conditions: AC 120 V, 60 Hz / 20.3 °C, 43.3 % R. H.  
 Operator Name: JongMyoung, Shin  
 Comment: NEUTRAL  
 Order Number: -

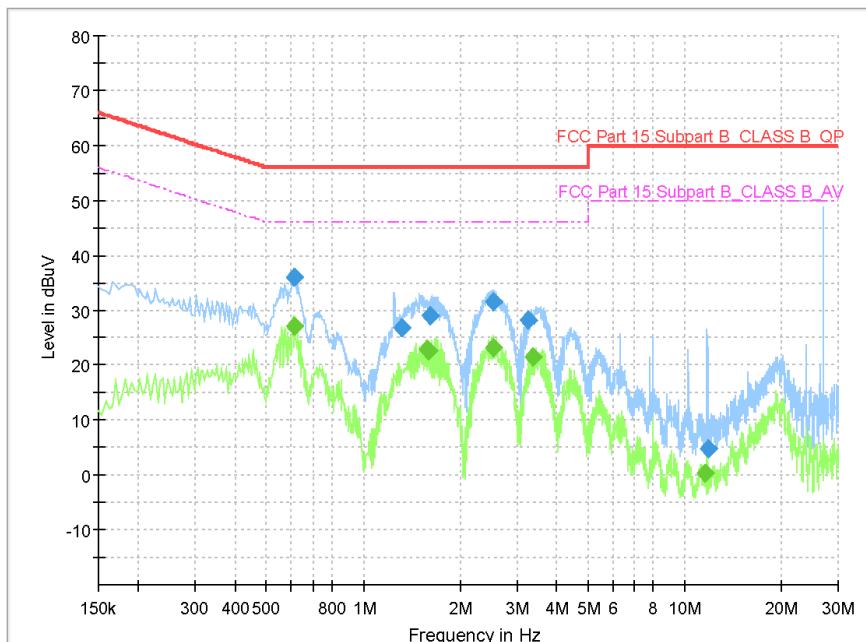

## Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.608000	36.11	—	56.00	19.89	1000.0	9.000	N	10.5
0.612000	—	27.14	46.00	18.86	1000.0	9.000	N	10.5
1.320000	26.79	—	56.00	29.21	1000.0	9.000	N	10.6
1.576000	—	23.03	46.00	22.97	1000.0	9.000	N	10.6
1.592000	—	22.49	46.00	23.51	1000.0	9.000	N	10.6
1.608000	29.06	—	56.00	26.94	1000.0	9.000	N	10.6
2.532000	31.67	—	56.00	24.33	1000.0	9.000	N	10.6
2.552000	—	23.24	46.00	22.76	1000.0	9.000	N	10.6
3.272000	28.27	—	56.00	27.73	1000.0	9.000	N	10.6
3.380000	—	21.59	46.00	24.41	1000.0	9.000	N	10.6
11.544000	—	0.39	50.00	49.61	1000.0	9.000	N	10.9
11.844000	4.82	—	60.00	55.18	1000.0	9.000	N	10.9

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
[www.nct.re.kr](http://www.nct.re.kr) TEL: +82-31-323-6070 FAX: +82-31-323-6071



## APPENDIX I

### TEST SETUP


---

Test Report No.: NW2101-F003-1


---

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071

- Radiated Measurement

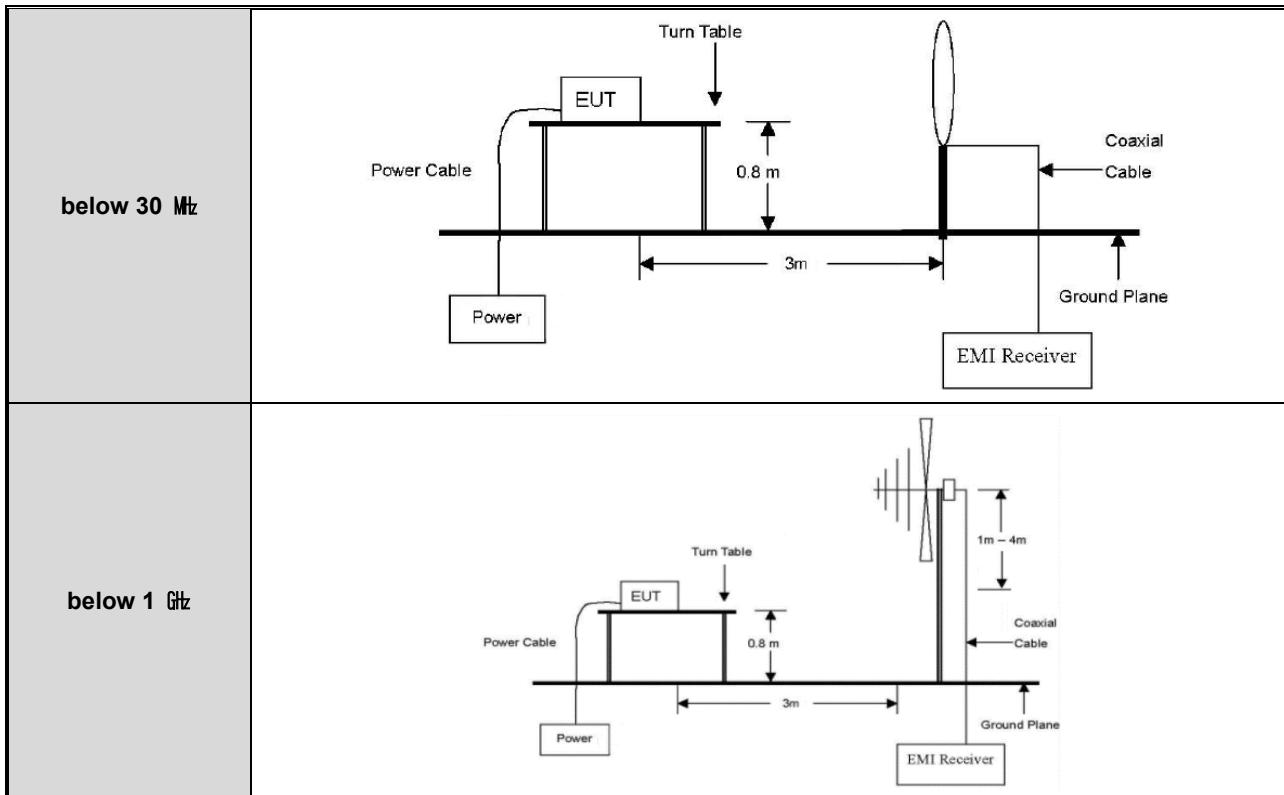

- Temp & Humid Chamber Measurement

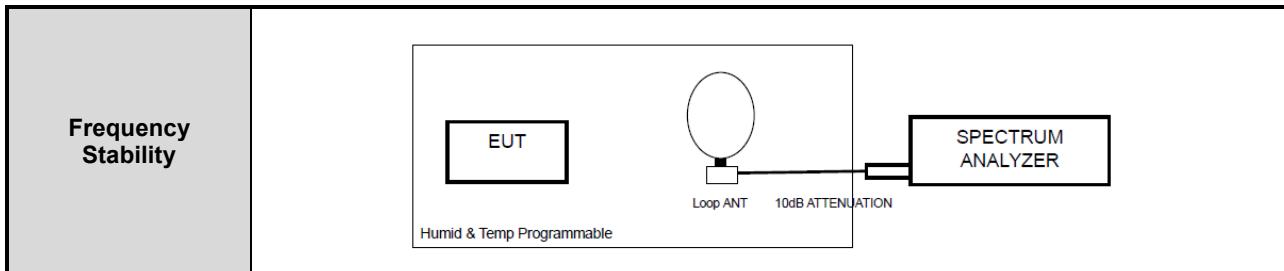



## APPENDIX II

### TEST EQUIPMENT USED FOR TESTS

---

Test Report No.: NW2101-F003-1

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071



	Description	Manufacturer	Serial No.	Model No.	Cal. Date	Next Cal. Date
1	SPECTRUM ANALYZER	R&S	100617	FSP40	2020-03-10	2021-03-10
2	Triple Output DC Power Supply	Agilent	MY40038816	E3631A	2020-03-10	2021-03-10
3	Frequency Counter	Agilent	MY40002341	53181A	2020-03-11	2021-03-11
4	Humi./Baro/Temp. data recorder	Lutron	38420	MHB-382SD	2020-11-13	2021-11-13
5	Temperature & humidity cabinet	TERCHY	1060906	MHCB-64AZDA	2020-12-04	2021-12-04
6	Vector SG	R&S	255563	SMBV100A	2020-03-10	2021-03-10
7	LOOP-ANTENNA	Schwarzbeck	00124	FMZB1519 B	2019-06-27	2021-06-27
8	TRILOG Broadband Antenna	Schwarzbeck	01027	VULB 9168	2019-06-17	2021-06-17
9	EMI Test Receiver	R&S	102138	ESR	2020-05-28	2021-05-28
10	LISN	Schwarzbeck	00984	NSLK 8127	2020-05-28	2021-05-28
11	EMI Test Receiver	R&S	102116	ESRP3	2020-05-28	2021-05-28

---

Test Report No.: NW2101-F003-1

---

211-71, Geumgok-ro, Hwaseong-si, Gyeonggi-do, Korea 18511  
www.nct.re.kr TEL: +82-31-323-6070 FAX: +82-31-323-6071