



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V04

Report Template Revision Date: 2018-07-06

# Test Report

**Report No. :** CQASZ20210500031EX-01

**Applicant:** SHENZHEN POWEROAK NEWENER CO., LTD

**Address of Applicant:** Room 701-3, Building B, CADRE Building, Tongsha Road, Nanshan District, Shenzhen City, Guangdong Province, P.R.China

**Manufacturer:** SHENZHEN POWEROAK NEWENER CO., LTD

**Address of Manufacturer:** Room 701-3, Building B, CADRE Building, Tongsha Road, Nanshan District, Shenzhen City, Guangdong Province, P.R.China

**Equipment Under Test (EUT):**

**Product:** Portable Power Station

**All Model No.:** EP500

**Test Model No.:** EP500

**Brand Name:** /

**FCC ID:** 2AYT3-EP500

**Standards:** 47 CFR FCC Part 15 Subpart C 15.247

**Date of Test:** May 25, 2021 – Jun. 10, 2021

**Date of Issue:** Jun. 10, 2021

**Test Result :** PASS

**Tested By:**

*Lewis Zhou*

( Lewis Zhou )

**Reviewed By:**

*Timo Lei*

( Timo Lei )

**Approved By:**

*Sheek Luo*

( Sheek Luo )



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 1 Version

### Revision History Of Report

| Report No.            | Version | Description    | Issue Date    |
|-----------------------|---------|----------------|---------------|
| CQASZ20210500031EX-01 | Rev.01  | Initial report | Jun. 10, 2021 |

## 2 Test Summary

| Test Item                                                         | Test Requirement                                    | Test method      | Result |
|-------------------------------------------------------------------|-----------------------------------------------------|------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2013 | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207            | ANSI C63.10 2013 | PASS   |
| Conducted Peak & Average Output Power                             | 47 CFR Part 15, Subpart C Section 15.247 (b)(3)     | ANSI C63.10 2013 | PASS   |
| 6dB Occupied Bandwidth                                            | 47 CFR Part 15, Subpart C Section 15.247 (a)(2)     | ANSI C63.10 2013 | PASS   |
| Power Spectral Density                                            | 47 CFR Part 15, Subpart C Section 15.247 (e)        | ANSI C63.10 2013 | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15, Subpart C Section 15.247(d)         | ANSI C63.10 2013 | PASS   |
| Radiated Spurious Emissions                                       | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209     | ANSI C63.10 2013 | PASS   |

### 3 Contents

|                                                        | Page |
|--------------------------------------------------------|------|
| 1 VERSION.....                                         | 2    |
| 2 TEST SUMMARY.....                                    | 3    |
| 3 CONTENTS.....                                        | 4    |
| 4 GENERAL INFORMATION.....                             | 5    |
| 4.1 CLIENT INFORMATION.....                            | 5    |
| 4.2 GENERAL DESCRIPTION OF EUT.....                    | 5    |
| 4.3 TEST ENVIRONMENT.....                              | 6    |
| 4.4 DESCRIPTION OF SUPPORT UNITS.....                  | 7    |
| 4.5 TEST LOCATION.....                                 | 7    |
| 4.6 TEST FACILITY.....                                 | 7    |
| 4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....      | 8    |
| 4.8 DEVIATION FROM STANDARDS.....                      | 8    |
| 4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....        | 8    |
| 4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....  | 8    |
| 4.11 EQUIPMENT LIST.....                               | 9    |
| 5 TEST RESULTS AND MEASUREMENT DATA.....               | 10   |
| 5.1 ANTENNA REQUIREMENT.....                           | 10   |
| 5.2 CONDUCTED EMISSIONS.....                           | 11   |
| 5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER.....         | 14   |
| 5.4 6dB OCCUPY BANDWIDTH.....                          | 15   |
| 5.5 POWER SPECTRAL DENSITY.....                        | 20   |
| 5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....          | 26   |
| 5.7 RF CONDUCTED SPURIOUS EMISSIONS.....               | 30   |
| 5.8 RADIATED SPURIOUS EMISSIONS.....                   | 44   |
| 5.8.1 Radiated emission below 1GHz.....                | 47   |
| 5.8.2 Transmitter emission above 1GHz.....             | 49   |
| 5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY..... | 54   |
| 6 PHOTOGRAPHS - EUT TEST SETUP.....                    | 60   |
| PLEASE REFER TO TEST SETUP FILE.....                   | 60   |
| 7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....        | 61   |

## 4 General Information

### 4.1 Client Information

|                          |                                                                                                                      |
|--------------------------|----------------------------------------------------------------------------------------------------------------------|
| Applicant:               | SHENZHEN POWEROAK NEWENER CO., LTD                                                                                   |
| Address of Applicant:    | Room 701-3, Building B, CADRE Building, Tongsha Road, Nanshan District, Shenzhen City, Guangdong Province, P.R.China |
| Manufacturer:            | SHENZHEN POWEROAK NEWENER CO., LTD                                                                                   |
| Address of Manufacturer: | Room 701-3, Building B, CADRE Building, Tongsha Road, Nanshan District, Shenzhen City, Guangdong Province, P.R.China |

### 4.2 General Description of EUT

|                      |                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:        | Portable Power Station                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Model No.:      | EP500                                                                                                                                                                                                                                                                                                                                                                                                        |
| Trade Mark:          | /                                                                                                                                                                                                                                                                                                                                                                                                            |
| Hardware Version:    | V1.0                                                                                                                                                                                                                                                                                                                                                                                                         |
| Software Version:    | /                                                                                                                                                                                                                                                                                                                                                                                                            |
| Operation Frequency: | IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz<br>IEEE 802.11n(H40): 2422MHz~2452MHz                                                                                                                                                                                                                                                                                                                             |
| Channel Numbers:     | IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels<br>IEEE 802.11n HT40: 7                                                                                                                                                                                                                                                                                                                                       |
| Channel Separation:  | 5MHz                                                                                                                                                                                                                                                                                                                                                                                                         |
| Type of Modulation:  | IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE for 802.11g : OFDM<br>IEEE for 802.11n(HT20): OFDM<br>IEEE for 802.11n(HT40): OFDM                                                                                                                                                                                                                                                                           |
| Product Type:        | <input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location                                                                                                                                                                                                                                                                                           |
| Antenna Type         | PCB antenna                                                                                                                                                                                                                                                                                                                                                                                                  |
| Antenna Gain         | 0dBi                                                                                                                                                                                                                                                                                                                                                                                                         |
| Power Supply:        | DC 51.2V from battery 5120Wh 100Ah<br>Input : 100-120VAC 50/60Hz 15A max DC55-145VDC 20AMAX<br>Output: AC*4: 100-120VAC 50/60Hz, 2000W Total<br>Aviation Sockets*1: 12VDC, 30A<br>USB-A*1: 5VDC, 2A,<br>USB-A*1: 5VDC ,1A,<br>USB-A*2: 5VDC, 2A, 9VDC,2A ,12VDC 1.5A<br>USB-C*1: 5V-15VDC 3A 20VDC 5A<br>Cigarette lighter*1: 12VDC, 10A<br>DC 5521*2: 12VDC, 10A<br>Wireless Charging*2: 5/7.5/10/15W Total |

Note: 1. This report is only for 2.4GHz WIFI

2. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

| Operation Frequency each of channel(802.11b/g/n HT20) |           |         |           |         |           |         |           |
|-------------------------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                                               | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                                     | 2412MHz   | 4       | 2427MHz   | 7       | 2442MHz   | 10      | 2457MHz   |
| 2                                                     | 2417MHz   | 5       | 2432MHz   | 8       | 2447MHz   | 11      | 2462MHz   |
| 3                                                     | 2422MHz   | 6       | 2437MHz   | 9       | 2452MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2412MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2462MHz   |

For 802.11n

(HT40):

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2422MHz   |
| The Middle channel  | 2437MHz   |
| The Highest channel | 2452MHz   |

Note: Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

### 4.3 Test Environment

| Operating Environment:                        |                                                                                                                             |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Conduction emission                           |                                                                                                                             |
| Temperature:                                  | 23 °C                                                                                                                       |
| Humidity:                                     | 51 % RH                                                                                                                     |
| Atmospheric Pressure:                         | 992mbar                                                                                                                     |
| Radiated Emission (Normal Conditions)         |                                                                                                                             |
| Temperature:                                  | 25.1 °C~25.5 °C                                                                                                             |
| Humidity:                                     | 51 % RH~55 % RH                                                                                                             |
| Atmospheric Pressure:                         | 992mbar                                                                                                                     |
| RF item test (RF test room Normal Conditions) |                                                                                                                             |
| Temperature:                                  | 26 °C~27.3 °C                                                                                                               |
| Humidity:                                     | 58 % RH~59 % RH                                                                                                             |
| Atmospheric Pressure:                         | 992mbar                                                                                                                     |
| Transmitting mode:                            | Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. |

Note: In the process of transmitting of EUT, the duty cycle > 98%.

## 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No. | Remark | certification |
|-------------|--------------|-----------|--------|---------------|
| /           | /            | /         | /      | /             |
| /           | /            | /         | /      | /             |

## 4.5 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        | Notes |
|-----|------------------------------------|--------------------|-------|
| 1   | Radiated Emission (Below 1GHz)     | 5.12dB             | (1)   |
| 2   | Radiated Emission (Above 1GHz)     | 4.60dB             | (1)   |
| 3   | Conducted Disturbance (0.15~30MHz) | 3.34dB             | (1)   |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ | (1)   |
| 5   | Duty cycle                         | 0.6 %.             | (1)   |
| 6   | Occupied Bandwidth                 | 1.1%               | (1)   |
| 7   | RF conducted power                 | 0.86dB             | (1)   |
| 8   | RF power density                   | 0.74               | (1)   |
| 9   | Conducted Spurious emissions       | 0.86dB             | (1)   |
| 10  | Temperature test                   | 0.8℃               | (1)   |
| 11  | Humidity test                      | 2.0%               | (1)   |
| 12  | Supply voltages                    | 0.5 %.             | (1)   |
| 13  | Frequency Error                    | 5.5 Hz             | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 4.8 Deviation from Standards

None.

## 4.9 Abnormalities from Standard Conditions

None.

## 4.10 Other Information Requested by the Customer

None.



## 4.11 Equipment List

| Test Equipment                            | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|-------------------------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver                         | R&S          | ESR7                   | CQA-005        | 2020/9/22        | 2021/9/21            |
| Spectrum analyzer                         | R&S          | FSU26                  | CQA-038        | 2020/10/24       | 2021/10/23           |
| Spectrum analyzer                         | keysight     | N9020A                 | CQA-105        | 2020/10/24       | 2021/10/23           |
| Preamplifier                              | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2020/9/22        | 2021/9/21            |
| Preamplifier                              | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2018/11/2        | 2019/11/1            |
| Loop antenna                              | Schwarzbeck  | FMZB1516               | CQA-087        | 2018/10/28       | 2020/10/27           |
| Bilog Antenna                             | R&S          | HL562                  | CQA-011        | 2020/9/22        | 2021/9/21            |
| Horn Antenna                              | R&S          | HF906                  | CQA-012        | 2020/9/22        | 2021/9/21            |
| Horn Antenna                              | Schwarzbeck  | BBHA 9170              | CQA-088        | 2020/9/22        | 2021/9/21            |
| Coaxial Cable (Above 1GHz)                | CQA          | N/A                    | C019           | 2020/9/22        | 2021/9/21            |
| Coaxial Cable (Below 1GHz)                | CQA          | N/A                    | C020           | 2020/9/22        | 2021/9/21            |
| Antenna Connector                         | CQA          | RFC-01                 | CQA-080        | 2020/9/22        | 2021/9/21            |
| RF cable(9KHz~40GHz)                      | CQA          | RF-01                  | CQA-079        | 2020/9/22        | 2021/9/21            |
| Power Sensor                              | KEYSIGHT     | U2021XA                | CQA-30         | 2020/9/22        | 2021/9/21            |
| N1918A Power Analysis Manager Power Panel | Agilent      | N1918A                 | CQA-074        | 2020/9/22        | 2021/9/21            |
| Power divider                             | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2020/9/22        | 2021/9/21            |
| EMI Test Receiver                         | R&S          | ESPI3                  | CQA-013        | 2020/9/22        | 2021/9/21            |
| LISN                                      | R&S          | ENV216                 | CQA-003        | 2021/11/1        | 2021/10/30           |
| Coaxial cable                             | CQA          | N/A                    | CQA-C009       | 2020/9/22        | 2021/9/21            |

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 47 CFR Part 15C Section 15.203 /247(c)                                                                  |
| <p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:</p> <p>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                                         |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>PCB Antenna</p>  |
| The antenna is PCB antenna. The best case gain of the antenna is 0dBi.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                         |

## 5.2 Conducted Emissions

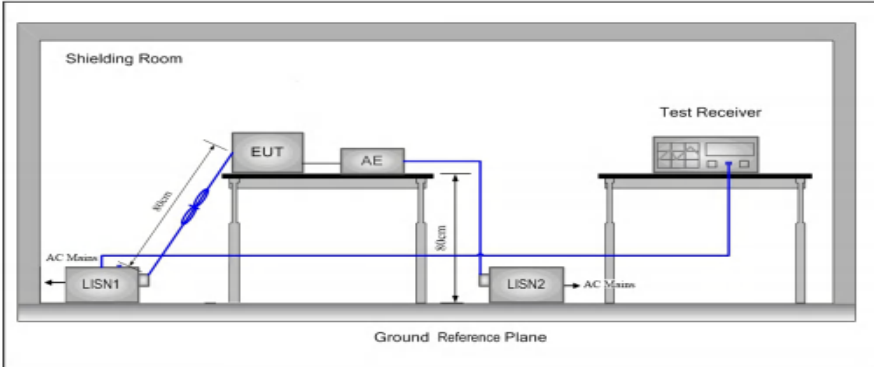
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
|--------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|
| Test Requirement:                                | 47 CFR Part 15C Section 15.207                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |              |           |
| Test Method:                                     | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |              |           |
| Test Frequency Range:                            | 150kHz to 30MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Limit:                                           | Frequency range (MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Limit (dBuV) |           |
|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Quasi-peak   | Average   |
|                                                  | 0.15-0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 66 to 56*    | 56 to 46* |
|                                                  | 0.5-5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 56           | 46        |
|                                                  | 5-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 60           | 50        |
| * Decreases with the logarithm of the frequency. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |              |           |
| Test Procedure:                                  | <p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</p> |              |           |
| Test Setup:                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |              |           |
| Exploratory Test Mode:                           | Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |              |           |

|                  |                                                                                                                          |
|------------------|--------------------------------------------------------------------------------------------------------------------------|
| Final Test Mode: | All wifi modes were tested at Low, Middle, and High channel; only the worst result of 802.11g- CH6 was reported as below |
| Test Voltage:    | AC120V/60Hz                                                                                                              |
| Test Results:    | Pass                                                                                                                     |

### Measurement Data

Live Line:

80.0 dBuV

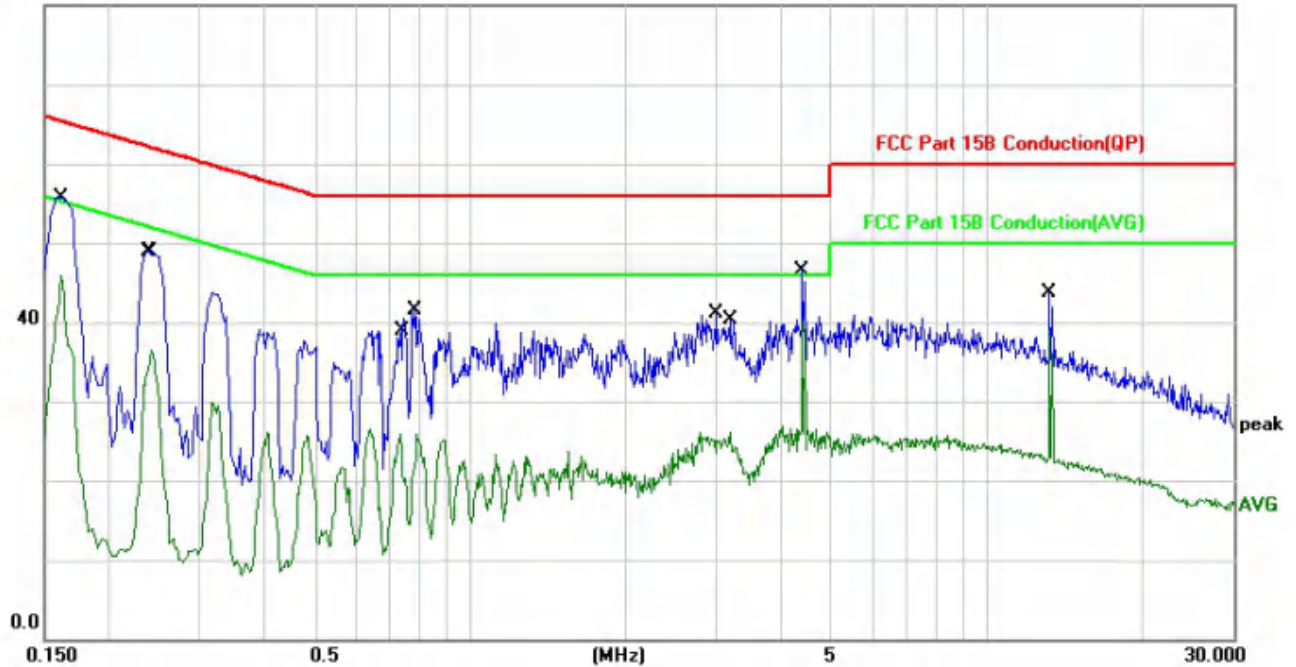


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1620       | 55.89                    | -0.13                   | 55.76                    | 65.36         | -9.60      | QP       |         |
| 2   |     | 0.1620       | 46.09                    | -0.13                   | 45.96                    | 55.36         | -9.40      | AVG      |         |
| 3   |     | 0.2380       | 49.07                    | -0.11                   | 48.96                    | 62.16         | -13.20     | QP       |         |
| 4   |     | 0.2420       | 36.67                    | -0.11                   | 36.56                    | 52.02         | -15.46     | AVG      |         |
| 5   |     | 0.7340       | 25.99                    | -0.06                   | 25.93                    | 46.00         | -20.07     | AVG      |         |
| 6   |     | 0.7820       | 41.50                    | -0.07                   | 41.43                    | 56.00         | -14.57     | QP       |         |
| 7   |     | 3.0059       | 41.31                    | -0.18                   | 41.13                    | 56.00         | -14.87     | QP       |         |
| 8   |     | 3.1740       | 26.26                    | -0.18                   | 26.08                    | 46.00         | -19.92     | AVG      |         |
| 9   |     | 4.3940       | 46.62                    | -0.21                   | 46.41                    | 56.00         | -9.59      | QP       |         |
| 10  | *   | 4.3940       | 40.29                    | -0.21                   | 40.08                    | 46.00         | -5.92      | AVG      |         |
| 11  |     | 13.2140      | 43.94                    | -0.15                   | 43.79                    | 60.00         | -16.21     | QP       |         |
| 12  |     | 13.2140      | 39.05                    | -0.15                   | 38.90                    | 50.00         | -11.10     | AVG      |         |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

80.0 dBuV

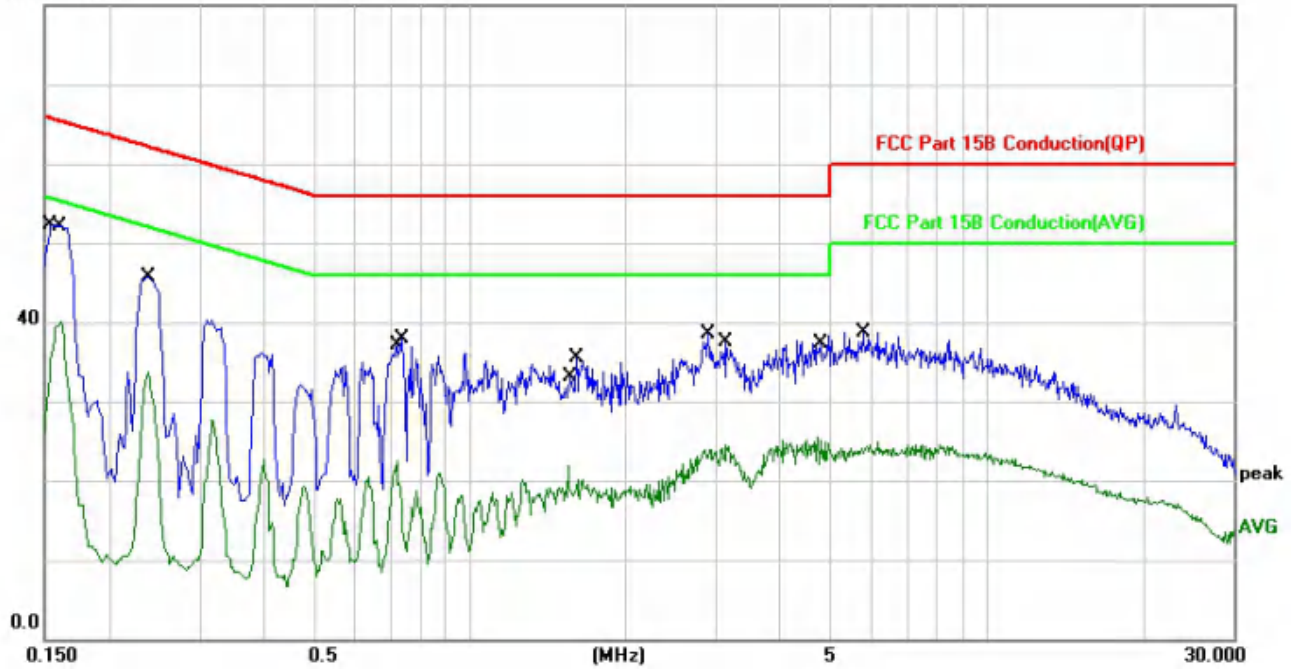

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1539       | 52.50                    | -0.13                   | 52.37                    | 65.78         | -13.41     | QP       |         |
| 2   |     | 0.1620       | 40.32                    | -0.13                   | 40.19                    | 55.36         | -15.17     | AVG      |         |
| 3   |     | 0.2380       | 45.74                    | -0.11                   | 45.63                    | 62.16         | -16.53     | QP       |         |
| 4   |     | 0.2380       | 33.77                    | -0.11                   | 33.66                    | 52.16         | -18.50     | AVG      |         |
| 5   |     | 0.7220       | 22.52                    | -0.06                   | 22.46                    | 46.00         | -23.54     | AVG      |         |
| 6   |     | 0.7380       | 37.87                    | -0.06                   | 37.81                    | 56.00         | -18.19     | QP       |         |
| 7   |     | 1.5500       | 22.09                    | -0.19                   | 21.90                    | 46.00         | -24.10     | AVG      |         |
| 8   |     | 1.6060       | 35.76                    | -0.20                   | 35.56                    | 56.00         | -20.44     | QP       |         |
| 9   |     | 2.8900       | 38.70                    | -0.18                   | 38.52                    | 56.00         | -17.48     | QP       |         |
| 10  |     | 3.1380       | 24.77                    | -0.18                   | 24.59                    | 46.00         | -21.41     | AVG      |         |
| 11  |     | 4.7020       | 25.62                    | -0.21                   | 25.41                    | 46.00         | -20.59     | AVG      |         |
| 12  |     | 5.7700       | 38.99                    | -0.24                   | 38.75                    | 60.00         | -21.25     | QP       |         |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 5.3 Conducted Peak & Average Output Power


|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(3)                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |                                                                                                                                                                                          |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report. |
| Limit:                 | 30dBm                                                                                                                                                                                                                                                                      |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |

#### WIFI

| Type          | Test channel | Peak Output Power (dBm) | AVG Output Power (dBm) | Limit (dBm) | Result |
|---------------|--------------|-------------------------|------------------------|-------------|--------|
| 802.11b       | Lowest       | 6.64                    | 3.47                   | 30.00       | Pass   |
|               | Middle       | 7.59                    | 4.19                   |             |        |
|               | Highest      | 7.98                    | 4.45                   |             |        |
| 802.11g       | Lowest       | 7.65                    | 3.59                   | 30.00       | Pass   |
|               | Middle       | 8.46                    | 4.59                   |             |        |
|               | Highest      | 6.34                    | 3.48                   |             |        |
| 802.11n(HT20) | Lowest       | 6.98                    | 4.12                   | 30.00       | Pass   |
|               | Middle       | 7.67                    | 4.53                   |             |        |
|               | Highest      | 5.42                    | 3.54                   |             |        |
| 802.11n(HT40) | Lowest       | 5.96                    | 3.47                   | 30.00       | Pass   |
|               | Middle       | 6.35                    | 3.24                   |             |        |
|               | Highest      | 6.59                    | 3.52                   |             |        |




## 5.4 6dB Occupy Bandwidth
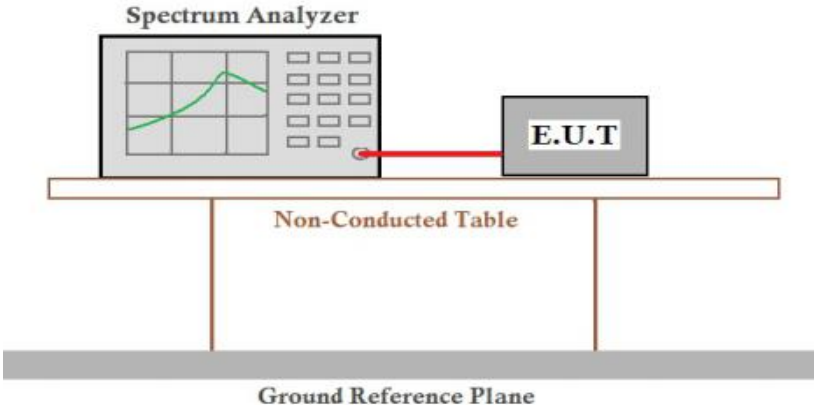
|                        |                                                                                                                                                                                                                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(2)                                                                                                                                                                                                                                                     |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                         |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                           |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                     |
| Final Test Mode:       | <p>Through Pre-scan, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40);</p> <p>Only the worst case is recorded in the report.</p> |
| Limit:                 | ≥ 500 kHz                                                                                                                                                                                                                                                                                 |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                      |




### Measurement Data




| Type          | Channel | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|---------------|---------|---------------------|-------------|--------|
| 802.11b       | Lowest  | 9.630               | ≥500        | Pass   |
|               | Middle  | 9.614               |             |        |
|               | Highest | 9.628               |             |        |
| 802.11g       | Lowest  | 16.606              | ≥500        | Pass   |
|               | Middle  | 16.520              |             |        |
|               | Highest | 16.543              |             |        |
| 802.11n(HT20) | Lowes   | 17.841              | ≥500        | Pass   |
|               | Middle  | 17.759              |             |        |
|               | Highest | 17.794              |             |        |
| 802.11n(HT40) | Lowest  | 36.552              | ≥500        | Pass   |
|               | Middle  | 36.049              |             |        |
|               | Highest | 35.786              |             |        |



Test plot as follows:

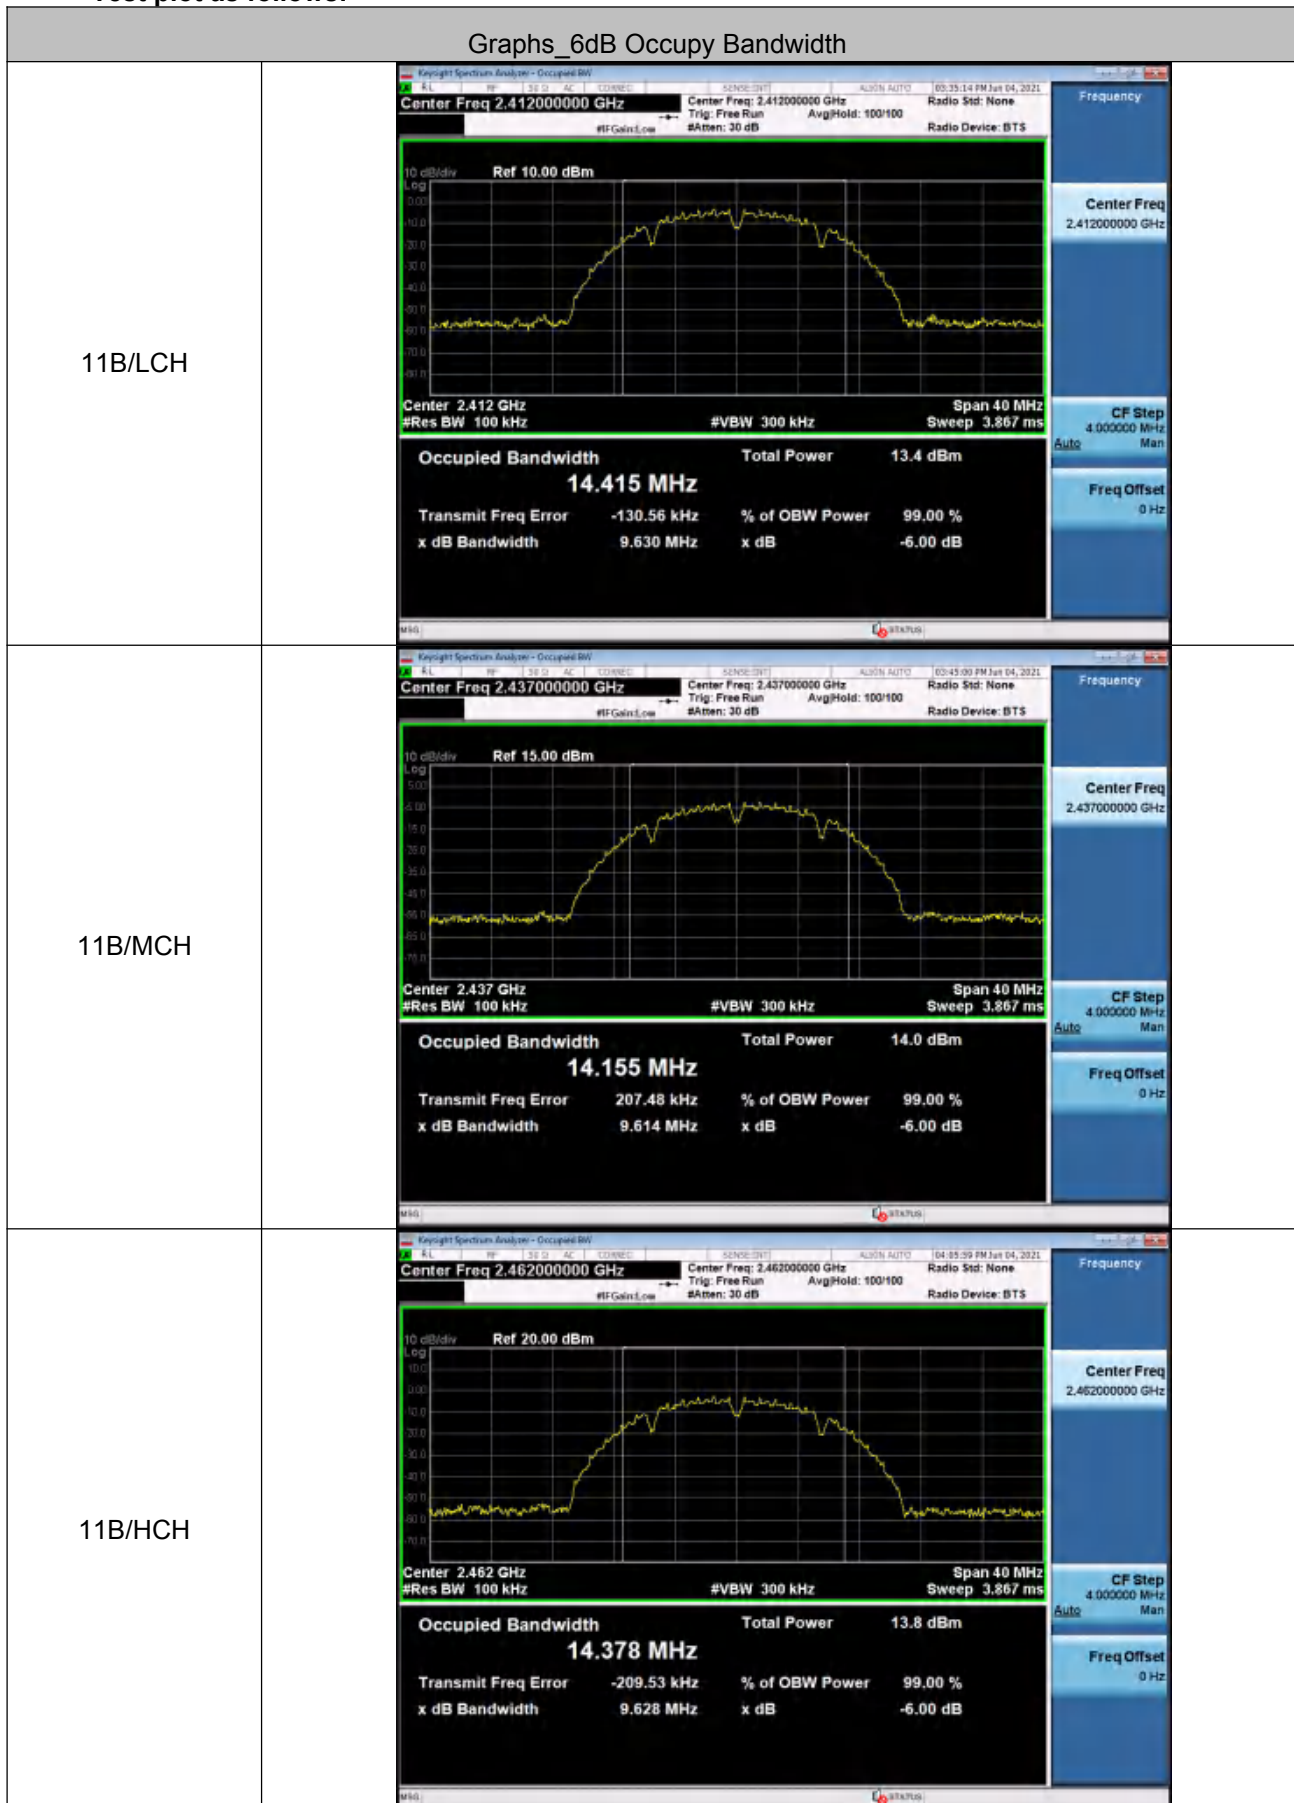

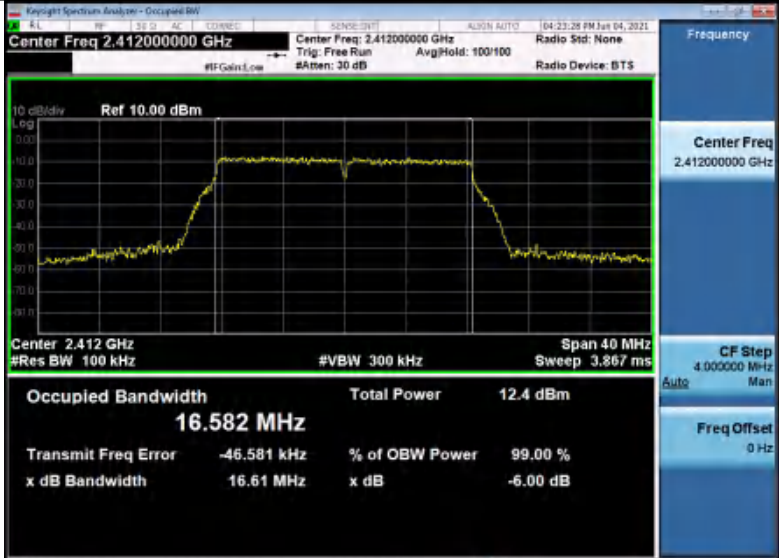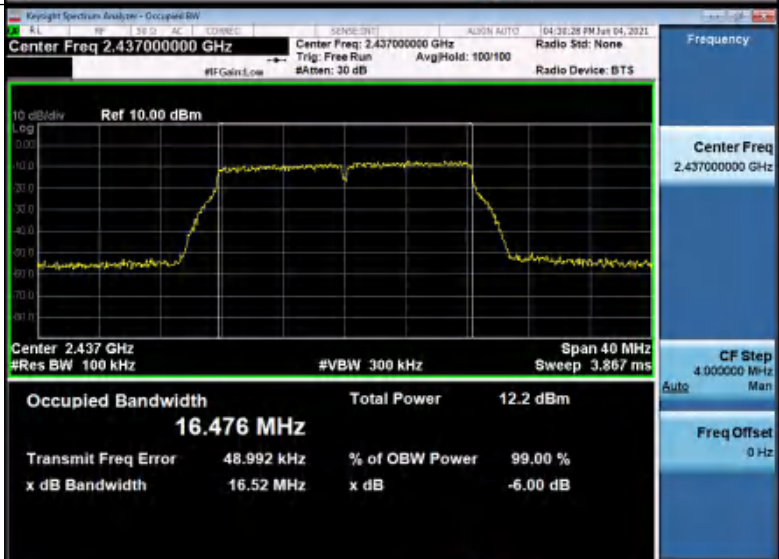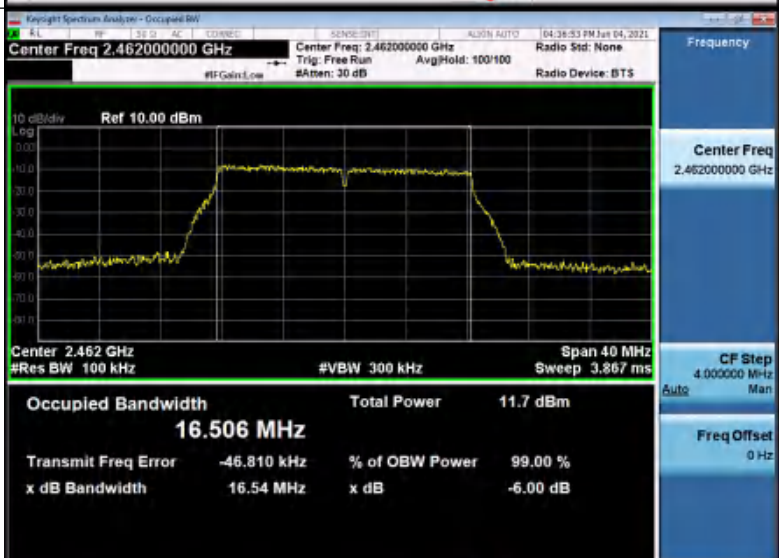


|         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11G/LCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.582 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -46.581 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.61 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.412000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11G/MCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.476 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error 48.992 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.52 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.437000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11G/HCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 16.506 MHz</p> <p>Total Power 11.7 dBm</p> <p>Transmit Freq Error -46.810 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 16.54 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.462000000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |
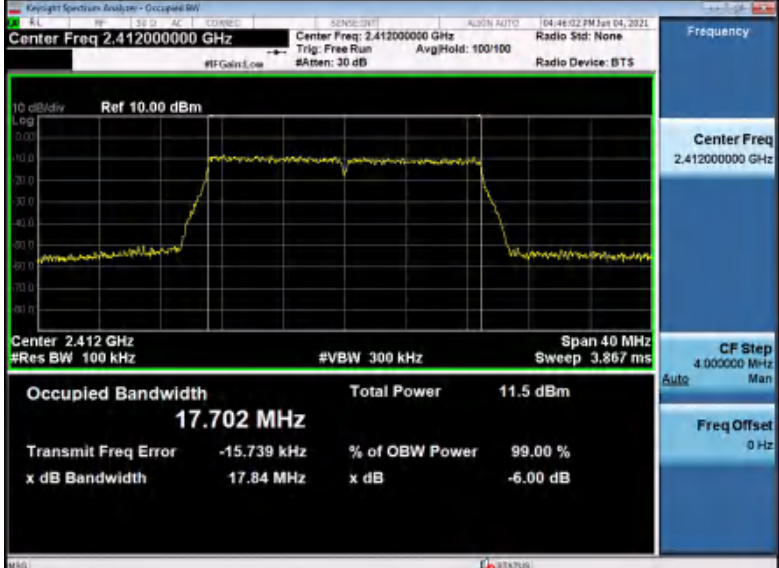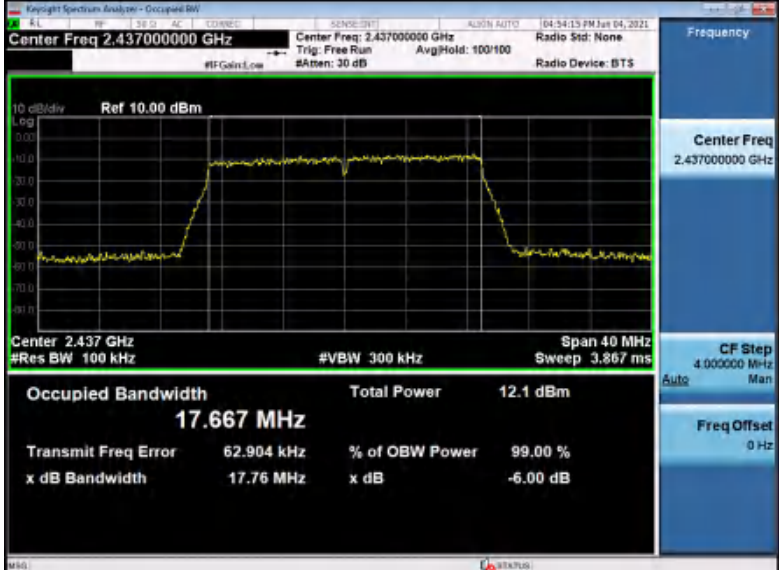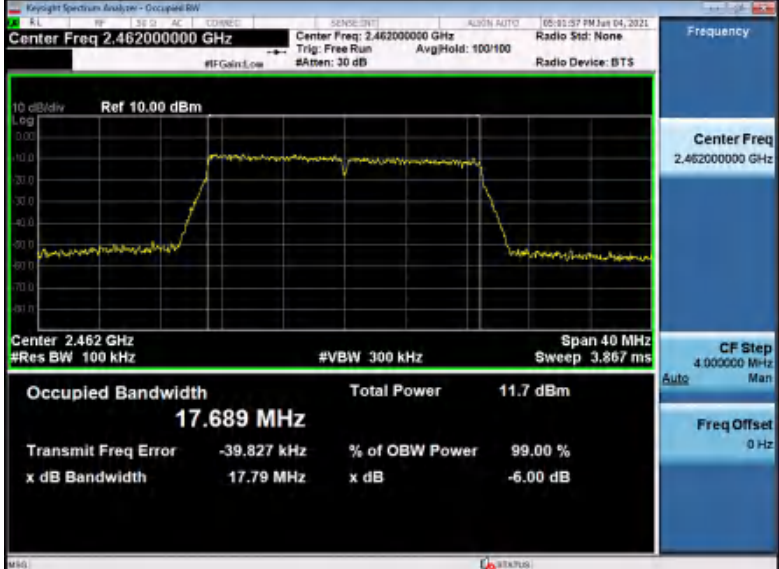
|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N20/LCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.702 MHz</p> <p>Total Power 11.5 dBm</p> <p>Transmit Freq Error -15.739 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.84 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.41200000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11N20/MCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.667 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error 62.904 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.76 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.43700000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11N20/HCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 40 MHz</p> <p>Sweep 3.867 ms</p> <p>Occupied Bandwidth 17.689 MHz</p> <p>Total Power 11.7 dBm</p> <p>Transmit Freq Error -39.827 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 17.79 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.46200000 GHz</p> <p>CF Step 4.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |
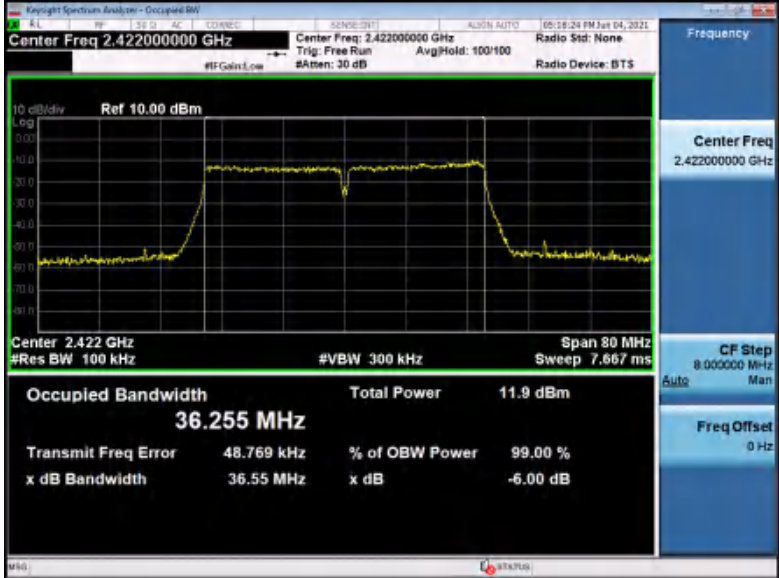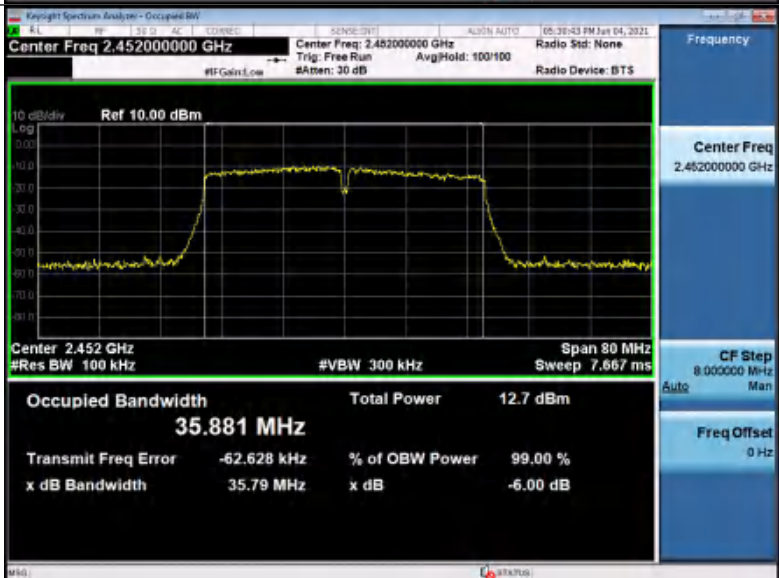
|           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N40/LCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 80 MHz</p> <p>Sweep 7.667 ms</p> <p>Occupied Bandwidth 36.255 MHz</p> <p>Total Power 11.9 dBm</p> <p>Transmit Freq Error 48.769 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 36.55 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.42200000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>    |
| 11N40/MCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 80 MHz</p> <p>Sweep 7.667 ms</p> <p>Occupied Bandwidth 35.966 MHz</p> <p>Total Power 12.6 dBm</p> <p>Transmit Freq Error 122.31 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 36.05 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.43700000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p>   |
| 11N40/HCH |  <p>Keylight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>AvgHold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref 10.00 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 80 MHz</p> <p>Sweep 7.667 ms</p> <p>Occupied Bandwidth 35.881 MHz</p> <p>Total Power 12.7 dBm</p> <p>Transmit Freq Error -62.628 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 35.79 MHz</p> <p>x dB -6.00 dB</p> <p>Frequency</p> <p>Center Freq 2.45200000 GHz</p> <p>CF Step 8.000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0 Hz</p> |

## 5.5 Power Spectral Density

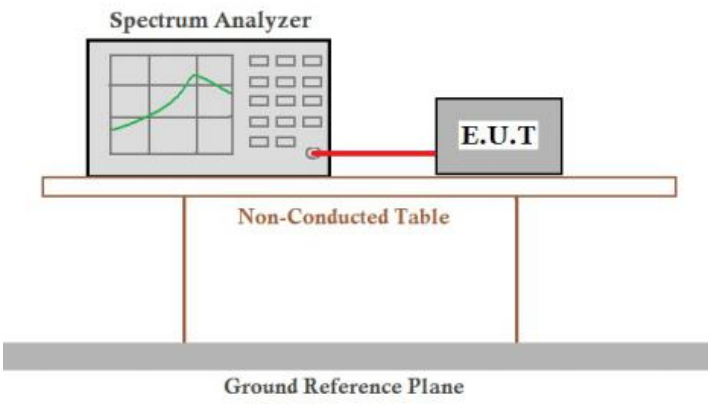
|                        |                                                                                                                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (e)                                                                                                                                                                                                                                         |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                          |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                            |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                      |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report. |
| Limit:                 | ≤8.00dBm/3kHz                                                                                                                                                                                                                                                              |
| Test Results:          | Pass                                                                                                                                                                                                                                                                       |




## Measurement Data

| Type          | Channel | Power Spectral Density (dBm/3KHz) | Limit (dBm/3KHz) | Result |
|---------------|---------|-----------------------------------|------------------|--------|
| 802.11b       | Lowes   | -18.034                           | 8                | Pass   |
|               | Middle  | -16.041                           |                  |        |
|               | Highest | -17.635                           |                  |        |
| 802.11g       | Lowest  | -21.356                           | 8                | Pass   |
|               | Middle  | -21.720                           |                  |        |
|               | Highest | -22.516                           |                  |        |
| 802.11n(HT20) | Lowest  | -22.640                           | 8                | Pass   |
|               | Middle  | -21.856                           |                  |        |
|               | Highest | -21.983                           |                  |        |
| 802.11n(HT40) | Lowest  | -24.221                           | 8                | Pass   |
|               | Middle  | -22.406                           |                  |        |
|               | Highest | -22.603                           |                  |        |








Test plot as follows:
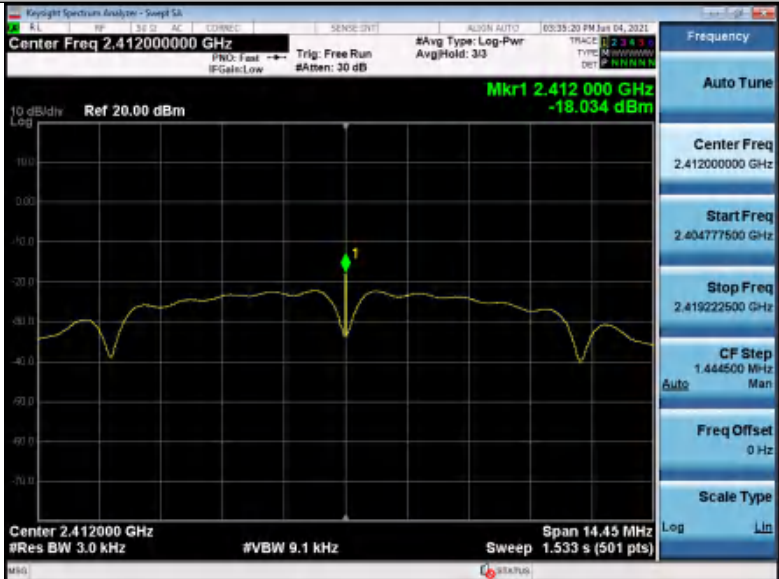
| Graphs  |                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11B/LCH |  <p>Key parameters for 11B/LCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.412000000 GHz</li> <li>Mkr1: 2.412 000 GHz, -18.034 dBm</li> <li>Ref: 20.00 dBm</li> <li>Span: 14.45 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 1.533 s (501 pts)</li> </ul>   |
| 11B/MCH |  <p>Key parameters for 11B/MCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.437000000 GHz</li> <li>Mkr1: 2.437 000 GHz, -16.041 dBm</li> <li>Ref: 20.00 dBm</li> <li>Span: 14.42 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 1.530 s (501 pts)</li> </ul>  |
| 11B/HCH |  <p>Key parameters for 11B/HCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.462000000 GHz</li> <li>Mkr1: 2.462 000 GHz, -17.635 dBm</li> <li>Ref: 20.00 dBm</li> <li>Span: 14.44 MHz</li> <li>Res BW: 3.0 kHz</li> <li>VBW: 9.1 kHz</li> <li>Sweep: 1.532 s (501 pts)</li> </ul> |

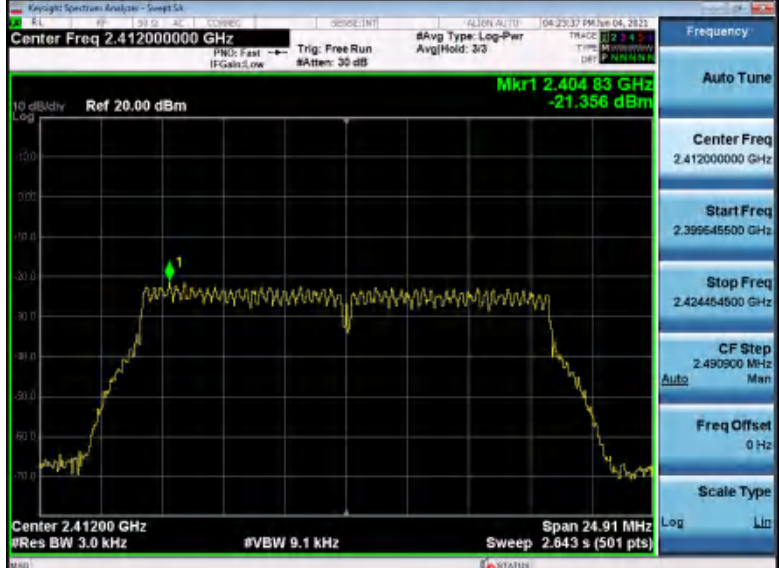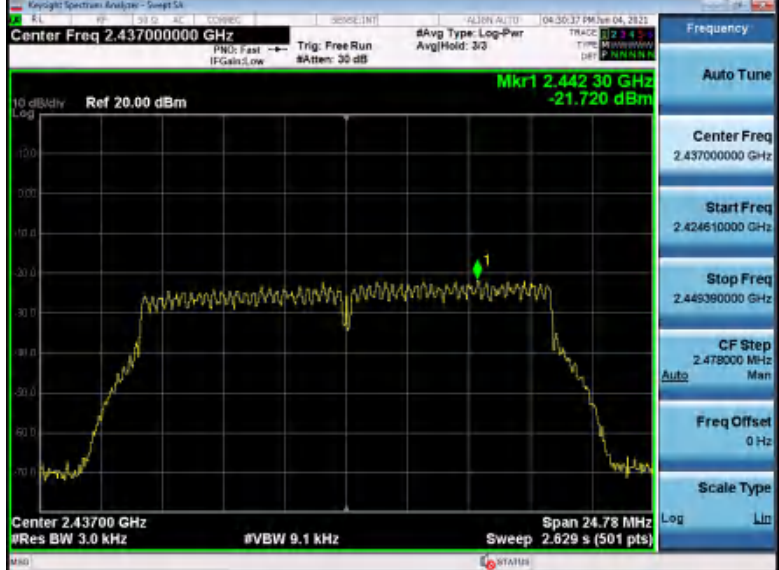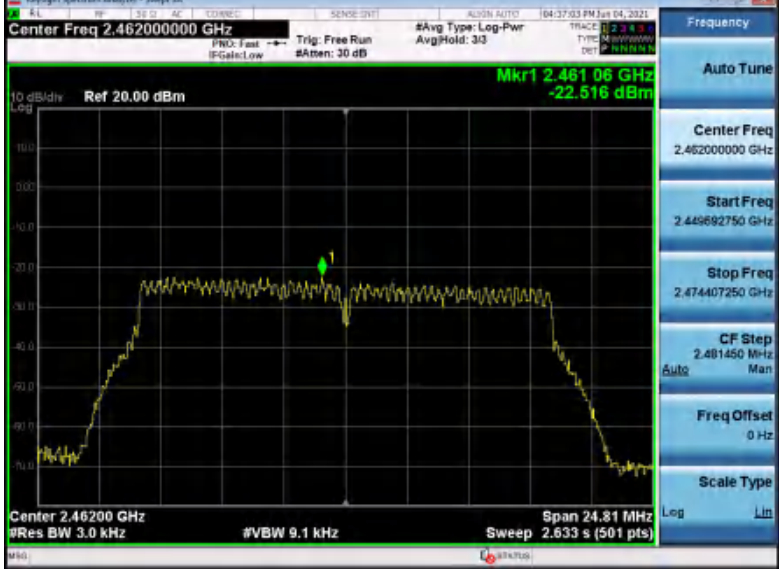
|         |                                                                                      |
|---------|--------------------------------------------------------------------------------------|
| 11G/LCH |    |
| 11G/MCH |   |
| 11G/HCH |  |

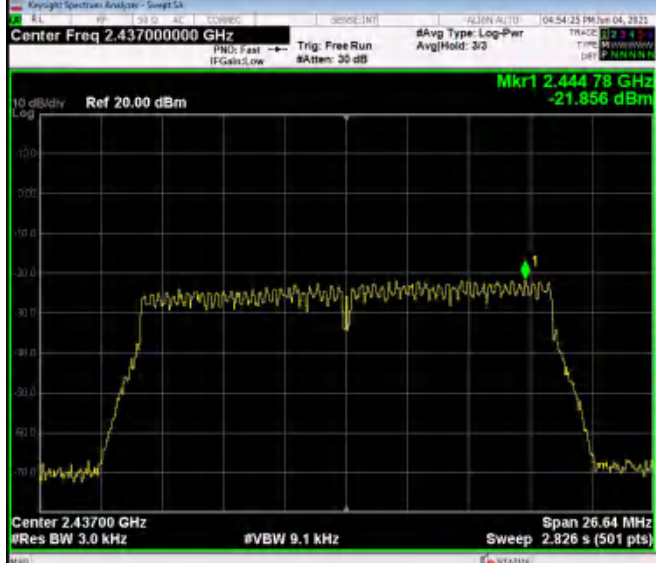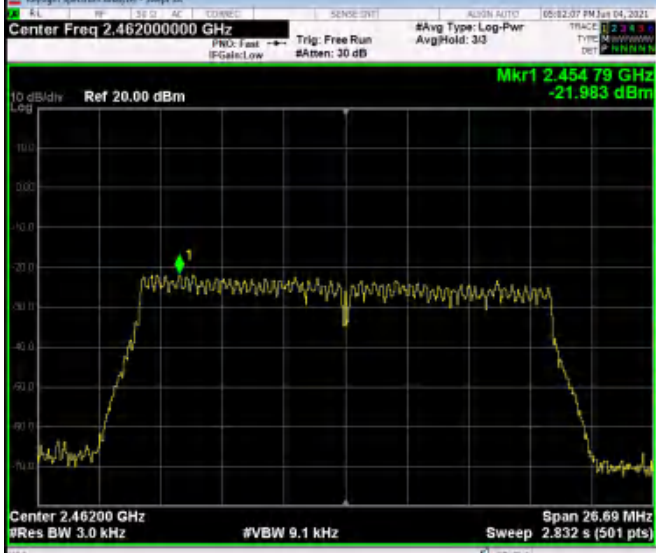

|           |                                                                                      |                                                                                                                                                                                                                                                            |
|-----------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11N20/LCH |    | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.412000000 GHz</p> <p>Start Freq<br/>2.399619250 GHz</p> <p>Stop Freq<br/>2.426380750 GHz</p> <p>CF Step<br/>2.676150 MHz<br/>Auto Man</p> <p>Freq Offset<br/>0 Hz</p> <p>Scale Type<br/>Log Lin</p> |
| 11N20/MCH |   | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.437000000 GHz</p> <p>Start Freq<br/>2.423680750 GHz</p> <p>Stop Freq<br/>2.450319250 GHz</p> <p>CF Step<br/>2.663950 MHz<br/>Auto Man</p> <p>Freq Offset<br/>0 Hz</p> <p>Scale Type<br/>Log Lin</p> |
| 11N20/HCH |  | <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq<br/>2.462000000 GHz</p> <p>Start Freq<br/>2.448684500 GHz</p> <p>Stop Freq<br/>2.475345500 GHz</p> <p>CF Step<br/>2.669100 MHz<br/>Auto Man</p> <p>Freq Offset<br/>0 Hz</p> <p>Scale Type<br/>Log Lin</p> |
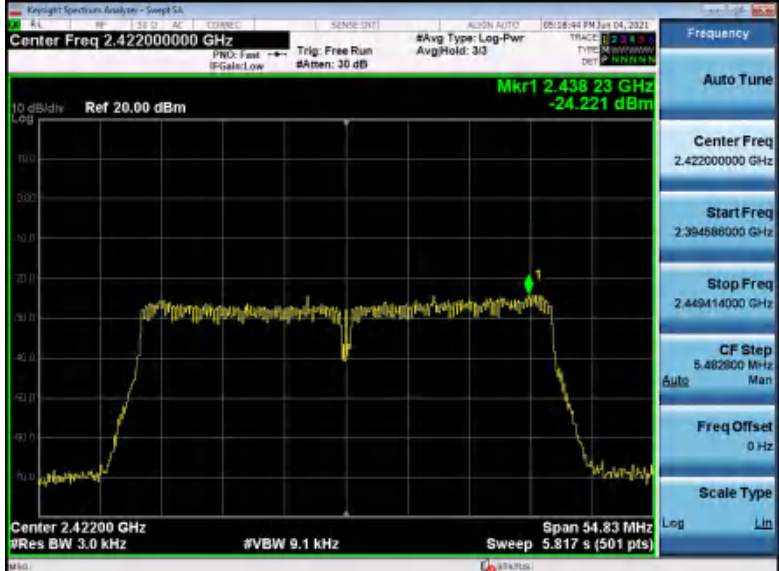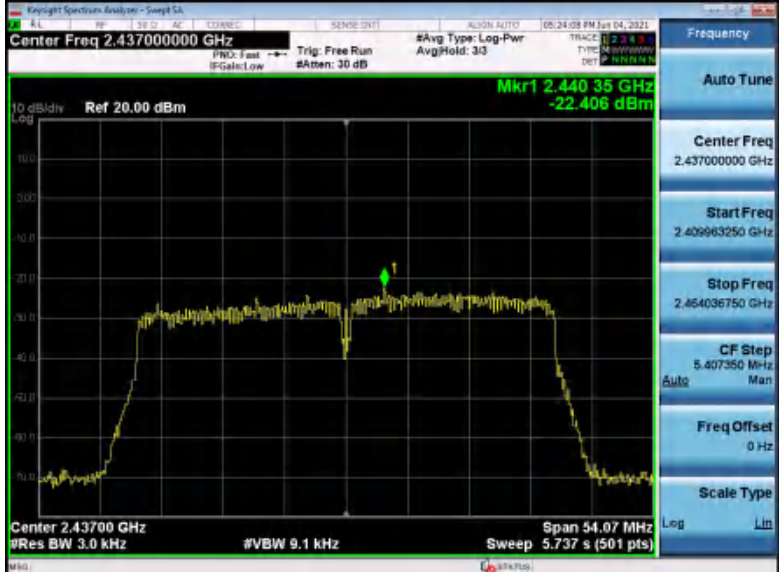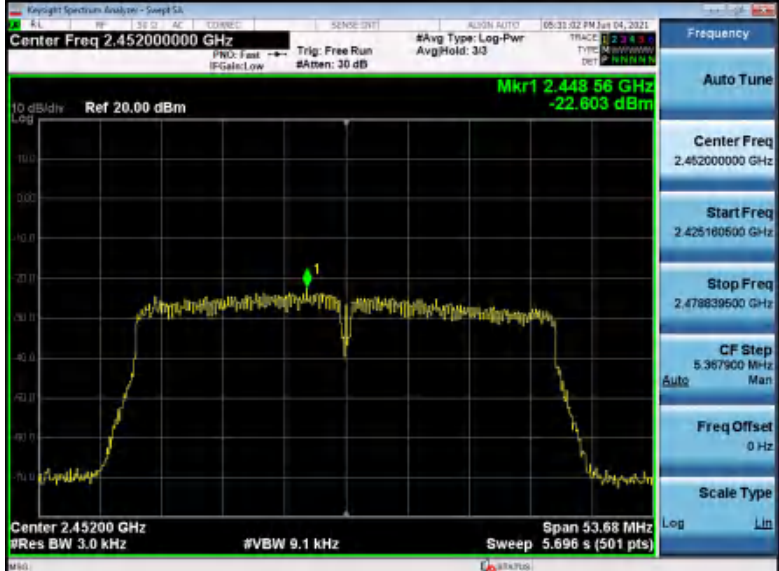
|           |                                                                                      |
|-----------|--------------------------------------------------------------------------------------|
| 11N40/LCH |    |
| 11N40/MCH |   |
| 11N40/HCH |  |

## 5.6 Band-edge for RF Conducted Emissions


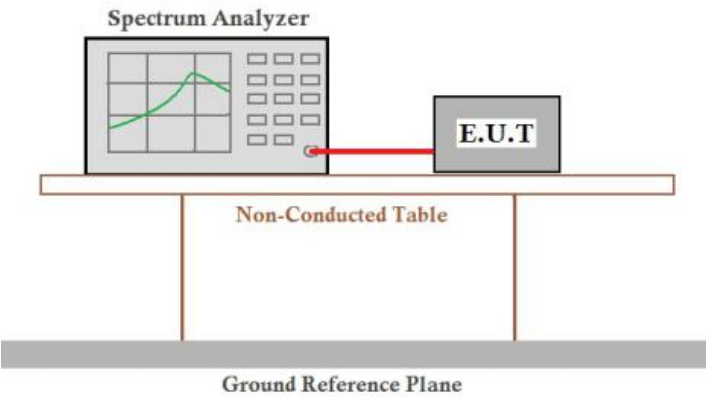
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.                                                                                                            |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

Test plot as follows:






|           |  |
|-----------|--|
| 11G/LCH   |  |
| 11G/HCH   |  |
| 11N20/LCH |  |

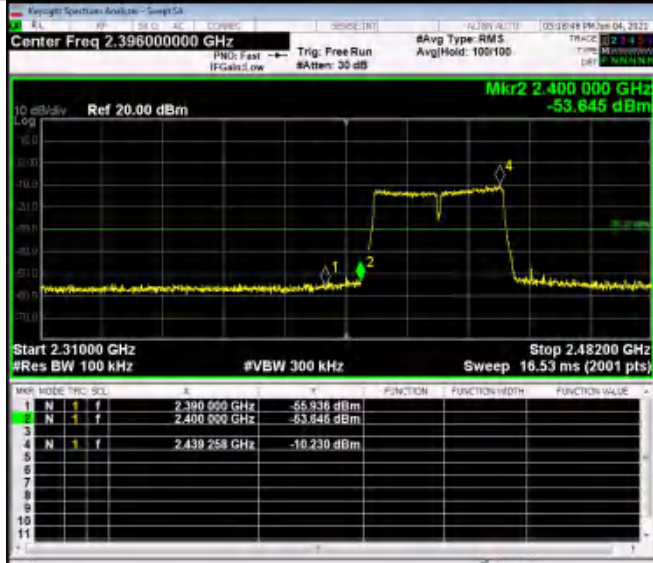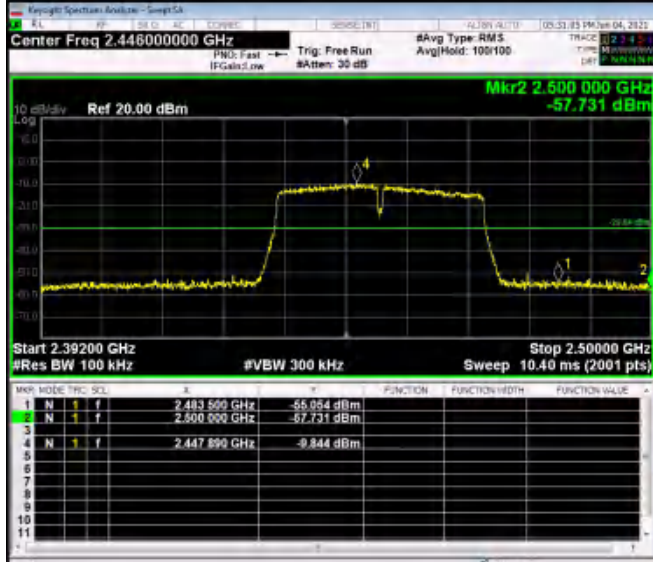
| 11N20/HCH |  <p>Center Freq 2.466000000 GHz</p> <p>Start 2.43200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.533 ms (2001 pts)</p> <p>Mkr2 2.500 000 GHz -57.270 dBm</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-53.587 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-57.270 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.456 650 GHz</td><td>-9.058 dBm</td><td></td><td></td><td></td></tr></table>   | MARK | MODE | TRIG          | SOL         | F        | F              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.483 500 GHz | -53.587 dBm |  |  |  | 2 | N | 1 | f | 2.500 000 GHz | -57.270 dBm |  |  |  | 3 |  |  |  |  |  |  |  |  | 4 | N | 1 | f | 2.456 650 GHz | -9.058 dBm  |  |  |  |
|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|---------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|---------------|-------------|--|--|--|---|---|---|---|---------------|-------------|--|--|--|---|--|--|--|--|--|--|--|--|---|---|---|---|---------------|-------------|--|--|--|
| MARK      | MODE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | TRIG | SOL  | F             | F           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.483 500 GHz | -53.587 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.500 000 GHz | -57.270 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 3         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |               |             |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.456 650 GHz | -9.058 dBm  |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 11N40/LCH |  <p>Center Freq 2.396000000 GHz</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.53 ms (2001 pts)</p> <p>Mkr2 2.400 000 GHz -53.646 dBm</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.396 000 GHz</td><td>-53.936 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-53.646 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.439 258 GHz</td><td>-10.239 dBm</td><td></td><td></td><td></td></tr></table> | MARK | MODE | TRIG          | SOL         | F        | F              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.396 000 GHz | -53.936 dBm |  |  |  | 2 | N | 1 | f | 2.400 000 GHz | -53.646 dBm |  |  |  | 3 |  |  |  |  |  |  |  |  | 4 | N | 1 | f | 2.439 258 GHz | -10.239 dBm |  |  |  |
| MARK      | MODE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | TRIG | SOL  | F             | F           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.396 000 GHz | -53.936 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.400 000 GHz | -53.646 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 3         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |               |             |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.439 258 GHz | -10.239 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 11N40/HCH |  <p>Center Freq 2.446000000 GHz</p> <p>Start 2.39200 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.40 ms (2001 pts)</p> <p>Mkr2 2.500 000 GHz -57.731 dBm</p> <table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-55.954 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-57.731 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.447 890 GHz</td><td>-9.844 dBm</td><td></td><td></td><td></td></tr></table> | MARK | MODE | TRIG          | SOL         | F        | F              | FUNCTION       | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.483 500 GHz | -55.954 dBm |  |  |  | 2 | N | 1 | f | 2.500 000 GHz | -57.731 dBm |  |  |  | 3 |  |  |  |  |  |  |  |  | 4 | N | 1 | f | 2.447 890 GHz | -9.844 dBm  |  |  |  |
| MARK      | MODE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | TRIG | SOL  | F             | F           | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 1         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.483 500 GHz | -55.954 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 2         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.500 000 GHz | -57.731 dBm |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 3         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |               |             |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |
| 4         | N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1    | f    | 2.447 890 GHz | -9.844 dBm  |          |                |                |                |                |   |   |   |   |               |             |  |  |  |   |   |   |   |               |             |  |  |  |   |  |  |  |  |  |  |  |  |   |   |   |   |               |             |  |  |  |



## 5.7 RF Conducted Spurious Emissions
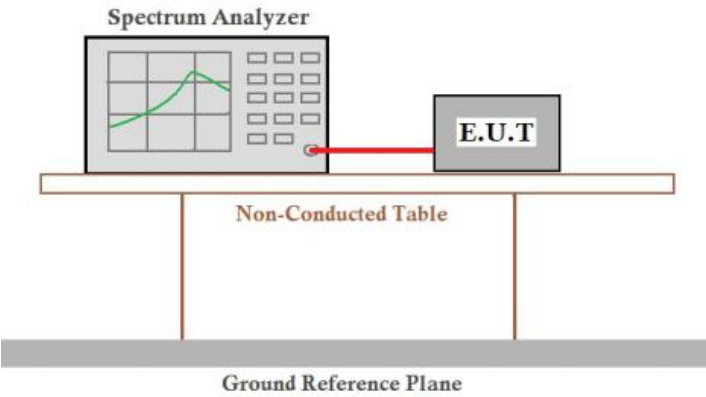
|                        |                                                                                                                                                                                                                                                                                                                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)                                                                                                                                                                                                                                                                                                                                                      |
| Test Method:           | ANSI C63.10: 2013                                                                                                                                                                                                                                                                                                                                                                       |
| Test Setup:            |  <p>Offset=cable loss+ attenuation factor</p>                                                                                                                                                                                                                                                         |
| Exploratory Test Mode: | Transmitting with all kind of modulations, data rates                                                                                                                                                                                                                                                                                                                                   |
| Final Test Mode:       | Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40); Only the worst case is recorded in the report.                                                                                                              |
| Limit:                 | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                    |

Test plot as follows:

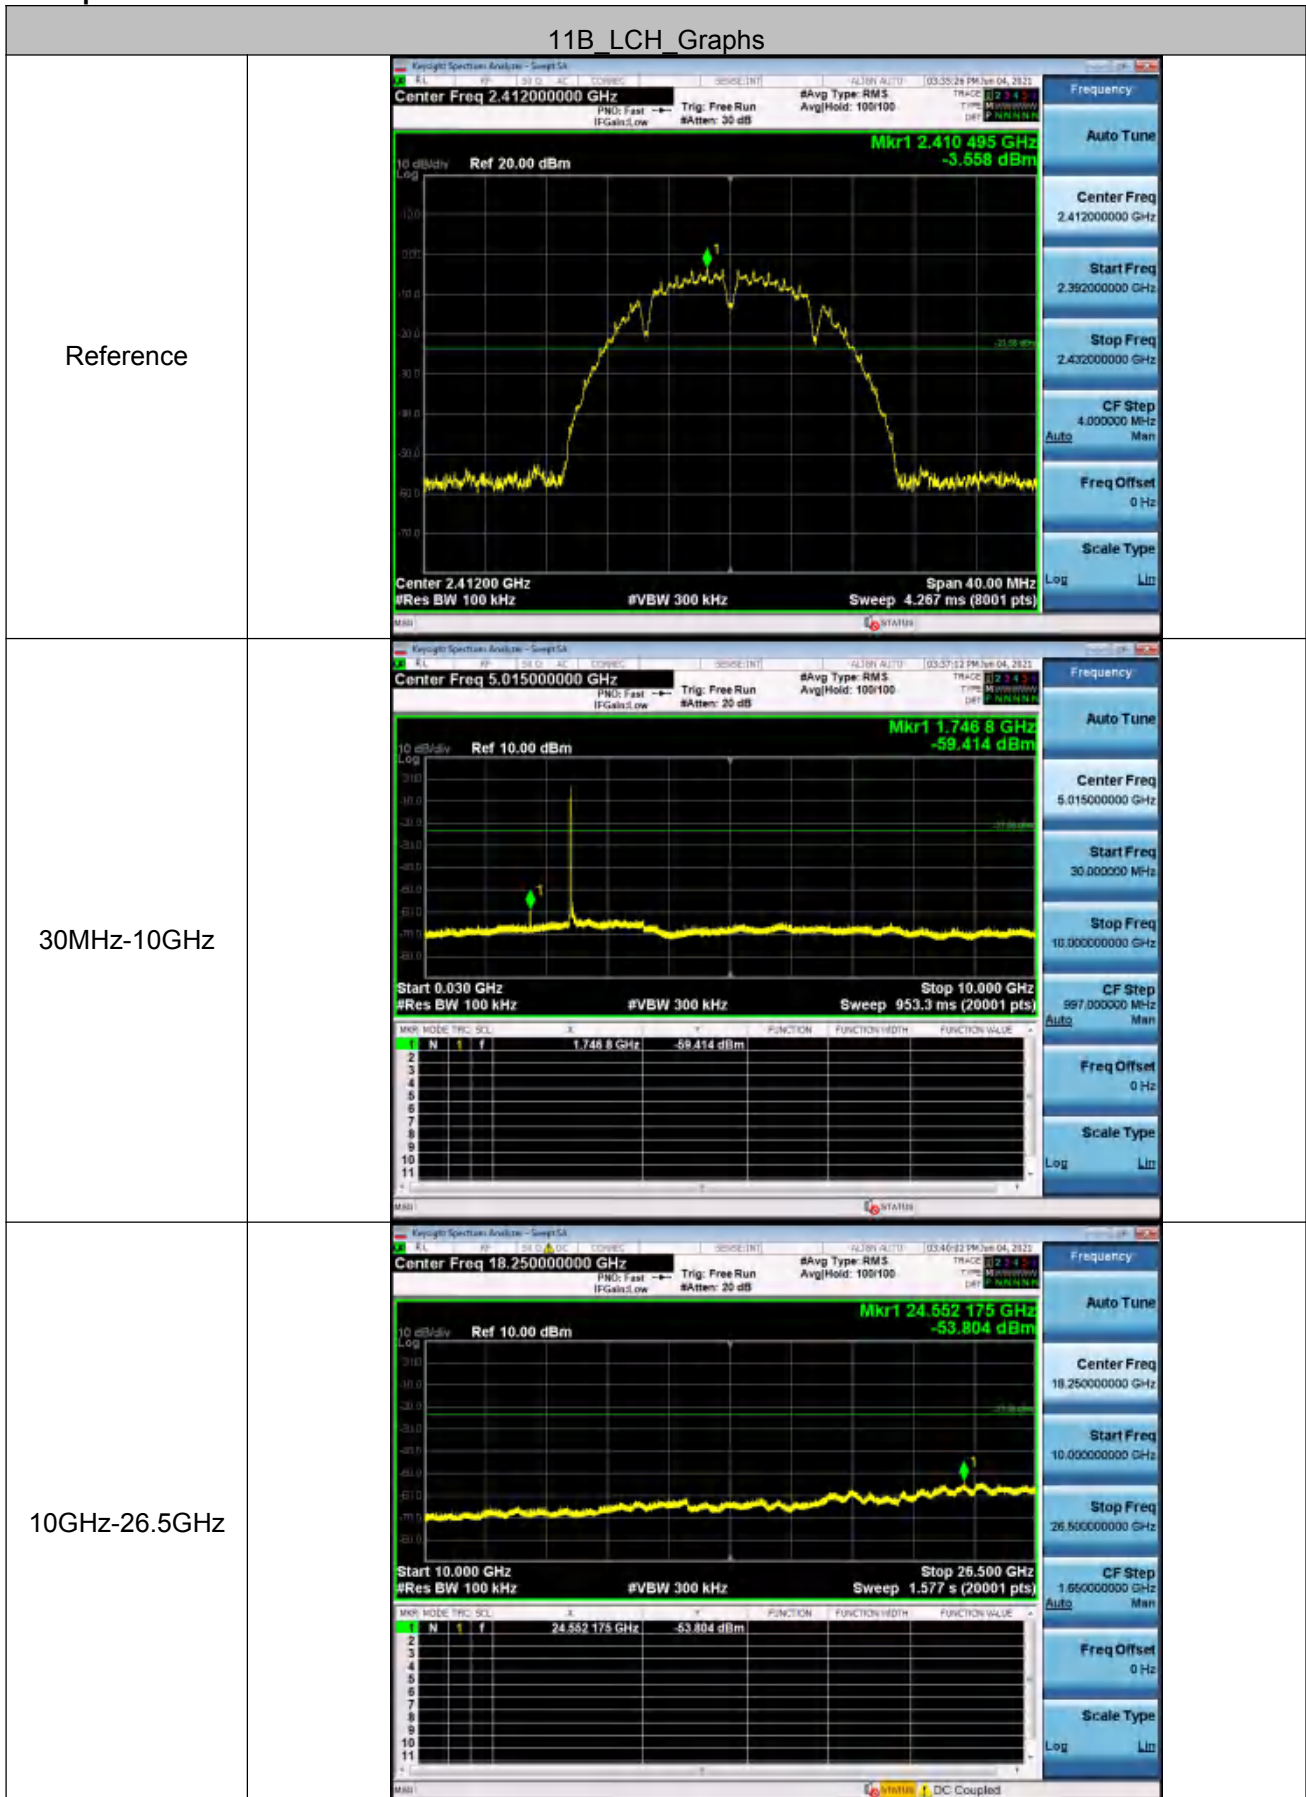


11B\_MCH\_Graphs


Reference



30MHz-10GHz

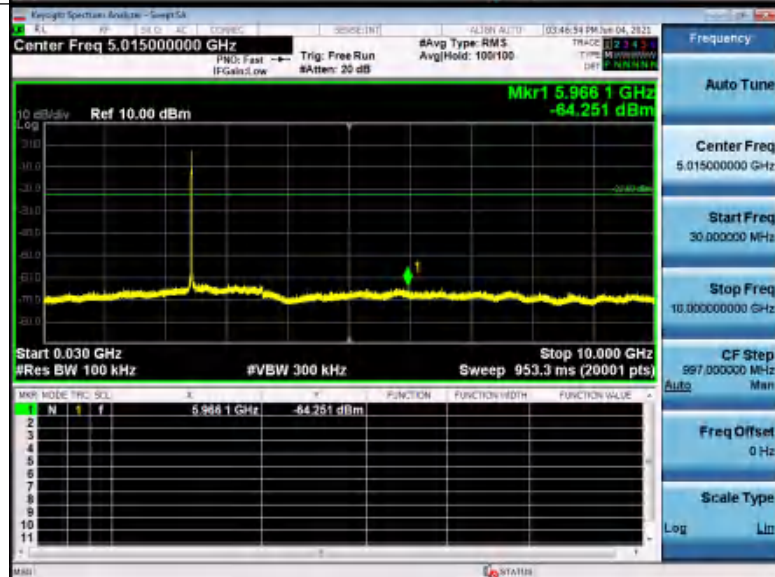

10GHz-26.5GHz

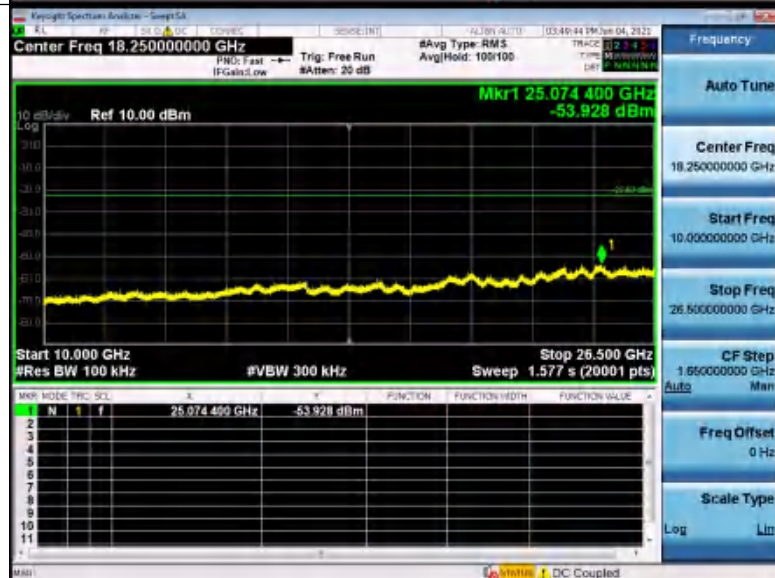


11B\_HCH\_Graphs


Reference



30MHz-10GHz

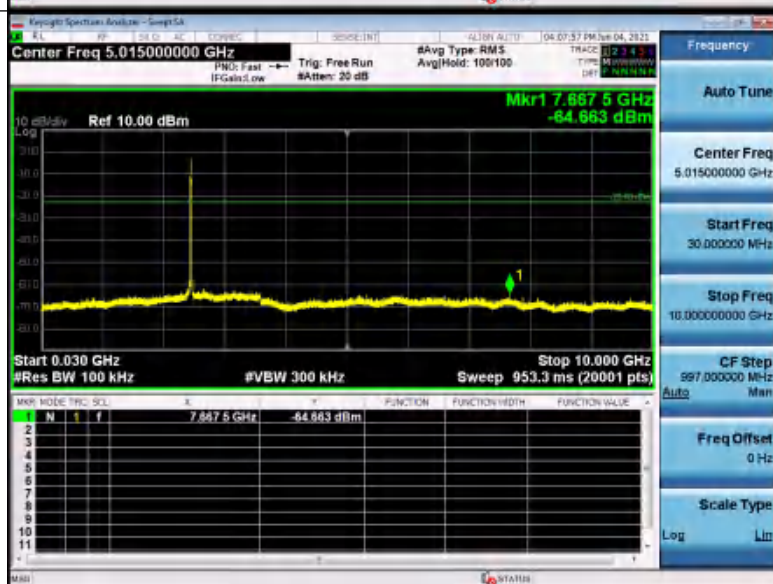

10GHz-26.5GHz

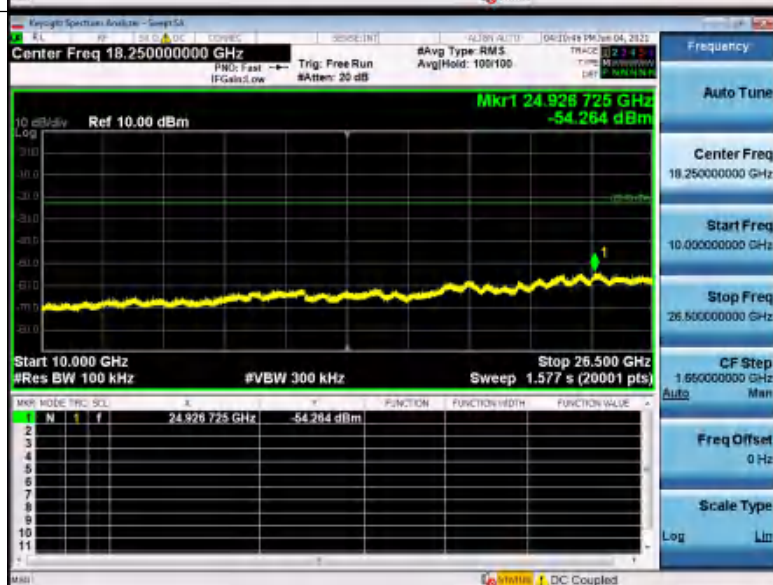




11G\_LCH\_Graphs


Reference




30MHz-10GHz

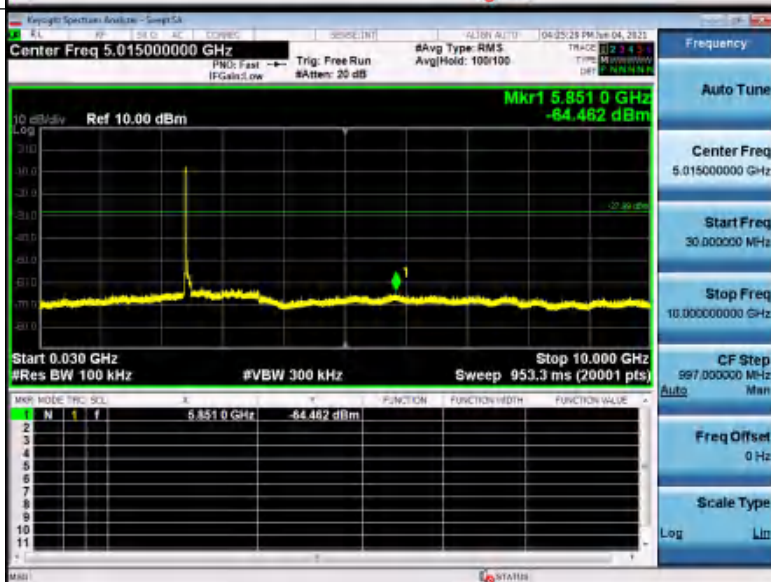

10GHz-26.5GHz

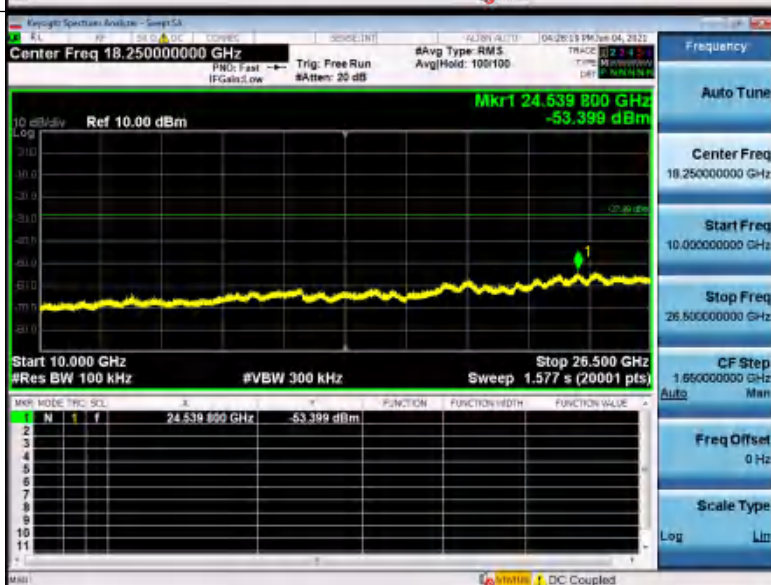



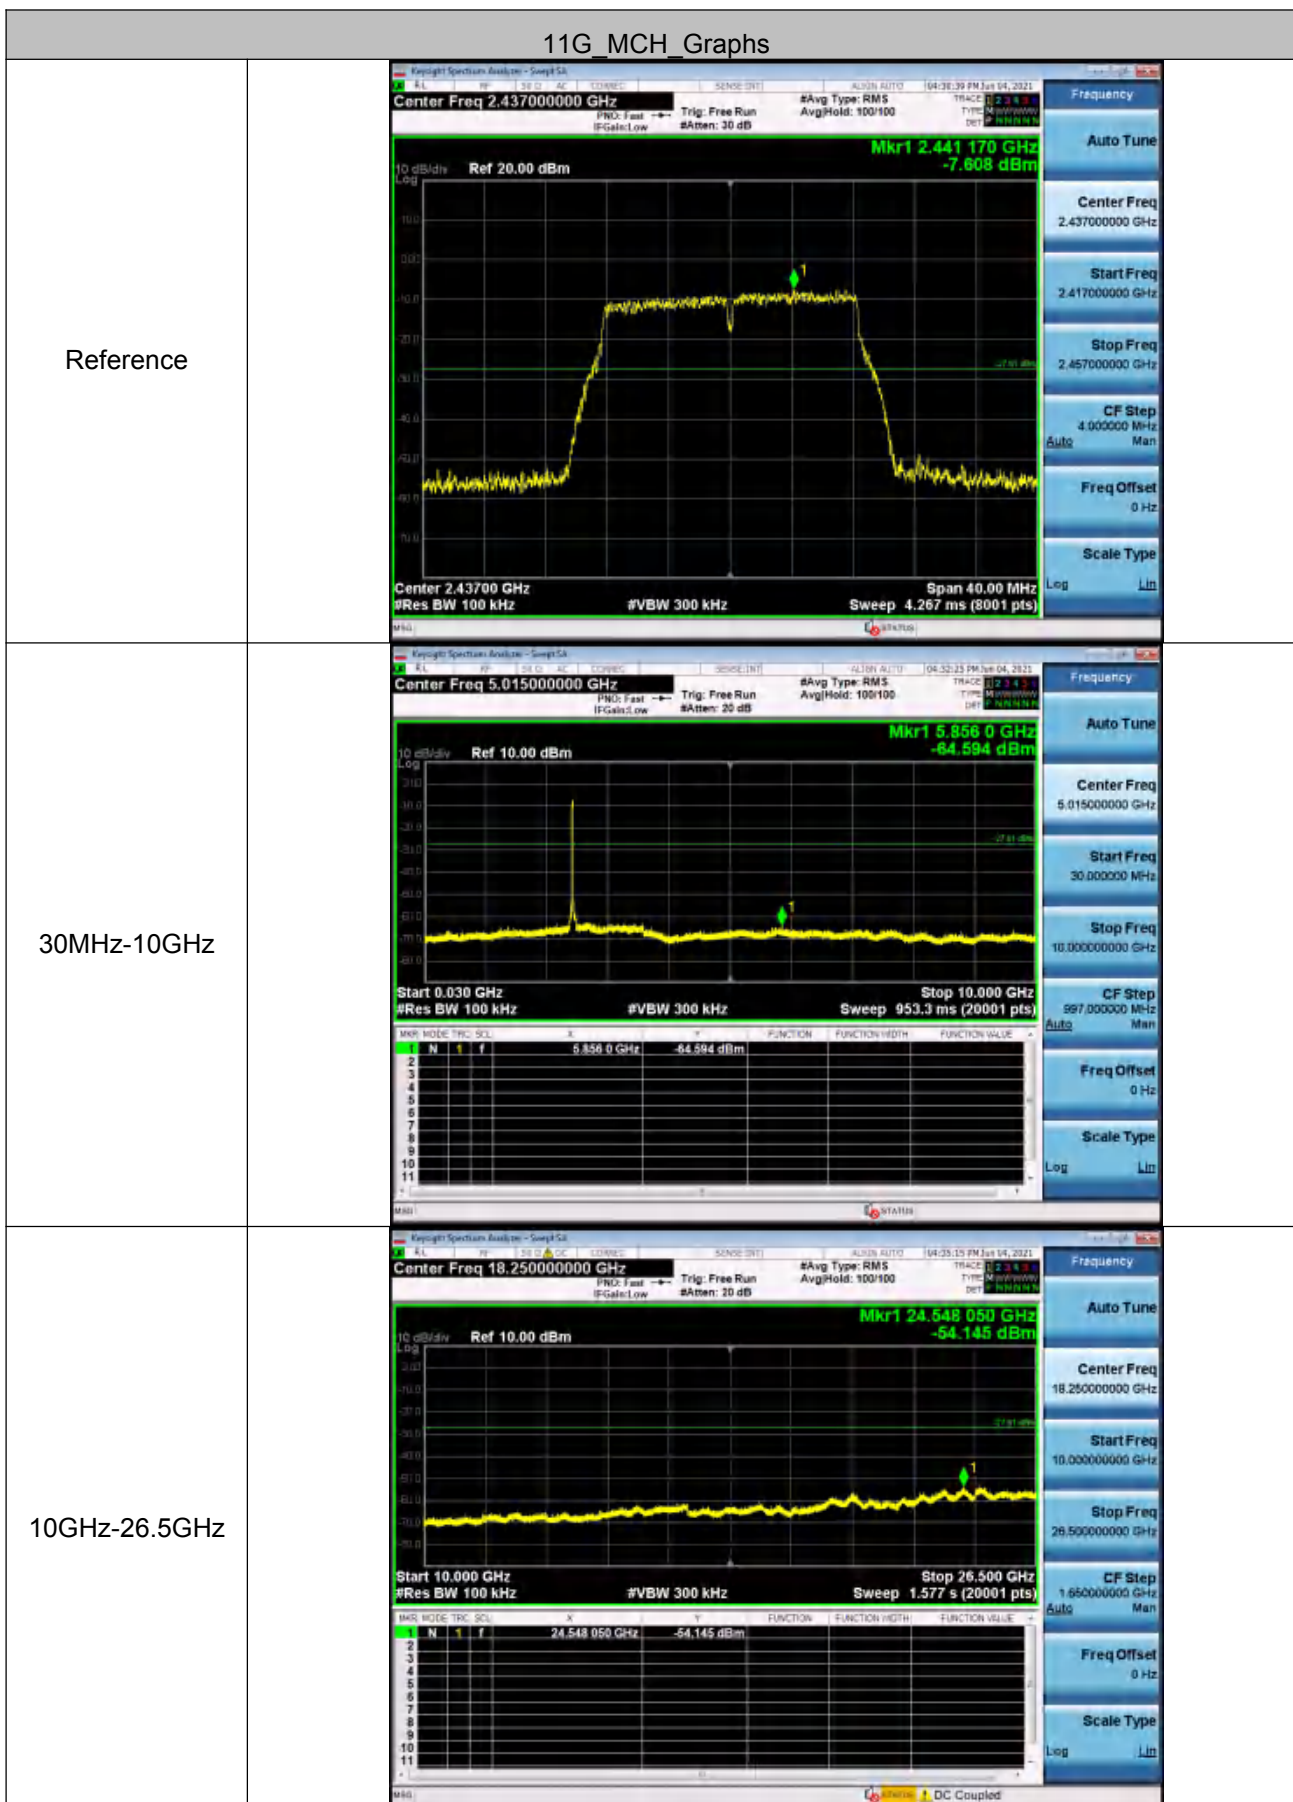


11G\_HCH\_Graphs


Reference



30MHz-10GHz

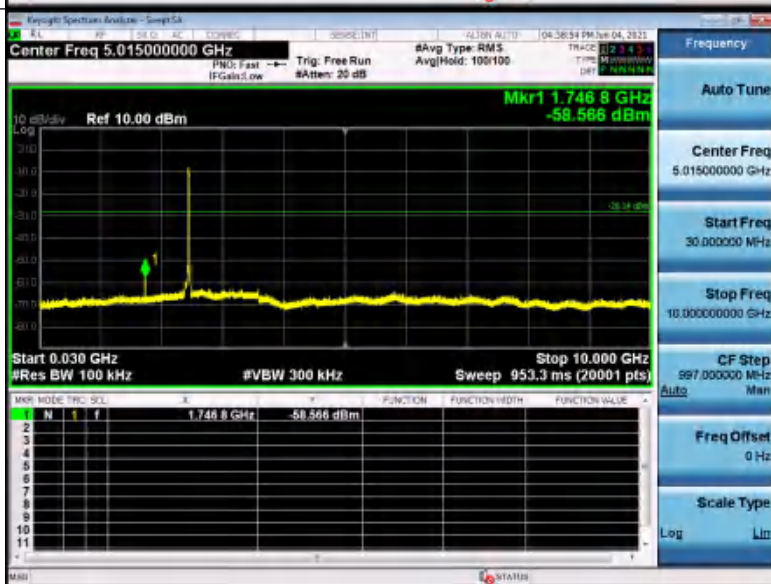

10GHz-26.5GHz

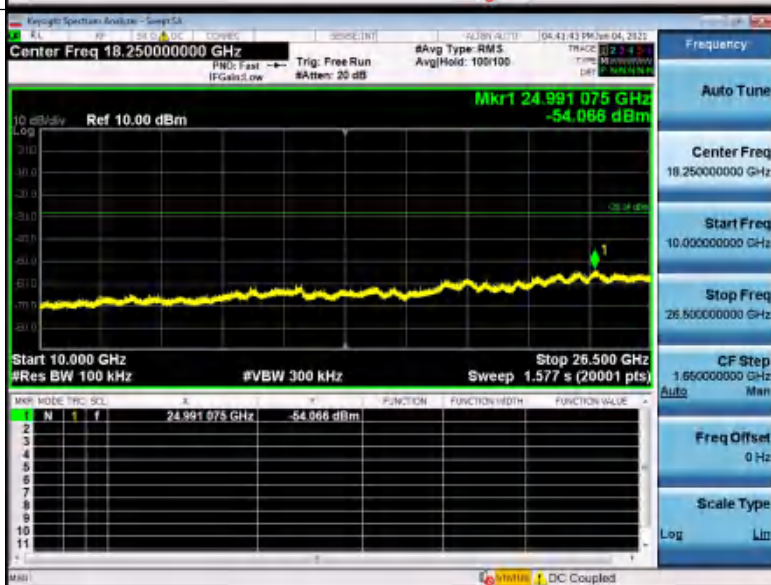


11N20\_LCH\_Graphs


Reference



30MHz-10GHz

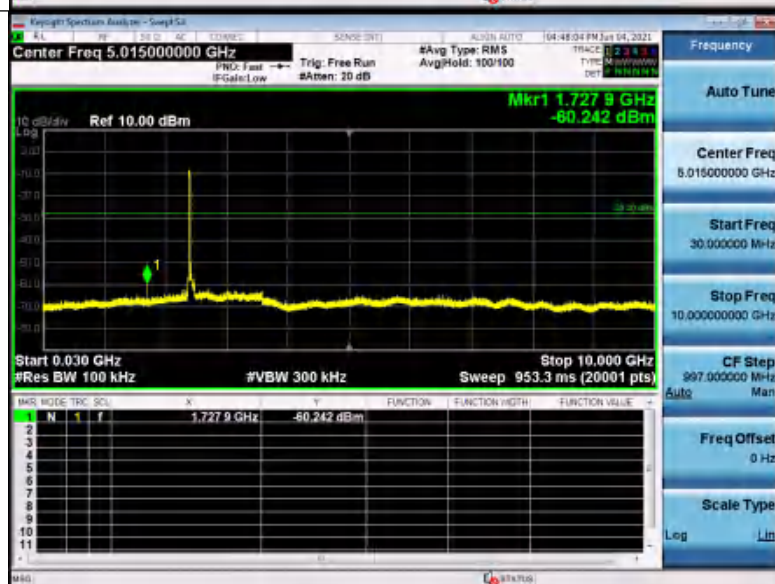

10GHz-26.5GHz

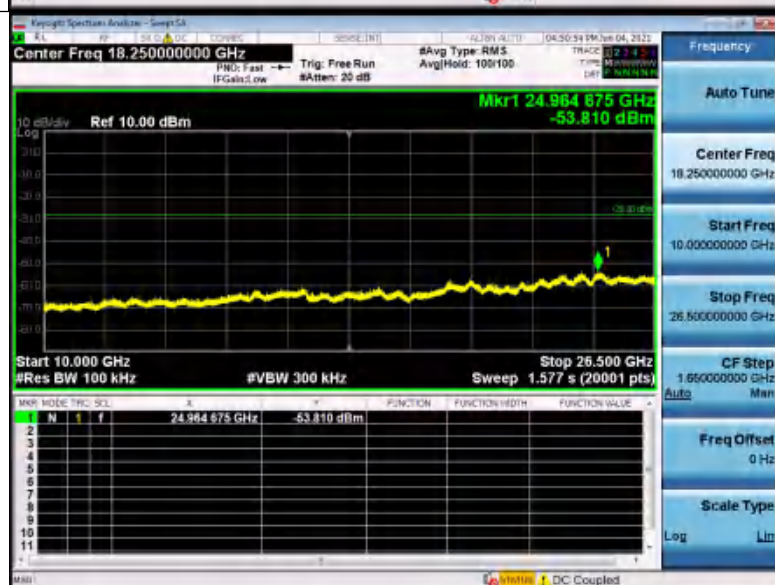




11N20\_MCH\_Graphs


Reference



30MHz-10GHz

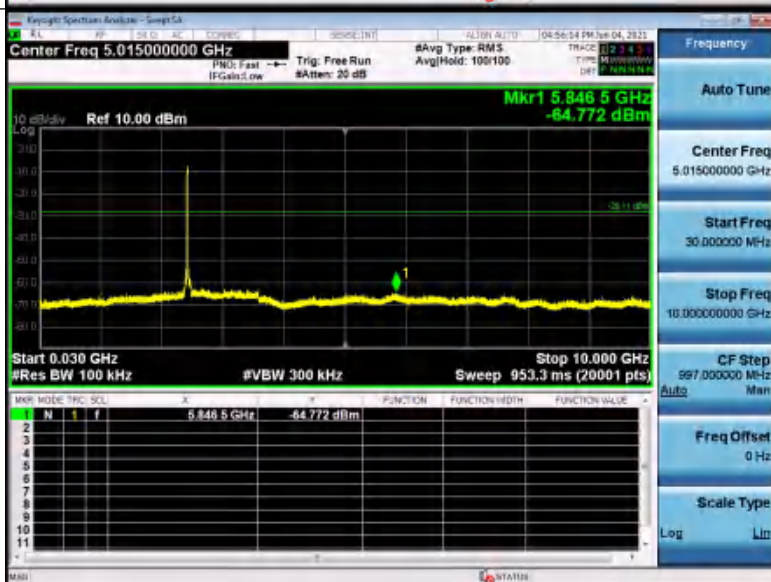

10GHz-26.5GHz

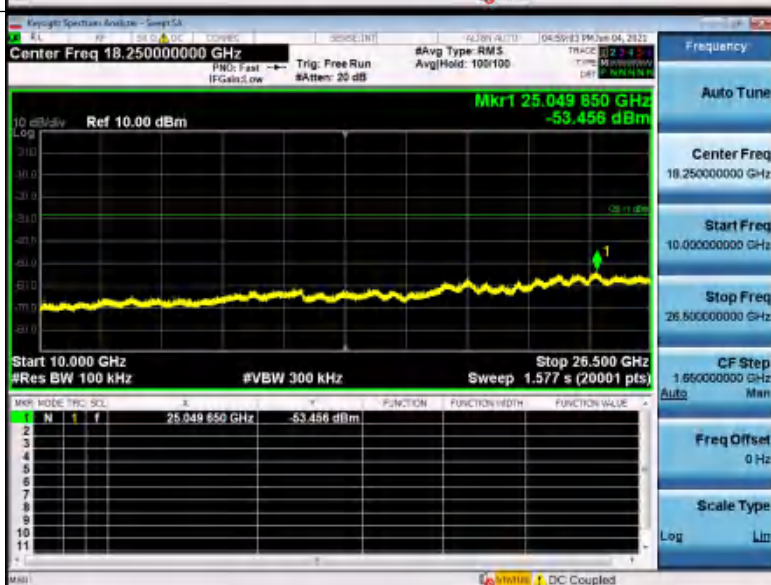


11N20\_HCH\_Graphs


Reference



30MHz-10GHz

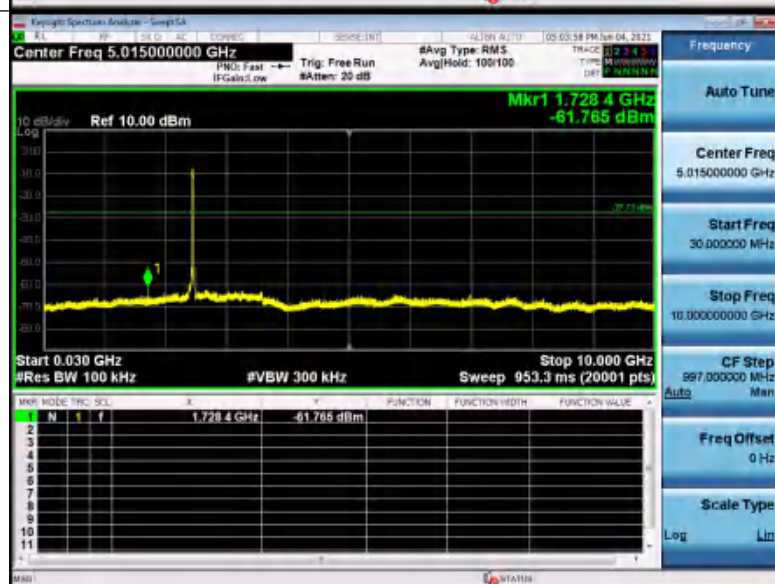

10GHz-26.5GHz

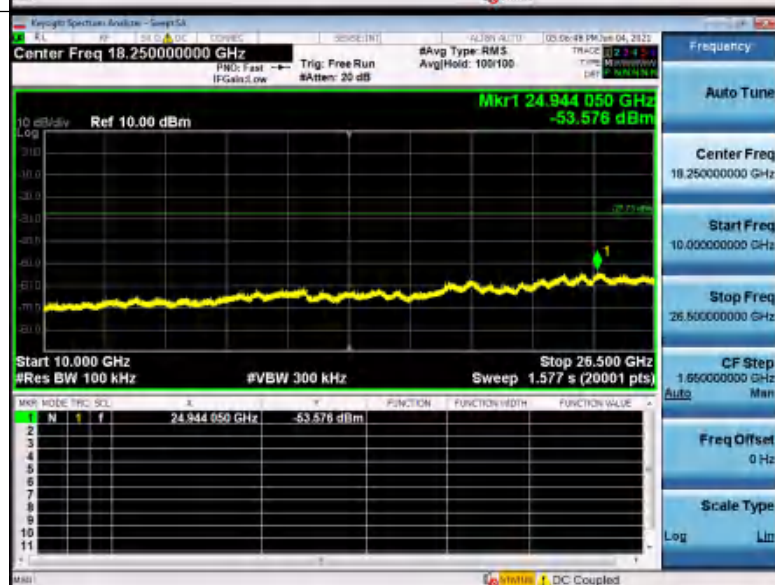




11N40\_LCH\_Graphs


Reference



30MHz-10GHz

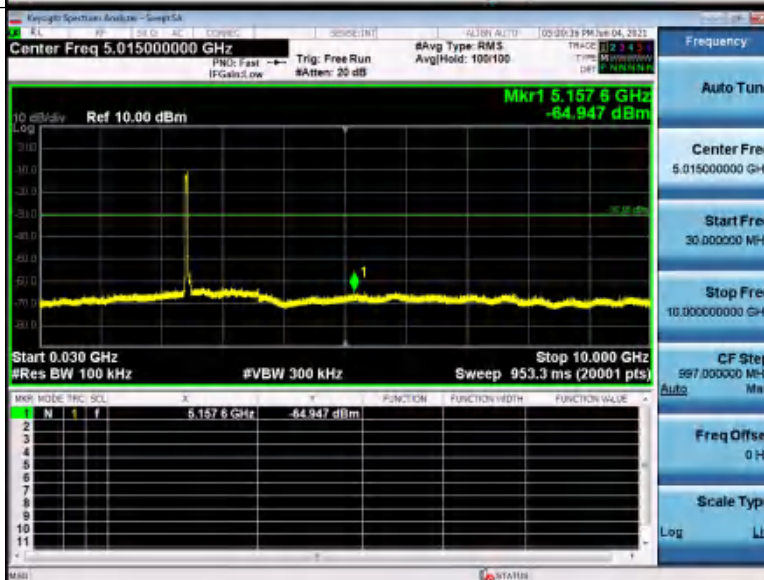

10GHz-26.5GHz

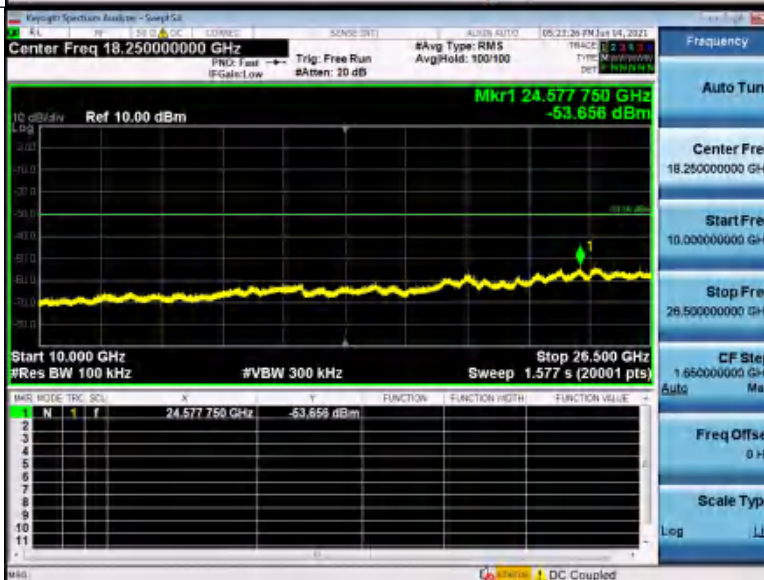


11N40 MCH Graphs


Reference



30MHz-10GHz

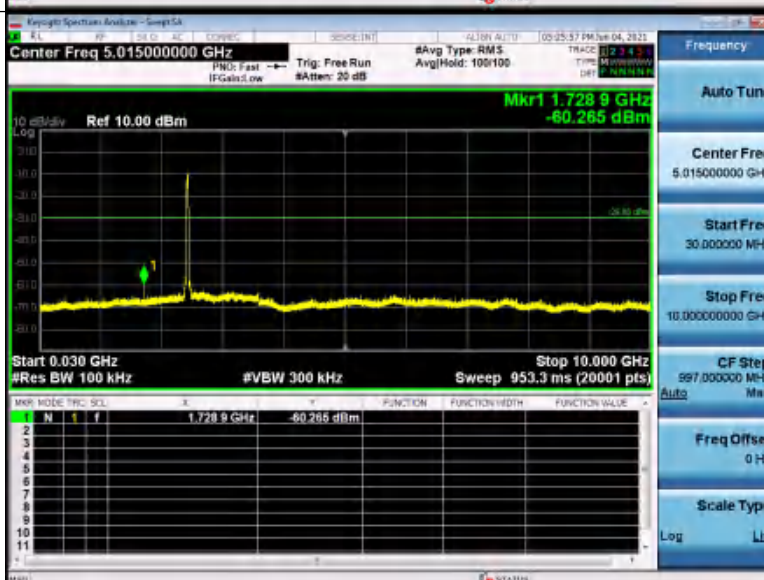

10GHz-26.5GHz

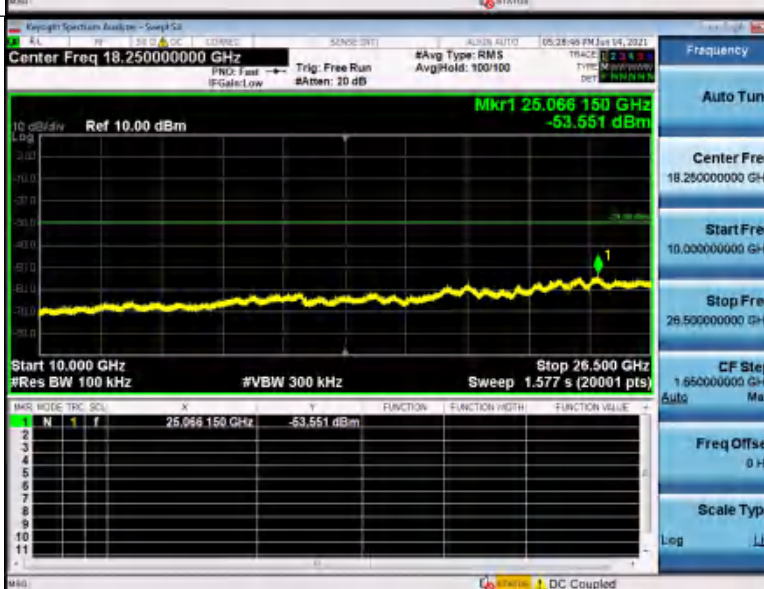


11N40\_HCH\_Graphs


Reference



30MHz-10GHz

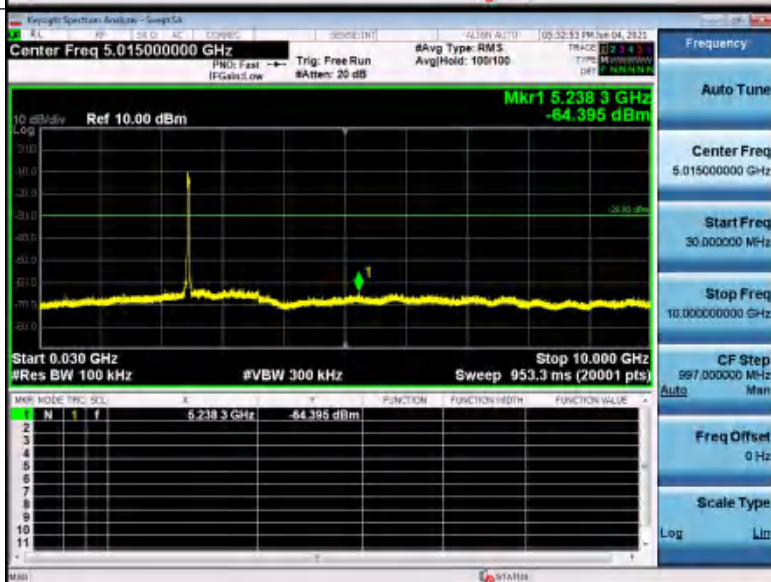

10GHz-26.5GHz

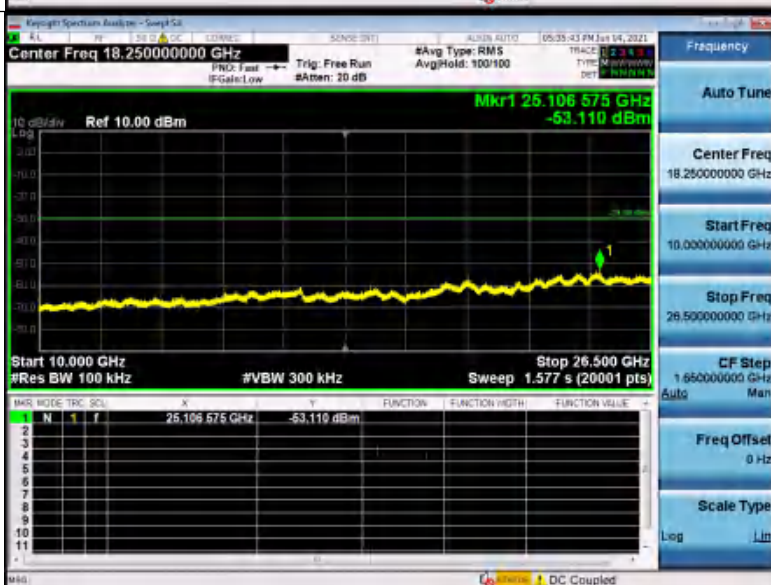

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



## 5.8 Radiated Spurious Emissions

|                   |                                                                                                                                                                                                                                                                             |                                     |                   |            |                             |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------|------------|-----------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205                                                                                                                                                                                                                                   |                                     |                   |            |                             |
| Test Method:      | ANSI C63.10 2013                                                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber)                                                                                                                                                                                                                            |                                     |                   |            |                             |
| Receiver Setup:   | Frequency                                                                                                                                                                                                                                                                   | Detector                            | RBW               | VBW        | Remark                      |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.009MHz-0.090MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.090MHz-0.110MHz                                                                                                                                                                                                                                                           | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Peak                                | 10kHz             | 30kHz      | Peak                        |
|                   | 0.110MHz-0.490MHz                                                                                                                                                                                                                                                           | Average                             | 10kHz             | 30kHz      | Average                     |
|                   | 0.490MHz -30MHz                                                                                                                                                                                                                                                             | Quasi-peak                          | 10kHz             | 30kHz      | Quasi-peak                  |
|                   | 30MHz-1GHz                                                                                                                                                                                                                                                                  | Quasi-peak                          | 100 kHz           | 300kHz     | Quasi-peak                  |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | Peak                                | 1MHz              | 3MHz       | Peak                        |
|                   |                                                                                                                                                                                                                                                                             | Peak                                | 1MHz              | 10Hz       | Average                     |
| Limit:            | Frequency                                                                                                                                                                                                                                                                   | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m) | Remark     | Measurement<br>distance (m) |
|                   | 0.009MHz-0.490MHz                                                                                                                                                                                                                                                           | 2400/F(kHz)                         | -                 | -          | 300                         |
|                   | 0.490MHz-1.705MHz                                                                                                                                                                                                                                                           | 24000/F(kHz)                        | -                 | -          | 30                          |
|                   | 1.705MHz-30MHz                                                                                                                                                                                                                                                              | 30                                  | -                 | -          | 30                          |
|                   | 30MHz-88MHz                                                                                                                                                                                                                                                                 | 100                                 | 40.0              | Quasi-peak | 3                           |
|                   | 88MHz-216MHz                                                                                                                                                                                                                                                                | 150                                 | 43.5              | Quasi-peak | 3                           |
|                   | 216MHz-960MHz                                                                                                                                                                                                                                                               | 200                                 | 46.0              | Quasi-peak | 3                           |
|                   | 960MHz-1GHz                                                                                                                                                                                                                                                                 | 500                                 | 54.0              | Quasi-peak | 3                           |
|                   | Above 1GHz                                                                                                                                                                                                                                                                  | 500                                 | 54.0              | Average    | 3                           |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device. |                                     |                   |            |                             |



Test Setup:

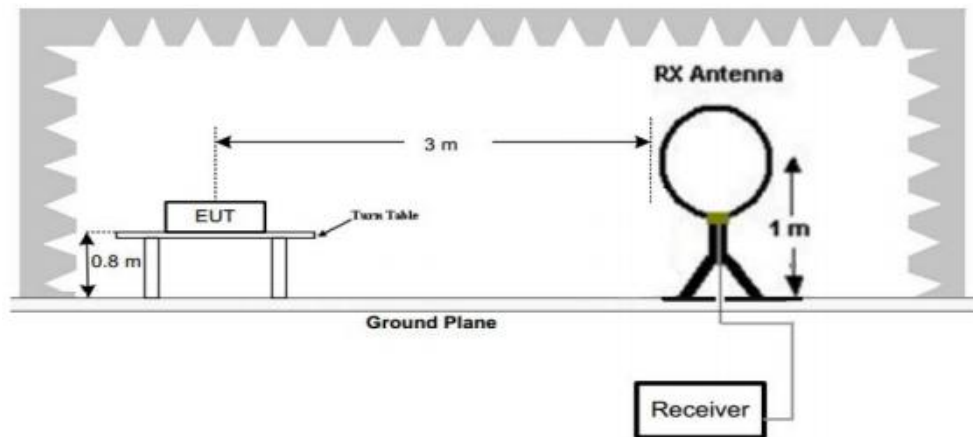


Figure 1. Below 30MHz

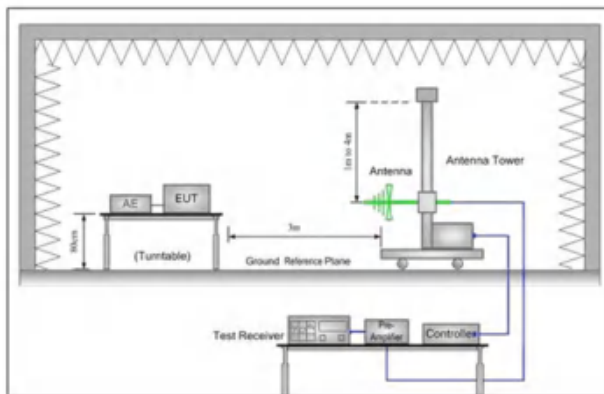


Figure 2. 30MHz to 1GHz

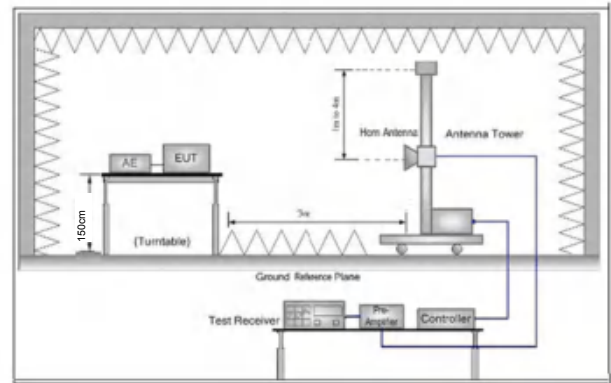


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode,</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Final Test Mode:       | <p>Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>For below 1GHz, through Pre-scan, find the 6Mbps of rate of 802.11g at mid channel is the worst case.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

### 5.8.1 Radiated emission below 1GHz

| 30MHz~1GHz |              |          |
|------------|--------------|----------|
| Test mode: | Transmitting | Vertical |



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   | !   | 30.4237      | 43.07                    | -8.11                     | 34.96                      | 40.00           | -5.04      | QP                      |                           |         |
| 2   | *   | 68.1512      | 53.60                    | -17.85                    | 35.75                      | 40.00           | -4.25      | QP                      |                           |         |
| 3   |     | 91.8161      | 53.03                    | -20.24                    | 32.79                      | 43.50           | -10.71     | QP                      |                           |         |
| 4   |     | 150.5378     | 52.08                    | -14.82                    | 37.26                      | 43.50           | -6.24      | QP                      |                           |         |
| 5   | !   | 234.1682     | 57.59                    | -16.56                    | 41.03                      | 46.00           | -4.97      | QP                      |                           |         |
| 6   | !   | 813.1114     | 34.04                    | 6.31                      | 40.35                      | 46.00           | -5.65      | QP                      |                           |         |

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

|            |              |            |
|------------|--------------|------------|
| Test mode: | Transmitting | Horizontal |
|------------|--------------|------------|



Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

## 5.8.2 Transmitter emission above 1GHz

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4824.000   | 53.04         | -4.26          | 48.78          | 74            | -26.70 | PK            | H         |
| 4824.000   | 33.63         | -4.26          | 29.37          | 54            | 21.55  | AV            | H         |
| 7236.000   | 46.39         | 1.18           | 47.57          | 74            | -26.36 | PK            | H         |
| 7236.000   | 32.76         | 1.18           | 33.94          | 54            | -18.42 | AV            | H         |
| 4824.000   | 51.18         | -4.26          | 46.92          | 74            | 24.30  | PK            | V         |
| 4824.000   | 36.06         | -4.26          | 31.80          | 54            | -20.70 | AV            | V         |
| 7236.000   | 48.82         | 1.18           | 50.00          | 74            | -24.61 | PK            | V         |
| 7236.000   | 30.34         | 1.18           | 31.52          | 54            | -21.12 | AV            | V         |

| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 51.48         | -4.12          | 47.36          | 74            | -24.62 | PK            | H         |
| 4874.000   | 34.24         | -4.12          | 30.12          | 54            | 21.66  | AV            | H         |
| 7311.000   | 46.95         | 1.46           | 48.41          | 74            | -27.14 | PK            | H         |
| 7311.000   | 33.26         | 1.46           | 34.72          | 54            | -18.47 | AV            | H         |
| 4874.000   | 49.82         | -4.12          | 45.70          | 74            | 25.03  | PK            | V         |
| 4874.000   | 36.69         | -4.12          | 32.57          | 54            | -21.18 | AV            | V         |
| 7311.000   | 47.32         | 1.46           | 48.78          | 74            | -24.85 | PK            | V         |
| 7311.000   | 32.97         | 1.46           | 34.43          | 54            | -19.64 | AV            | V         |



| Test mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4924.000   | 51.79         | -4.03          | 47.76          | 74            | -26.42 | PK            | H         |
| 4924.000   | 35.11         | -4.03          | 31.08          | 54            | 19.31  | AV            | H         |
| 7386.000   | 45.37         | 1.66           | 47.03          | 74            | -25.10 | PK            | H         |
| 7386.000   | 34.47         | 1.66           | 36.13          | 54            | -20.20 | AV            | H         |
| 4924.000   | 51.15         | -4.03          | 47.12          | 74            | 24.39  | PK            | V         |
| 4924.000   | 34.90         | -4.03          | 30.87          | 54            | -22.26 | AV            | V         |
| 7386.000   | 47.00         | 1.66           | 48.66          | 74            | -23.36 | PK            | V         |
| 7386.000   | 32.58         | 1.66           | 34.24          | 54            | -21.68 | AV            | V         |

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4824.000   | 51.68         | -4.26          | 47.42          | 74            | -24.77 | PK            | H         |
| 4824.000   | 33.69         | -4.26          | 29.43          | 54            | 21.06  | AV            | H         |
| 7236.000   | 45.42         | 1.18           | 46.60          | 74            | -26.93 | PK            | H         |
| 7236.000   | 32.08         | 1.18           | 33.26          | 54            | -19.82 | AV            | H         |
| 4824.000   | 51.12         | -4.26          | 46.86          | 74            | 25.39  | PK            | V         |
| 4824.000   | 36.30         | -4.26          | 32.04          | 54            | -21.40 | AV            | V         |
| 7236.000   | 47.63         | 1.18           | 48.81          | 74            | -23.96 | PK            | V         |
| 7236.000   | 33.01         | 1.18           | 34.19          | 54            | -21.71 | AV            | V         |

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 53.46         | -4.12          | 49.34          | 74            | -26.86 | PK            | H         |
| 4874.000   | 33.96         | -4.12          | 29.84          | 54            | 19.37  | AV            | H         |
| 7311.000   | 47.26         | 1.46           | 48.72          | 74            | -25.75 | PK            | H         |
| 7311.000   | 34.37         | 1.46           | 35.83          | 54            | -20.17 | AV            | H         |
| 4874.000   | 49.23         | -4.12          | 45.11          | 74            | 25.33  | PK            | V         |
| 4874.000   | 35.76         | -4.12          | 31.64          | 54            | -22.79 | AV            | V         |
| 7311.000   | 46.95         | 1.46           | 48.41          | 74            | -25.76 | PK            | V         |
| 7311.000   | 30.83         | 1.46           | 32.29          | 54            | -21.02 | AV            | V         |

| Test mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4924.000   | 51.32         | -4.03          | 47.29          | 74            | -24.01 | PK            | H         |
| 4924.000   | 34.49         | -4.03          | 30.46          | 54            | 20.84  | AV            | H         |
| 7386.000   | 46.17         | 1.66           | 47.83          | 74            | -24.79 | PK            | H         |
| 7386.000   | 32.57         | 1.66           | 34.23          | 54            | -20.41 | AV            | H         |
| 4924.000   | 48.55         | -4.03          | 44.52          | 74            | 24.21  | PK            | V         |
| 4924.000   | 36.70         | -4.03          | 32.67          | 54            | -22.51 | AV            | V         |
| 7386.000   | 48.26         | 1.66           | 49.92          | 74            | -24.88 | PK            | V         |
| 7386.000   | 32.36         | 1.66           | 34.02          | 54            | -21.26 | AV            | V         |

| Test mode: |               | 802.11n(6.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor           | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)             | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4824.000   | 54.09         | -4.26            | 49.83          | 74            | -25.46 | PK            | H         |
| 4824.000   | 34.38         | -4.26            | 30.12          | 54            | 20.33  | AV            | H         |
| 7236.000   | 45.72         | 1.18             | 46.90          | 74            | -25.01 | PK            | H         |
| 7236.000   | 34.70         | 1.18             | 35.88          | 54            | -19.68 | AV            | H         |
| 4824.000   | 51.23         | -4.26            | 46.97          | 74            | 24.33  | PK            | V         |
| 4824.000   | 35.74         | -4.26            | 31.48          | 54            | -20.45 | AV            | V         |
| 7236.000   | 48.36         | 1.18             | 49.54          | 74            | -25.44 | PK            | V         |
| 7236.000   | 32.21         | 1.18             | 33.39          | 54            | -20.26 | AV            | V         |

| Test mode: |               | 802.11n(6.5Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor           | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)             | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 54.12         | -4.12            | 50.00          | 74            | -26.21 | PK            | H         |
| 4874.000   | 35.13         | -4.12            | 31.01          | 54            | 20.71  | AV            | H         |
| 7311.000   | 48.01         | 1.46             | 49.47          | 74            | -26.05 | PK            | H         |
| 7311.000   | 31.90         | 1.46             | 33.36          | 54            | -18.59 | AV            | H         |
| 4874.000   | 50.14         | -4.12            | 46.02          | 74            | 25.37  | PK            | V         |
| 4874.000   | 37.84         | -4.12            | 33.72          | 54            | -21.82 | AV            | V         |
| 7311.000   | 48.94         | 1.46             | 50.40          | 74            | -25.58 | PK            | V         |
| 7311.000   | 33.03         | 1.46             | 34.49          | 54            | -20.85 | AV            | V         |

| Test mode: |               | 802.11n(6.5Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor           | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)             | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4924.000   | 52.14         | -4.03            | 48.11          | 74            | -24.63 | PK            | H         |
| 4924.000   | 33.79         | -4.03            | 29.76          | 54            | 20.97  | AV            | H         |
| 7386.000   | 45.91         | 1.66             | 47.57          | 74            | -24.68 | PK            | H         |
| 7386.000   | 32.66         | 1.66             | 34.32          | 54            | -18.75 | AV            | H         |
| 4924.000   | 48.80         | -4.03            | 44.77          | 74            | 24.95  | PK            | V         |
| 4924.000   | 35.79         | -4.03            | 31.76          | 54            | -22.90 | AV            | V         |
| 7386.000   | 47.19         | 1.66             | 48.85          | 74            | -25.49 | PK            | V         |
| 7386.000   | 31.88         | 1.66             | 33.54          | 54            | -22.41 | AV            | V         |

| Test mode: |               | 802.11n40(13.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------|---------------|---------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor              | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)                | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4844.000   | 52.24         | -4.2                | 48.04          | 74            | -26.33 | PK            | H         |
| 4844.000   | 35.56         | -4.2                | 31.36          | 54            | 20.39  | AV            | H         |
| 7266.000   | 46.16         | 1.18                | 47.34          | 74            | -24.98 | PK            | H         |
| 7266.000   | 32.38         | 1.18                | 33.56          | 54            | -20.83 | AV            | H         |
| 4844.000   | 48.90         | -4.2                | 44.70          | 74            | 25.35  | PK            | V         |
| 4844.000   | 35.31         | -4.2                | 31.11          | 54            | -20.83 | AV            | V         |
| 7266.000   | 47.84         | 1.18                | 49.02          | 74            | -26.15 | PK            | V         |
| 7266.000   | 30.76         | 1.18                | 31.94          | 54            | -19.85 | AV            | V         |

| Test mode: |               | 802.11n40(13.5Mbps) |                | Test channel: |        | Middle        |           |
|------------|---------------|---------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor              | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)                | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4874.000   | 54.22         | -4.12               | 50.10          | 74            | -25.45 | PK            | H         |
| 4874.000   | 34.54         | -4.12               | 30.42          | 54            | 20.06  | AV            | H         |
| 7311.000   | 46.91         | 1.46                | 48.37          | 74            | -25.63 | PK            | H         |
| 7311.000   | 33.68         | 1.46                | 35.14          | 54            | -19.82 | AV            | H         |
| 4874.000   | 48.53         | -4.12               | 44.41          | 74            | 25.88  | PK            | V         |
| 4874.000   | 36.27         | -4.12               | 32.15          | 54            | -20.74 | AV            | V         |
| 7311.000   | 48.56         | 1.46                | 50.02          | 74            | -25.08 | PK            | V         |
| 7311.000   | 31.32         | 1.46                | 32.78          | 54            | -20.74 | AV            | V         |

| Test mode: |               | 802.11n40(13.5Mbps) |                | Test channel: |        | Highest       |           |
|------------|---------------|---------------------|----------------|---------------|--------|---------------|-----------|
| Frequency  | Meter Reading | Factor              | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)      | (dBμV)        | (dB)                | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 4904.000   | 52.56         | -4.03               | 48.53          | 74            | -26.77 | PK            | H         |
| 4904.000   | 36.44         | -4.03               | 32.41          | 54            | 20.71  | AV            | H         |
| 7356.000   | 45.86         | 1.66                | 47.52          | 74            | -25.81 | PK            | H         |
| 7356.000   | 32.73         | 1.66                | 34.39          | 54            | -20.19 | AV            | H         |
| 4904.000   | 48.89         | -4.03               | 44.86          | 74            | 25.89  | PK            | V         |
| 4904.000   | 36.62         | -4.03               | 32.59          | 54            | -23.17 | AV            | V         |
| 7356.000   | 46.84         | 1.66                | 48.50          | 74            | -25.19 | PK            | V         |
| 7356.000   | 32.29         | 1.66                | 33.95          | 54            | -20.28 | AV            | V         |

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
 Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## 5.9 Restricted bands around fundamental frequency

|                   |                                                  |                    |                  |
|-------------------|--------------------------------------------------|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205        |                    |                  |
| Test Method:      | ANSI C63.10 2013                                 |                    |                  |
| Test Site:        | Measurement Distance: 3m (Semi-Anechoic Chamber) |                    |                  |
| Limit:            | Frequency                                        | Limit (dBuV/m @3m) | Remark           |
|                   | 30MHz-88MHz                                      | 40.0               | Quasi-peak Value |
|                   | 88MHz-216MHz                                     | 43.5               | Quasi-peak Value |
|                   | 216MHz-960MHz                                    | 46.0               | Quasi-peak Value |
|                   | 960MHz-1GHz                                      | 54.0               | Quasi-peak Value |
|                   | Above 1GHz                                       | 54.0               | Average Value    |
|                   |                                                  | 74.0               | Peak Value       |
| Test Setup:       |                                                  |                    |                  |

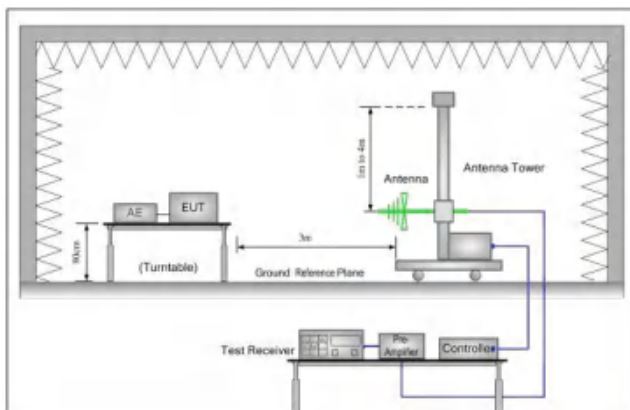


Figure 1. 30MHz to 1GHz

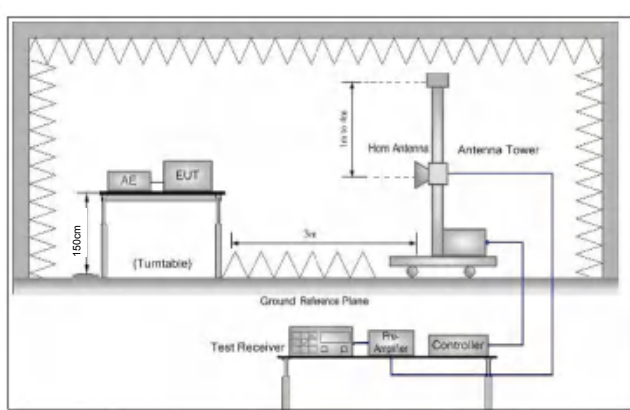


Figure 2. Above 1GHz

### Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
  - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
  - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.



|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                        | <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel , the Highest channel</p> <p>h. Repeat above procedures until all frequencies measured was complete.</p> |
| Exploratory Test Mode: | <p>Transmitting with all kind of modulations, data rates.</p> <p>Transmitting mode.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Final Test Mode:       | <p>1Mbps of rate is the worst case of 802.11b;</p> <p>6Mbps of rate is the worst case of 802.11g ;</p> <p>6.5Mbps of rate is the worst case of 802.11n(HT20) ;</p> <p>13.5Mbps of rate is the worst case of 802.11n(HT40)</p> <p>Only the worst case is recorded in the report.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**Test data:**

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 56.33         | -9.2           | 47.13          | 74            | -25.98 | PK            | H         |
| 2390.000         | 40.70         | -9.2           | 31.50          | 54            | 19.22  | AV            | H         |
| 2400.000         | 57.28         | -9.39          | 47.89          | 74            | -25.09 | PK            | H         |
| 2400.000         | 38.35         | -9.39          | 28.96          | 54            | -18.59 | AV            | H         |
| 2390.000         | 56.60         | -9.2           | 47.40          | 74            | 24.86  | PK            | V         |
| 2390.000         | 39.62         | -9.2           | 30.42          | 54            | -20.63 | AV            | V         |
| 2400.000         | 57.88         | -9.39          | 48.49          | 74            | -24.94 | PK            | V         |
| 2400.000         | 39.86         | -9.39          | 30.47          | 54            | -20.62 | AV            | V         |

| Worse case mode: |               | 802.11b(1Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 57.70         | -9.29          | 48.41          | 74            | -25.55 | PK            | H         |
| 2483.500         | 40.82         | -9.29          | 31.53          | 54            | 20.65  | AV            | H         |
| 2483.500         | 58.47         | -9.29          | 49.18          | 74            | -26.47 | PK            | V         |
| 2483.500         | 38.20         | -9.29          | 28.91          | 54            | -18.93 | AV            | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 58.21         | -9.2           | 49.01          | 74            | -24.55 | PK            | H         |
| 2390.000         | 39.04         | -9.2           | 29.84          | 54            | 21.55  | AV            | H         |
| 2400.000         | 56.43         | -9.39          | 47.04          | 74            | -27.18 | PK            | H         |
| 2400.000         | 39.07         | -9.39          | 29.68          | 54            | -20.06 | AV            | H         |
| 2390.000         | 55.99         | -9.2           | 46.79          | 74            | 25.24  | PK            | V         |
| 2390.000         | 39.26         | -9.2           | 30.06          | 54            | -22.31 | AV            | V         |
| 2400.000         | 57.76         | -9.39          | 48.37          | 74            | -25.31 | PK            | V         |
| 2400.000         | 40.07         | -9.39          | 30.68          | 54            | -21.99 | AV            | V         |

| Worse case mode: |               | 802.11g(6Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|----------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor         | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)           | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 57.56         | -9.29          | 48.27          | 74            | -24.15 | PK            | H         |
| 2483.500         | 42.00         | -9.29          | 32.71          | 54            | 20.61  | AV            | H         |
| 2483.500         | 57.08         | -9.29          | 47.79          | 74            | -27.44 | PK            | V         |
| 2483.500         | 37.38         | -9.29          | 28.09          | 54            | -20.29 | AV            | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 56.15         | -9.2                   | 46.95          | 74            | -26.16 | PK            | H         |
| 2390.000         | 41.32         | -9.2                   | 32.12          | 54            | 18.95  | AV            | H         |
| 2400.000         | 57.55         | -9.39                  | 48.16          | 74            | -27.35 | PK            | H         |
| 2400.000         | 37.95         | -9.39                  | 28.56          | 54            | -20.31 | AV            | H         |
| 2390.000         | 56.37         | -9.2                   | 47.17          | 74            | 25.38  | PK            | V         |
| 2390.000         | 41.35         | -9.2                   | 32.15          | 54            | -22.14 | AV            | V         |
| 2400.000         | 56.61         | -9.39                  | 47.22          | 74            | -24.67 | PK            | V         |
| 2400.000         | 40.11         | -9.39                  | 30.72          | 54            | -20.91 | AV            | V         |

| Worse case mode: |               | 802.11n(HT20)(6.5Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                 | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                   | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 57.86         | -9.29                  | 48.57          | 74            | -26.87 | PK            | H         |
| 2483.500         | 40.60         | -9.29                  | 31.31          | 54            | 20.27  | AV            | H         |
| 2483.500         | 58.78         | -9.29                  | 49.49          | 74            | -25.50 | PK            | V         |
| 2483.500         | 39.60         | -9.29                  | 30.31          | 54            | -19.00 | AV            | V         |

| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Lowest        |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2390.000         | 58.26         | -9.2                    | 49.06          | 74            | -24.74 | PK            | H         |
| 2390.000         | 39.74         | -9.2                    | 30.54          | 54            | 20.66  | AV            | H         |
| 2400.000         | 57.12         | -9.39                   | 47.73          | 74            | -27.44 | PK            | H         |
| 2400.000         | 38.88         | -9.39                   | 29.49          | 54            | -20.46 | AV            | H         |
| 2390.000         | 54.69         | -9.2                    | 45.49          | 74            | 25.09  | PK            | V         |
| 2390.000         | 39.26         | -9.2                    | 30.06          | 54            | -22.81 | AV            | V         |
| 2400.000         | 57.15         | -9.39                   | 47.76          | 74            | -25.36 | PK            | V         |
| 2400.000         | 41.33         | -9.39                   | 31.94          | 54            | -20.46 | AV            | V         |

| Worse case mode: |               | 802.11n(HT40)(13.5Mbps) |                | Test channel: |        | Highest       |           |
|------------------|---------------|-------------------------|----------------|---------------|--------|---------------|-----------|
| Frequency        | Meter Reading | Factor                  | Emission Level | Limits        | Over   | Detector Type | Ant. Pol. |
| (MHz)            | (dBμV)        | (dB)                    | (dBμV/m)       | (dBμV/m)      | (dB)   |               | H/V       |
| 2483.500         | 57.90         | -9.29                   | 48.61          | 74            | -25.47 | PK            | H         |
| 2483.500         | 41.70         | -9.29                   | 32.41          | 54            | 21.58  | AV            | H         |
| 2483.500         | 57.38         | -9.29                   | 48.09          | 74            | -24.89 | PK            | V         |
| 2483.500         | 38.16         | -9.29                   | 28.87          | 54            | -20.44 | AV            | V         |

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor*



## 6 Photographs - EUT Test Setup

Please refer to test setup file

## 7 Photographs - EUT Constructional Details

Please refer to the report No.: CQASZ20210500031EX-03

**THE END**