

FCC REPORT**(Bluetooth)****Applicant:** Hongkong (shenzhen) Phonezer Union Technology Co. Ltd.**Address of Applicant:** No. 1 elevator 6 building, 1 science and technology park, 67 districk, Bao'an, Shenzhen, China**Equipment Under Test (EUT)**

Product Name: Bluetooth earphone

Model No.: T2 Pro , FZ105, FZ106, FZ107, FZ108, FZ109, FZ112, FZ113, FZ114, FZ115, FZ116, FZ117, FZ118, FZ119

Trade mark:

yobola**FCC ID:** 2AYU7-T2PRO**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247**Date of sample receipt:** 08 Jan., 2021**Date of Test:** 09 Jan., 2021 to 28 Jan., 2021**Date of report issued:** 22 Feb., 2021**Test Result:** PASS *

* In the configuration tested, the EUT complied with the standards specified above.

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	01 Jan., 2021	Original

Tested by: miles chen

Date: 22 Feb., 2021

Test Engineer

Reviewed by: hite

Date: 22 Feb., 2021

Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST ENVIRONMENT AND MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION.....	6
5.9 TEST INSTRUMENTS LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	8
6.2 CONDUCTED EMISSIONS	9
6.3 CONDUCTED OUTPUT POWER	12
6.4 20DB OCCUPY BANDWIDTH.....	13
6.5 CARRIER FREQUENCIES SEPARATION	14
6.6 HOPPING CHANNEL NUMBER.....	15
6.7 DWELL TIME	16
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	17
6.9 BAND EDGE.....	18
6.9.1 Conducted Emission Method.....	18
6.9.2 Radiated Emission Method.....	19
6.10 SPURIOUS EMISSION.....	32
6.10.1 Conducted Emission Method.....	32
6.10.2 Radiated Emission Method.....	33
7 TEST SETUP PHOTO	38
8 EUT CONSTRUCTIONAL DETAILS	40

4 Test Summary

Test Items	Section in CFR 47	Test Data	Result	
Antenna Requirement	15.203 & 15.247 (b)	See Section 6.1	Pass	
AC Power Line Conducted Emission	15.207	See Section 6.2	Pass	
Conducted Peak Output Power	15.247 (b)(1)	Appendix A – BT	Pass	
20dB Occupied Bandwidth	15.247 (a)(1)	Appendix A – BT	Pass	
Carrier Frequencies Separation	15.247 (a)(1)	Appendix A – BT	Pass	
Hopping Channel Number	15.247 (a)(1)	Appendix A – BT	Pass	
Dwell Time	15.247 (a)(1)	Appendix A – BT	Pass	
Conducted Band Edge	15.205 & 15.209	Appendix A – BT	Pass	
Radiated Band Edge		See Section 6.9.2	Pass	
Conducted Spurious Emission	15.247(d)	Appendix A – BT	Pass	
Radiated Spurious Emission		See Section 6.10.2	Pass	
Remark:				
1. Pass: The EUT complies with the essential requirements in the standard.				
2. N/A: Not Applicable.				
3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).				
Test Method:	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02			

5 General Information

5.1 Client Information

Applicant:	Hongkong (shenzhen) Phonezer Union Technology Co. Ltd.
Address:	No. 1 elevator 6 building, 1 science and technology park, 67 district, Bao'an, Shenzhen, China
Manufacturer/ Factory:	Hongkong (shenzhen) Phonezer Union Technology Co. Ltd.
Address:	No. 1 elevator 6 building, 1 science and technology park, 67 district, Bao'an, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	Bluetooth earphone
Model No.:	T2 Pro , FZ105, FZ106, FZ107, FZ108, FZ109, FZ112, FZ113, FZ114, FZ115, FZ116, FZ117, FZ118, FZ119
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	Internal Antenna
Antenna gain:	2.67 dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V, 30mAh
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remarks:	Mode No.: T2 Pro/ FZ105, FZ106, FZ107, FZ108, FZ109, FZ112, FZ113, FZ114, FZ115, FZ116, FZ117, FZ118, FZ119 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
...
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark: Channel 0, 39 &78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.

5.3 Test environment and mode

Operating Environment:	
Temperature:	22.5 °C
Humidity:	55 % RH
Atmospheric Pressure:	1010 mbar
Test Modes:	
Non-hopping mode:	Keep the EUT in continuous transmitting mode with worst case data rate.
Hopping mode:	Keep the EUT in hopping mode.
Remark	GFSK (1 Mbps) is the worst case mode.
Radiated Emission: The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 150kHz)	±1.60 dB (k=2)
Conducted Emission (150kHz ~ 30MHz)	±2.20 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.40 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.20 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±4.80 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1279**

Jianyan Testing Group Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 892155.

● **ISED – CAB identifier.: CN0102**

Jianyan Testing Group Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with ISED#:26114.

● **A2LA - Registration No.: 5568.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/5568-01.pdf>

5.8 Laboratory Location

JianYan Testing Group Co., Ltd.

Address: No.760, Fengling Road, Tong'an District, Xiamen, Fujian, China

Tel: +86-592-2273071, Fax:+86-592-2273700

Email: quality@xmabr.com, Website: <http://www.lets.com/>

5.9 Test Instruments list

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR 3	102330	2020-08-05	2021-08-04
EMI Test Receiver	Rohde & Schwarz	ESR 3	102329	2020-08-06	2021-08-05
EMI Test Receiver	Rohde & Schwarz	ESR 7	102259	2020-04-12	2021-04-11
LISN	Rohde & Schwarz	ENV 216	102240	2020-08-05	2021-08-04
Voltage probe	Schwarzbeck	TK9420+VT9420	814	2020-08-05	2021-08-04
ISN	Schwarzbeck	CAT3 8158	95	2020-08-05	2021-08-04
EMI Test Software	Farad	EZ-EMC	Version: V.EMCE-3A1		

Radiated Disturbances:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	BOST	CHC-966	966-1#	2019-12-27	2022-12-26
3m SAC	BOST	CHC-966	966-2#	2019-12-27	2022-12-26
EMI Test Receiver	Rohde & Schwarz	ESR 3	102330	2020-08-05	2021-08-04
EMI Test Receiver	Rohde & Schwarz	ESR 3	102329	2020-08-06	2021-08-05
EMI Test Receiver	Rohde & Schwarz	ESR 7	102259	2020-04-12	2021-04-11
Spectrum Analyzer	Agilent	E4407B	MY45115531	2020-12-27	2021-12-26
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102175	2020-04-15	2021-04-14
BiConiLog Antenna	SCHWARZBECK	VULB 9163	1105	2020-12-20	2021-12-19
BiConiLog Antenna	SCHWARZBECK	VULB 9168	1066	2020-04-11	2021-04-10
Horn Antenna	SCHWARZBECK	BBHA 9120 D	911	2020-04-01	2021-03-31
Pre-amplifier	SCHWARZBECK	BBV9743	00009	2020-08-06	2021-08-05
Pre-amplifier	SCHWARZBECK	BBV9744	162	2020-12-22	2021-12-21
Pre-amplifier	SCHWARZBECK	BBV9718C	00014	2020-04-08	2021-04-07
EMI Test Software	Farad	EZ-EMC	Version: V.EMCE-3A1		

Conducted method:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Signal Generator	Agilent	N5181	MY49060122	2020-04-27	2021-04-26
Spectrum Analyzer	R&S	FSV40-N	102175	2020-04-15	2021-04-14
Power Sensor	Keysight	U2021XA	MY54320007	2020-04-08	2021-04-07
Power Sensor	Keysight	U2021XA	MY55130021	2020-04-08	2021-04-07
Power Sensor	Keysight	U2021XA	MY55240006	2020-04-08	2021-04-07
DC Power Source	Keysight	E3642A	MY50180038	2020-05-29	2021-05-28
Wideband Radio Communication Tester	R&S	CMW500	145852	2020-05-15	2021-05-14
Signal Generator	Agilent	N5182A	MY51004823	2020-04-22	2021-04-21
Power Sensor	Keysight	U2021XA	MY54320004	2020-04-08	2021-04-07
Test Software	MWRFTEST	MTS 8310	Version: 2.0.0.0		

6 Test results and measurement data

6.1 Antenna Requirement


Standard requirement:	FCC Part 15 C Section 15.203 & 247(b)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:	(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
E.U.T Antenna:	The Bluetooth antenna is an Internal antenna which permanently attached, and the best case gain of the antenna is 2.67 dBi.

6.2 Conducted Emissions

Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	<p>Reference Plane</p> <p>LISN</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>80cm</p> <p>40cm</p> <p>LISN</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10(latest version) on conducted measurement. 		
Test Instruments:	Refer to section 5.9 for details		
Test mode:	Hopping mode		
Test results:	Pass		

Measurement Data:

Product name:	Bluetooth earphone	Product model:	T2 Pro
Test by:	Miles Chen	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

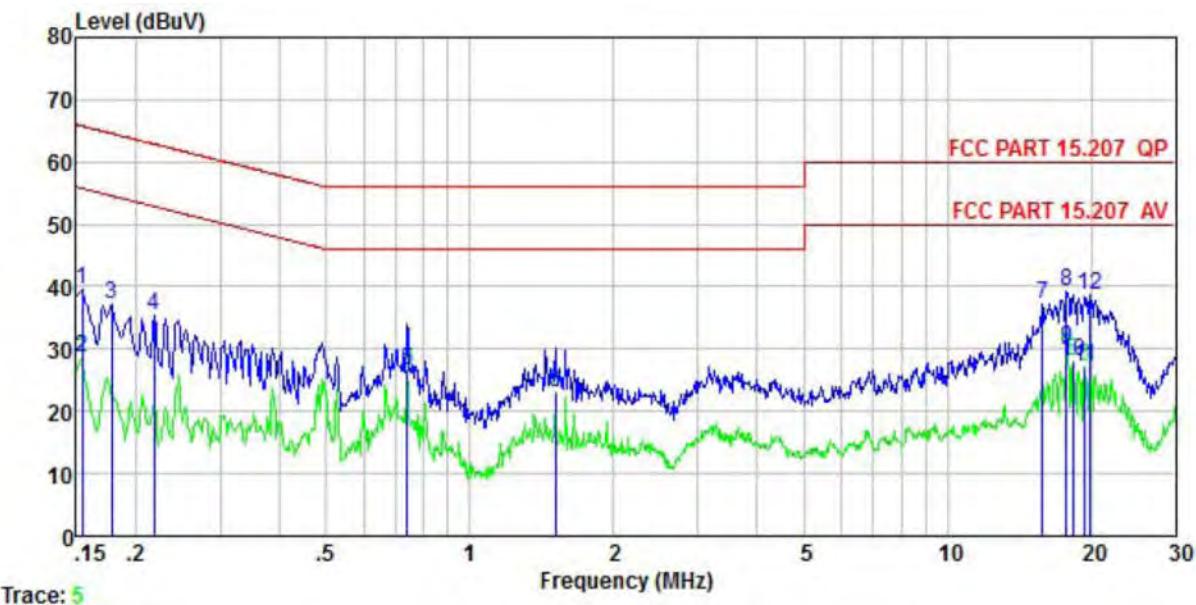


Freq MHz	Read Level dBuV	LISN Factor dB	Aux Factor dB	Cable Loss dB	Limit Line dBuV	Over Line dB	Over Limit Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.154	29.26	-0.57	-0.06	10.78	39.41	65.78 -26.37 QP
2	0.154	18.38	-0.57	-0.06	10.78	28.53	55.78 -27.25 Average
3	0.178	27.21	-0.58	-0.12	10.77	37.28	64.59 -27.31 QP
4	0.219	25.43	-0.58	-0.18	10.76	35.43	62.88 -27.45 QP
5	0.739	16.57	-0.54	-0.28	10.79	26.54	46.00 -19.46 Average
6	1.511	12.74	-0.55	-0.01	10.92	23.10	46.00 -22.90 Average
7	15.801	23.95	-0.72	3.14	10.91	37.28	60.00 -22.72 QP
8	17.755	27.03	-0.79	2.06	10.92	39.22	60.00 -20.78 QP
9	17.755	17.83	-0.79	2.06	10.92	30.02	50.00 -19.98 Average
10	18.328	16.20	-0.81	1.74	10.92	28.05	50.00 -21.95 Average
11	19.428	15.78	-0.85	1.20	10.93	27.06	50.00 -22.94 Average
12	19.845	27.60	-0.86	0.97	10.93	38.64	60.00 -21.36 QP

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.

Product name:	Bluetooth earphone	Product model:	T2 Pro
Test by:	Miles Chen	Test mode:	BT Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

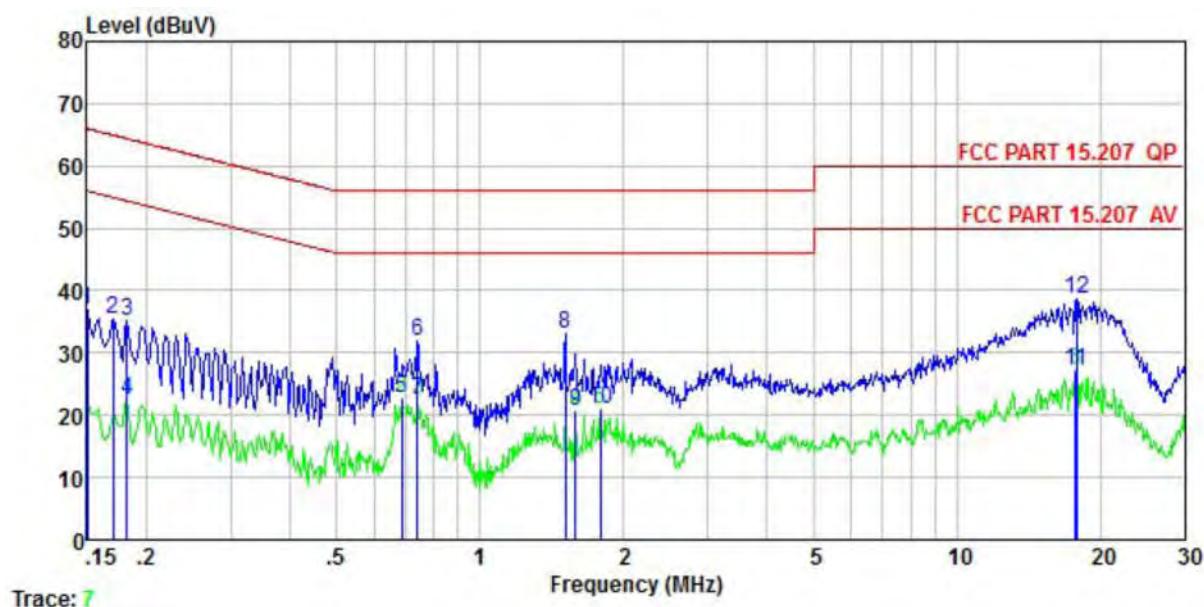


Freq	Read	LISN	Aux	Cable	Limit	Over	Limit	Remark
	Level	Factor	Factor	Loss				
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	26.85	-0.69	0.01	10.78	36.95	66.00	-29.05 QP
2	0.170	25.38	-0.68	0.01	10.77	35.48	64.94	-29.46 QP
3	0.182	25.10	-0.68	0.00	10.77	35.19	64.42	-29.23 QP
4	0.182	12.35	-0.68	0.00	10.77	22.44	54.42	-31.98 Average
5	0.686	12.68	-0.64	0.04	10.77	22.85	46.00	-23.15 Average
6	0.739	21.66	-0.65	0.05	10.79	31.85	56.00	-24.15 QP
7	0.739	12.15	-0.65	0.05	10.79	22.34	46.00	-23.66 Average
8	1.511	22.59	-0.70	0.13	10.92	32.94	56.00	-23.06 QP
9	1.585	10.26	-0.70	0.14	10.93	20.63	46.00	-25.37 Average
10	1.790	10.66	-0.71	0.16	10.95	21.06	46.00	-24.94 Average
11	17.755	15.95	-1.08	1.47	10.92	27.26	50.00	-22.74 Average
12	17.849	27.47	-1.09	1.39	10.92	38.69	60.00	-21.31 QP


Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Final Level = Receiver Read level + LISN Factor + Aux Factor + Cable Loss.


6.3 Conducted Output Power

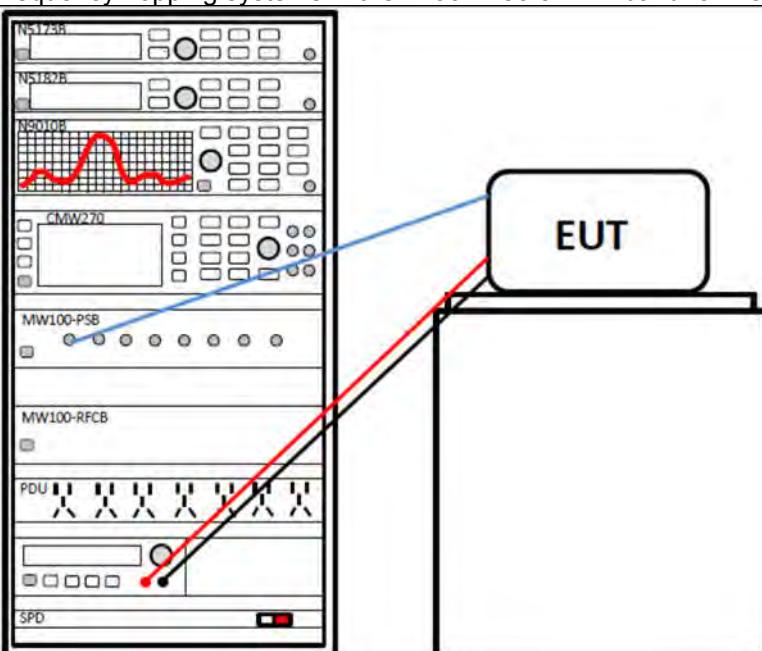Test Requirement:	FCC Part 15 C Section 15.247 (b)(1)
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak (If 20dB BW \leq 1 MHz) RBW=2MHz, VBW=6MHz, Detector=Peak (If 20dB BW $>$ 1 MHz and $<$ 3MHz)
Limit:	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT


6.4 20dB Occupy Bandwidth

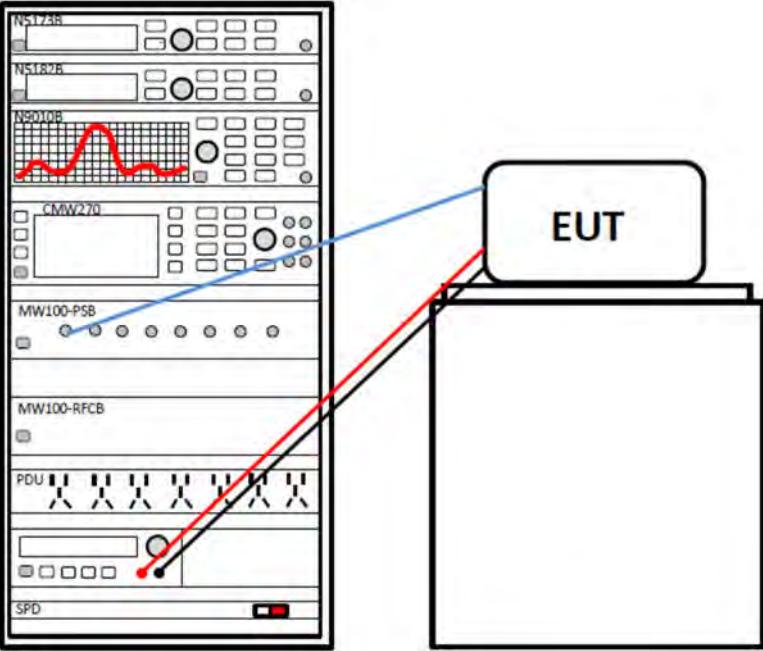Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Receiver setup:	DH1: RBW=15 kHz, VBW=47 kHz, detector=Peak 2DH1&3DH: RBW=20 kHz, VBW=62 kHz, detector=Peak
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT


6.5 Carrier Frequencies Separation

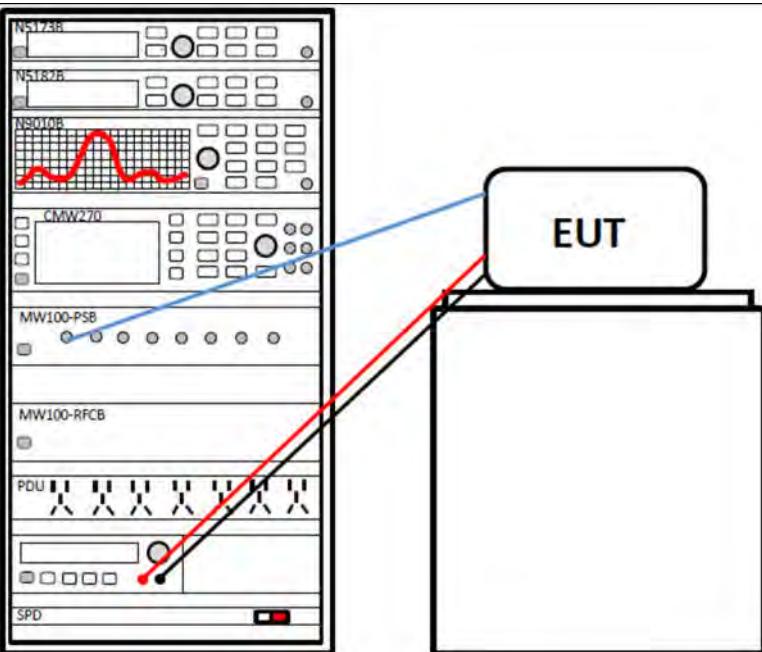Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Receiver setup:	RBW=300 kHz, VBW=1 MHz, detector=Peak
Limit:	a) 0.025MHz or the 20dB bandwidth (whichever is greater) b) 0.025MHz or two-thirds of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT


6.6 Hopping Channel Number

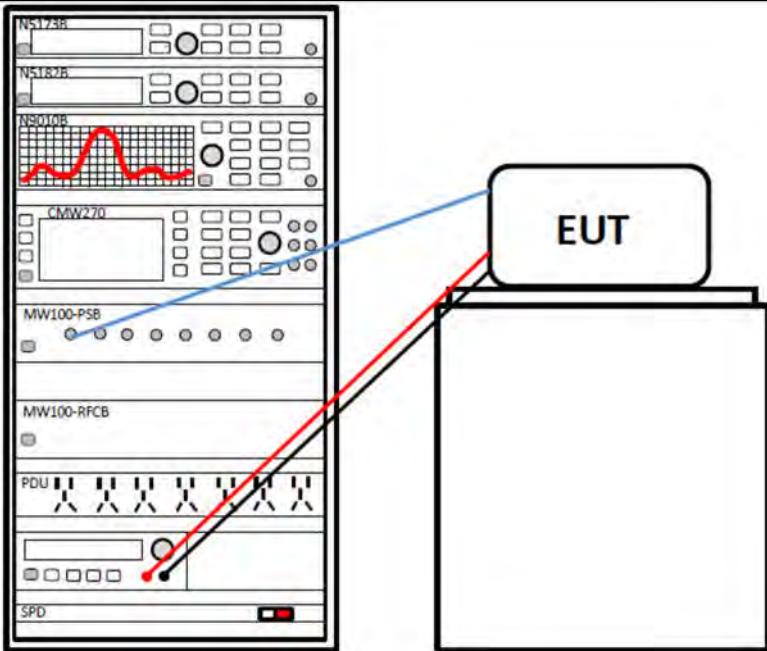Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Center Frequency=2441MHz, Span= 100MHz, Detector=Peak
Limit:	15 channels
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT

6.7 Dwell Time

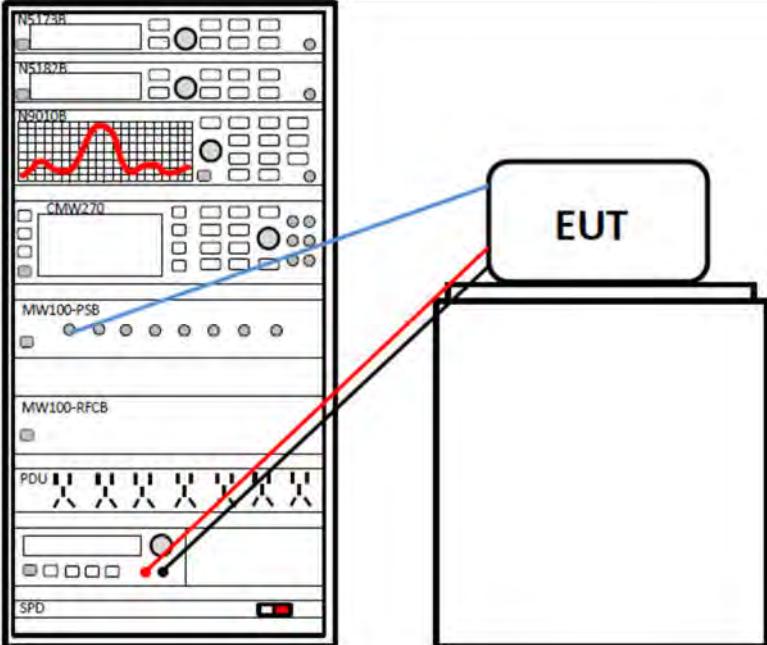
Test Requirement:	FCC Part 15 C Section 15.247 (a)(1)
Receiver setup:	RBW=1 MHz, VBW=1 MHz, Span=0 Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT

6.8 Pseudorandom Frequency Hopping Sequence

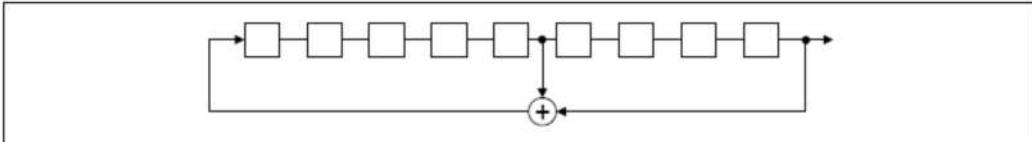
Test Requirement:	FCC Part 15 C Section 15.247 (a)(1) requirement:																						
	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>																						
EUT Pseudorandom Frequency Hopping Sequence																							
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal)  <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1" data-bbox="257 1096 1235 1237"> <tr> <td>0</td> <td>2</td> <td>4</td> <td>6</td> <td>62</td> <td>64</td> <td>78</td> <td>1</td> <td>73</td> <td>75</td> <td>77</td> </tr> <tr> <td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>		0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													

6.9 Band Edge

6.9.1 Conducted Emission Method

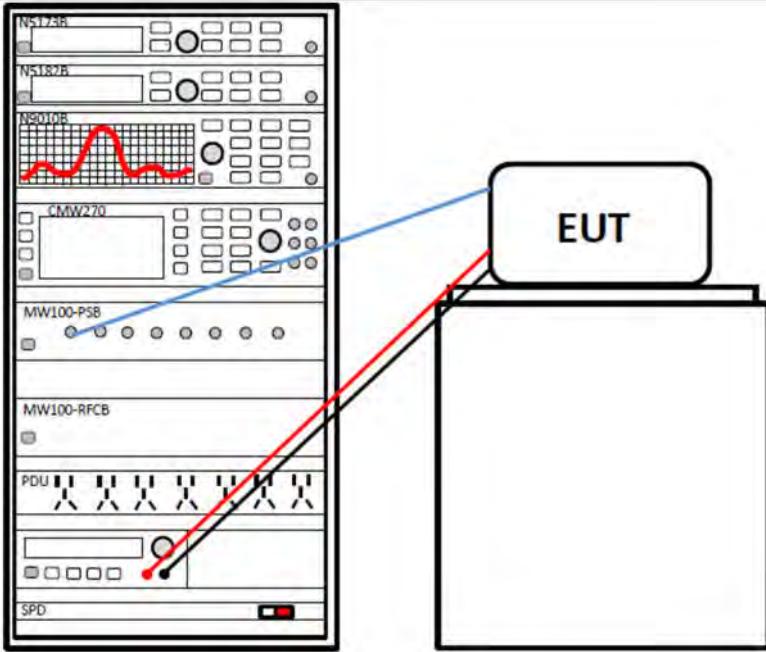
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Receiver setup:	RBW=100 kHz, VBW=300 kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT

6.9.2 Radiated Emission Method

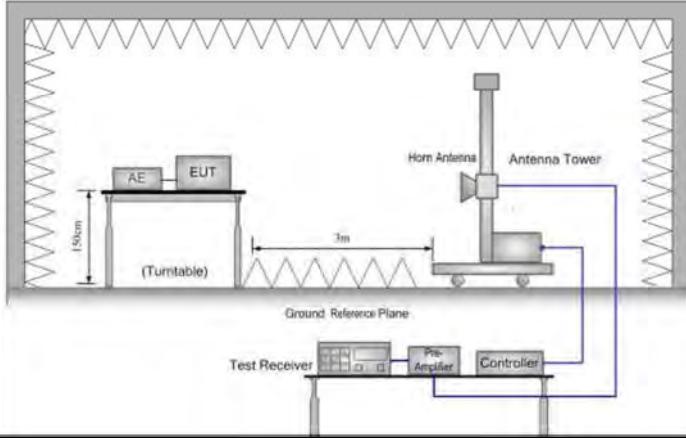Test Requirement:	FCC Part 15 C Section 15.209 and 15.205								
Test Frequency Range:	2310 MHz to 2390 MHz and 2483.5 MHz to 2500 MHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		RMS	1MHz	3MHz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								
Test Instruments:	Refer to section 5.9 for details								
Test mode:	Non-hopping mode								
Test results:	Passed								

GFSK Mode:

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

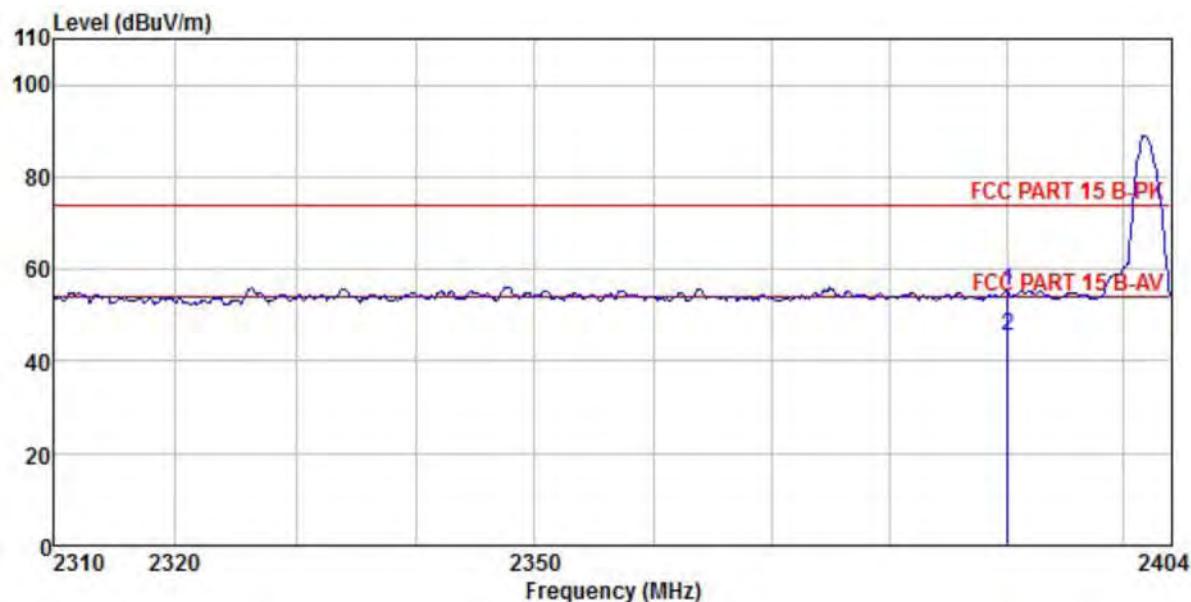


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Line	Limit	Remark	
	Freq	Level	Antenna	Cable	Loss	Factor	Preamp	Level	dBuV/m	dBuV/m	dB
	MHz	dBuV	dB/m	dB	dB	dB	dB	dB	dBuV/m	dBuV/m	-----
1	2390.000	22.04	27.03	4.28	1.68	0.00	55.03	74.00	-18.97	Peak	
2	2390.000	12.48	27.03	4.28	1.68	0.00	45.47	54.00	-8.53	Average	

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

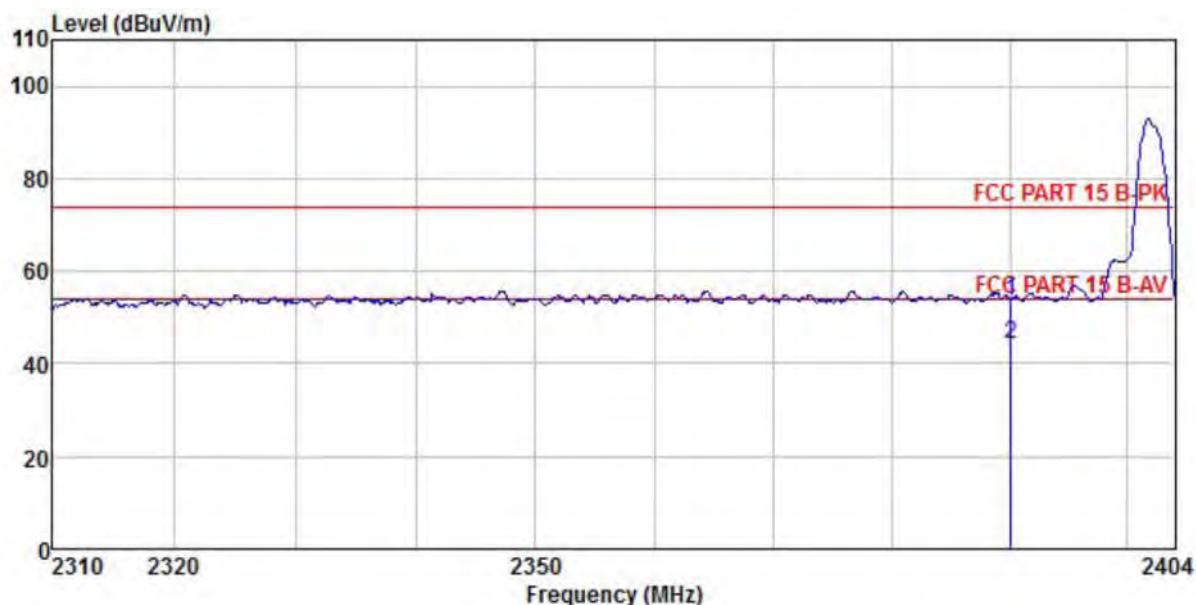


Freq	ReadAntenna		Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	Freq	Level	Factor	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.63	27.03	4.28	1.68	0.00	53.62	74.00	-20.38 Peak
2	2390.000	11.35	27.03	4.28	1.68	0.00	44.34	54.00	-9.66 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

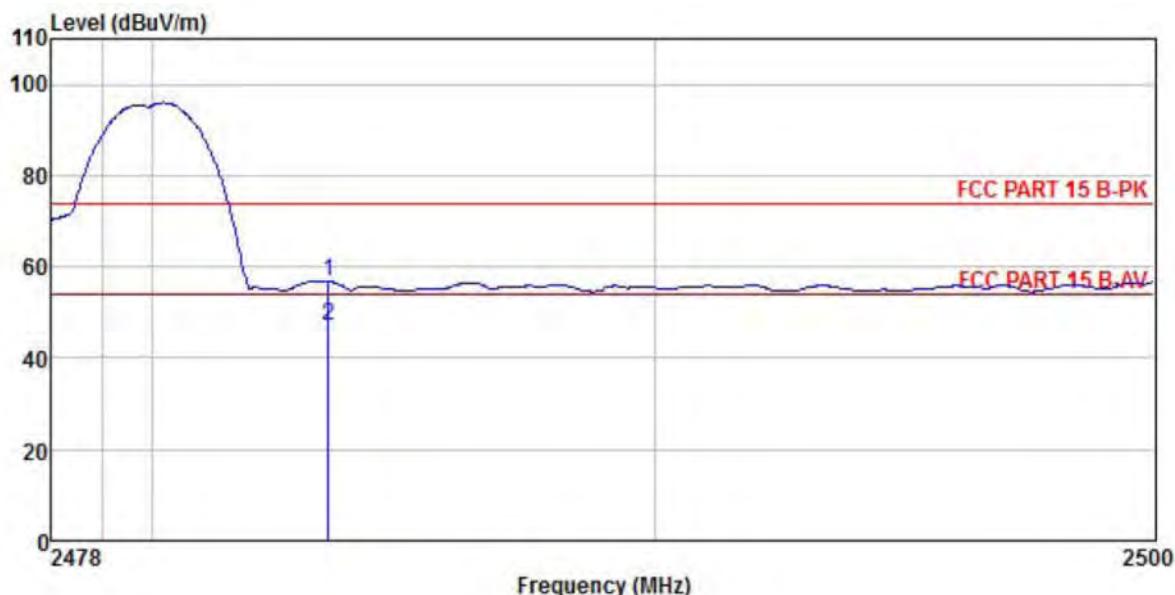


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark	
	Freq	Level	Factor	Loss	Factor				
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	23.51	27.27	4.38	1.70	0.00	56.86	74.00	-17.14 Peak
2	2483.500	13.93	27.27	4.38	1.70	0.00	47.28	54.00	-6.72 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

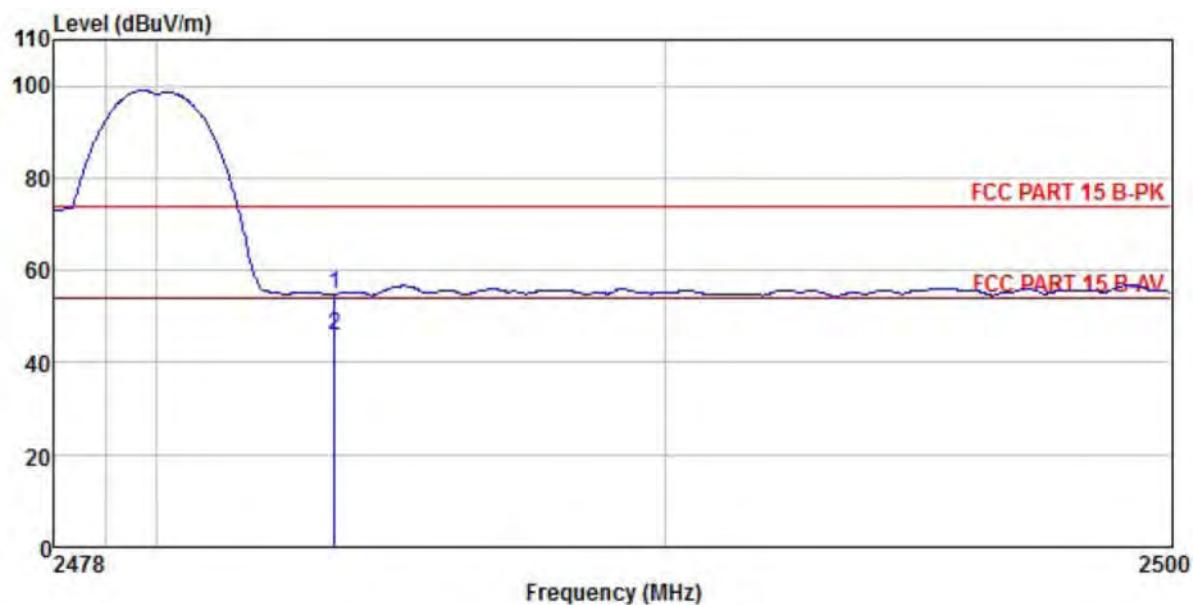


Freq	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Over
	Level	Level	Loss	Factor	Factor			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.49	27.27	4.38	1.70	0.00	54.84	74.00 -19.16 Peak
2	2483.500	12.63	27.27	4.38	1.70	0.00	45.98	54.00 -8.02 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

$\pi/4$ -DQPSK mode

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

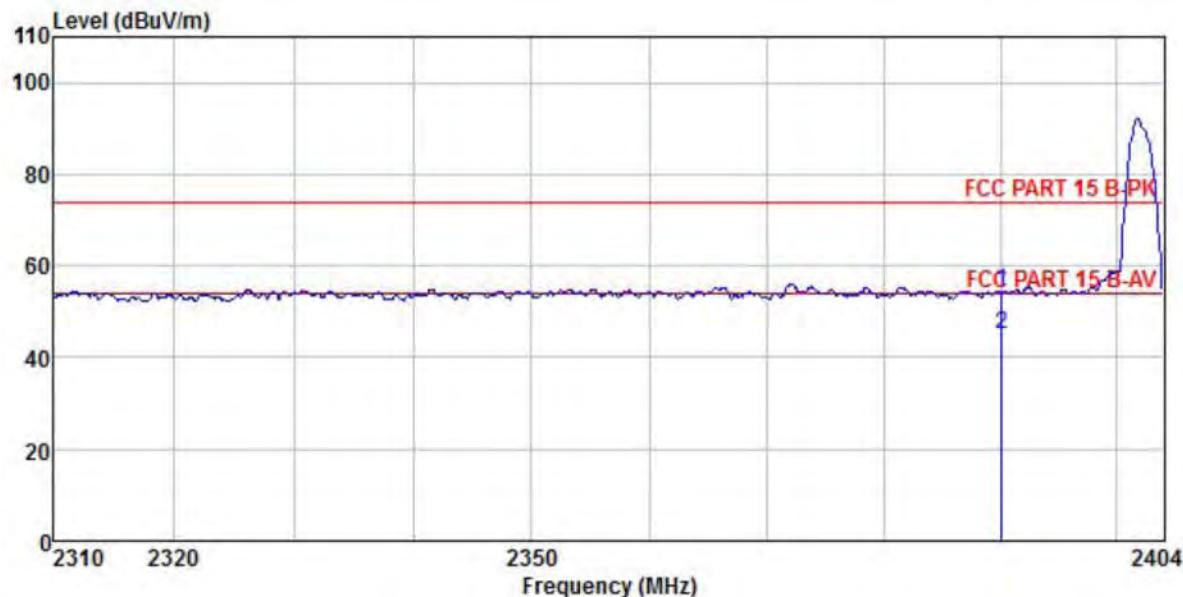


Freq	Read		Antenna	Cable	Aux	Preampl	Limit	Over	Over	Remark
	Level	Antenna	Level	Loss	Factor	Factor				
MHz	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.49	27.03	4.28	1.68	0.00	54.48	74.00	-19.52	Peak
2	2390.000	12.08	27.03	4.28	1.68	0.00	45.07	54.00	-8.93	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	2DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

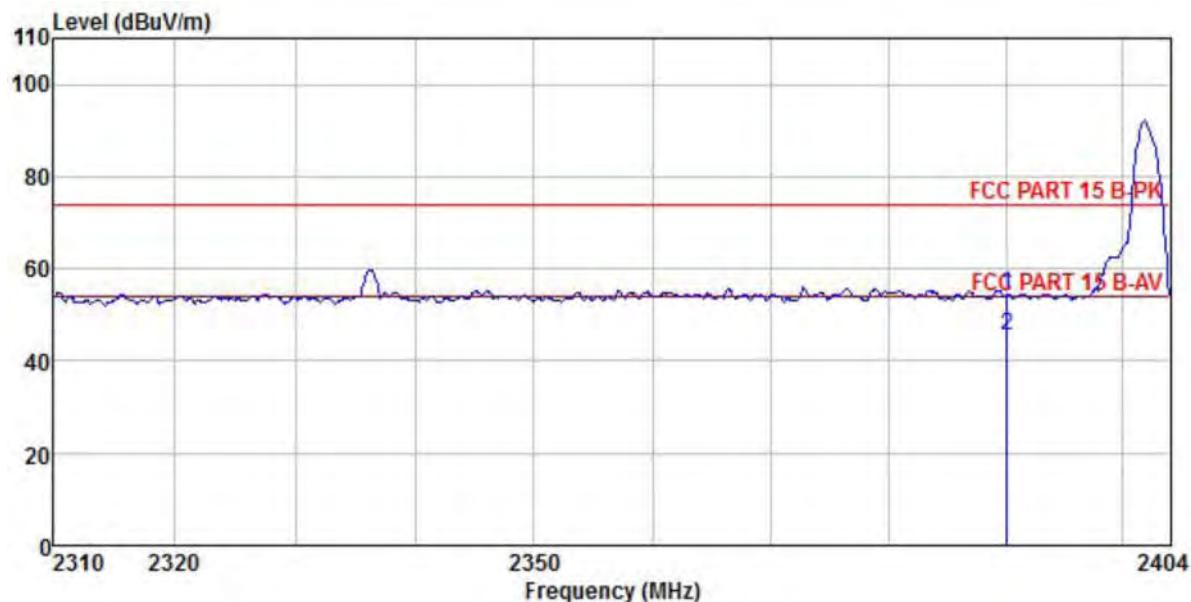


Freq	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Over
	Level	Level	Loss	Factor	Factor			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	21.28	27.03	4.28	1.68	0.00	54.27	74.00 -19.73 Peak
2	2390.000	12.35	27.03	4.28	1.68	0.00	45.34	54.00 -8.66 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

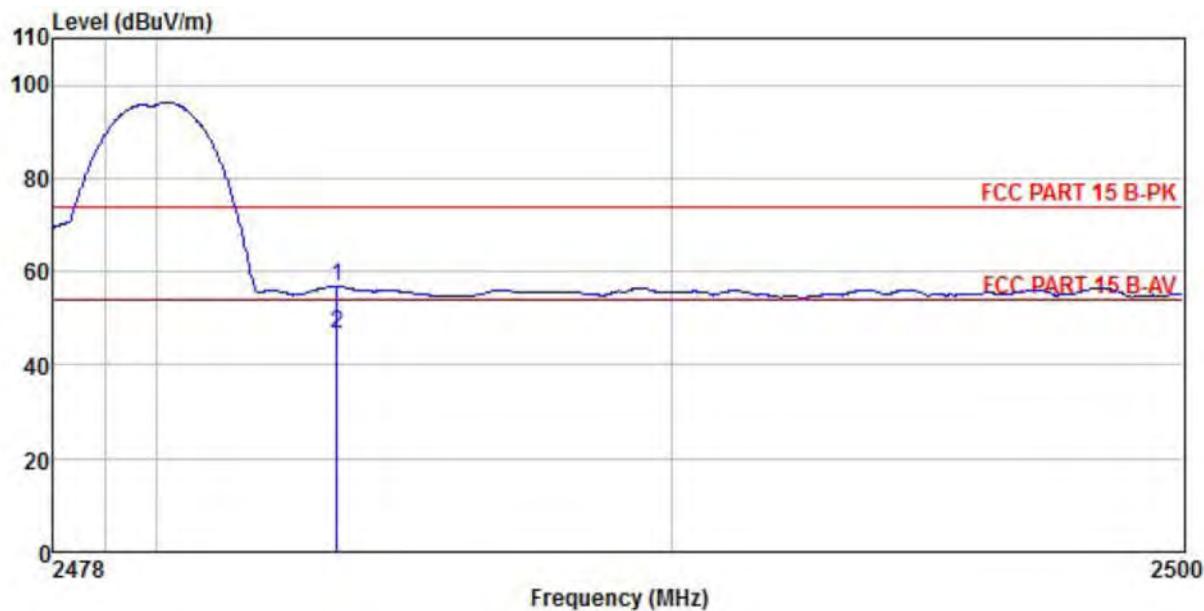


Freq MHz	Read	Antenna	Cable	Aux	Preamp	Limit Line dBuV/m	Over Line dB	Over Limit dB	Remark
	Level dBuV	Factor	Cable Loss dB	Aux Factor	Preamp Factor				
1 2483.500	23.40	27.27	4.38	1.70	0.00	56.75	74.00	-17.25	Peak
2 2483.500	13.15	27.27	4.38	1.70	0.00	46.50	54.00	-7.50	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	2DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

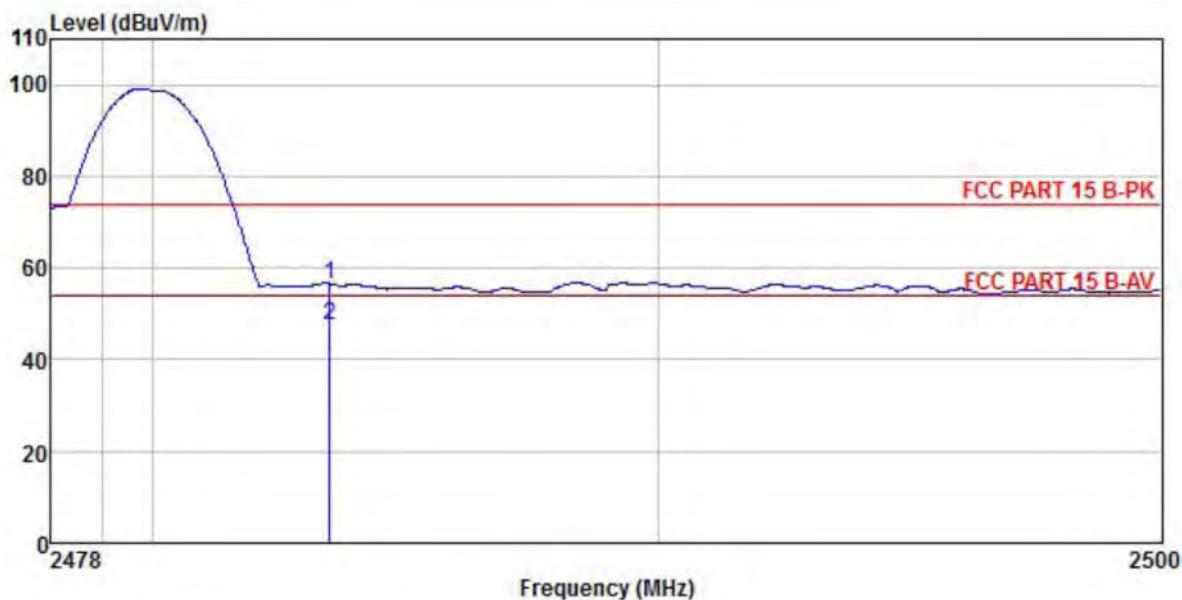


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Line	Limit	Remark
	Level	Factor	Loss	Factor	Factor					
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.26	27.27	4.38	1.70	0.00	56.61	74.00	-17.39	Peak
2	2483.500	14.02	27.27	4.38	1.70	0.00	47.37	54.00	-6.63	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

8DPSK mode

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

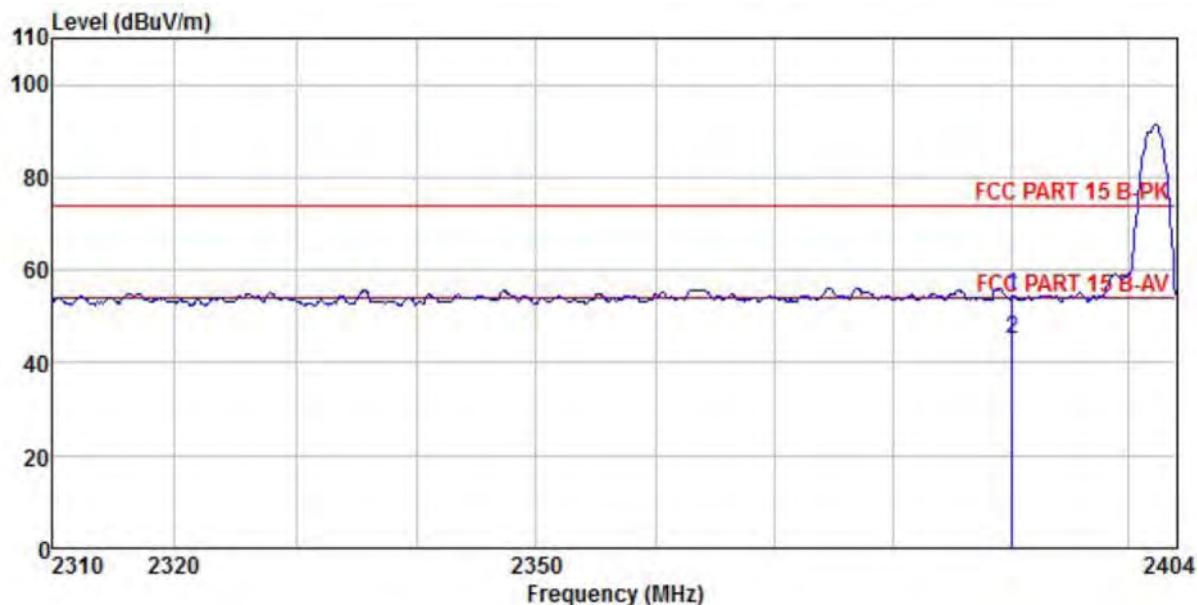


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamp Factor dB	Limit Level dBuV/m	Line Limit dBuV/m	Over Limit dB	Over Limit Remark
1 2390.000	21.43	27.03	4.28	1.68	0.00	54.42	74.00	-19.58	Peak
2 2390.000	12.15	27.03	4.28	1.68	0.00	45.14	54.00	-8.86	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	3DH1 Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

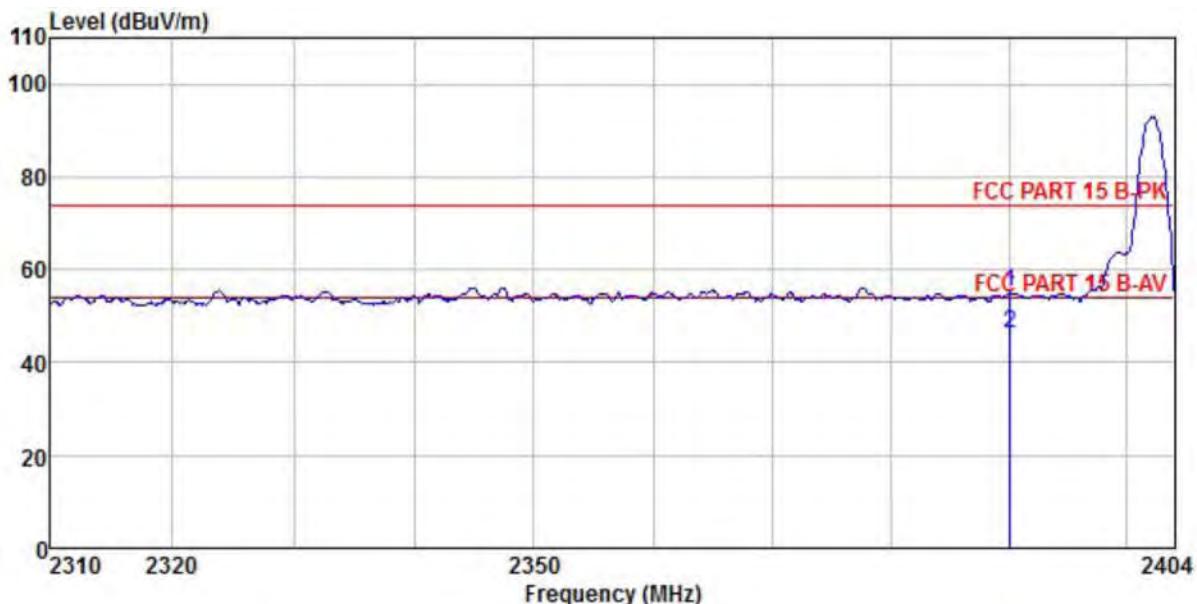


Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preampl Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	22.04	27.03	4.28	1.68	0.00	55.03	74.00	-18.97	Peak
2 2390.000	13.10	27.03	4.28	1.68	0.00	46.09	54.00	-7.91	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

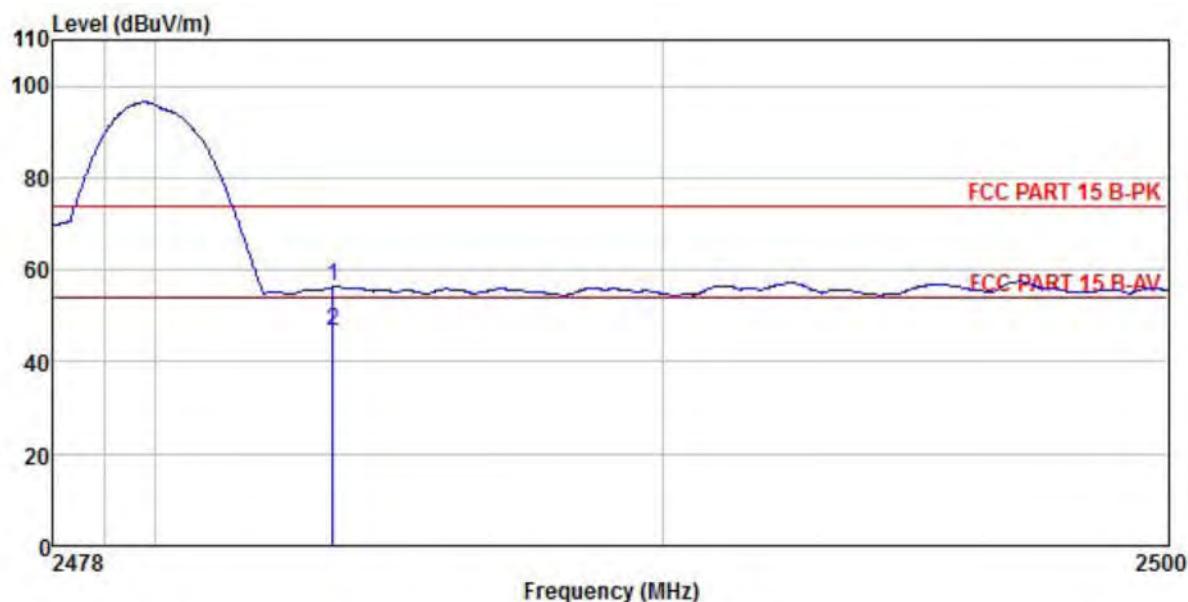


Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamp Factor dB	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	MHz	dBuV	dB/m	dB	dB				
1 2483.500	22.88	27.27	4.38	1.70	0.00	56.23	74.00	-17.77	Peak
2 2483.500	13.43	27.27	4.38	1.70	0.00	46.78	54.00	-7.22	Average

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	3DH1 Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

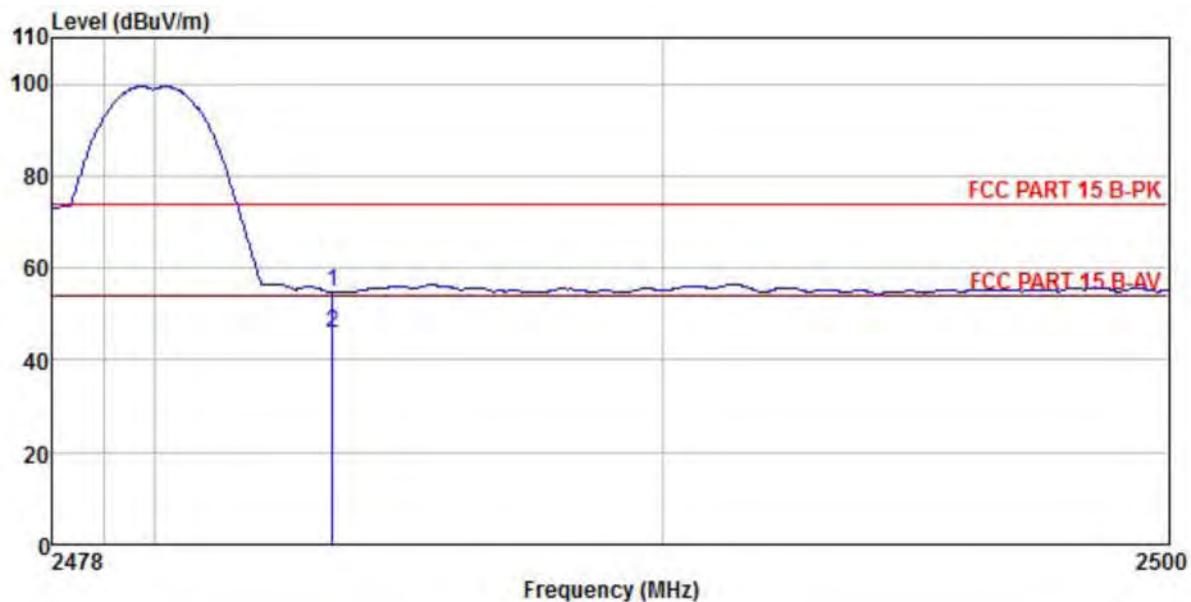

Freq MHz	Read Level dBuV	Antenna Factor dB/m	Cable Loss dB	Aux Factor dB	Preamp Factor dB	Limit Level dBuV/m	Line Limit dBuV/m	Over Line Limit dB	Over Limit Remark
1 2483.500	21.49	27.27	4.38	1.70	0.00	54.84	74.00	-19.16	Peak
2 2483.500	12.42	27.27	4.38	1.70	0.00	45.77	54.00	-8.23	Average

Remark:



1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

6.10 Spurious Emission

6.10.1 Conducted Emission Method

Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass
Measurement Data:	Refer to Appendix A - BT

6.10.2 Radiated Emission Method

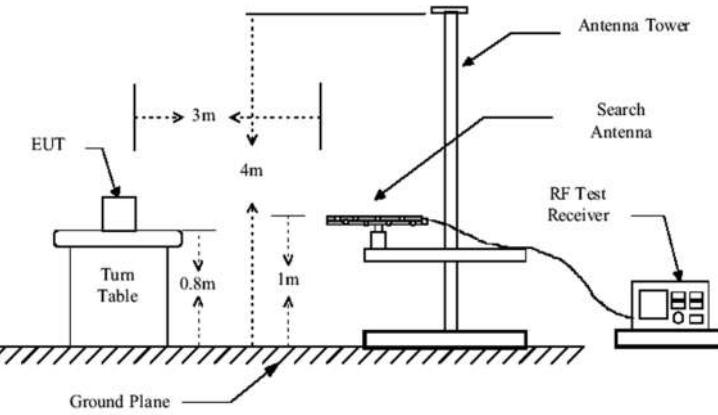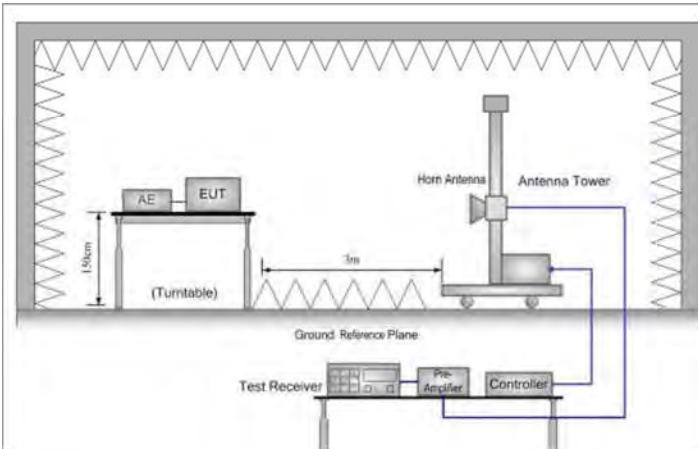
Test Requirement:	FCC Part 15 C Section 15.209								
Test Frequency Range:	9 kHz to 25 GHz								
Test Distance:	3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
Receiver setup:	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
		RMS	1MHz	3MHz	Average Value				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark					
Limit:	30MHz-88MHz	40.0		Quasi-peak Value					
	88MHz-216MHz	43.5		Quasi-peak Value					
	216MHz-960MHz	46.0		Quasi-peak Value					
	960MHz-1GHz	54.0		Quasi-peak Value					
	Above 1GHz	54.0		Average Value					
		74.0		Peak Value					
Test setup:	Below 1GHz								
									
	Above 1GHz								
									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 								

	<ol style="list-style-type: none">3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Non-hopping mode
Test results:	Pass
Remark:	<ol style="list-style-type: none">1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.2. 9 kHz to 30 MHz is noise floor and lower than the limit 20dB, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

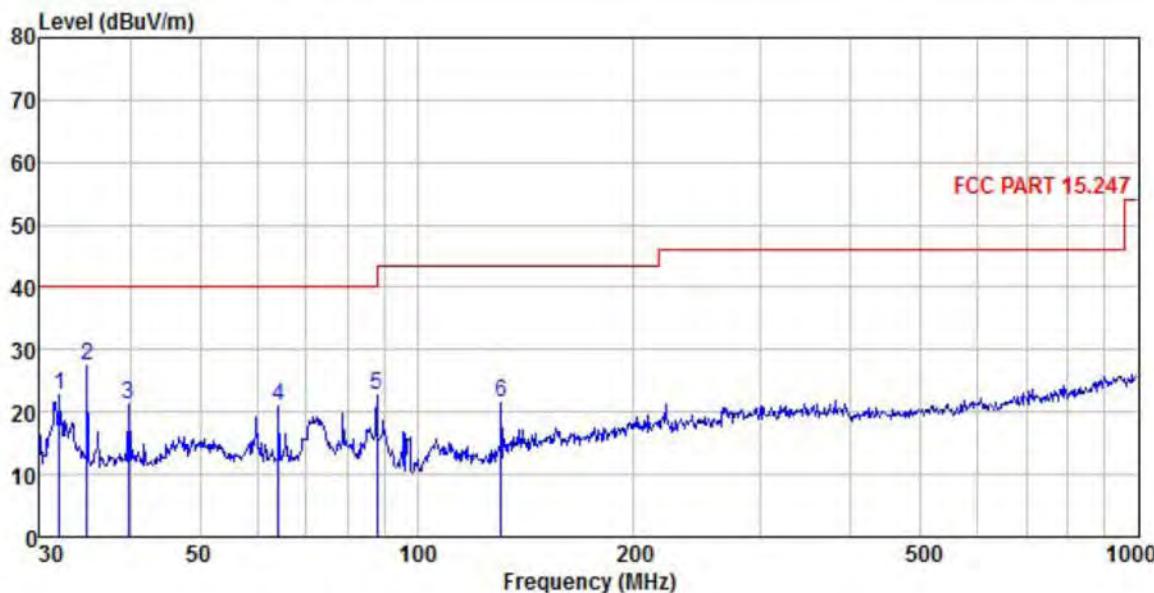


Freq	Read	Antenna	Cable	Aux	Preamp	Limit	Over	Remark
	Freq	Level	Factor	Loss	Factor			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	31.955	40.28	12.13	0.38	0.00	29.97	22.82	40.00 -17.18 QP
2	34.882	44.56	12.58	0.34	0.00	29.95	27.53	40.00 -12.47 QP
3	39.854	37.91	12.79	0.35	0.00	29.90	21.15	40.00 -18.85 QP
4	64.208	40.20	9.94	0.43	0.00	29.76	20.81	40.00 -19.19 QP
5	88.033	41.60	10.29	0.49	0.00	29.58	22.80	43.50 -20.70 QP
6	130.837	38.29	12.11	0.59	0.00	29.32	21.67	43.50 -21.83 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Product Name:	Bluetooth earphone	Product Model:	T2 Pro
Test By:	Miles Chen	Test mode:	BT Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Huni: 57%

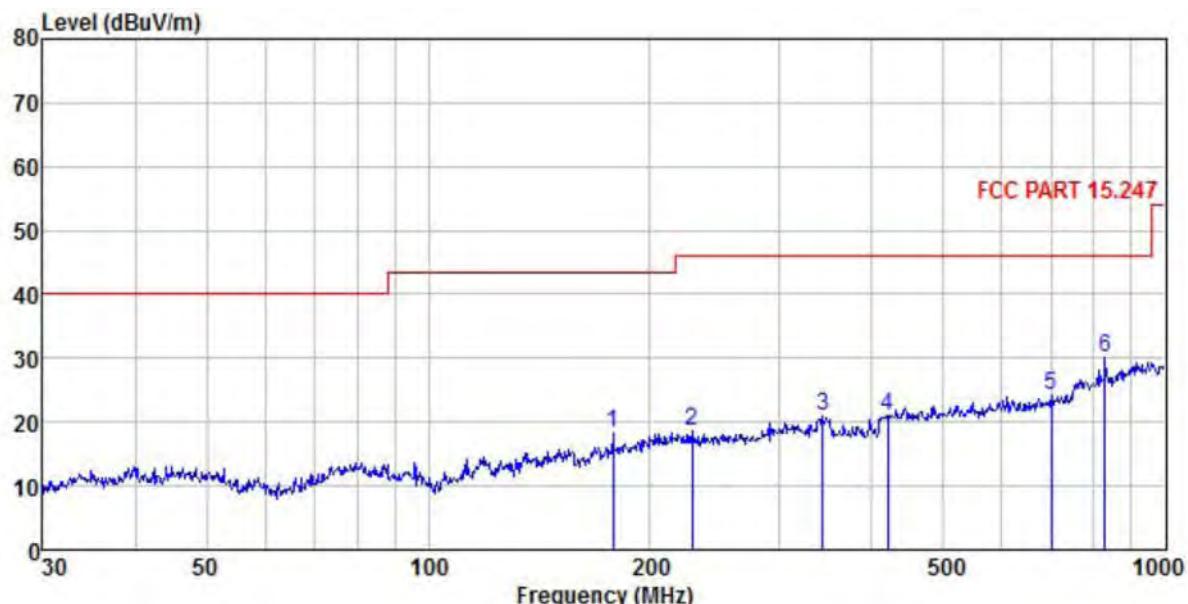

Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit Line	Over Limit	Remark
	Freq	Level Factor	Loss Factor	Factor	Level			
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	178.133	29.67	16.86	0.68	0.00	28.99	18.22	43.50 -25.28 QP
2	227.691	28.01	18.42	0.75	0.00	28.66	18.52	46.00 -27.48 QP
3	343.180	29.67	18.79	0.92	0.00	28.55	20.83	46.00 -25.17 QP
4	420.580	29.71	19.14	1.02	0.00	28.82	21.05	46.00 -24.95 QP
5	699.305	31.18	20.50	1.33	0.00	28.67	24.34	46.00 -21.66 QP
6	827.493	35.69	21.18	1.42	0.00	28.09	30.20	46.00 -15.80 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.
3. The Aux Factor is a notch filter switch box loss, this item is not used.

Above 1GHz:

Test channel: Lowest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	47.93	30.78	6.80	2.44	41.81	46.14	74.00	-27.86	Vertical
4804.00	49.23	30.78	6.80	2.44	41.81	47.44	74.00	-26.56	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	38.92	30.78	6.80	2.44	41.81	37.13	54.00	-16.87	Vertical
4804.00	39.62	30.78	6.80	2.44	41.81	37.83	54.00	-16.17	Horizontal
Test channel: Middle channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	47.16	30.96	6.86	2.47	41.84	45.61	74.00	-28.39	Vertical
4882.00	49.34	30.96	6.86	2.47	41.84	47.79	74.00	-26.21	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	38.15	30.96	6.86	2.47	41.84	36.60	54.00	-17.40	Vertical
4882.00	39.23	30.96	6.86	2.47	41.84	37.68	54.00	-16.32	Horizontal
Test channel: Highest channel									
Detector: Peak Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	47.15	31.11	6.91	2.49	41.87	45.79	74.00	-28.21	Vertical
4960.00	49.71	31.11	6.91	2.49	41.87	48.35	74.00	-25.65	Horizontal
Detector: Average Value									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Aux Factor (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	38.14	31.11	6.91	2.49	41.87	36.78	54.00	-17.22	Vertical
4960.00	38.92	31.11	6.91	2.49	41.87	37.56	54.00	-16.44	Horizontal

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.