






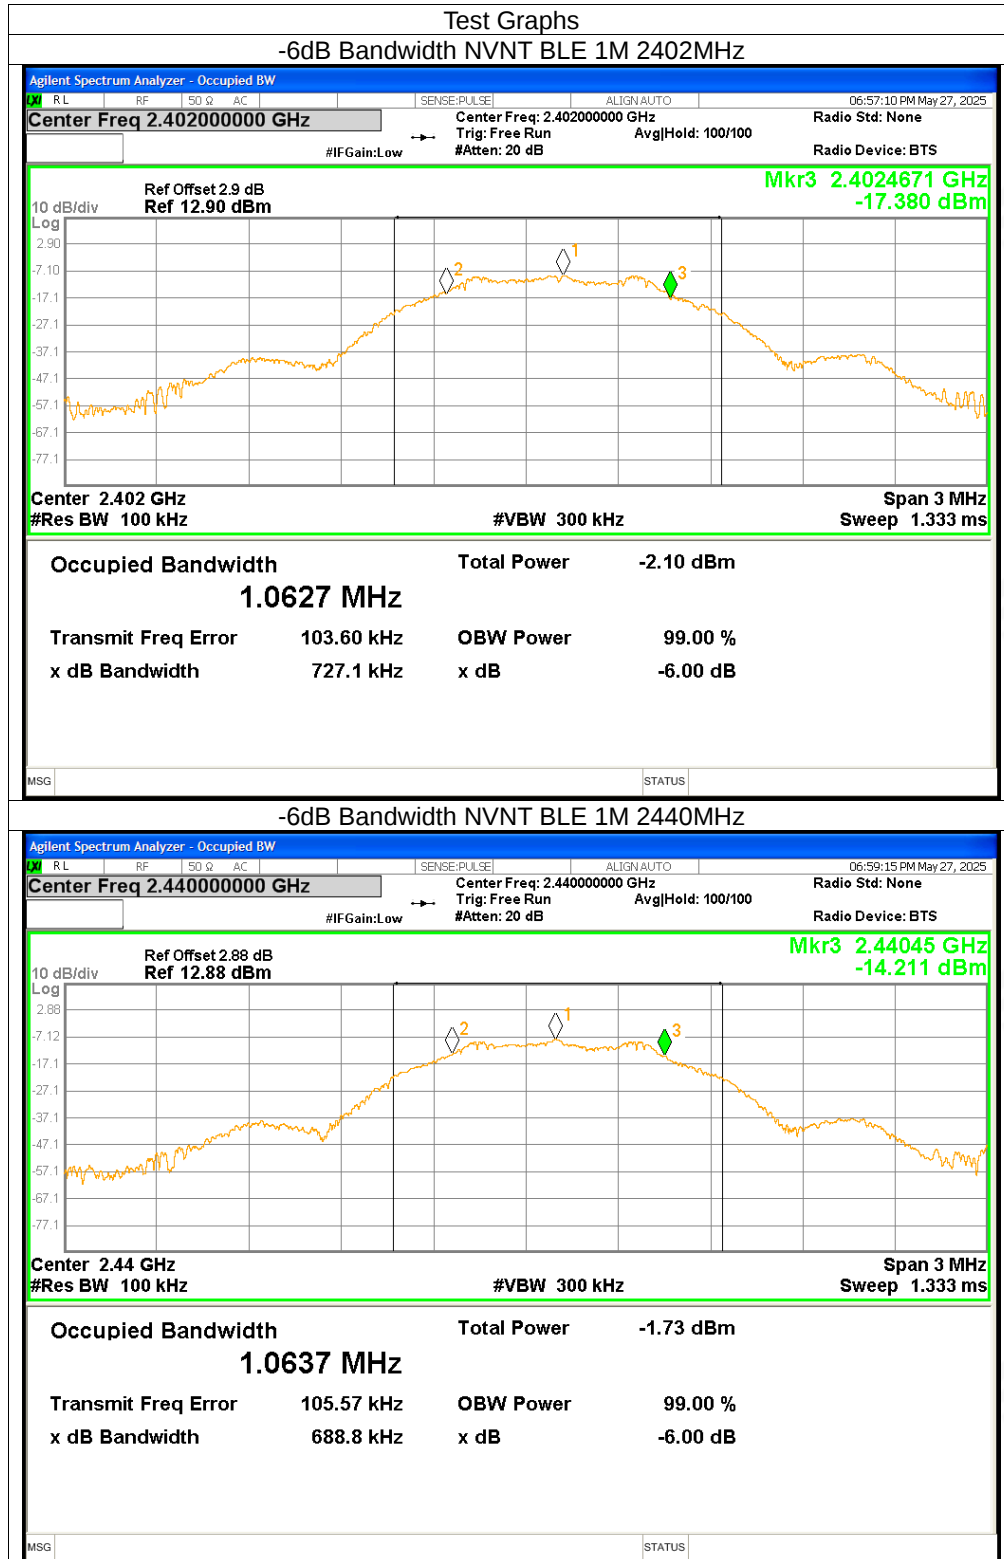


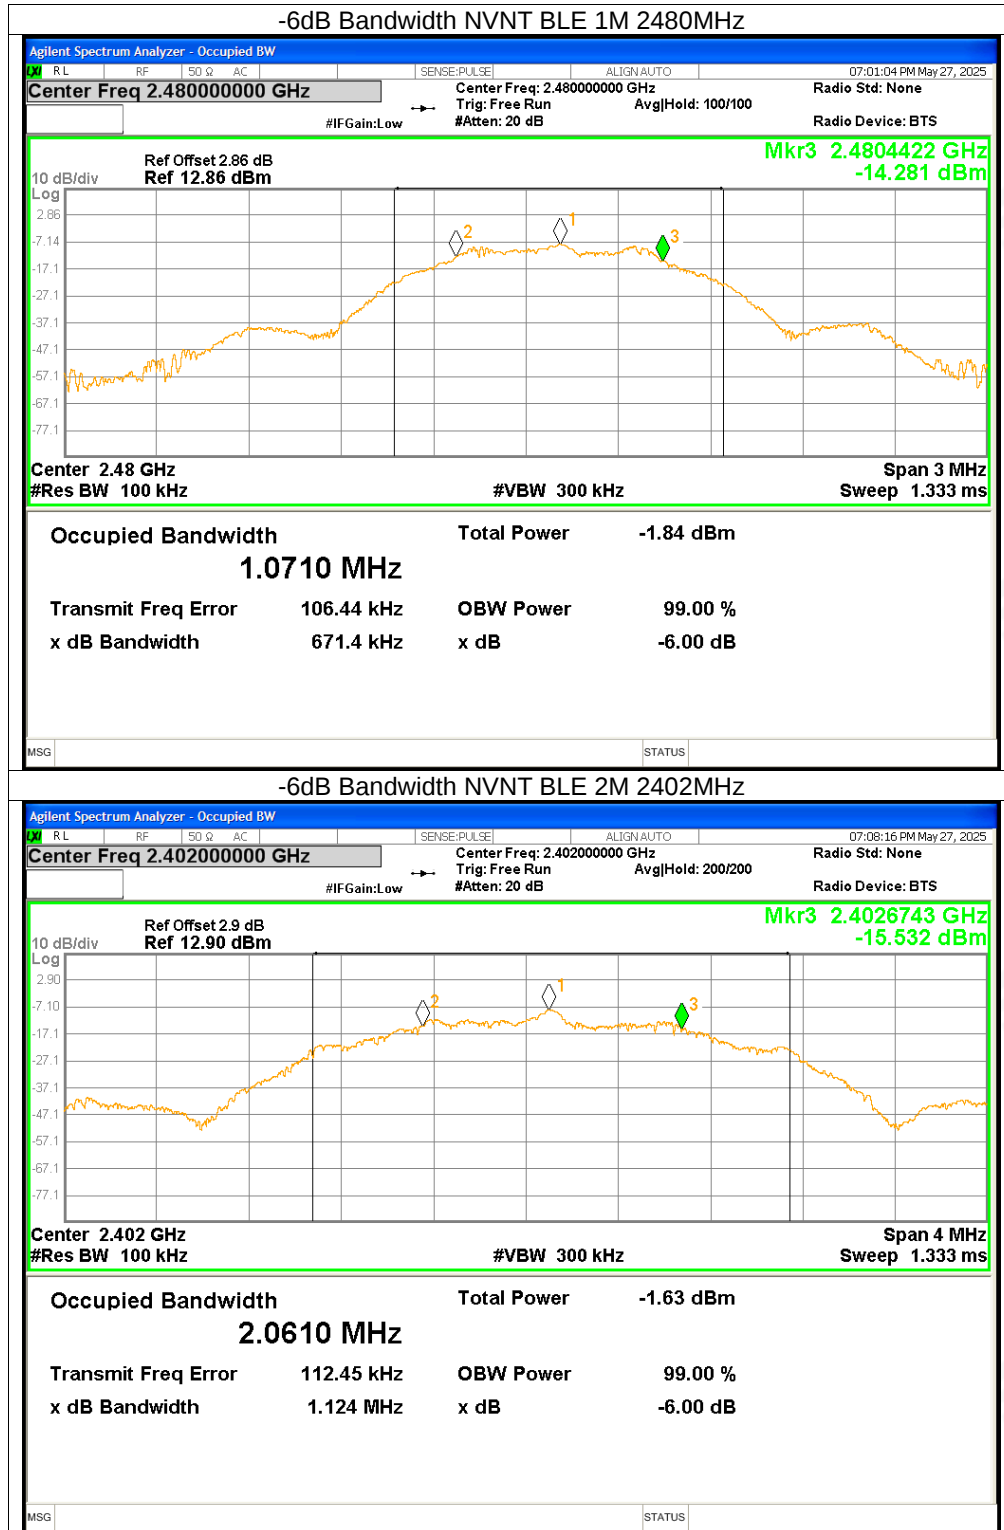


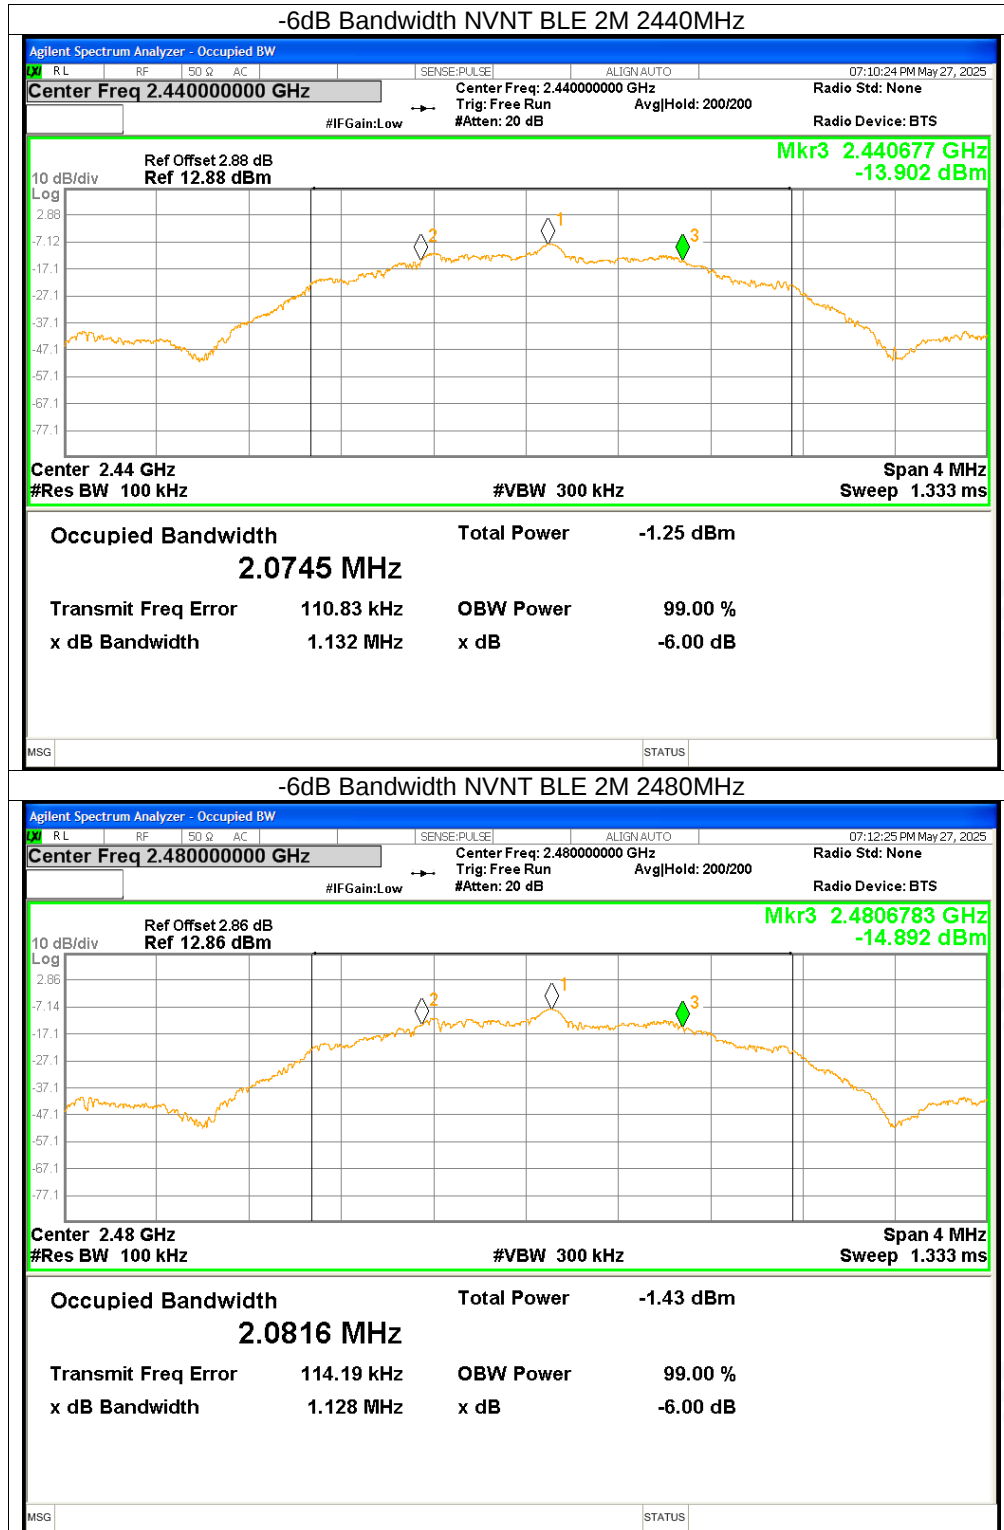


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-23.58	≤ -8	Pass
NVNT	BLE 1M	2440	-23.2	≤ -8	Pass
NVNT	BLE 1M	2480	-23.32	≤ -8	Pass
NVNT	BLE 2M	2402	-26	≤ -8	Pass
NVNT	BLE 2M	2440	-25.77	≤ -8	Pass
NVNT	BLE 2M	2480	-25.81	≤ -8	Pass

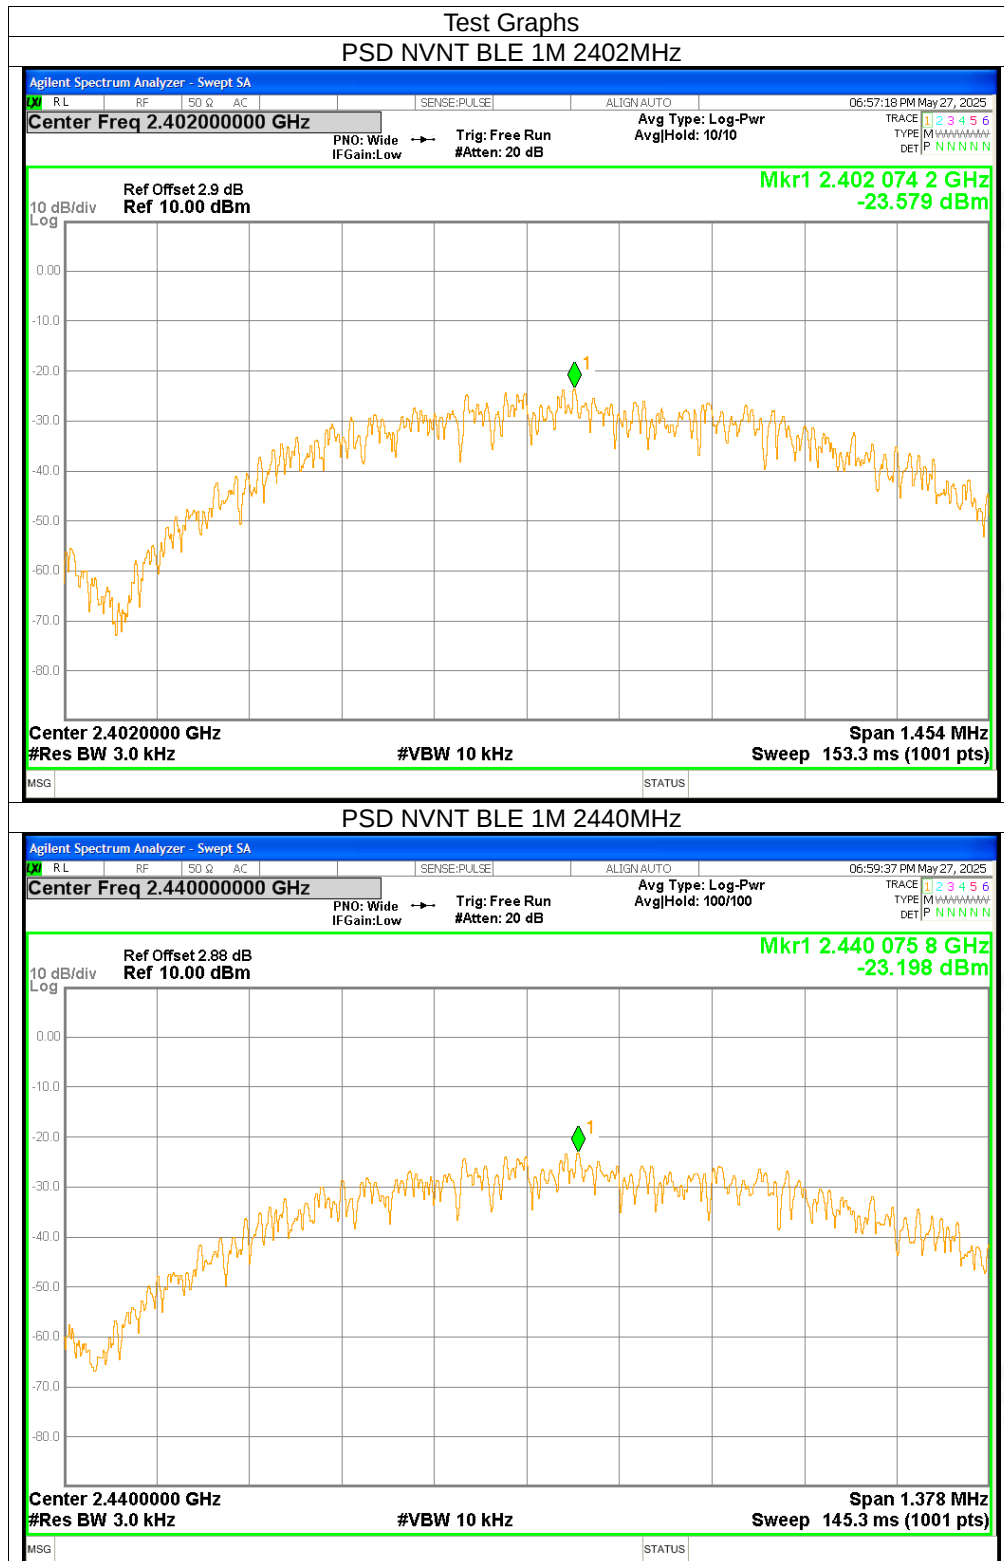

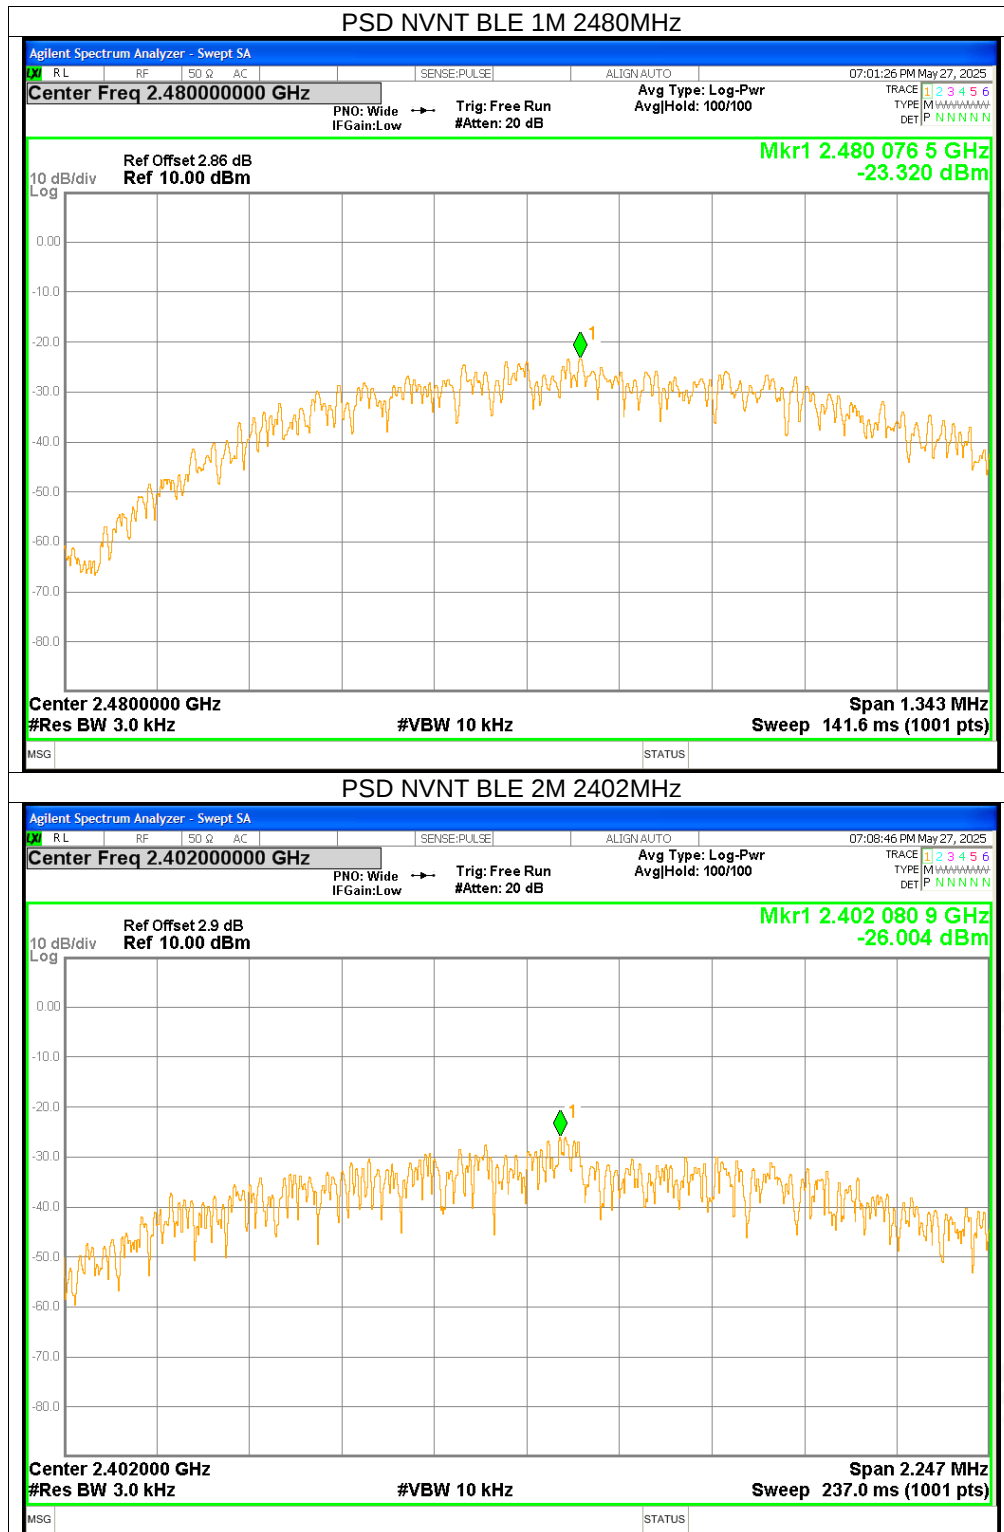


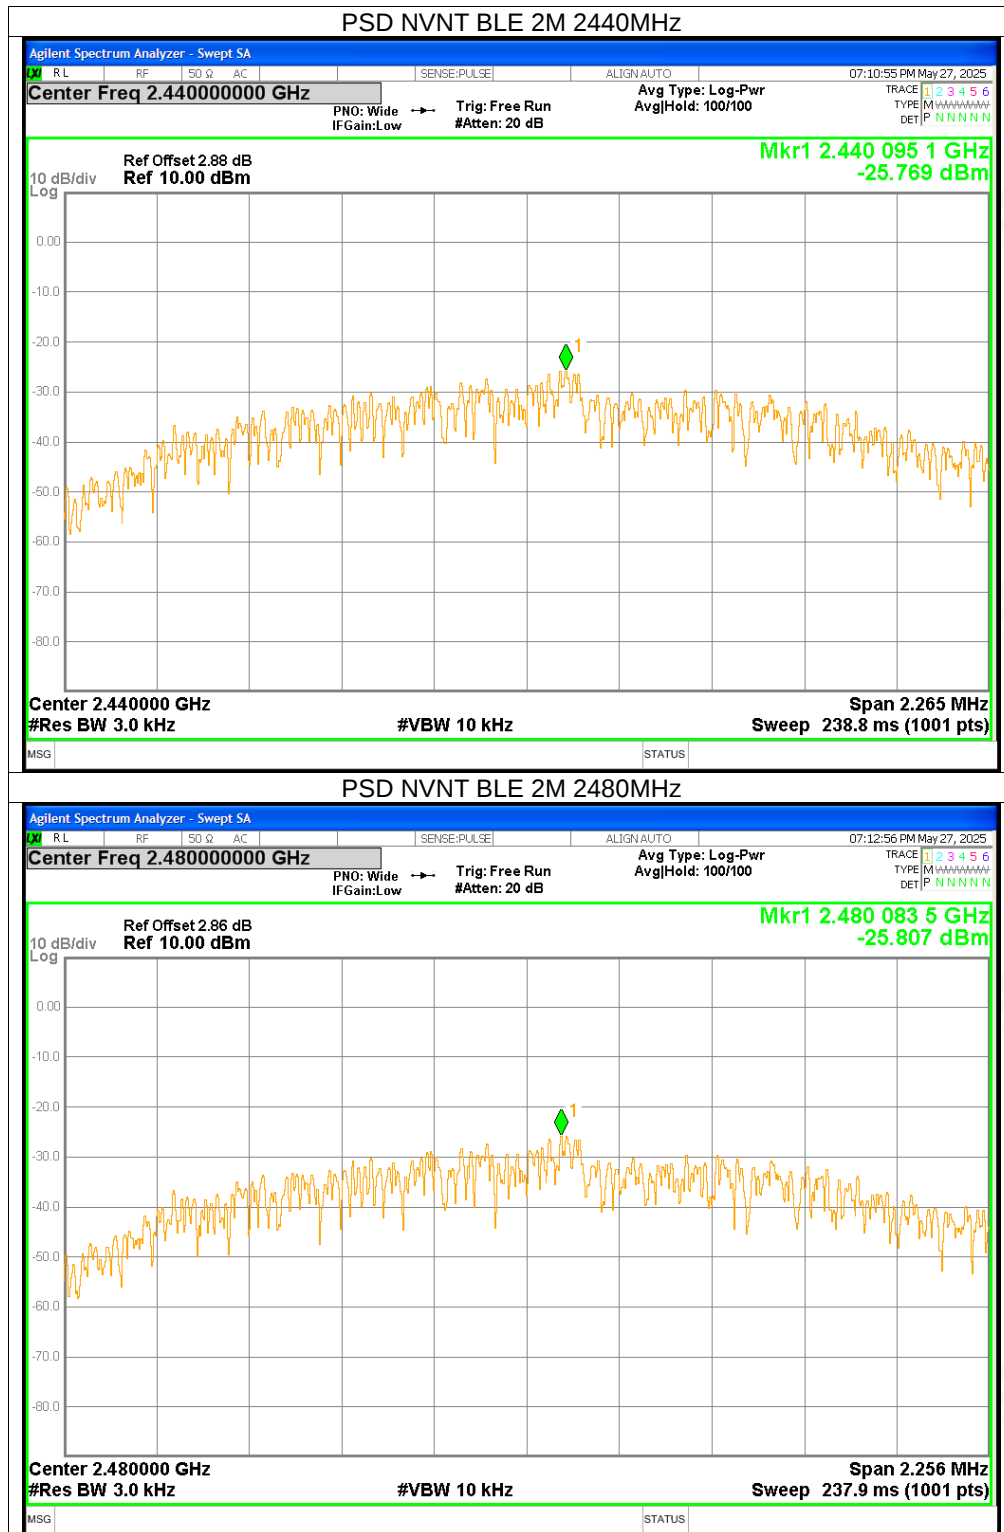






Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-48.18	≤ -20	Pass
NVNT	BLE 1M	2480	-56.94	≤ -20	Pass
NVNT	BLE 2M	2402	-34.51	≤ -20	Pass
NVNT	BLE 2M	2480	-51.64	≤ -20	Pass

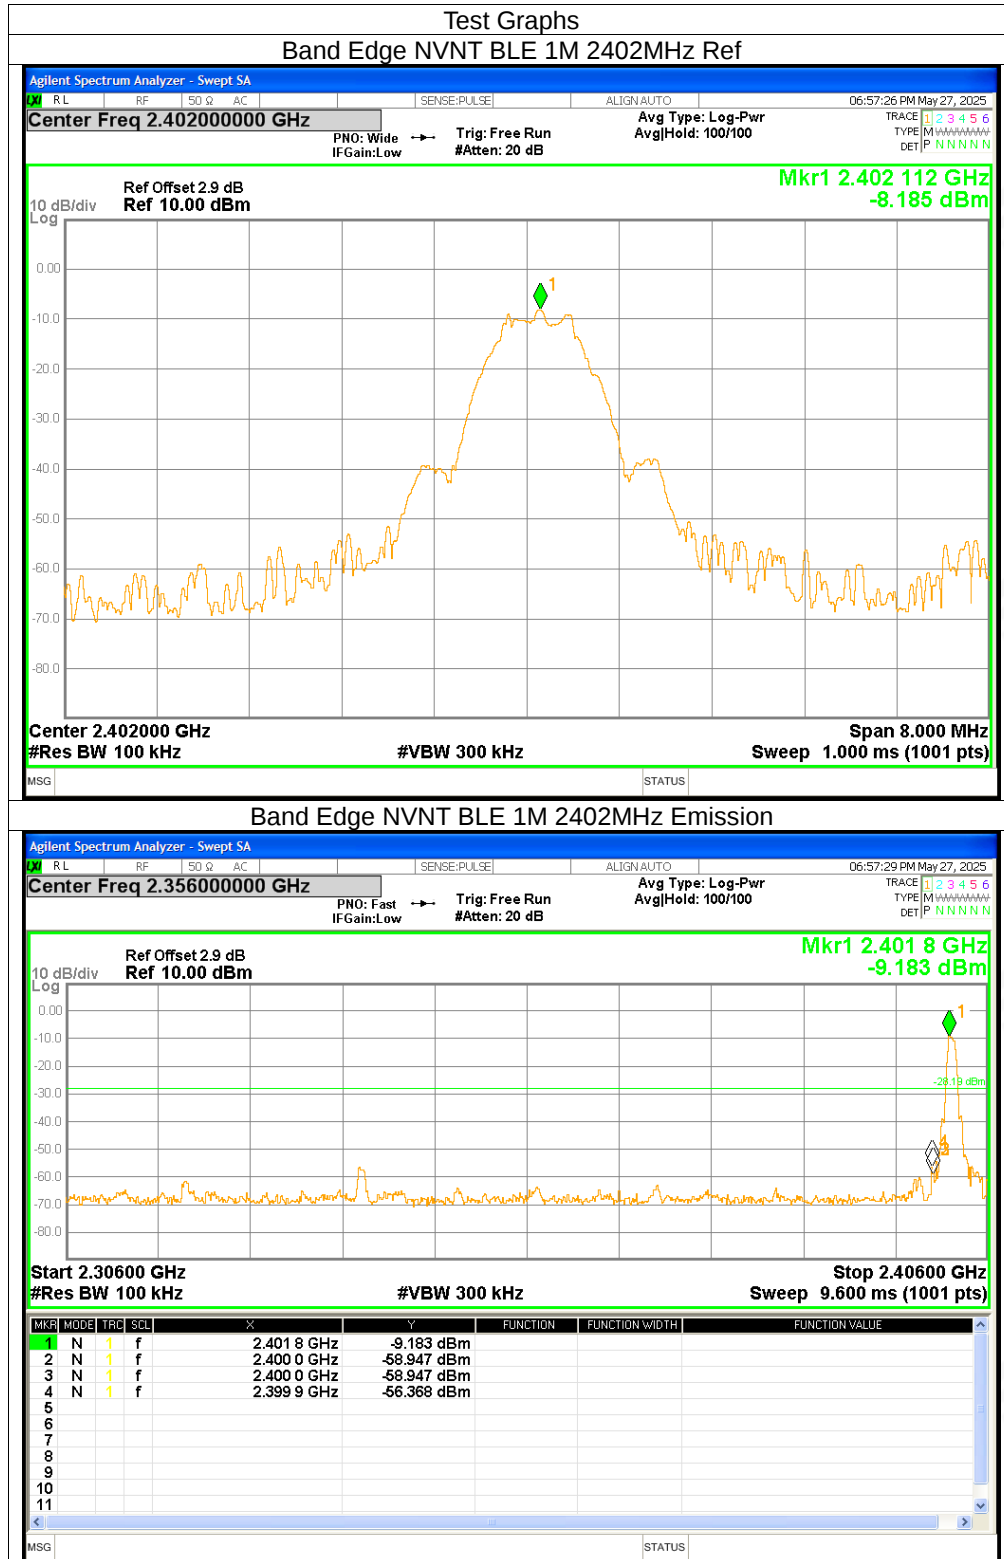

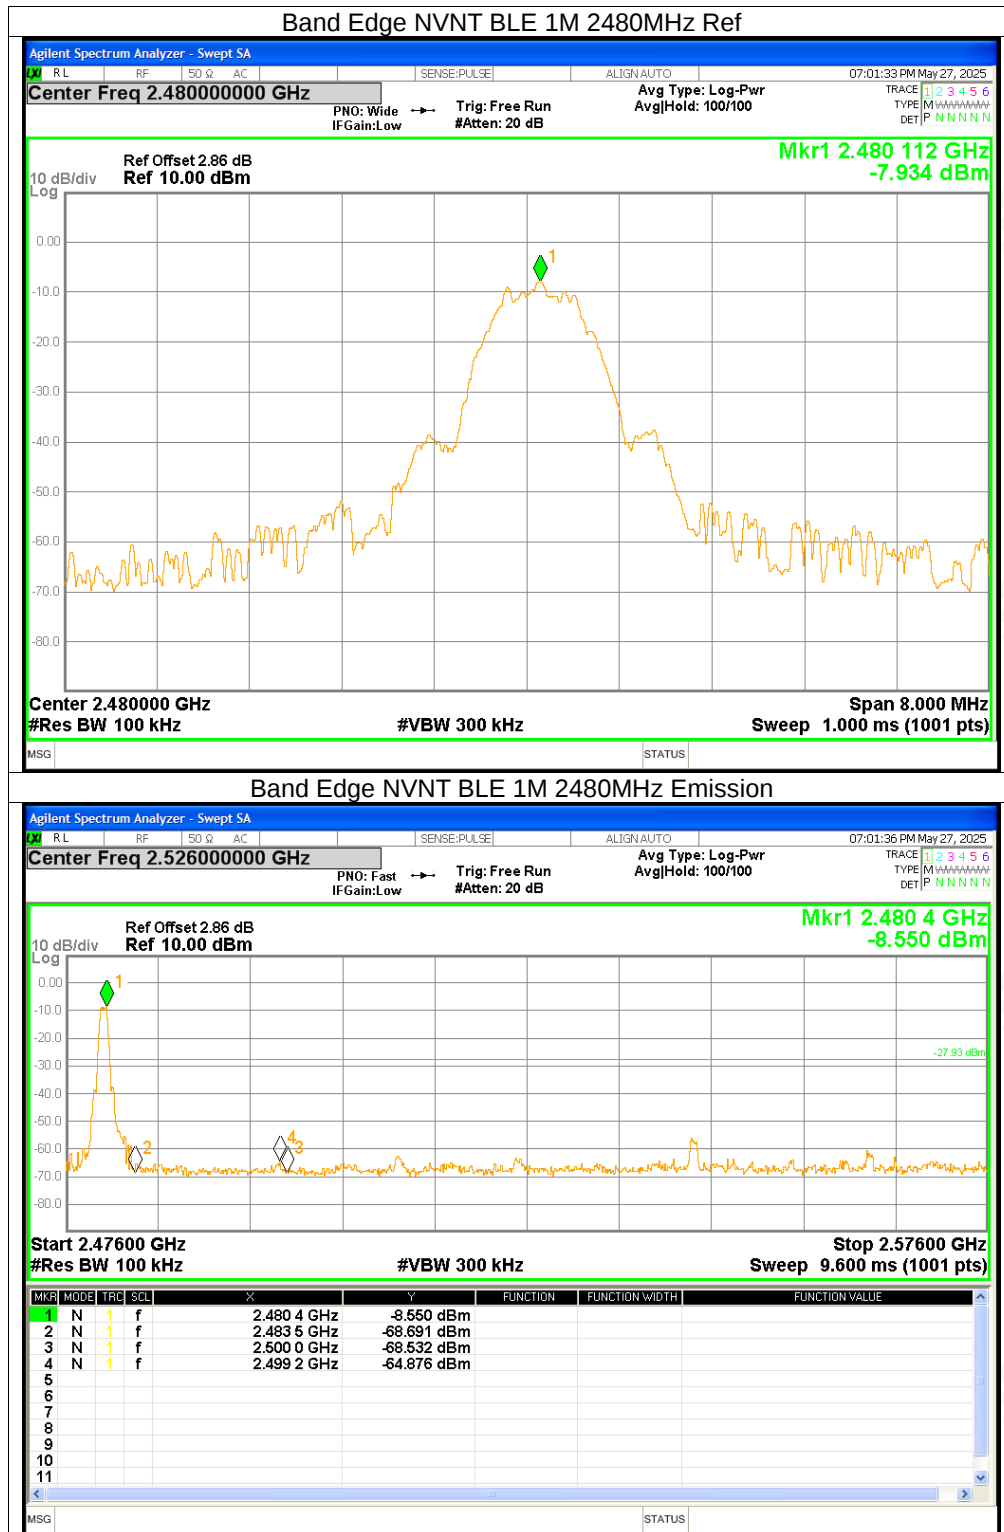

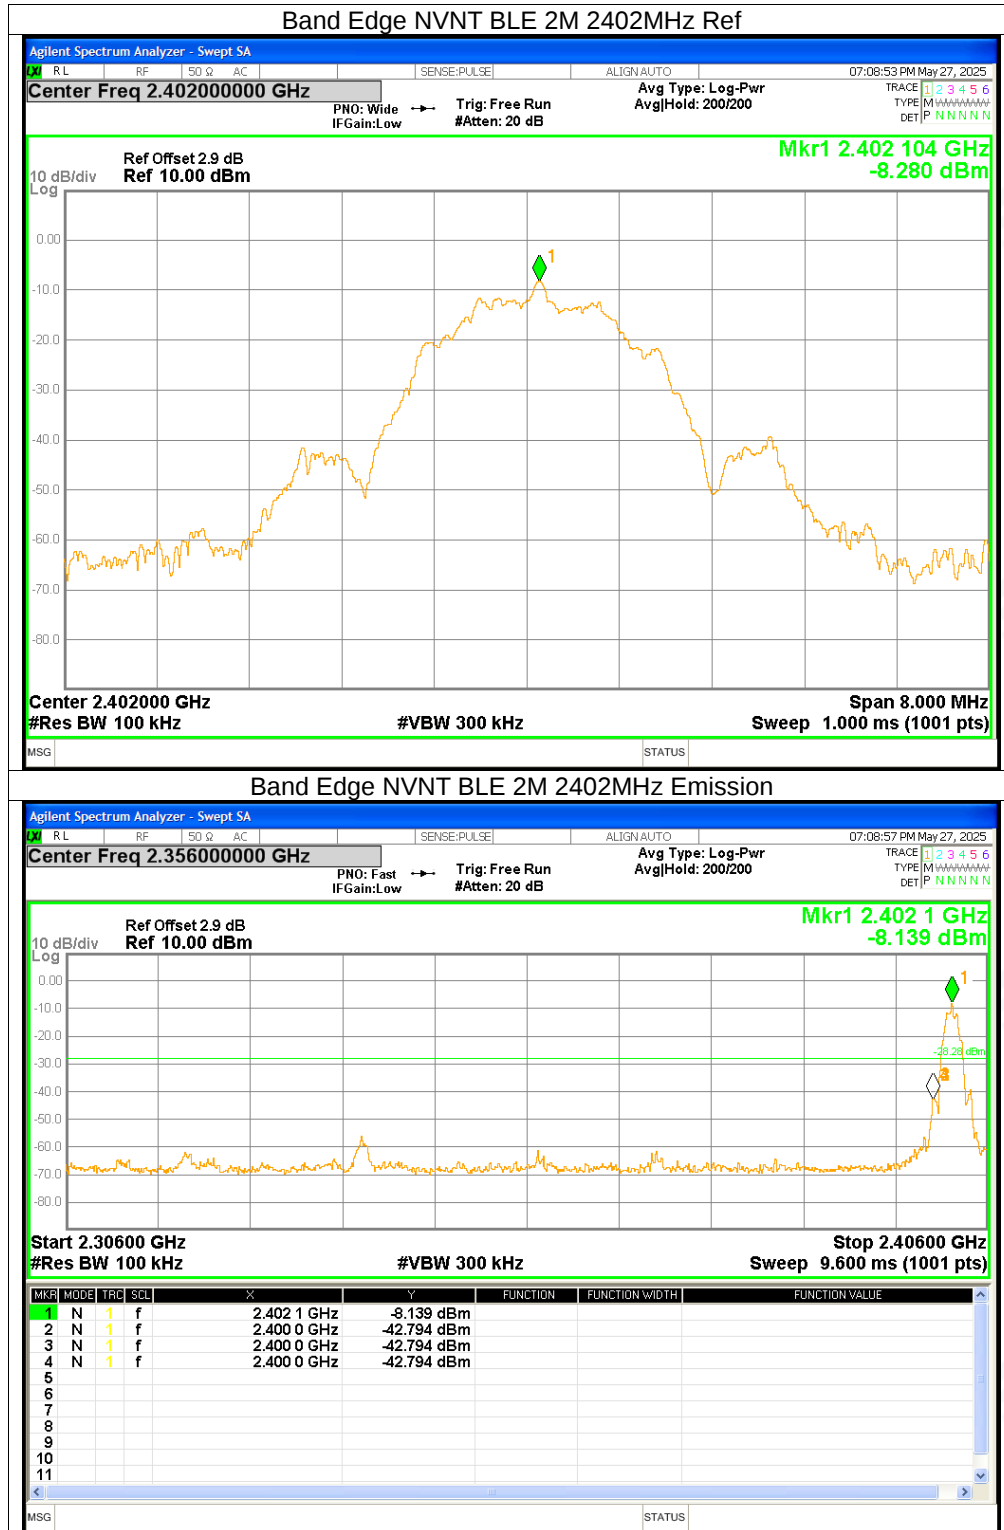


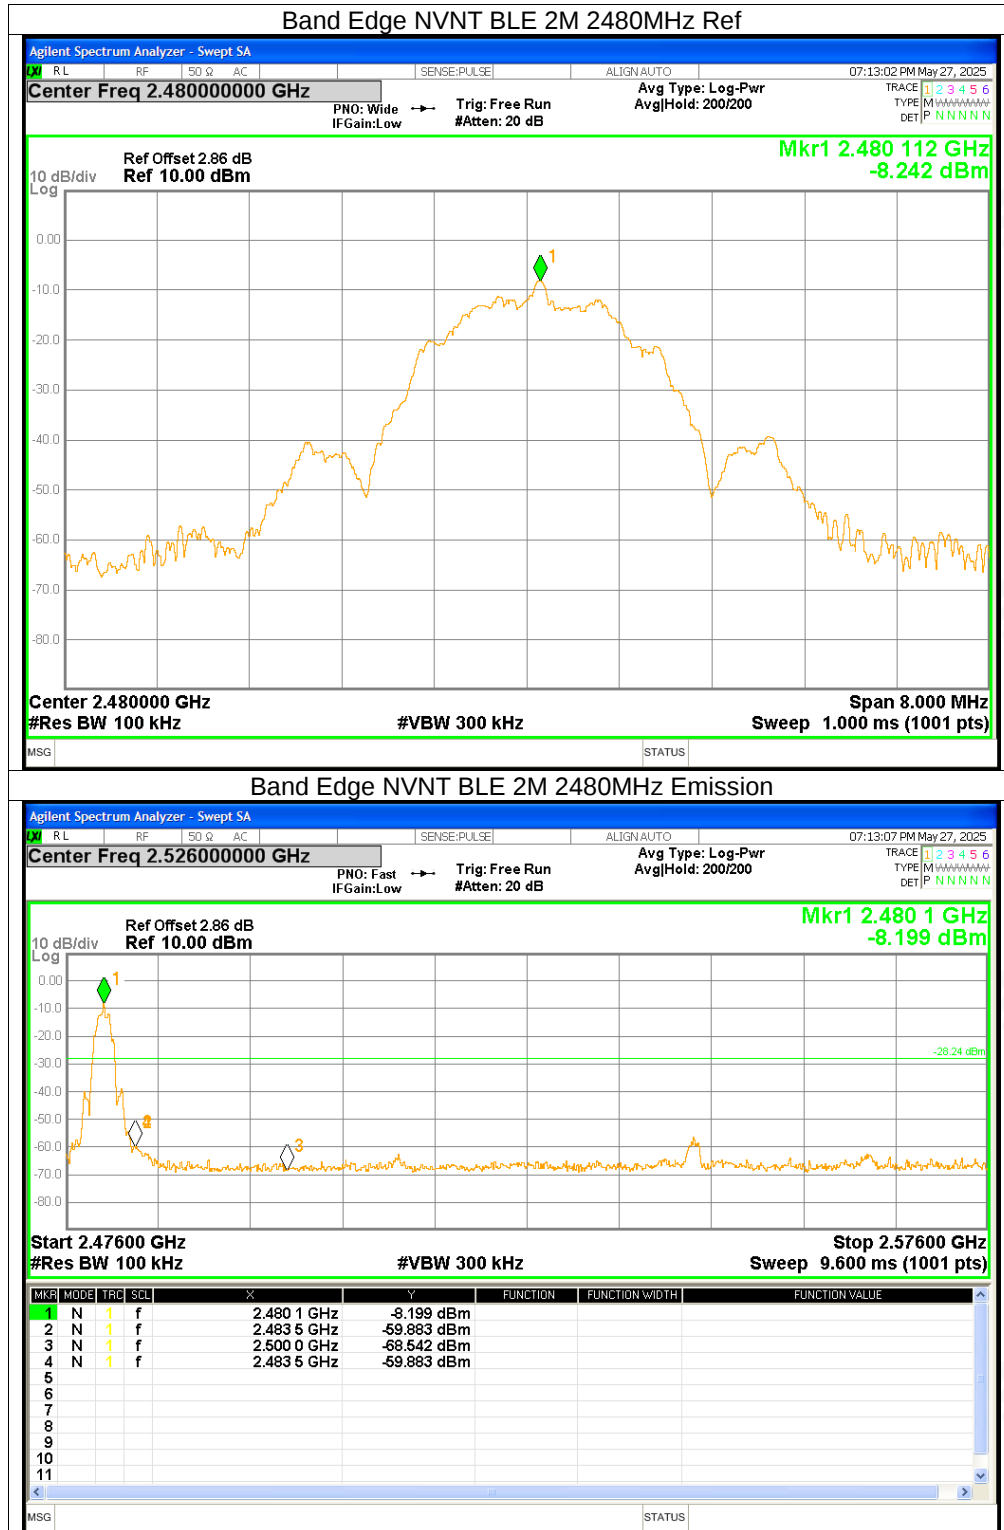






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-45.34	<=-20	Pass
NVNT	BLE 1M	2440	-45.77	<=-20	Pass
NVNT	BLE 1M	2480	-36.81	<=-20	Pass
NVNT	BLE 2M	2402	-46.62	<=-20	Pass
NVNT	BLE 2M	2440	-46.44	<=-20	Pass
NVNT	BLE 2M	2480	-46.21	<=-20	Pass

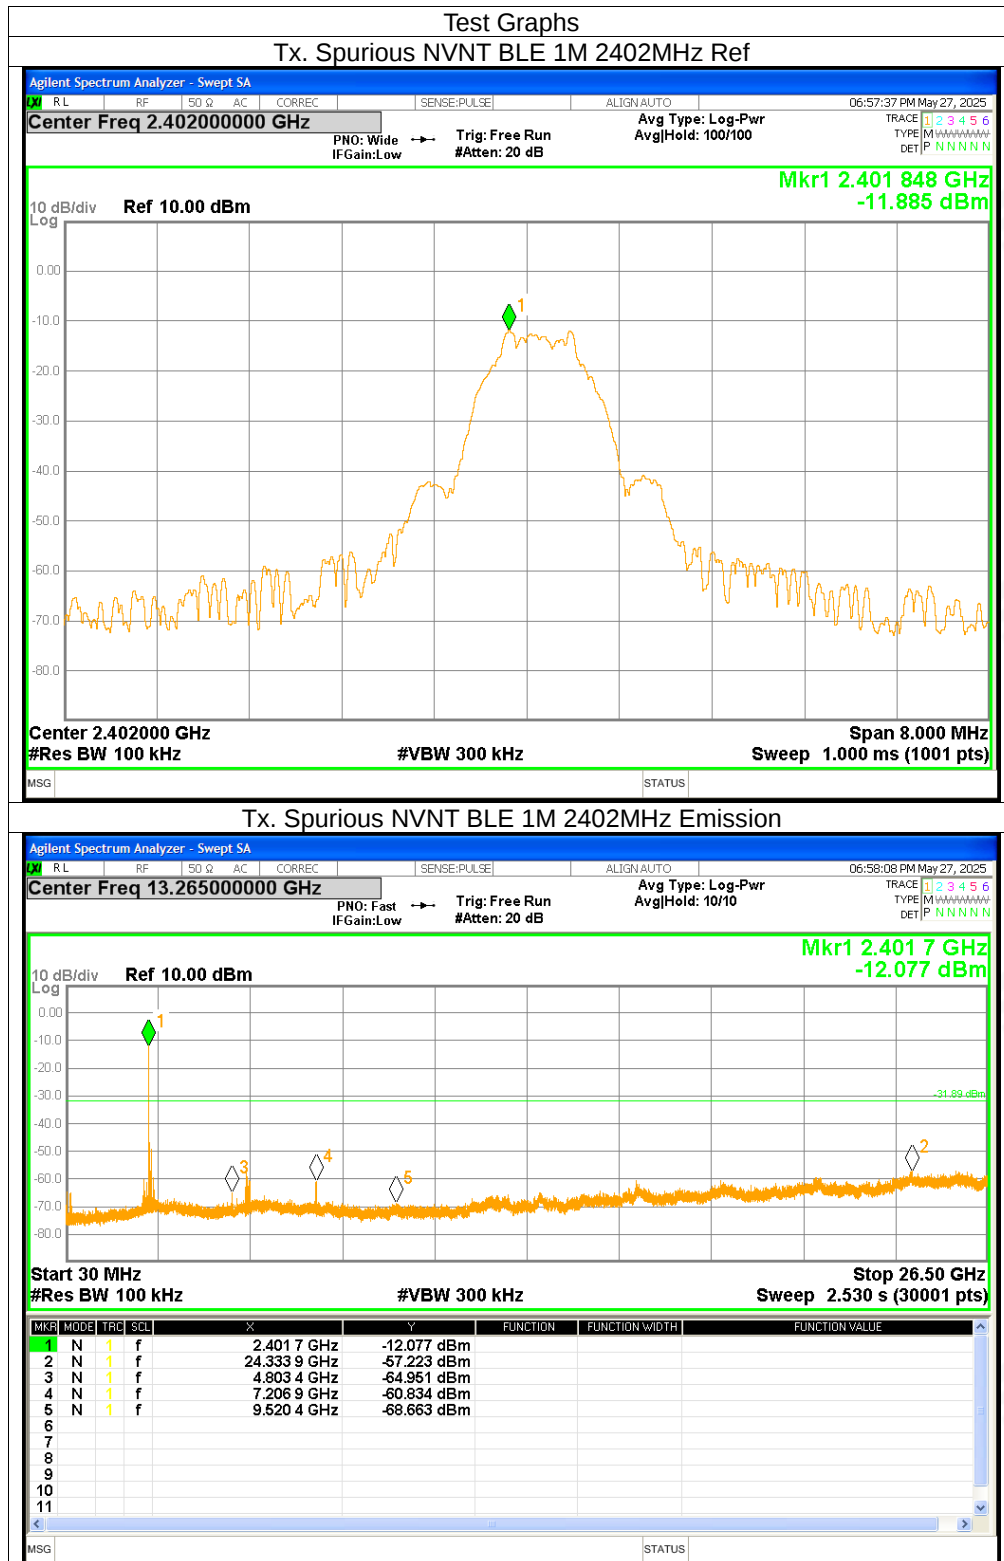


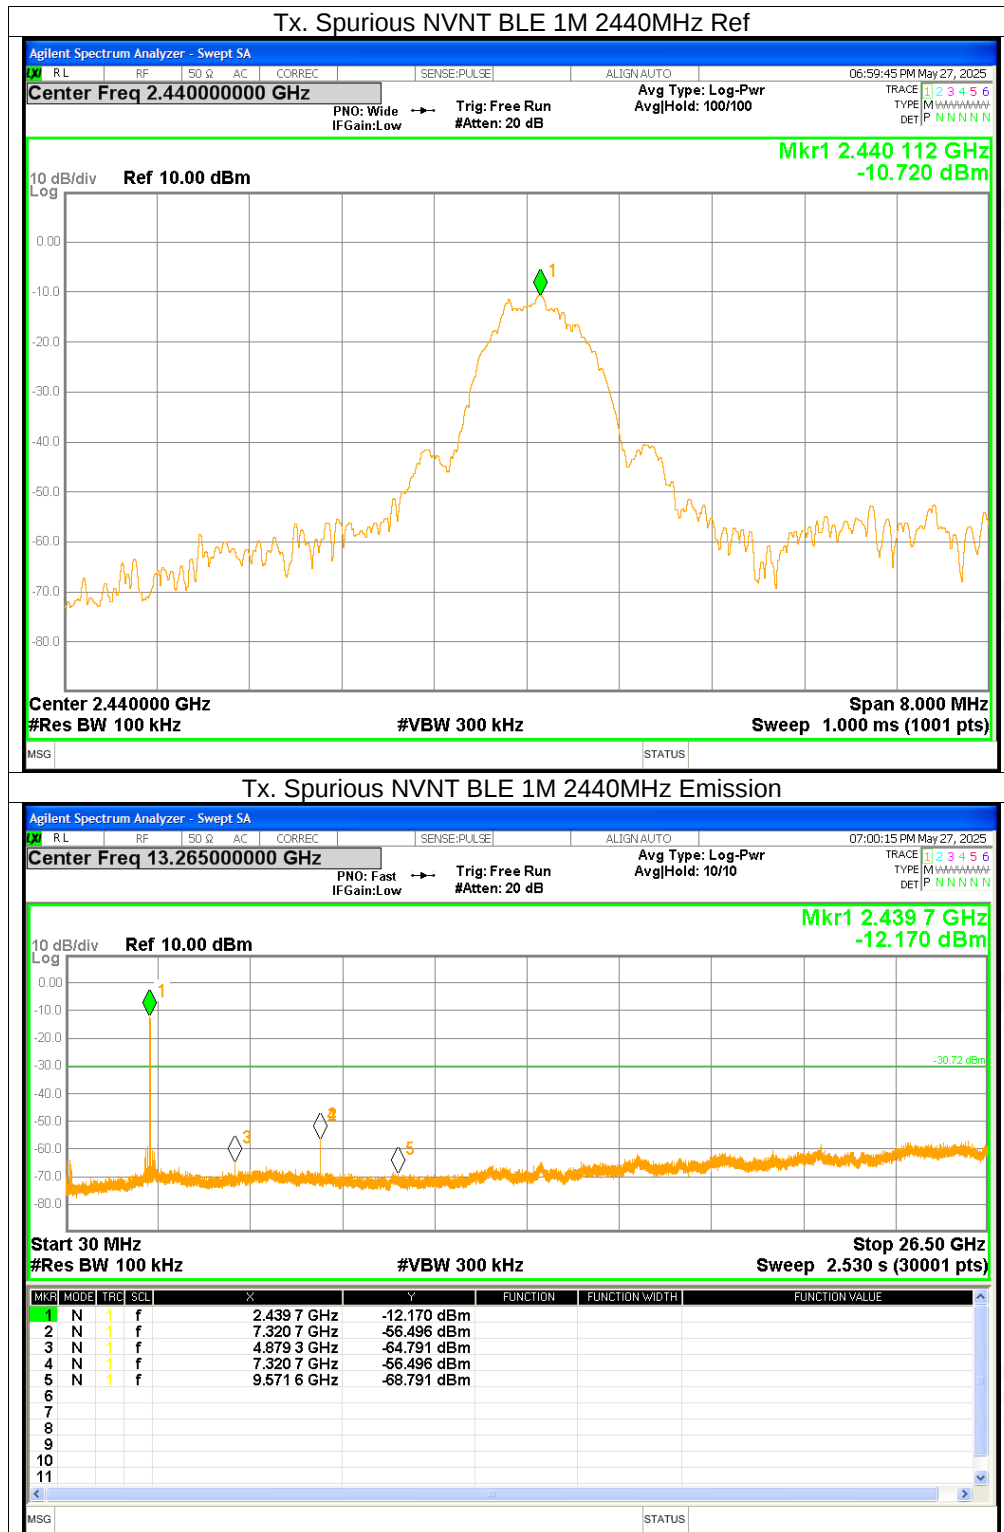

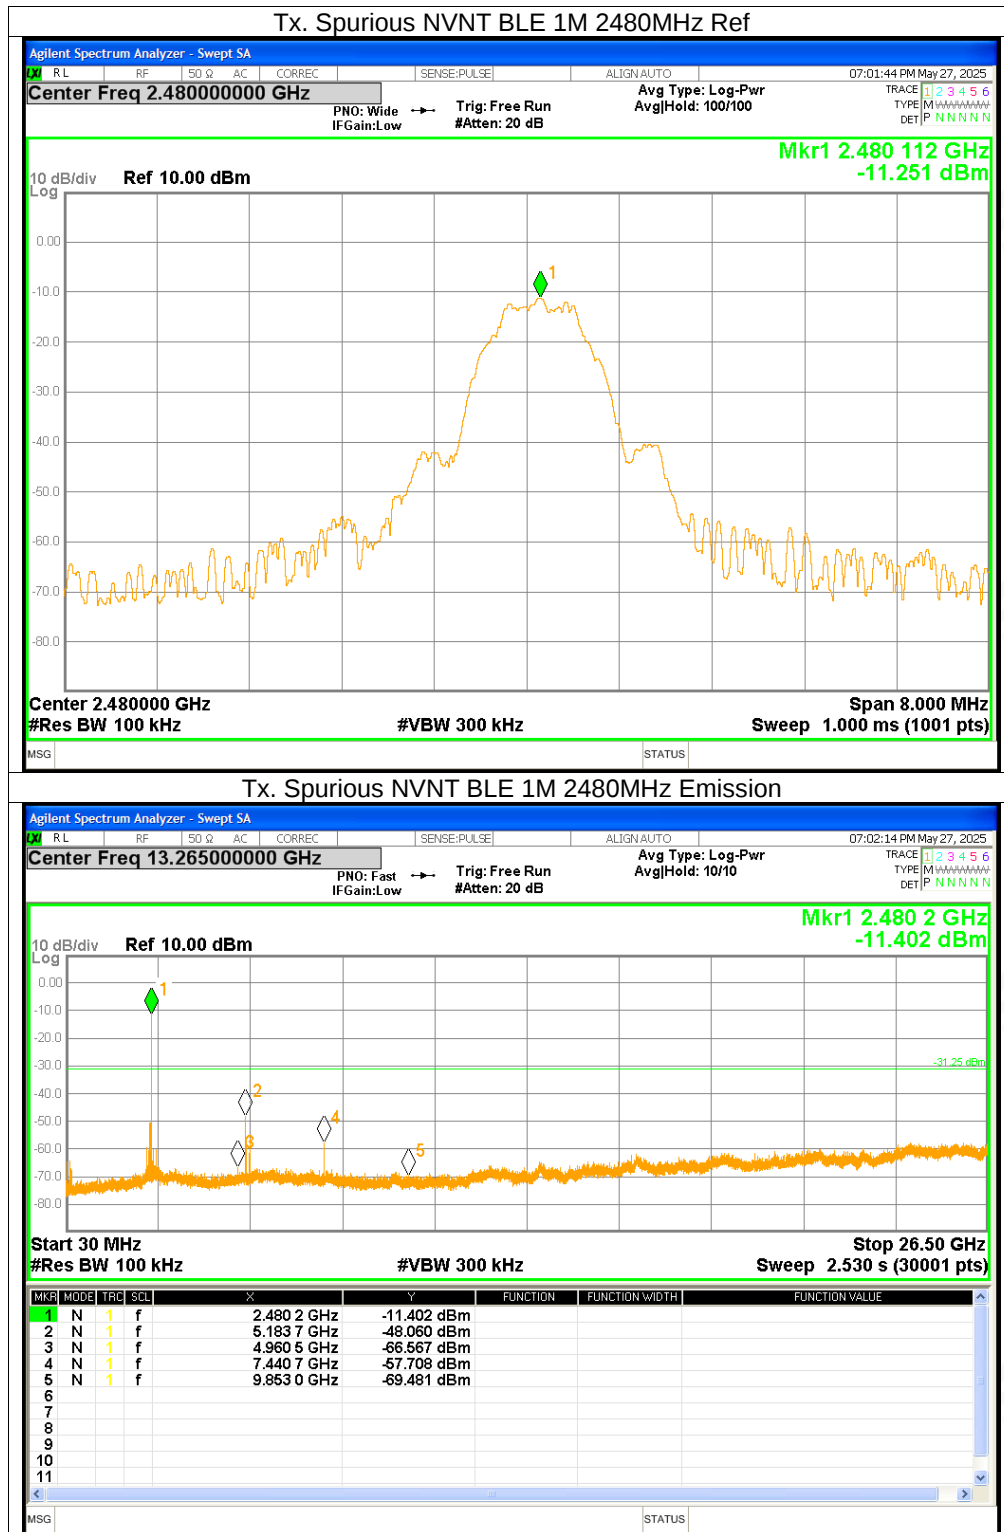

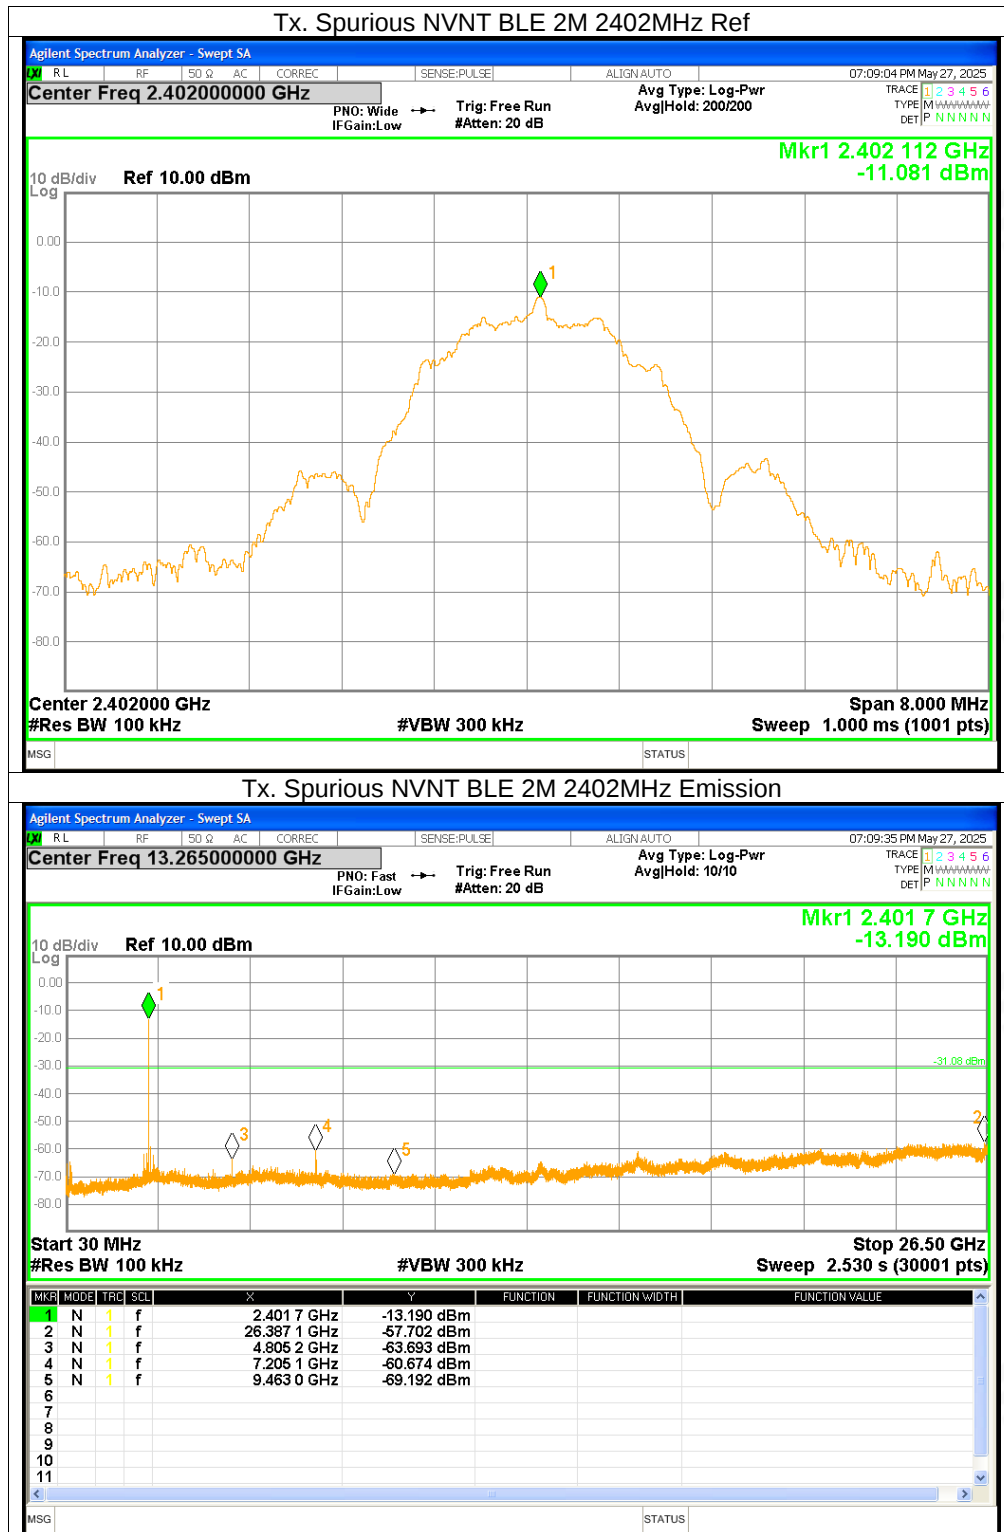

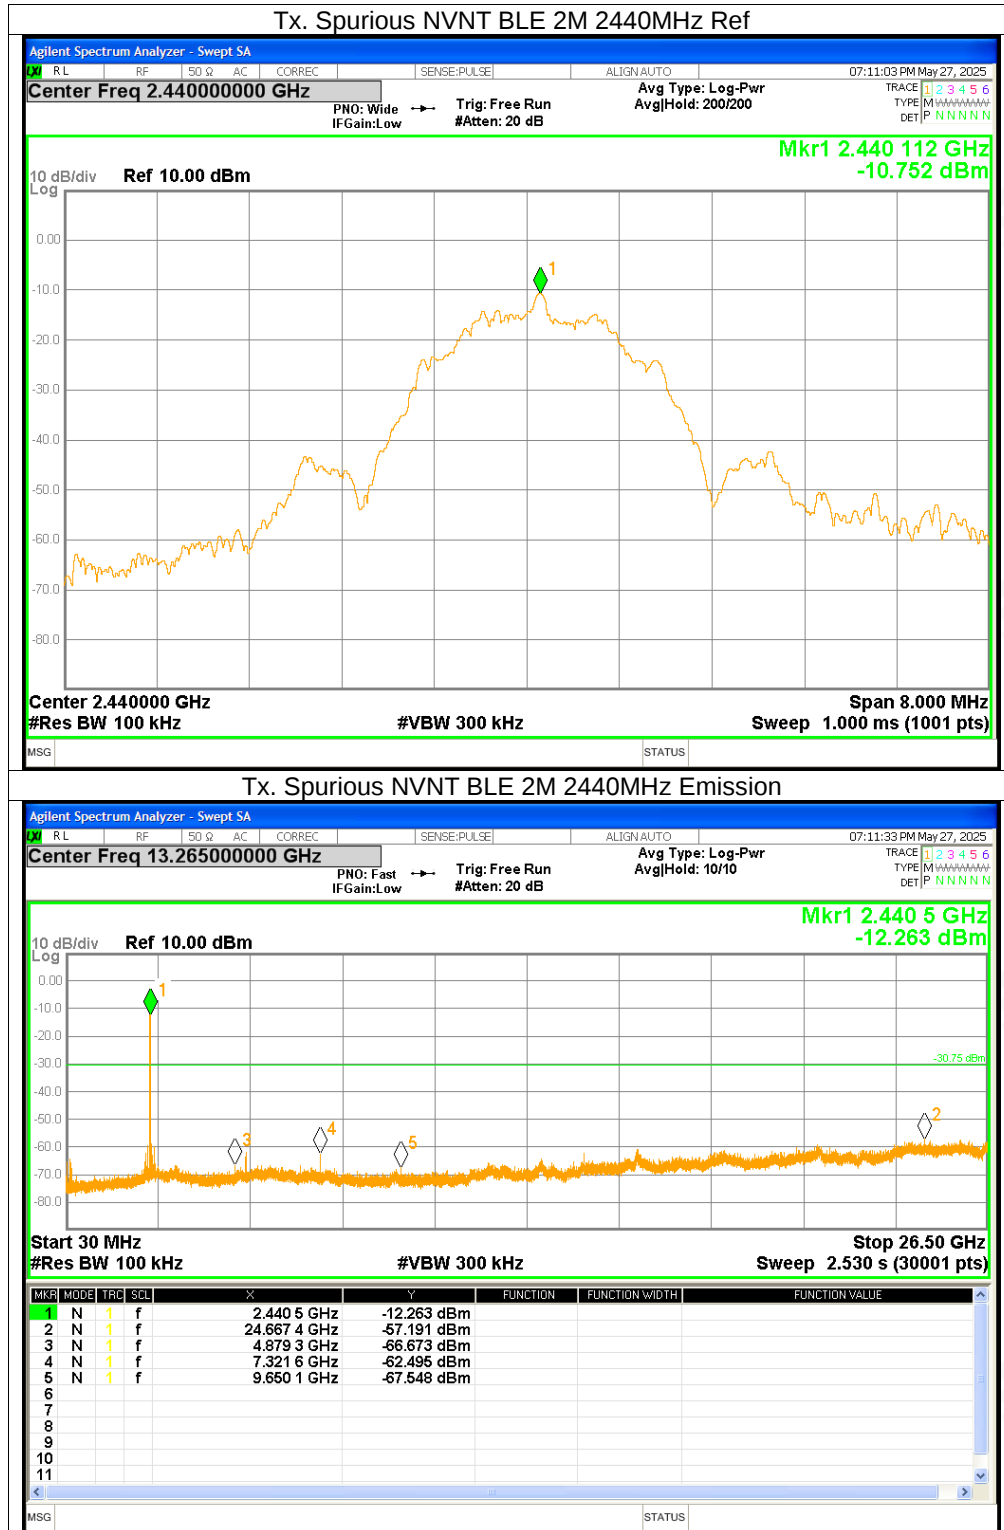

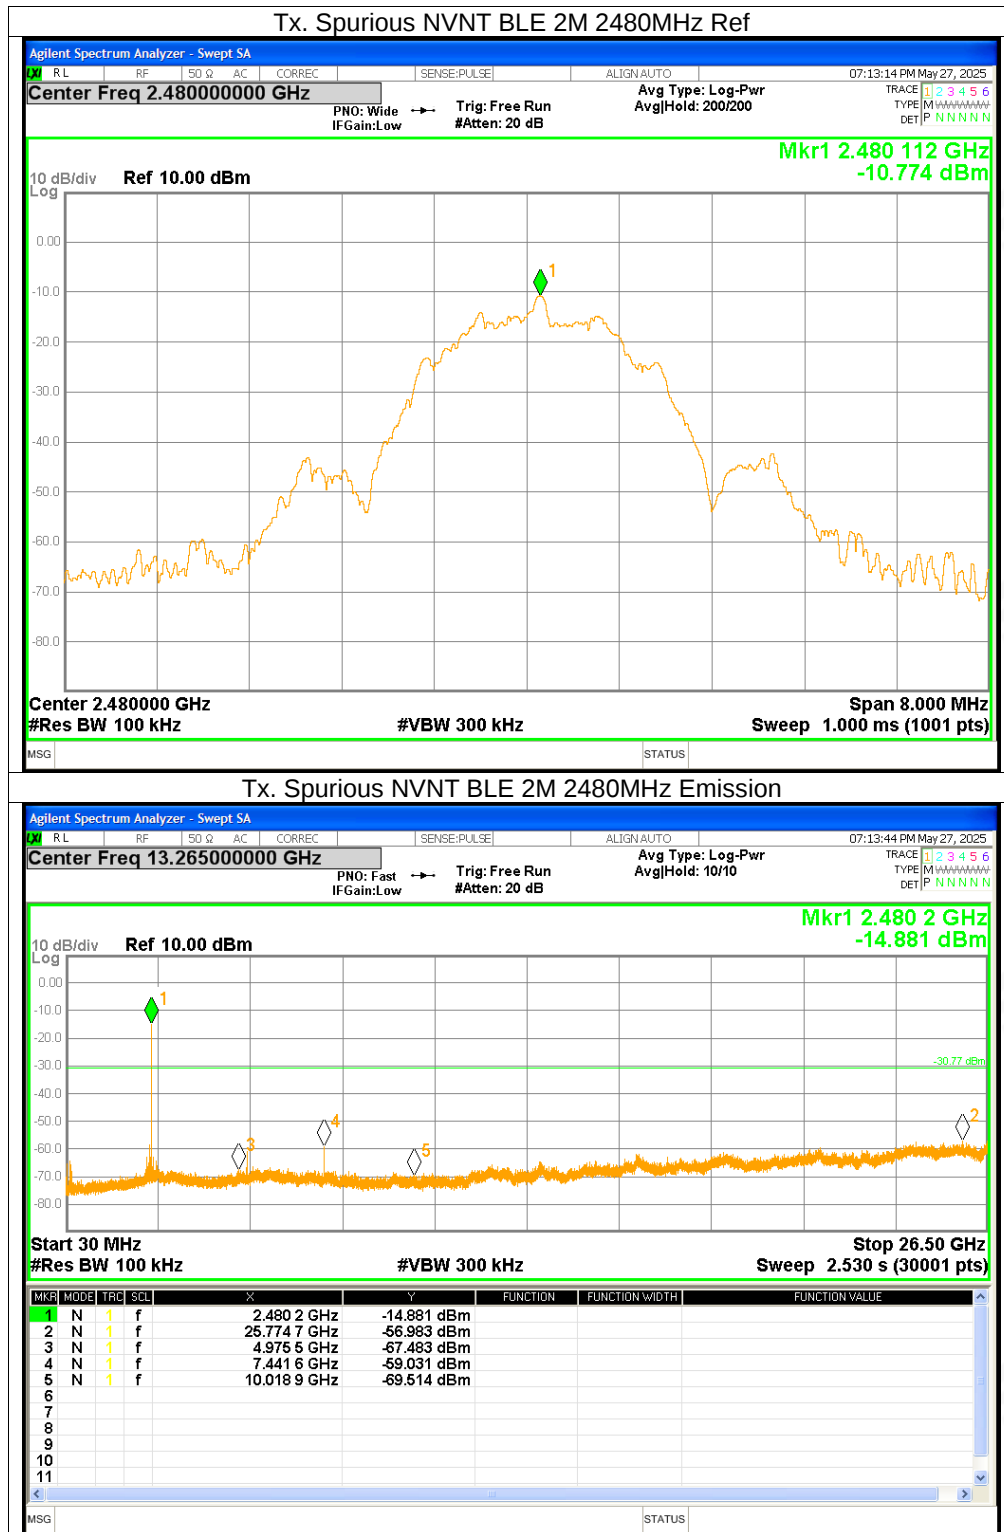



APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****