

# TEST REPORT

Reference No..... : WTX21X02011253W-1  
FCC ID ..... : 2AYV2-SM-621D  
Applicant ..... : Shenzhen Simolio Electronic Co., Ltd  
Address ..... : 7B/F, 3 Block, Qiyu Industrial Park, Gongle Tiezai Road, Xixiang, Baoan District, Shenzhen, Guangdong, China  
Product Name ..... : Wireless Speaker  
Test Model. .... : SM-621D  
Standards ..... : FCC Part 15.247  
Date of Receipt sample .... : Feb.03, 2021  
Date of Test..... : Feb.03, 2021 to Mar.24, 2021  
Date of Issue ..... : Mar.24, 2021  
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

**TABLE OF CONTENTS**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4         |
| 1.2 TEST STANDARDS.....                                     | 6         |
| 1.3 TEST METHODOLOGY.....                                   | 6         |
| 1.4 TEST FACILITY.....                                      | 6         |
| 1.5 EUT SETUP AND TEST MODE.....                            | 7         |
| 1.6 MEASUREMENT UNCERTAINTY.....                            | 8         |
| 1.7 TEST EQUIPMENT LIST AND DETAILS.....                    | 9         |
| <b>2. SUMMARY OF TEST RESULTS.....</b>                      | <b>11</b> |
| <b>3. ANTENNA REQUIREMENT.....</b>                          | <b>12</b> |
| 3.1 STANDARD APPLICABLE.....                                | 12        |
| 3.2 EVALUATION INFORMATION.....                             | 12        |
| <b>4. POWER SPECTRAL DENSITY.....</b>                       | <b>13</b> |
| 4.1 STANDARD APPLICABLE.....                                | 13        |
| 4.2 TEST SETUP BLOCK DIAGRAM.....                           | 13        |
| 4.3 TEST PROCEDURE.....                                     | 13        |
| 4.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 13        |
| <b>5. DTS BANDWIDTH.....</b>                                | <b>14</b> |
| 5.1 STANDARD APPLICABLE.....                                | 14        |
| 5.2 TEST SETUP BLOCK DIAGRAM.....                           | 14        |
| 5.3 TEST PROCEDURE.....                                     | 14        |
| 5.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 14        |
| <b>6. RF OUTPUT POWER.....</b>                              | <b>15</b> |
| 6.1 STANDARD APPLICABLE.....                                | 15        |
| 6.2 TEST SETUP BLOCK DIAGRAM.....                           | 15        |
| 6.3 TEST PROCEDURE.....                                     | 15        |
| 6.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 15        |
| <b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS.....</b>         | <b>16</b> |
| 7.1 STANDARD APPLICABLE.....                                | 16        |
| 7.2 TEST PROCEDURE.....                                     | 16        |
| 7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....           | 18        |
| 7.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 18        |
| <b>8. OUT OF BAND EMISSIONS.....</b>                        | <b>26</b> |
| 8.1 STANDARD APPLICABLE.....                                | 26        |
| 8.2 TEST PROCEDURE.....                                     | 26        |
| 8.3 SUMMARY OF TEST RESULTS/PLOTS.....                      | 27        |
| <b>9. CONDUCTED EMISSIONS.....</b>                          | <b>30</b> |
| 9.1 TEST PROCEDURE.....                                     | 30        |
| 9.2 BASIC TEST SETUP BLOCK DIAGRAM.....                     | 30        |
| 9.3 TEST RECEIVER SETUP.....                                | 30        |
| 9.4 SUMMARY OF TEST RESULTS/PLOTS.....                      | 30        |
| <b>APPENDIX SUMMARY.....</b>                                | <b>33</b> |
| <b>APPENDIX A.....</b>                                      | <b>34</b> |
| <b>APPENDIX B.....</b>                                      | <b>36</b> |
| <b>APPENDIX C.....</b>                                      | <b>38</b> |
| <b>APPENDIX D.....</b>                                      | <b>40</b> |
| <b>APPENDIX PHOTOGRAPHS.....</b>                            | <b>42</b> |

**Report version**

| Version No. | Date of issue | Description |
|-------------|---------------|-------------|
| Rev.00      | Mar.24, 2021  | Original    |
| /           | /             | /           |

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Simolio Electronic Co., Ltd  
Address of applicant: 7B/F, 3 Block, Qiyu Industrial Park, Gongle Tiezai Road,  
Xixiang, Baoan District, Shenzhen, Guangdong, China

Manufacturer: Shenzhen Simolio Electronic Co., Ltd  
Address of manufacturer: 7B/F, 3 Block, Qiyu Industrial Park, Gongle Tiezai Road,  
Xixiang, Baoan District, Shenzhen, Guangdong, China

| General Description of EUT                                                                                                                                                                                                                                                                  |                                                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| Product Name:                                                                                                                                                                                                                                                                               | Wireless Speaker                                                                                                  |
| Trade Name                                                                                                                                                                                                                                                                                  | SIMOLIO                                                                                                           |
| Model No.:                                                                                                                                                                                                                                                                                  | SM-621D                                                                                                           |
| Adding Model(s):                                                                                                                                                                                                                                                                            | SM-621, SM-622D, SM-623D, SM-624D, SM-625D,<br>SM-626D, SM-627D, TS1, TS1D, TS2D, TS3D, TS4D,<br>TS5D, TS6D, TS7D |
| Rated Voltage:                                                                                                                                                                                                                                                                              | Power in:DC9V<br>Receiver Battery:DC7.4V                                                                          |
| Battery Capacity:                                                                                                                                                                                                                                                                           | Receiver :1000mAh                                                                                                 |
| Power Adapter:                                                                                                                                                                                                                                                                              | MODEL:JS018SPS-090150U<br>INPUT:AC100-240V, 50/60Hz, 0.5A<br>OUTPUT:DC9V,1.5A                                     |
| Software Version:                                                                                                                                                                                                                                                                           | BACHTX_A38B_8479                                                                                                  |
| Hardware Version:                                                                                                                                                                                                                                                                           | SM621T1-20181027                                                                                                  |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model SM-621D, but the circuit and the electronic construction do not change, declared by the manufacturer.</i> |                                                                                                                   |

| <b>Technical Characteristics of EUT</b> |                       |
|-----------------------------------------|-----------------------|
| Frequency Range:                        | 2406-2472MHz          |
| RF Output Power:                        | 10.220dBm (Conducted) |
| Modulation:                             | GFSK                  |
| Quantity of Channels:                   | 31                    |
| Channel Separation:                     | 2MHz                  |
| Type of Antenna:                        | PIFA Antenna          |
| Antenna Gain:                           | -2dBi                 |

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List |             |         |
|----------------|-------------|---------|
| Test Mode      | Description | Remark  |
| TM1            | Low         | 2406MHz |
| TM2            | Middle      | 2440MHz |
| TM3            | High        | 2472MHz |

| Test Conditions    |           |
|--------------------|-----------|
| Temperature:       | 22~25 °C  |
| Relative Humidity: | 50~55 %   |
| ATM Pressure:      | 1019 mbar |

| EUT Cable List and Details |            |                     |                        |
|----------------------------|------------|---------------------|------------------------|
| Cable Description          | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| DC Cable                   | 2.0        | Unshielded          | Without Ferrite        |
| Optical Fiber Cable        | 2.5        | /                   | /                      |
| Audio Cable                | 2.0        | Unshielded          | Without Ferrite        |
| RCA Audio Cable            | 2.0        | Unshielded          | Without Ferrite        |

| Special Cable List and Details |            |                     |                        |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description              | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                              | /          | /                   | /                      |

| Auxiliary Equipment List and Details |              |       |               |
|--------------------------------------|--------------|-------|---------------|
| Description                          | Manufacturer | Model | Serial Number |
| /                                    | /            | /     | /             |

## 1.6 Measurement Uncertainty

| Measurement uncertainty        |            |                                |
|--------------------------------|------------|--------------------------------|
| Parameter                      | Conditions | Uncertainty                    |
| RF Output Power                | Conducted  | $\pm 0.42\text{dB}$            |
| Occupied Bandwidth             | Conducted  | $\pm 1.5\%$                    |
| Power Spectral Density         | Conducted  | $\pm 1.8\text{dB}$             |
| Conducted Spurious Emission    | Conducted  | $\pm 2.17\text{dB}$            |
| Conducted Emissions            | Conducted  | 9-150kHz $\pm 3.74\text{dB}$   |
|                                |            | 0.15-30MHz $\pm 3.34\text{dB}$ |
| Transmitter Spurious Emissions | Radiated   | 30-200MHz $\pm 4.52\text{dB}$  |
|                                |            | 0.2-1GHz $\pm 5.56\text{dB}$   |
|                                |            | 1-6GHz $\pm 3.84\text{dB}$     |
|                                |            | 6-26GHz $\pm 3.92\text{dB}$    |

## 1.7 Test Equipment List and Details

| No.       | Description       | Manufacturer           | Model                 | Serial No.  | Cal Date   | Due Date   |
|-----------|-------------------|------------------------|-----------------------|-------------|------------|------------|
| SEMT-1072 | Spectrum Analyzer | Agilent                | E4407B                | MY41440400  | 2020-04-28 | 2021-04-27 |
| SEMT-1031 | Spectrum Analyzer | Rohde & Schwarz        | FSP30                 | 836079/035  | 2020-04-28 | 2021-04-27 |
| SEMT-1007 | EMI Test Receiver | Rohde & Schwarz        | ESVB                  | 825471/005  | 2020-04-28 | 2021-04-27 |
| SEMT-1008 | Amplifier         | Agilent                | 8447F                 | 3113A06717  | 2020-04-28 | 2021-04-27 |
| SEMT-1043 | Amplifier         | C&D                    | PAP-1G18              | 2002        | 2020-04-28 | 2021-04-27 |
| SEMT-1011 | Broadband Antenna | Schwarz beck           | VULB9163              | 9163-333    | 2019-05-05 | 2021-05-04 |
| SEMT-1042 | Horn Antenna      | ETS                    | 3117                  | 00086197    | 2019-05-05 | 2021-05-04 |
| SEMT-1121 | Horn Antenna      | Schwarzbeck            | BBHA 9170             | BBHA9170582 | 2019-05-05 | 2021-05-04 |
| SEMT-1069 | Loop Antenna      | Schwarz beck           | FMZB 1516             | 9773        | 2019-05-05 | 2021-05-04 |
| SEMT-1001 | EMI Test Receiver | Rohde & Schwarz        | ESPI                  | 101611      | 2020-04-28 | 2021-04-27 |
| SEMT-1003 | L.I.S.N           | Schwarz beck           | NSLK8126              | 8126-224    | 2020-04-28 | 2021-04-27 |
| SEMT-1002 | Pulse Limiter     | Rohde & Schwarz        | ESH3-Z2               | 100911      | 2020-04-28 | 2021-04-27 |
| SEMT-1168 | Pre-amplifier     | Direction Systems Inc. | PAP-0126              | 14141-12838 | 2020-04-28 | 2021-04-27 |
| SEMT-1169 | Pre-amplifier     | Direction Systems Inc. | PAP-2640              | 14145-14153 | 2020-04-28 | 2021-04-27 |
| SEMT-1163 | Spectrum Analyzer | Rohde & Schwarz        | FSP40                 | 100612      | 2020-04-28 | 2021-04-27 |
| SEMT-1170 | DRG Horn Antenna  | A.H. SYSTEMS           | SAS-574               | 571         | 2019-05-05 | 2021-05-04 |
| SEMT-1166 | Power Limiter     | Agilent                | N9356B                | MY45450376  | 2020-04-28 | 2021-04-27 |
| SEMT-1048 | RF Limiter        | ATTEN                  | AT-BSF-2400~2500      | /           | 2020-04-28 | 2021-04-27 |
| SEMT-1076 | RF Switcher       | Top Precision          | RCS03-A2              | /           | 2020-04-28 | 2021-04-27 |
| SEMT-C001 | Cable             | Zheng DI               | LL142-07-07-10M(A)    | /           | /          | /          |
| SEMT-C002 | Cable             | Zheng DI               | ZT40-2.92J-2.92J-6M   | /           | /          | /          |
| SEMT-C003 | Cable             | Zheng DI               | ZT40-2.92J-2.92J-2.5M | /           | /          | /          |
| SEMT-C004 | Cable             | Zheng DI               | 2M0RFC                | /           | /          | /          |
| SEMT-C005 | Cable             | Zheng DI               | 1M0RFC                | /           | /          | /          |
| SEMT-C006 | Cable             | Zheng DI               | 1M0RFC                | /           | /          | /          |

| Software List                              |              |        |         |
|--------------------------------------------|--------------|--------|---------|
| Description                                | Manufacturer | Model  | Version |
| EMI Test Software<br>(Radiated Emission)*  | Farad        | EZ-EMC | RA-03A1 |
| EMI Test Software<br>(Conducted Emission)* | Farad        | EZ-EMC | RA-03A1 |

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

| FCC Rules                 | Description of Test Item          | Result    |
|---------------------------|-----------------------------------|-----------|
| §15.203; §15.247(b)(4)(i) | Antenna Requirement               | Compliant |
| §15.205                   | Restricted Band of Operation      | Compliant |
| §15.207(a)                | Conducted Emission                | Compliant |
| §15.247(e)                | Power Spectral Density            | Compliant |
| §15.247(a)(2)             | DTS Bandwidth                     | Compliant |
| §15.247(b)(3)             | RF Output Power                   | Compliant |
| §15.209(a)                | Radiated Emission                 | Compliant |
| §15.247(d)                | Band Edge (Out of Band Emissions) | Compliant |

N/A: Not applicable

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has a PIFA antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

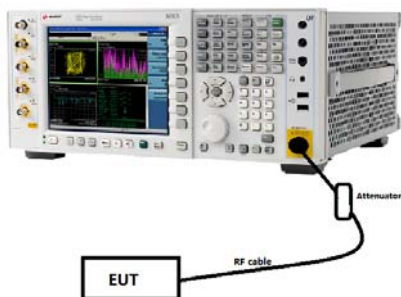

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- Set the VBW  $\geq 3 \times \text{RBW}$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.2 Test Setup Block Diagram

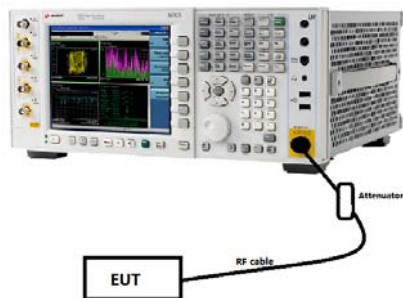

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

**Please refer to Appendix B**


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

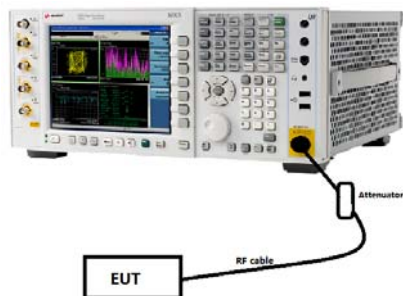

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq 3 \times$  RBW.
- Set span  $\geq 3 \times$  RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

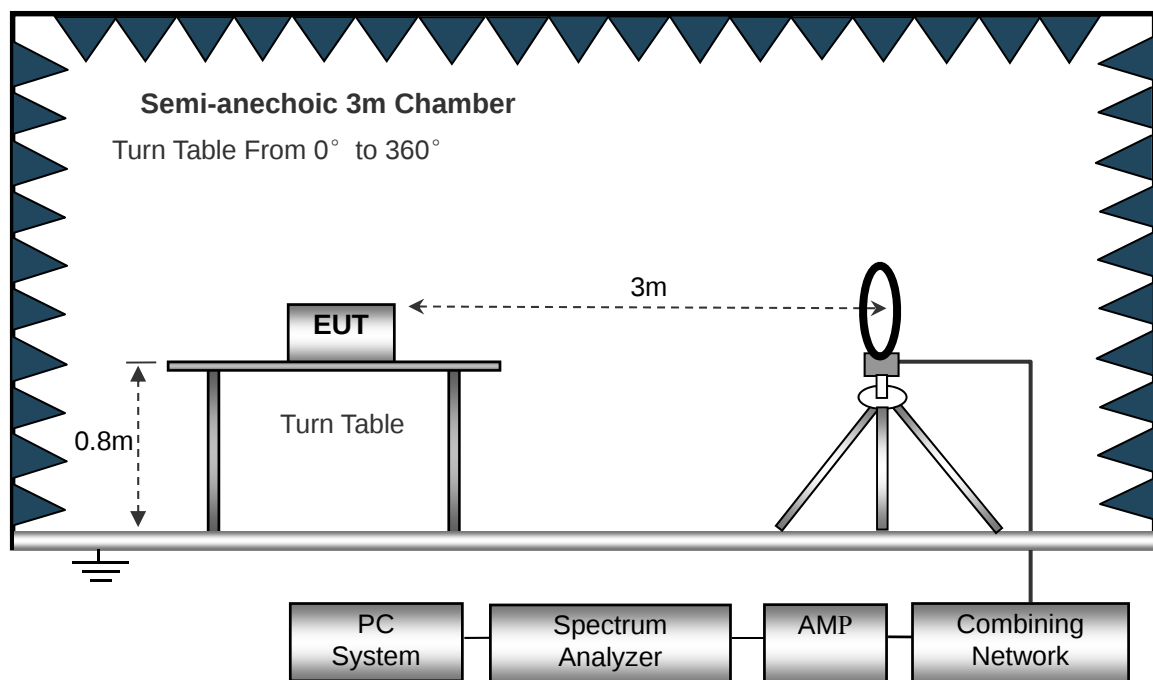

The test setup for emission measurement from 30 MHz to 1 GHz..

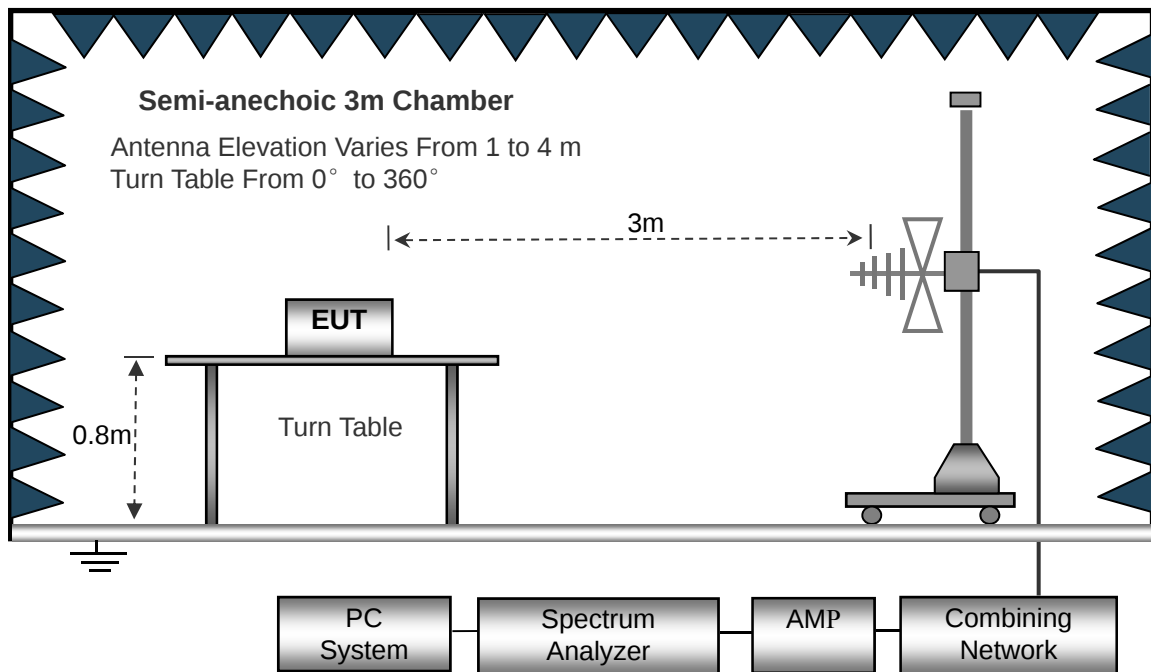

The test setup for emission measurement above 1 GHz..

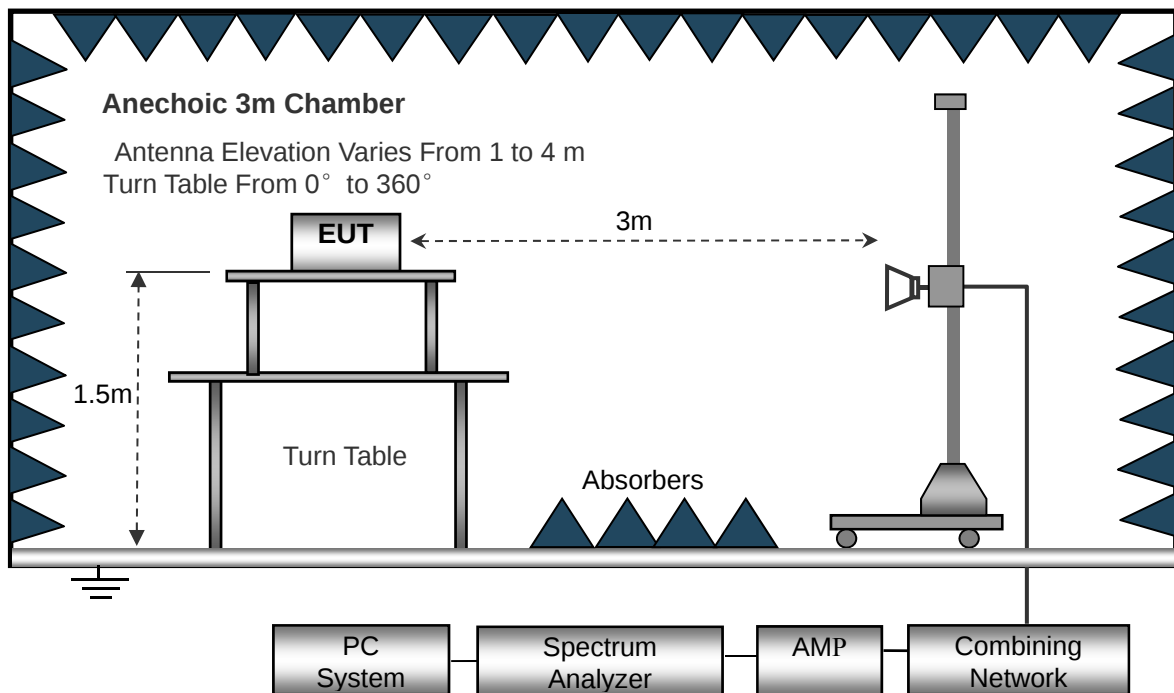

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

|              |     |           |            |
|--------------|-----|-----------|------------|
| Test Channel | Low | Polarity: | Horizontal |
|--------------|-----|-----------|------------|

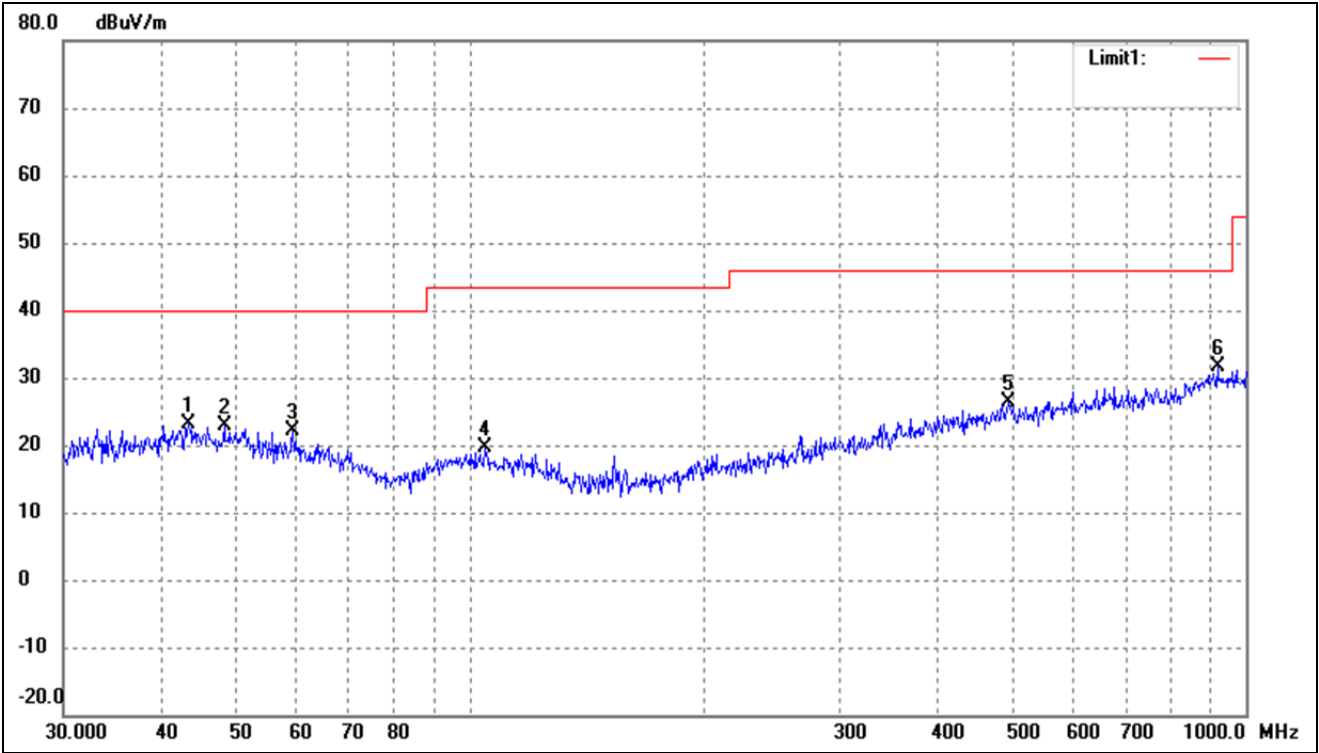


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 43.5057            | 35.03               | -11.85          | 23.18              | 40.00             | -16.82         | -             | -              | peak   |
| 2   | 48.3318            | 34.48               | -11.62          | 22.86              | 40.00             | -17.14         | -             | -              | peak   |
| 3   | 59.2325            | 35.06               | -12.98          | 22.08              | 40.00             | -17.92         | -             | -              | peak   |
| 4   | 104.5361           | 32.91               | -13.32          | 19.59              | 43.50             | -23.91         | -             | -              | peak   |
| 5   | 494.1984           | 30.69               | -4.22           | 26.47              | 46.00             | -19.53         | -             | -              | peak   |
| 6   | 919.2866           | 29.79               | 1.78            | 31.57              | 46.00             | -14.43         | -             | -              | peak   |

|              |     |           |          |
|--------------|-----|-----------|----------|
| Test Channel | Low | Polarity: | Vertical |
|--------------|-----|-----------|----------|

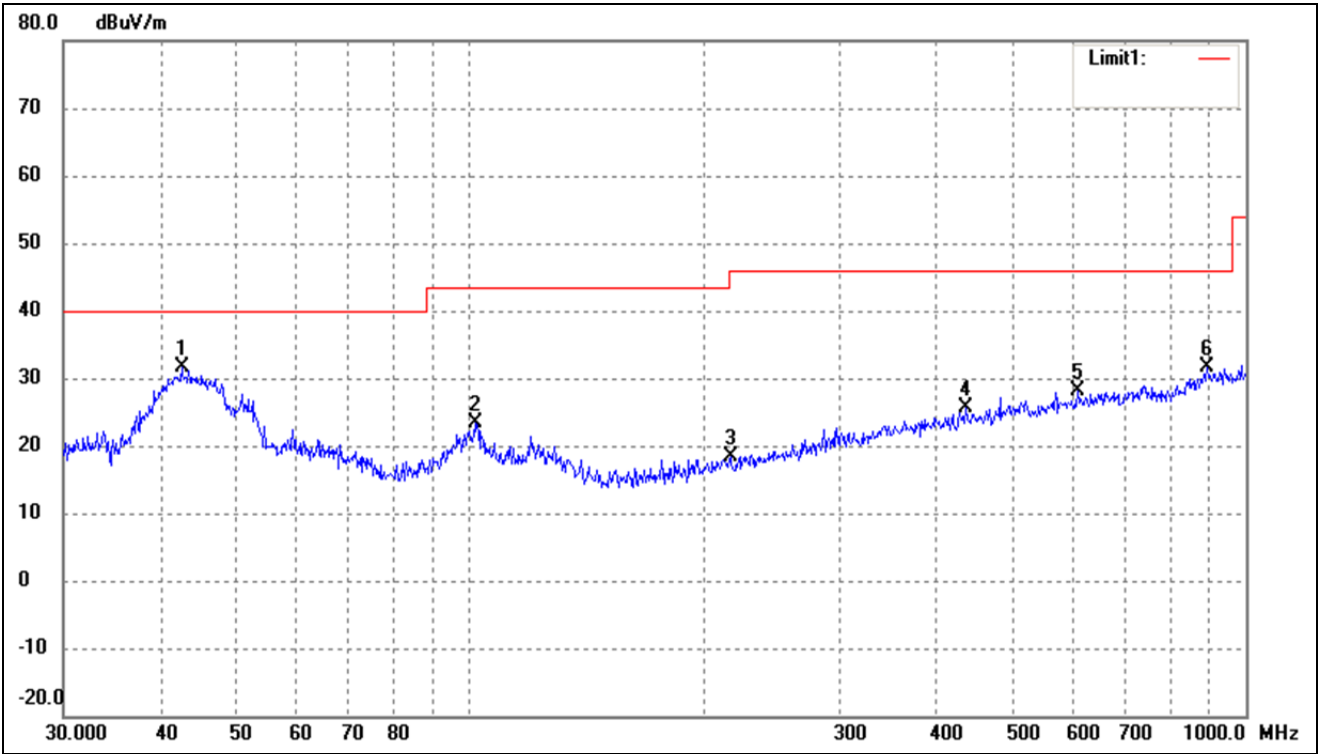


| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | ( )    | (cm)   |        |
| 1   | 42.6000   | 43.43    | -11.89  | 31.54    | 40.00    | -8.46  | -      | -      | peak   |
| 2   | 101.6443  | 36.77    | -13.32  | 23.45    | 43.50    | -20.05 | -      | -      | peak   |
| 3   | 216.7828  | 30.65    | -12.23  | 18.42    | 46.00    | -27.58 | -      | -      | peak   |
| 4   | 435.5898  | 31.37    | -5.77   | 25.60    | 46.00    | -20.40 | -      | -      | peak   |
| 5   | 607.7867  | 30.04    | -2.00   | 28.04    | 46.00    | -17.96 | -      | -      | peak   |
| 6   | 890.7278  | 30.41    | 1.18    | 31.59    | 46.00    | -14.41 | -      | -      | peak   |

|              |        |           |            |
|--------------|--------|-----------|------------|
| Test Channel | Middle | Polarity: | Horizontal |
|--------------|--------|-----------|------------|

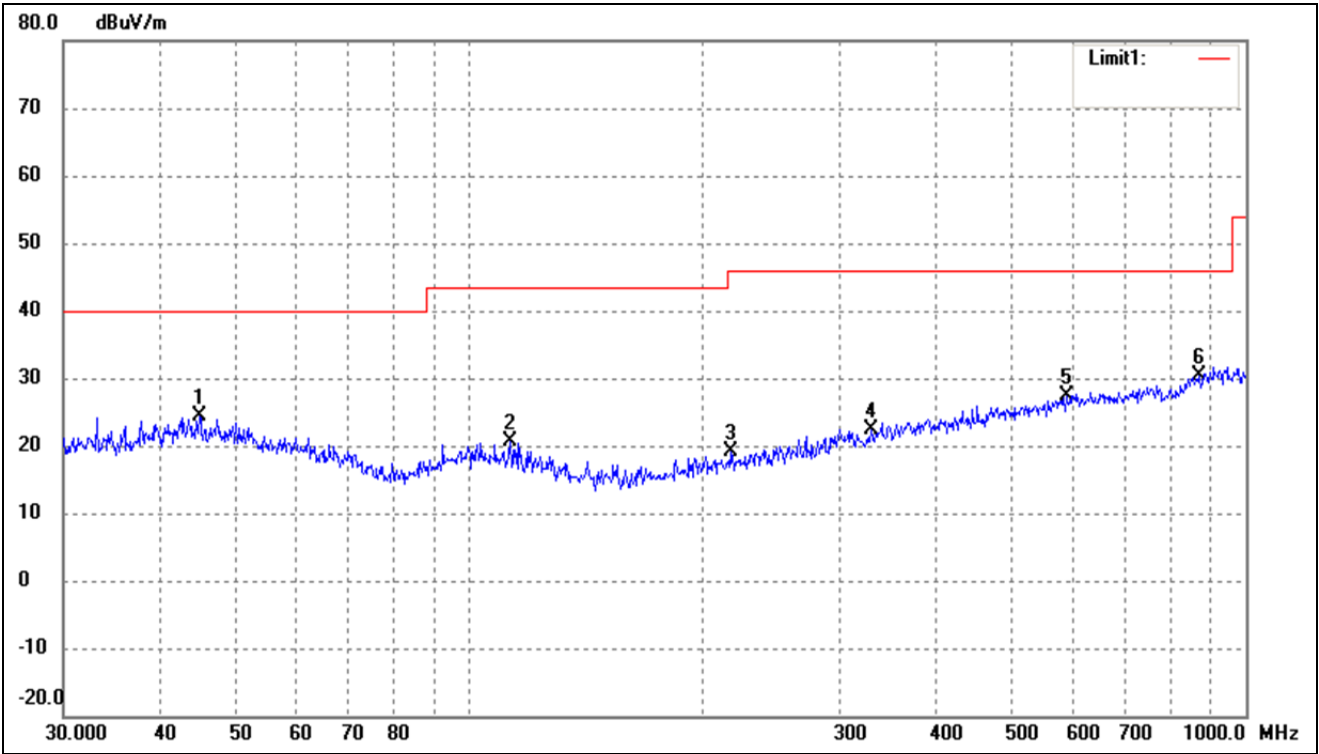


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 44.9006            | 36.25               | -11.80          | 24.45              | 40.00             | -15.55         | -             | -              | peak   |
| 2   | 112.9196           | 34.14               | -13.60          | 20.54              | 43.50             | -22.96         | -             | -              | peak   |
| 3   | 216.7828           | 31.34               | -12.23          | 19.11              | 46.00             | -26.89         | -             | -              | peak   |
| 4   | 329.0390           | 31.22               | -8.72           | 22.50              | 46.00             | -23.50         | -             | -              | peak   |
| 5   | 586.8437           | 29.56               | -2.27           | 27.29              | 46.00             | -18.71         | -             | -              | peak   |
| 6   | 869.1302           | 29.95               | 0.49            | 30.44              | 46.00             | -15.56         | -             | -              | peak   |

|              |        |           |          |
|--------------|--------|-----------|----------|
| Test Channel | Middle | Polarity: | Vertical |
|--------------|--------|-----------|----------|

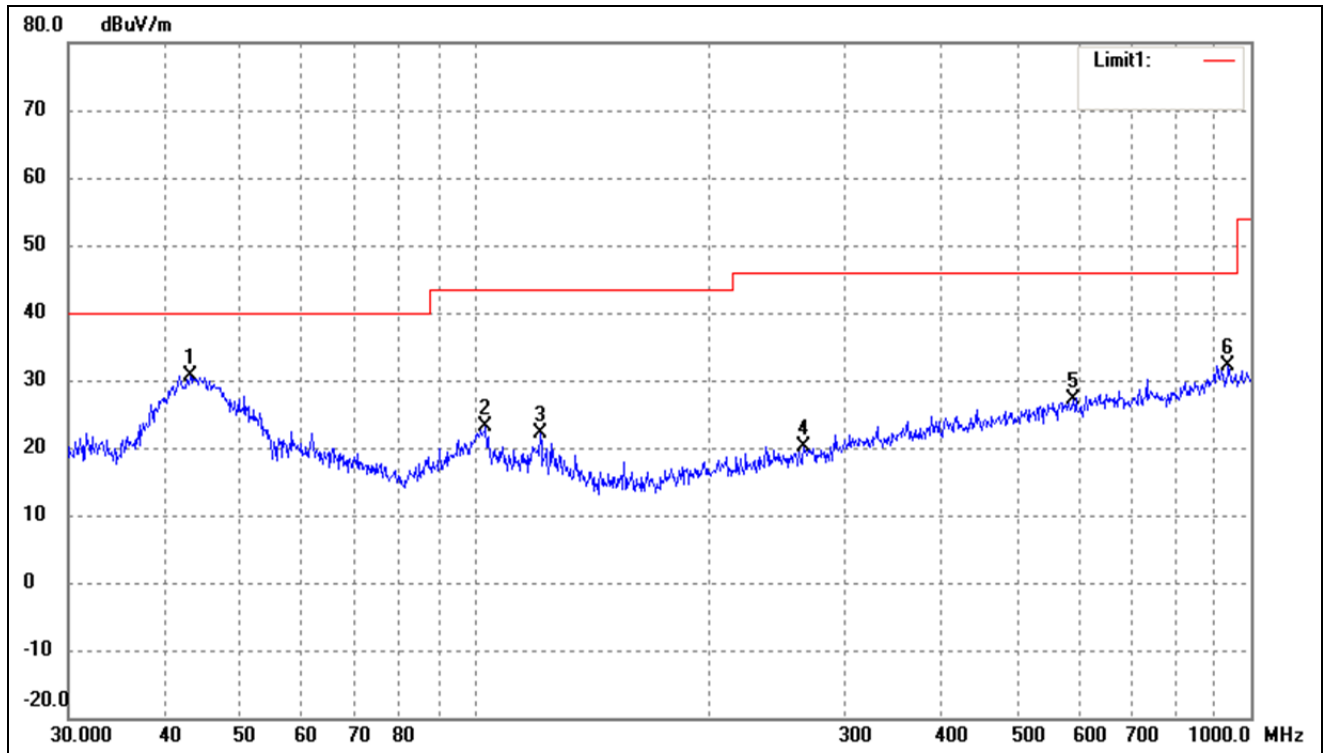


| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 43.0505            | 42.58               | -11.87          | 30.71              | 40.00             | -9.29          | -             | -              | peak   |
| 2   | 103.4421           | 36.34               | -13.31          | 23.03              | 43.50             | -20.47         | -             | -              | peak   |
| 3   | 121.5486           | 36.74               | -14.71          | 22.03              | 43.50             | -21.47         | -             | -              | peak   |
| 4   | 265.6757           | 30.89               | -10.80          | 20.09              | 46.00             | -25.91         | -             | -              | peak   |
| 5   | 590.9737           | 29.33               | -2.16           | 27.17              | 46.00             | -18.83         | -             | -              | peak   |
| 6   | 935.5463           | 30.53               | 1.65            | 32.18              | 46.00             | -13.82         | -             | -              | peak   |

|              |      |           |            |
|--------------|------|-----------|------------|
| Test Channel | High | Polarity: | Horizontal |
|--------------|------|-----------|------------|

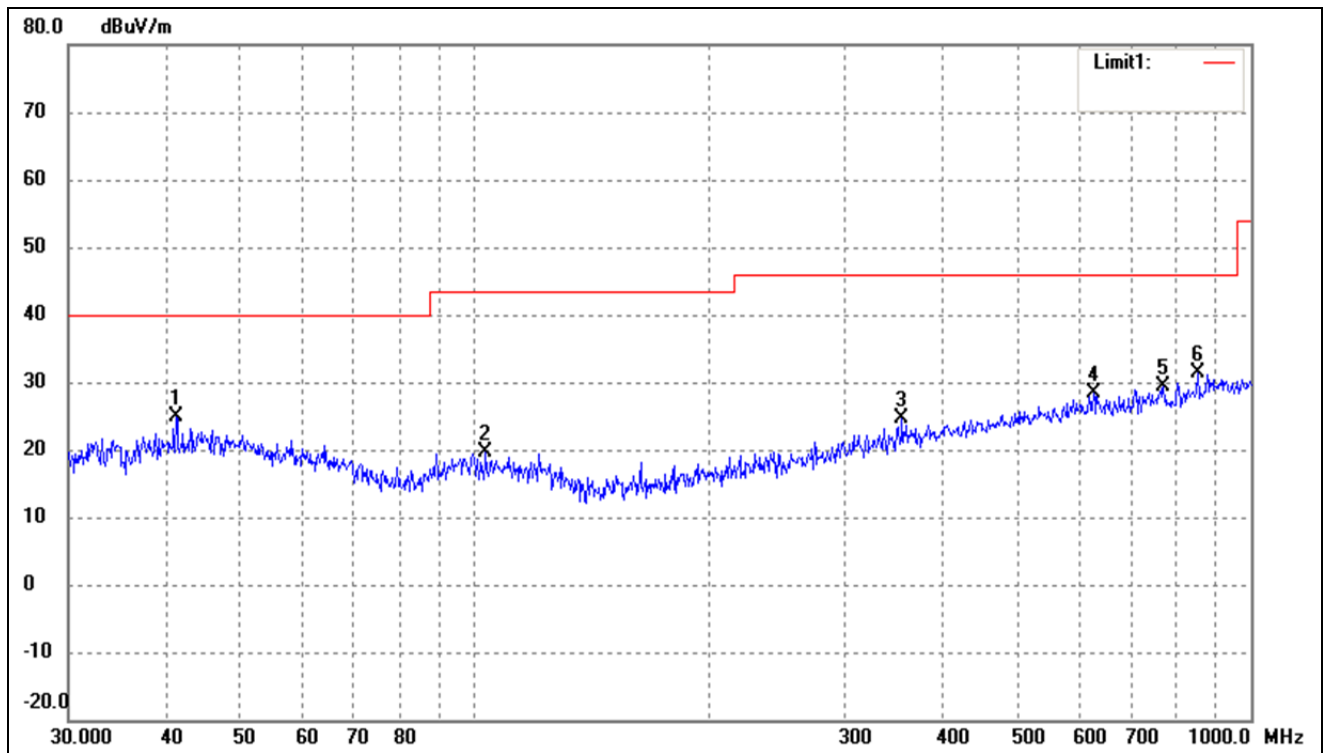

| No. | Frequency | Reading  | Correct | Result   | Limit    | Margin | Degree | Height | Remark |
|-----|-----------|----------|---------|----------|----------|--------|--------|--------|--------|
|     | (MHz)     | (dBuV/m) | dB/m    | (dBuV/m) | (dBuV/m) | (dB)   | ( )    | (cm)   |        |
| 1   | 41.2765   | 36.72    | -11.94  | 24.78    | 40.00    | -15.22 | -      | -      | peak   |
| 2   | 103.4421  | 32.89    | -13.31  | 19.58    | 43.50    | -23.92 | -      | -      | peak   |
| 3   | 355.4273  | 31.99    | -7.38   | 24.61    | 46.00    | -21.39 | -      | -      | peak   |
| 4   | 627.2738  | 30.51    | -2.17   | 28.34    | 46.00    | -17.66 | -      | -      | peak   |
| 5   | 771.4486  | 30.49    | -1.12   | 29.37    | 46.00    | -16.63 | -      | -      | peak   |
| 6   | 854.0247  | 30.95    | 0.36    | 31.31    | 46.00    | -14.69 | -      | -      | peak   |

|              |      |           |          |
|--------------|------|-----------|----------|
| Test Channel | High | Polarity: | Vertical |
|--------------|------|-----------|----------|

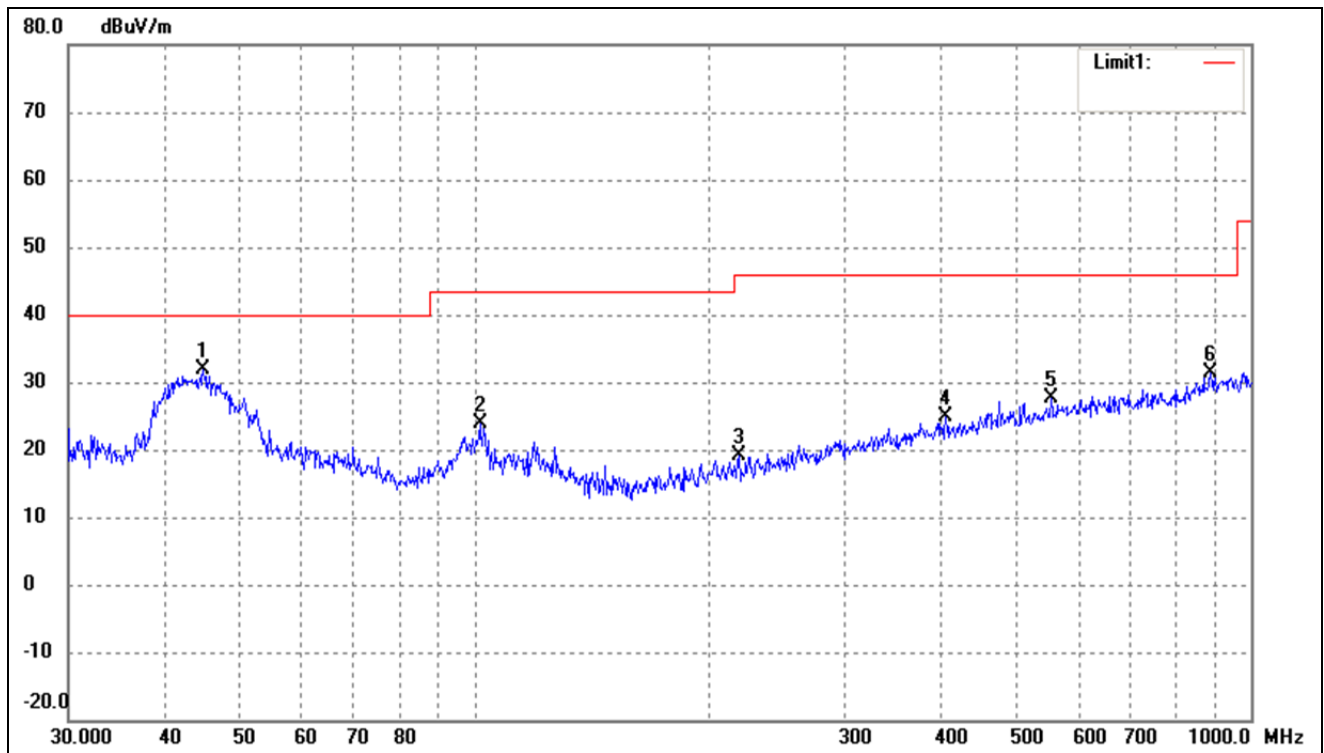

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Degree<br>( ) | Height<br>(cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|---------------|----------------|--------|
| 1   | 44.7434            | 43.65               | -11.81          | 31.84              | 40.00             | -8.16          | -             | -              | peak   |
| 2   | 101.6443           | 37.21               | -13.32          | 23.89              | 43.50             | -19.61         | -             | -              | peak   |
| 3   | 219.0753           | 31.24               | -12.20          | 19.04              | 46.00             | -26.96         | -             | -              | peak   |
| 4   | 404.6665           | 31.24               | -6.36           | 24.88              | 46.00             | -21.12         | -             | -              | peak   |
| 5   | 552.8833           | 31.29               | -3.65           | 27.64              | 46.00             | -18.36         | -             | -              | peak   |
| 6   | 887.6099           | 30.41               | 1.05            | 31.46              | 46.00             | -14.54         | -             | -              | peak   |

Remark: '-' Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

## ➤ Spurious Emissions Above 1GHz

| Frequency              | Reading  | Correct | Result   | Limit    | Margin | Polar | Detector |
|------------------------|----------|---------|----------|----------|--------|-------|----------|
| (MHz)                  | (dBuV/m) | dB      | (dBuV/m) | (dBuV/m) | (dB)   | H/V   |          |
| Low Channel-2406MHz    |          |         |          |          |        |       |          |
| 4812                   | 56.18    | -4.51   | 51.67    | 74       | -22.33 | H     | PK       |
| 4812                   | 53.43    | -4.51   | 48.92    | 54       | -5.08  | H     | AV       |
| 7218                   | 52.29    | -2.20   | 50.09    | 74       | -23.91 | H     | PK       |
| 7218                   | 49.14    | -2.20   | 46.94    | 54       | -7.06  | H     | AV       |
| 4812                   | 54.24    | -4.51   | 49.73    | 74       | -24.27 | V     | PK       |
| 4812                   | 50.93    | -4.51   | 46.42    | 54       | -7.58  | V     | AV       |
| 7218                   | 49.35    | -2.20   | 47.15    | 74       | -26.85 | V     | PK       |
| 7218                   | 47.12    | -2.20   | 44.92    | 54       | -9.08  | V     | AV       |
| Middle Channel-2440MHz |          |         |          |          |        |       |          |
| 4880                   | 56.32    | -4.47   | 51.85    | 74       | -22.15 | H     | PK       |
| 4880                   | 53.09    | -4.47   | 48.62    | 54       | -5.38  | H     | AV       |
| 7320                   | 51.90    | -2.17   | 49.73    | 74       | -24.27 | H     | PK       |
| 7320                   | 49.60    | -2.17   | 47.43    | 54       | -6.57  | H     | AV       |
| 4880                   | 54.48    | -4.47   | 50.01    | 74       | -23.99 | V     | PK       |
| 4880                   | 50.05    | -4.47   | 45.58    | 54       | -8.42  | V     | AV       |
| 7320                   | 49.77    | -2.17   | 47.60    | 74       | -26.40 | V     | PK       |
| 7320                   | 47.48    | -2.17   | 45.31    | 54       | -8.69  | V     | AV       |
| High Channel-2472MHz   |          |         |          |          |        |       |          |
| 4944                   | 55.16    | -4.42   | 50.74    | 74       | -23.26 | H     | PK       |
| 4944                   | 52.88    | -4.42   | 48.46    | 54       | -5.54  | H     | AV       |
| 7416                   | 51.71    | -2.14   | 49.57    | 74       | -24.43 | H     | PK       |
| 7416                   | 49.31    | -2.14   | 47.17    | 54       | -6.83  | H     | AV       |
| 4944                   | 54.03    | -4.42   | 49.61    | 74       | -24.39 | V     | PK       |
| 4944                   | 51.19    | -4.42   | 46.77    | 54       | -7.23  | V     | AV       |
| 7416                   | 50.61    | -2.14   | 48.47    | 74       | -25.53 | V     | PK       |
| 7416                   | 46.94    | -2.14   | 44.80    | 54       | -9.20  | V     | AV       |

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

#### B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b)  $VBW \geq [3 \times RBW]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

| Frequency        | RBW              |
|------------------|------------------|
| 9kHz to 150kHz   | 200Hz to 300Hz   |
| 0.15MHz to 30MHz | 9kHz to 10kHz    |
| 30MHz to 1000MHz | 100kHz to 120kHz |
| >1000MHz         | 1MHz             |


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 8.3 Summary of Test Results/Plots


➤ Radiated test

|              |     |           |                         |
|--------------|-----|-----------|-------------------------|
| Test Channel | Low | Polarity: | Horizontal (worst case) |
|--------------|-----|-----------|-------------------------|

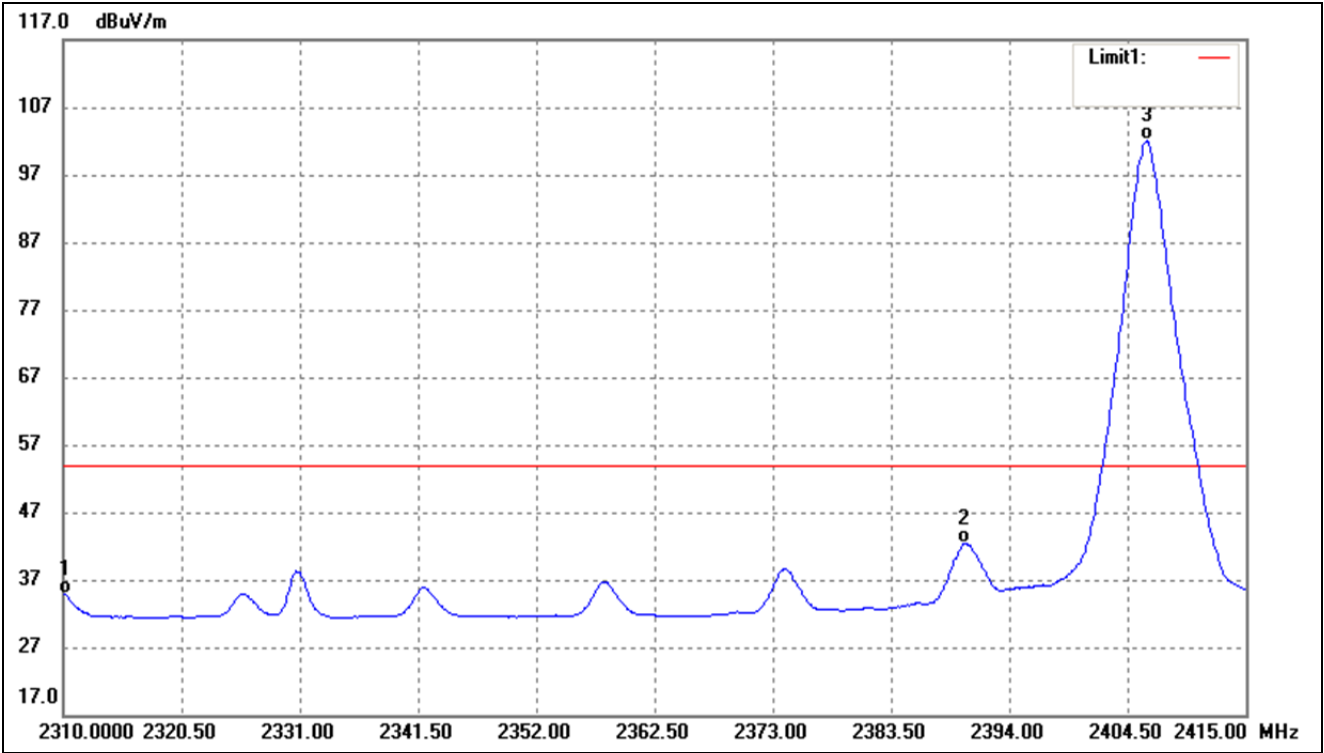

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>Factor(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------------|--------------------|-------------------|----------------|------------------|
| 1   | 2310.000           | 44.53               | -9.66                 | 34.87              | 54.00             | -19.13         | Average Detector |
|     | 2310.000           | 66.86               | -9.66                 | 57.20              | 74.00             | -16.80         | Peak Detector    |
| 2   | 2390.000           | 51.91               | -9.50                 | 42.41              | 54.00             | -11.59         | Average Detector |
|     | 2390.000           | 80.48               | -9.50                 | 70.98              | 74.00             | -3.02          | Peak Detector    |
| 3   | 2406.180           | 111.61              | -9.47                 | 102.14             | /                 | /              | Average Detector |
|     | 2405.760           | 116.36              | -9.48                 | 106.88             | /                 | /              | Peak Detector    |

|              |      |           |                         |
|--------------|------|-----------|-------------------------|
| Test Channel | High | Polarity: | Horizontal (worst case) |
|--------------|------|-----------|-------------------------|

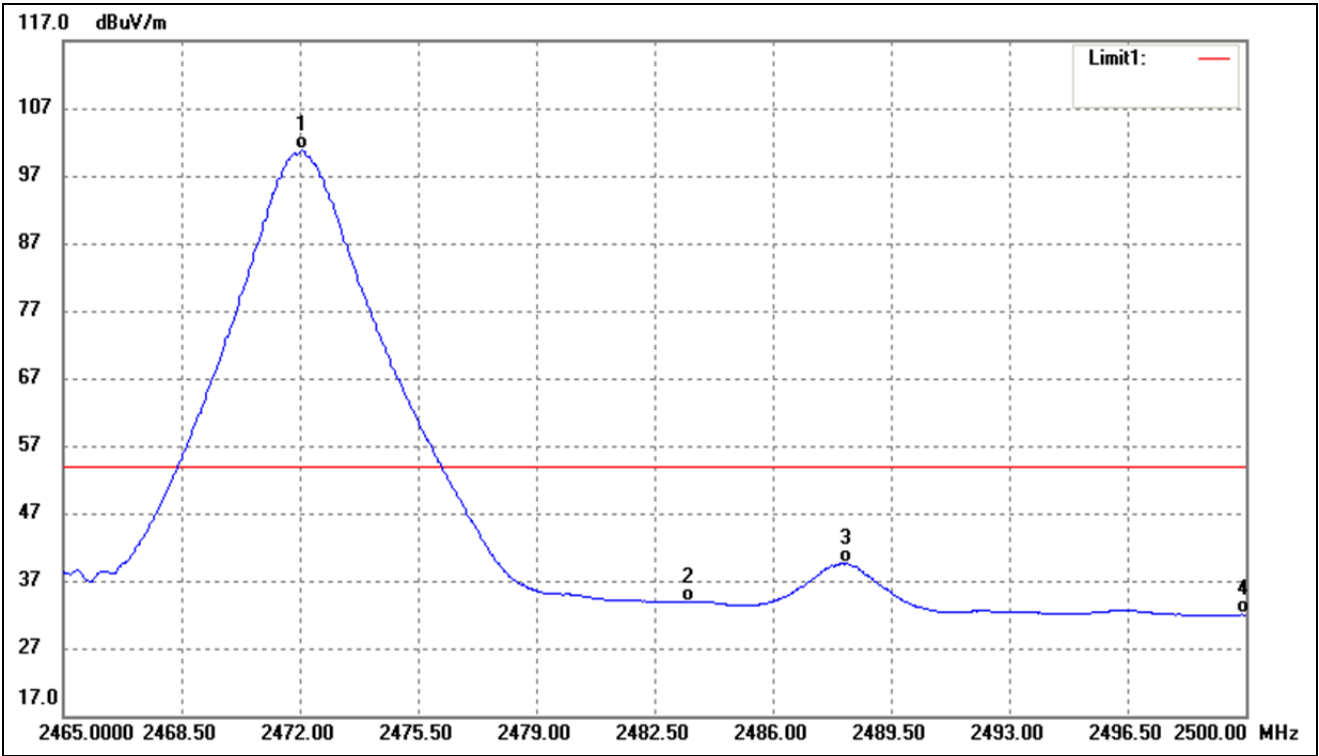

| No. | Frequency<br>(MHz) | Reading<br>(dBuV/m) | Correct<br>dB/m | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark           |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|------------------|
| 1   | 2472.070           | 110.12              | -9.34           | 100.78             | /                 | /              | Average Detector |
|     | 2472.315           | 112.24              | -9.34           | 102.90             | /                 | /              | Peak Detector    |
| 2   | 2483.500           | 43.18               | -9.31           | 33.87              | 54.00             | -20.13         | Average Detector |
|     | 2483.500           | 79.42               | -9.31           | 70.11              | 74.00             | -3.89          | Peak Detector    |
| 3   | 2488.170           | 48.92               | -9.30           | 39.62              | 54.00             | -14.38         | Average Detector |
| 4   | 2500.000           | 41.30               | -9.28           | 32.02              | 54.00             | -21.98         | Average Detector |
|     | 2500.000           | 72.18               | -9.28           | 62.90              | 74.00             | -11.10         | Peak Detector    |

➤ Conducted test

Please refer to Appendix D


## 9. Conducted Emissions

### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 9.2 Basic Test Setup Block Diagram

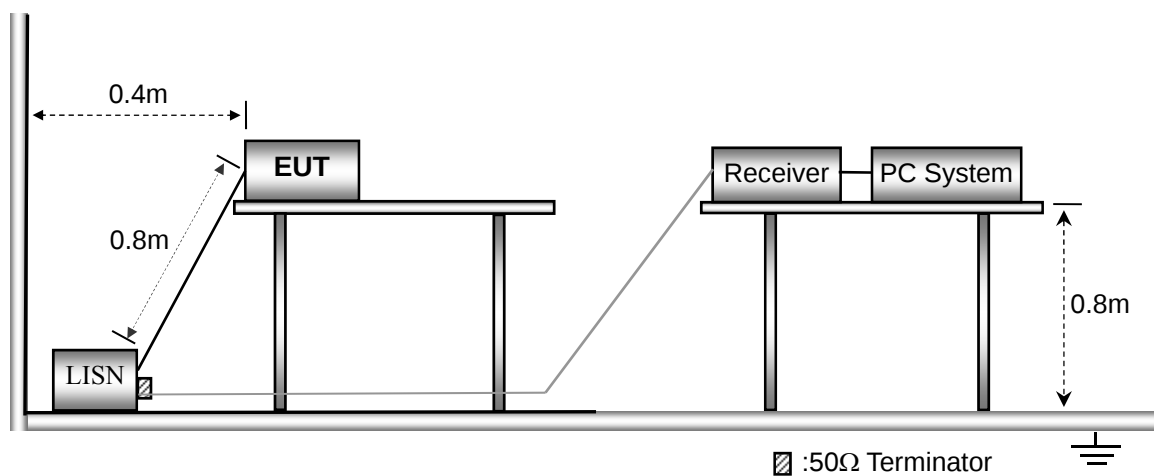


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

|                                    |         |
|------------------------------------|---------|
| Start Frequency .....              | 150 kHz |
| Stop Frequency .....               | 30 MHz  |
| Sweep Speed .....                  | Auto    |
| IF Bandwidth.....                  | 10 kHz  |
| Quasi-Peak Adapter Bandwidth ..... | 9 kHz   |
| Quasi-Peak Adapter Mode .....      | Normal  |


### 9.4 Summary of Test Results/Plots

|           |               |             |           |      |
|-----------|---------------|-------------|-----------|------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Line |
|-----------|---------------|-------------|-----------|------|

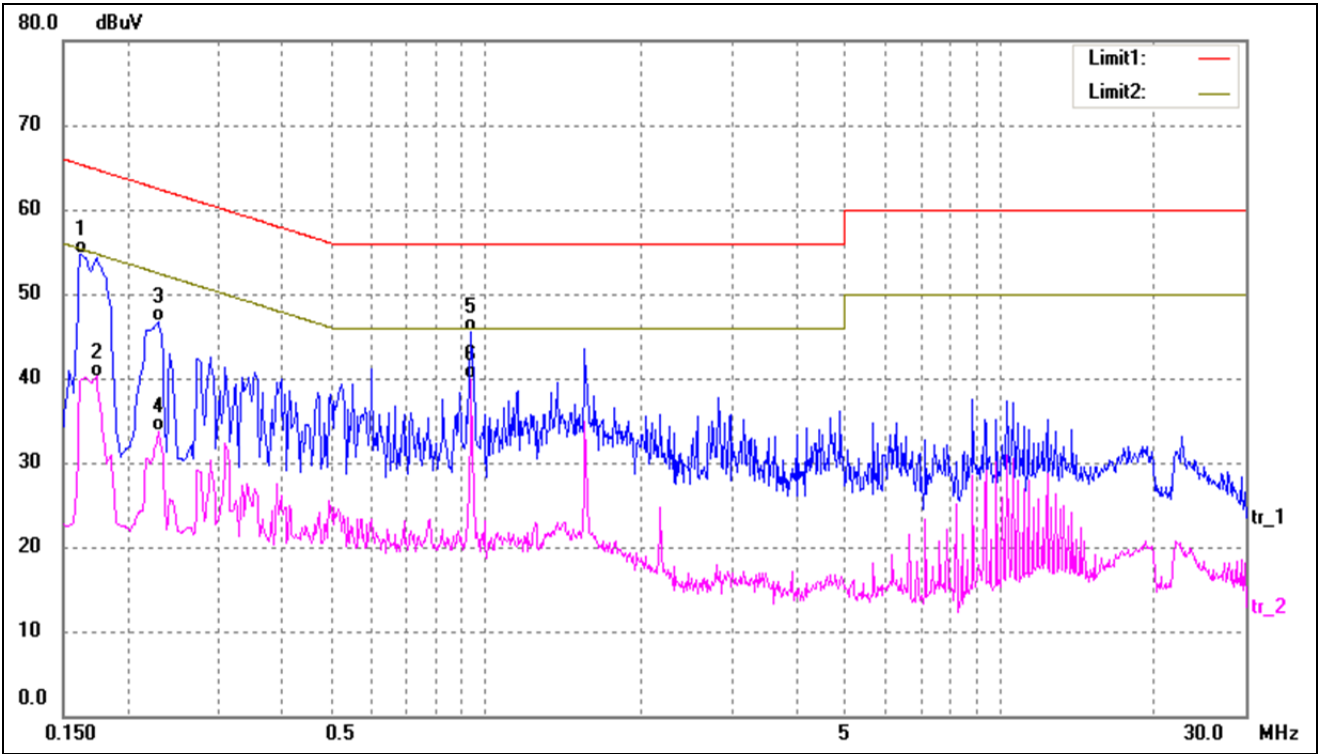

| No. | Frequency | Reading | Correct | Result | Limit  | Margin | Detector |
|-----|-----------|---------|---------|--------|--------|--------|----------|
|     | (MHz)     | (dBuV)  | (dB/m)  | (dBuV) | (dBuV) | (dB)   |          |
| 1   | 0.1620    | 44.54   | 10.26   | 54.80  | 65.36  | -10.56 | QP       |
| 2   | 0.1740    | 29.95   | 10.25   | 40.20  | 54.77  | -14.57 | AVG      |
| 3   | 0.2300    | 36.39   | 10.26   | 46.65  | 62.45  | -15.80 | QP       |
| 4   | 0.2300    | 23.42   | 10.26   | 33.68  | 52.45  | -18.77 | AVG      |
| 5   | 0.9340    | 35.35   | 10.22   | 45.57  | 56.00  | -10.43 | QP       |
| 6*  | 0.9340    | 29.72   | 10.22   | 39.94  | 46.00  | -6.06  | AVG      |

|           |               |             |           |         |
|-----------|---------------|-------------|-----------|---------|
| Test Mode | Communication | AC120V 60Hz | Polarity: | Neutral |
|-----------|---------------|-------------|-----------|---------|

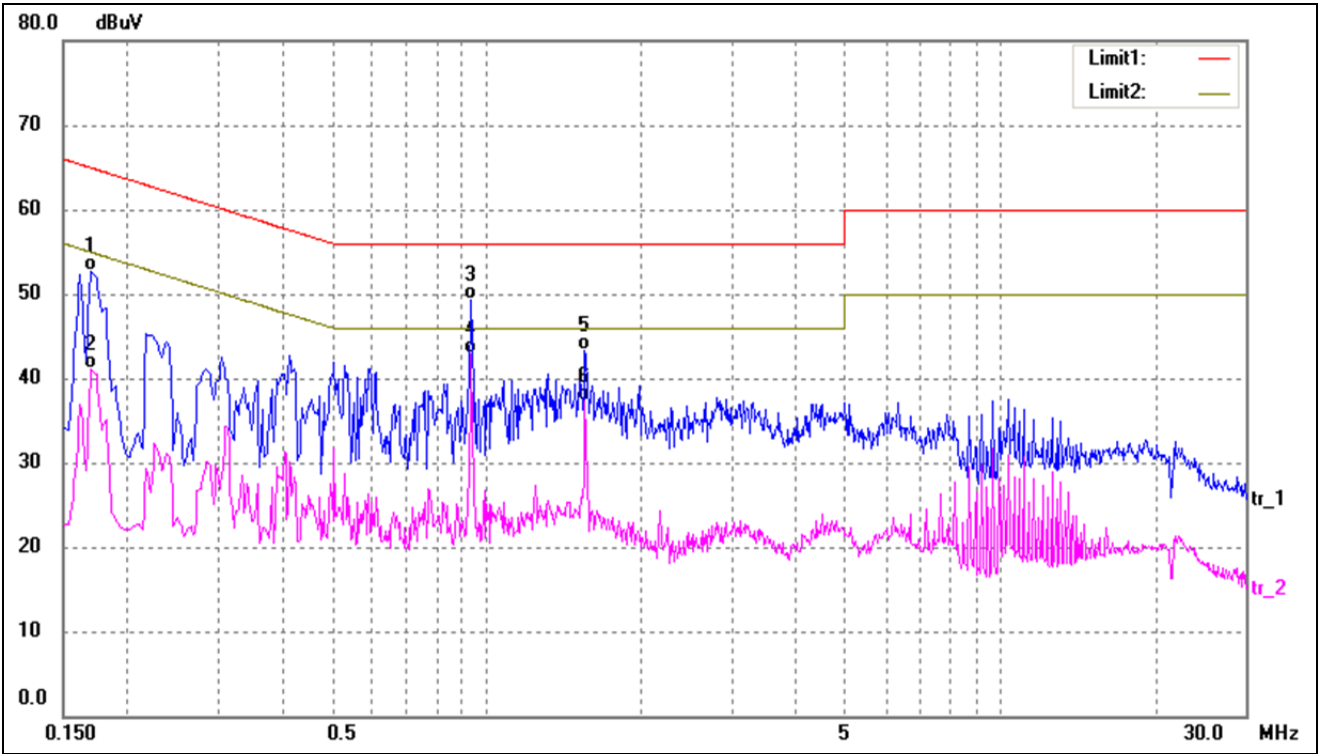

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>(dB/m) | Result<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|-------------------|------------------|-----------------|----------------|----------|
| 1   | 0.1700             | 42.51             | 10.25             | 52.76            | 64.96           | -12.20         | QP       |
| 2   | 0.1700             | 30.76             | 10.25             | 41.01            | 54.96           | -13.95         | AVG      |
| 3   | 0.9340             | 38.99             | 10.22             | 49.21            | 56.00           | -6.79          | QP       |
| 4*  | 0.9340             | 32.69             | 10.22             | 42.91            | 46.00           | -3.09          | AVG      |
| 5   | 1.5580             | 32.98             | 10.24             | 43.22            | 56.00           | -12.78         | QP       |
| 6   | 1.5580             | 26.98             | 10.24             | 37.22            | 46.00           | -8.78          | AVG      |

## APPENDIX SUMMARY

---

|                   |                 |               |           |
|-------------------|-----------------|---------------|-----------|
| Project No.       | WTX21X02011253W | Test Engineer | Shaw      |
| Start date        | 2021/3/23       | Finish date   | 2021/3/23 |
| Temperature       | 24℃             | Humidity      | 48%       |
| RF specifications | 2.4G            |               |           |

| APPENDIX | Description of Test Item        | Result    |
|----------|---------------------------------|-----------|
| A        | Power Spectral Density          | Compliant |
| B        | DTS Bandwidth                   | Compliant |
| C        | RF Output Power                 | Compliant |
| D        | Conducted Out of Band Emissions | Compliant |

APPENDIX A

---

| Power Spectral Density |              |                                    |                   |
|------------------------|--------------|------------------------------------|-------------------|
| Test Mode              | Test Channel | Power Spectral Density<br>dBm/3kHz | Limit<br>dBm/3kHz |
| GFSK(2.4G)             | Low          | -0.189                             | 8                 |
|                        | Middle       | -0.831                             | 8                 |
|                        | High         | 1.368                              | 8                 |

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Low</p>    | <div><div><div>Agilent</div><div><div>Ref 10 dBm</div><div>Atten 20 dB</div><div>Mkr1 2.405688 GHz<br/>-0.189 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.405688000 GHz</div><div>-0.189 dBm</div></div><div><div>Center 2.406 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▾</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More<br/>1 of 2</div></div></div> |
| <p>Middle</p> | <div><div><div>Agilent</div><div><div>Ref 10 dBm</div><div>Atten 20 dB</div><div>Mkr1 2.439712 GHz<br/>-0.831 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.439712000 GHz</div><div>-0.831 dBm</div></div><div><div>Center 2.44 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▾</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More<br/>1 of 2</div></div></div>  |
| <p>High</p>   | <div><div><div>Agilent</div><div><div>Ref 10 dBm</div><div>Atten 20 dB</div><div>Mkr1 2.471688 GHz<br/>1.368 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.471688000 GHz</div><div>1.368 dBm</div></div><div><div>Center 2.472 GHz</div><div>#Res BW 3 kHz</div><div>#VBW 10 kHz</div><div>Sweep 343.1 ms (1001 pts)</div><div>Span 3 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▾</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More<br/>1 of 2</div></div></div>   |

APPENDIX B

---

| Test Mode  | Test Channel | 6 dB Bandwidth<br>kHz | Limit<br>kHz |
|------------|--------------|-----------------------|--------------|
| GFSK(2.4G) | Low          | 850.432               | ≥500         |
|            | Middle       | 846.026               | ≥500         |
|            | High         | 874.696               | ≥500         |

|        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Low    | <div><div><div><div>Agilent</div><div>R T</div></div><div><div>Ch Freq 2.406 GHz</div><div>Trig Free</div></div><div>Occupied Bandwidth</div><div>Ref Level 20.00 dBm</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>Center 2.406 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 6 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.7215 MHz</div><div>Occ BW % Pwr 99.00 %</div><div>x dB -6.00 dB</div><div>Transmit Freq Error 8.118 kHz</div><div>x dB Bandwidth 850.432 kHz</div></div></div></div><div><div>Trace/View</div><div>Trace 1 2 3</div><div>Clear Write</div><div>Max Hold</div><div>Min Hold</div><div>View</div><div>Blank</div><div>More 1 of 2</div></div></div>                                                                                                                               |
| Middle | <div><div><div><div>Agilent</div><div>R T</div></div><div><div>Ch Freq 2.44 GHz</div><div>Trig Free</div></div><div>Occupied Bandwidth</div><div>Span 6.000000000 MHz</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>Center 2.44 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 6 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.7464 MHz</div><div>Occ BW % Pwr 99.00 %</div><div>x dB -6.00 dB</div><div>Transmit Freq Error 19.405 kHz</div><div>x dB Bandwidth 846.026 kHz</div></div></div></div><div><div>Span</div><div>Span 6.000000000 MHz</div><div>Span Zoom</div><div>Full Span</div><div>Zero Span</div><div>Last Span</div><div>Zone ▶</div></div></div>                                                                                                                                            |
| High   | <div><div><div><div>Agilent</div><div>R T</div></div><div><div>Ch Freq 2.472 GHz</div><div>Trig Free</div></div><div>Occupied Bandwidth</div><div>Center 2.472000000 GHz</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>Center 2.472 GHz</div><div>#Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 6 MHz</div></div><div><div>Occupied Bandwidth</div><div>1.7260 MHz</div><div>Occ BW % Pwr 99.00 %</div><div>x dB -6.00 dB</div><div>Transmit Freq Error 24.989 kHz</div><div>x dB Bandwidth 874.696 kHz</div></div></div></div><div><div>Freq/Channel</div><div>Center Freq 2.47200000 GHz</div><div>Start Freq 2.46900000 GHz</div><div>Stop Freq 2.47500000 GHz</div><div>CF Step 600.000000 kHz</div><div>Auto Man</div><div>Freq Offset 0.00000000 Hz</div><div>Signal Track On Off</div><div>Scale Type Log Lin</div></div></div> |

APPENDIX C

---

| RF Output Power |              |                |              |
|-----------------|--------------|----------------|--------------|
| Test Mode       | Test Channel | Reading<br>dBm | Limit<br>dBm |
| GFSK(2.4G)      | Low          | 10.220         | 30.00        |
|                 | Middle       | 9.980          | 30.00        |
|                 | High         | 9.807          | 30.00        |

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Low</p>    | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div>Mkr1 2.40626 GHz</div><div>10.22 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.406260000 GHz</div><div>10.22 dBm</div></div><div><div>Center 2.406 GHz</div><div>#Res BW 3 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 10 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div> |
| <p>Middle</p> | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div>Mkr1 2.43958 GHz</div><div>9.98 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.439580000 GHz</div><div>9.98 dBm</div></div><div><div>Center 2.44 GHz</div><div>#Res BW 3 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 10 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div>    |
| <p>High</p>   | <div><div><div>Agilent</div><div><div>Ref 20 dBm</div><div>Atten 30 dB</div><div>Mkr1 2.47231 GHz</div><div>9.807 dBm</div></div><div><div>#Peak</div><div>Log</div><div>10</div><div>dB/</div><div>Offset</div><div>1</div><div>dB</div></div><div><div>M1 S2</div><div>S3 FC</div><div>AA</div></div><div><div>Marker</div><div>2.472310000 GHz</div><div>9.807 dBm</div></div><div><div>Center 2.472 GHz</div><div>#Res BW 3 MHz</div><div>#VBW 3 MHz</div><div>Sweep 10 ms (1001 pts)</div><div>Span 10 MHz</div></div></div><div><div>Peak Search</div><div>Meas Tools ▶</div><div>Next Peak</div><div>Next Pk Right</div><div>Next Pk Left</div><div>Min Search</div><div>Pk-Pk Search</div><div>More 1 of 2</div></div></div> |

APPENDIX D

Conducted Out of Band Emissions

Low

Agilent R T

Ref 20 dBm Atten 30 dB Mkr1 2.405700 GHz 10.11 dBm

#Peak Log 10 dB/Offset 1 dB DI 9.9 dBm

Display Line -9.89 dBm

Center 2.398 GHz Span 25 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)

| Marker | Trace | Type | X Axis       | Amplitude  |
|--------|-------|------|--------------|------------|
| 1      | (1)   | Freq | 2.405700 GHz | 10.11 dBm  |
| 2      | (1)   | Freq | 2.400000 GHz | -48.04 dBm |

Display Full Screen Display Line -9.89 dBm On Off Limits Active Fctn Position Bottom Title Preferences

Agilent R T

Ref 20 dBm Atten 30 dB Mkr1 25.351 GHz 41.35 dBm

#Peak Log 10 dB/Offset 1 dB DI 9.9 dBm

M1 S2 S3 FC AA

Marker 25.350750000 GHz -41.35 dBm

Start 30 MHz Stop 26 GHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 2.691 s (1001 pts)

Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2

Middle

Agilent R T


Ref 20 dBm Atten 30 dB Mkr1 2.439700 GHz 10.06 dBm

#Peak Log 10 dB/Offset 1 dB DI 9.9 dBm

Display Line -9.94 dBm

Center 2.44 GHz Span 12 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)

Display Full Screen Display Line -9.94 dBm On Off Limits Active Fctn Position Bottom Title Preferences

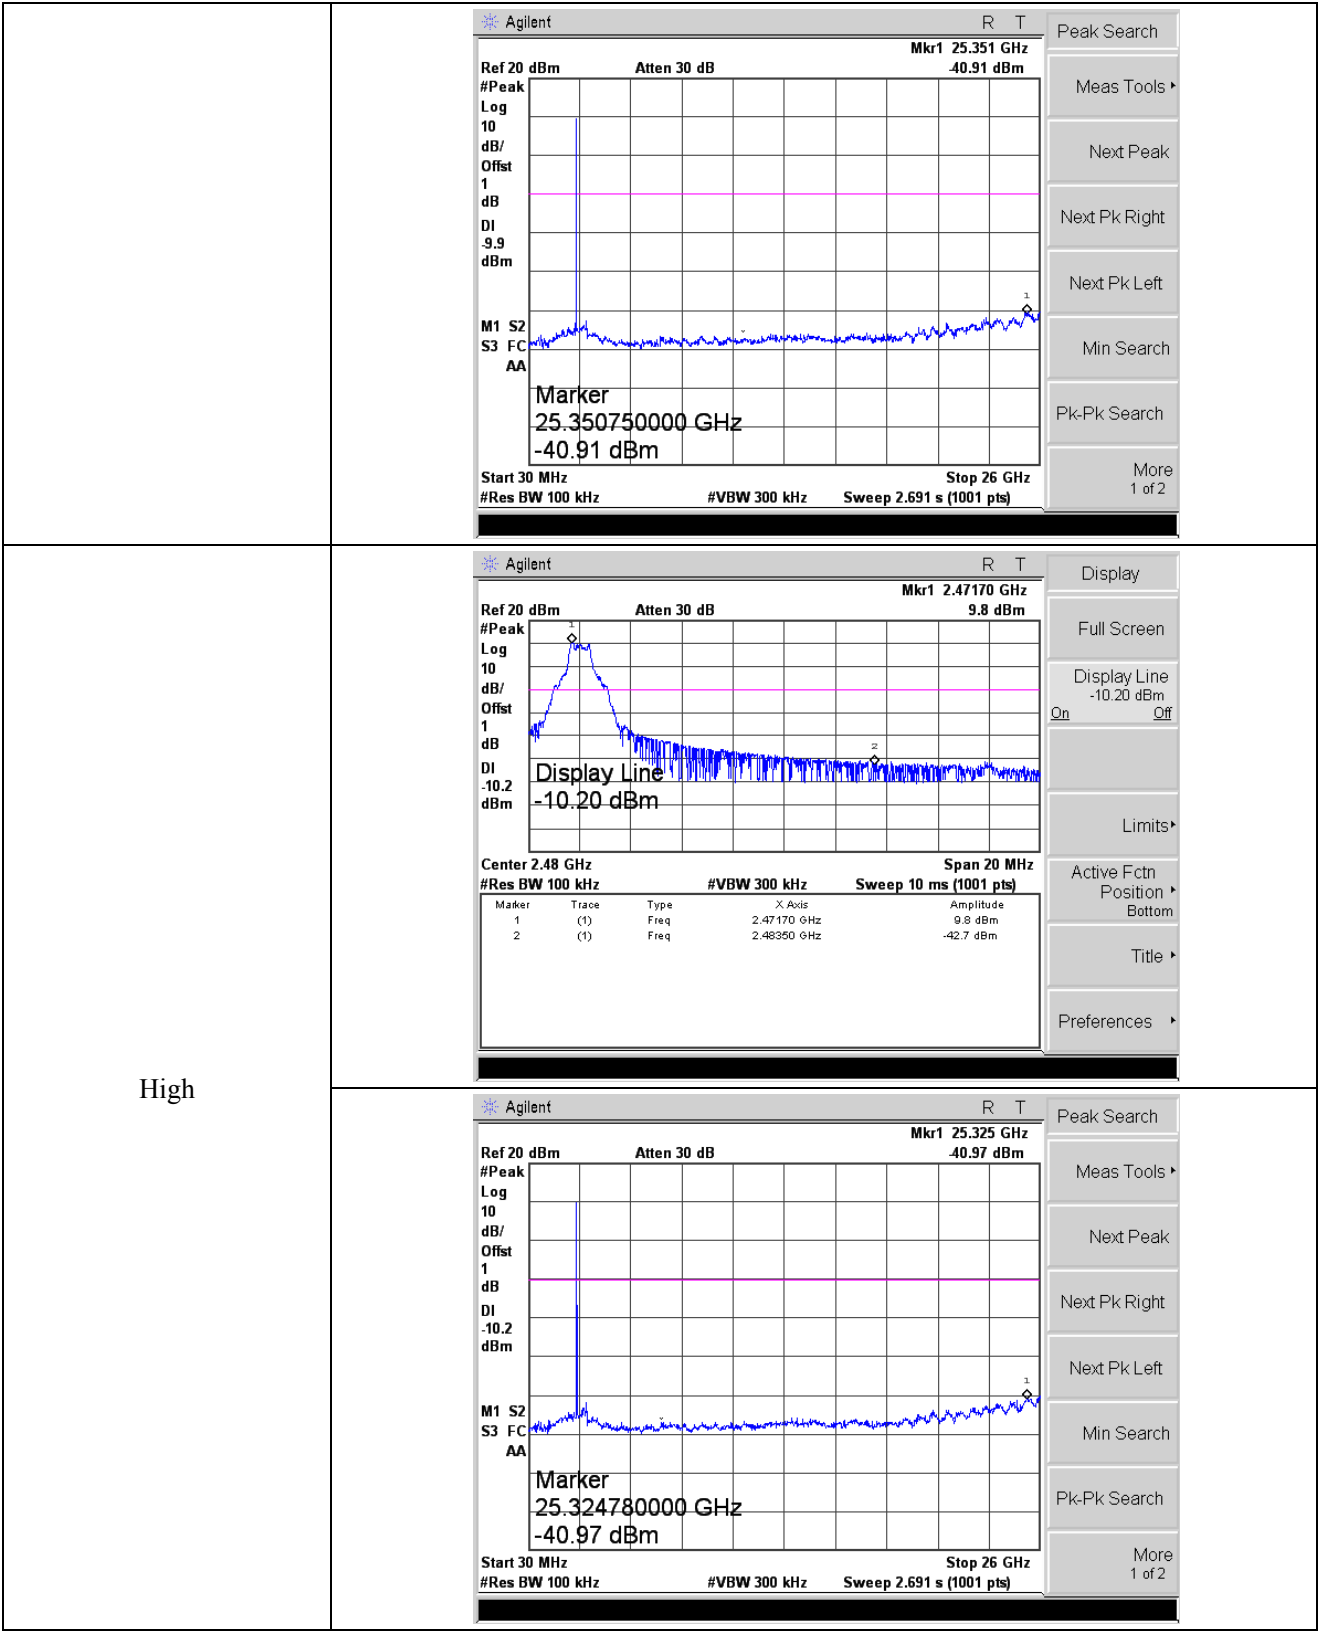

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***