

Prüfbericht-Nr.: Test report no.:	60435442-002	Auftrags-Nr.: Order no.:	23870435 030	Seite 1 von 51 Page 1 of 51
Kunden-Referenz-Nr.: Client reference no.:	2285816	Auftragsdatum: Order date:	2020.09.30	
Auftraggeber: Client:	The Raymond Corporation			
Prüfgegenstand: Test item:	RTU (Remote Transmitter Unit)			
Bezeichnung / Typ-Nr.: Identification / Type no.:	2302042400 Remote / FCC ID: 2AYXJ-1360796			
Auftrags-Inhalt: Order content:	Accredited testing according to FCC 47 CFR Part 15			
Prüfgrundlage: Test specification:	FCC 47 CFR Part 15.247 with parts 15.207 & 15.209 ANSI C63.10: 2013			
Wareneingangsdatum: Date of sample receipt:	2020.09.30			
Prüfmuster-Nr.: Test sample no.:	See section 2.3			
Prüfzeitraum: Testing period:	2020.10.05 – 2020.11.12			
Ort der Prüfung: Place of testing:	Lund, Sweden			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland Sweden			
Prüfergebnis*: Test result*:	Pass			
überprüft von: reviewed by:	genehmigt von: authorized by:			
Datum: 2021.09.09 Date:	Datum: 2021.09.09 Date:			
Stellung / Position:	Senior Technical Expert	Stellung / Position:	Lab Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:				
Prüfmuster vollständig und unbeschädigt Test item complete and undamaged				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet 5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts.</i>				

Revision History60435442-00260435442-002

REVISION	DATE	REMARKS	AUTHOR
001	2021.01.22	First release	Niall Forrester
002	2021.09.09	Added FCC ID	Niall Forrester
Note: Latest revision report will replace all previous reports			
This report based on FCC Part 15.247 Template version 1.1			

Summary of Test Results

FCC 47 CFR Rule Part	Test Description	Applicability	Report Section	RESULT	REMARKS
15.207	AC Power Line Conducted Emissions (Intentional Radiators)	NO	4.1	N/A	No Wired Connections
15.209	Radiated Emissions (Intentional Radiators)	YES	4.2	PASS	
15.247 (d)	Out of Band Emissions	YES	4.3	PASS	
15.247 (d)	Band Edge Compliance (Authorized Band)	YES	4.4	PASS	
15.247 (d)	Band Edge Compliance (Restricted Band)	YES	4.5	PASS	
15.247 (a)(1)	20dB Bandwidth	NO	4.6	N/A	BLE is non-hopping
15.247 (a)(1)	Carrier (Hopping Channel) Separation	NO	4.7	N/A	BLE is non-hopping
15.247 (a)(1)	Number of Hopping Channels	NO	4.8	N/A	BLE is non-hopping
15.247 (a)(1)	Time of Occupancy (Dwell Time)	NO	4.9	N/A	BLE is non-hopping
15.247 (a)(2)	6dB Bandwidth	YES	4.10	PASS	
15.247 (b)	Peak Conducted Output Power	YES	4.11	PASS	
15.247 (e)	Power Spectral Density	YES	4.12	PASS	

Possible test case verdicts:

- | | |
|--|-----------------------|
| - Test case does not apply to the test object: | N/A |
| - Test object complies with the requirement: | PASS or COMPLIANT |
| - Test object does not meet the requirement: | FAIL or NOT COMPLIANT |
| - Test case not performed on the test object: | N.P. |

Table of Contents

1. GENERAL INFORMATION	4
1.1 Test Site.....	4
1.2 Client Information.....	4
2. PRODUCT INFORMATION.....	5
2.1 General Description.....	5
2.2 Device Characteristics.....	5
2.3 Test Samples	5
2.4 Wireless Technologies and Bands Supported by the EUT.....	5
2.5 Antenna Information.....	6
2.6 Wireless Technology Details	6
2.7 Ancillary Equipment.....	6
2.8 EUT Diagrams.....	6
3. TEST METHODS	7
3.1 Test Standards.....	7
3.2 Additional references.....	7
3.3 Limits	8
3.4 Description of Test Methods and Equipment Setup	9
3.5 EUT Configuration During Test.....	14
3.6 EUT Operation Modes.....	14
3.7 Deviations from the Test Standard	14
3.8 Environmental Conditions.....	15
4. TEST RESULTS	15
4.1 Test Results – AC Power Line Conducted Emissions (Intentional Transmitter).....	15
4.2 Test Results – Radiated Emissions (Intentional Transmitter)	16
4.3 Test Results – Out of Band Emissions	35
4.4 Test Results – Band Edge Compliance (Authorized Band)	37
4.5 Test Results – Band Edge Compliance (Restricted Band).....	39
4.6 Test Results – 20dB Bandwidth.....	42
4.7 Test Results – Carrier (Hopping Channel) Separation	42
4.8 Test Results – Number of Hopping Channels.....	42
4.9 Test Results – Time of Occupancy (Dwell Time)	42
4.10 Test Results – 6dB Bandwidth.....	43
4.11 Test Results – Peak Conducted Output Power	45
4.12 Test Results – Power Spectral Density.....	47
5. TEST EQUIPMENT STATUS.....	49
5.1 List of Hardware with Calibration Dates	49
5.2 Software / Firmware Versions.....	50
6. MEASUREMENT UNCERTAINTY	51
6.1 Measurement Uncertainty for CTE	51
6.2 Measurement Uncertainty for Conducted Emissions	51
6.3 Measurement Uncertainty for SAC 5 (Radiated Emissions & Band Edge)	51
7. PHOTOGRAPHS.....	51

1. GENERAL INFORMATION

1.1 Test Site

Test Facility:	TÜV Rheinland Sweden AB
Address:	Mobilvägen 10
	223 62 Lund
	Sweden
Swedac Registration Number:	10325
FCC Test Firm Registration Number:	517458
ISED Test Site Registration Number:	24753

1.2 Client Information

Company Name:	The Raymond Corporation
Address:	22 S Canal St
	Greene, NY 13778
Contact Person:	Ben Grotton
Contact e-Mail / Telephone	(607) 656-2311 x2040

2. PRODUCT INFORMATION

2.1 General Description

Model name:	RTU (Remote Transmitter Unit)
Manufacturer:	Scanfil
Model number / Marketing name:	2302042400
FCC ID:	2AYXJ-1360796
Description:	RTU (Remote Transmitter Unit)
Ancillary Equipment:	See section 2.7

2.2 Device Characteristics

Type of Power Supply	Battery
Nominal Supply Voltage	3.5V
Supply Voltage Range	1.5V – 3.5V
Operating Temperature Range	0°C - 50 °C
Operating Air Humidity Range	-
Highest Internal Frequency Source	2480 MHz

2.3 Test Samples

EUT #	EUT ID	Description	Used For:
1	A002921813-006	Sample with semi-rigid antenna and DTM mode	Conducted radio tests
2	A002932488-001	Standard Sample	Radiated emissions
3	A002921813-002	Standard Sample	Radiated emissions
4	A002921813-003	Standard Sample	Radiated emissions
5	A002921813-004	Standard Sample	Radiated emissions

2.4 Wireless Technologies and Bands Supported by the EUT

Technology	Band	Frequency Range (Tx)	Evaluation Performed*
NFC	13.56 MHz	13.56 MHz	NO
BLE	2.4 GHz	2402 MHz - 2480 MHz	YES

*This statement refers only to this report. Other wireless technologies may be covered by other reports.

2.5 Antenna Information

Technology	Band	Number of Antennas	Antenna Type(s)	Gain
NFC	13.56 MHz	1	PCB Loop	2 dBi
BLE	2.4 GHz	1	PIFA	-2.28 dBi

2.6 Wireless Technology Details

Technology	Band	Modulation Type(s)	No. of Channels	Channel Spacing	Adaptivity
NFC	13.56 MHz	ASK	1	-	N/A
BLE	2.4 GHz	GFSK	40	2 MHz	N/A

2.7 Ancillary Equipment

N/A

2.8 EUT Diagrams

N/A

3. TEST METHODS

3.1 Test Standards

Testing was performed according to the following standards / references

Standard	Version	Description
FCC 47 CFR 15.247	-	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
FCC 47 CFR 15.207	-	Conducted limits
FCC 47 CFR 15.209	-	Radiated emission limits; general requirements

3.2 Additional references

The following standards / references were also considered for the testing

Standard	Version	Description
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.3 Limits

FCC 47 CFR Rule Part	Test Description	Limit Reference (FCC 47 CFR Reference)
15.207	AC Power Line Conducted Emissions (Intentional Radiators)	15.207 (a)
15.209	Radiated Emissions (Intentional Radiators)	15.209 (a) *See Note 1
15.247 (d)	Out of Band Emissions	15.247 (d)
15.247 (d)	Band Edge Compliance (Authorized Band)	15.247 (d)
15.247 (d)	Band Edge Compliance (Restricted Band)	15.247 (d)
15.247 (a)(1)	20dB Bandwidth	15.247 (a)(1)
15.247 (a)(1)	Carrier (Hopping Channel) Separation	15.247 (a)(1)
15.247 (a)(1)	Number of Hopping Channels	15.247 (a)(1)
15.247 (a)(1)	Time of Occupancy (Dwell Time)	15.247 (a)(1)
15.247 (a)(2)	6dB Bandwidth	15.247 (a)(2)
15.247 (b)	Peak Conducted Output Power	15.247 (b)(1) [Hopping] 15.247 (b)(3) [Non-Hopping]
15.247 (e)	Power Spectral Density	15.247 (e)

Note 1

Radiated Emissions limits in the tables from 47 CFR sections 15.109 & 15.209 are presented in $\mu\text{V/m}$. Measurements on the test system are made in $\text{dB}\mu\text{V/m}$. To convert between these, the following adjustment is used:

$$\text{New Limit} = 20 \log \left(\frac{\text{Original Limit}}{10^6} \right) + 120$$

Example: from 15.209(a) the limit for 30MHz – 88MHz is $100\mu\text{V/m}$ at 3m. This gives:

$$\text{New Limit} = 20 \log \left(\frac{100}{10^6} \right) + 120 = 40\text{dB}\mu\text{V/m at 3m}$$

Additionally, in some cases testing has been performed at distances other than those specified in the tables. When this has occurred, the limits have been adjusted in accordance with the requirements in 47 CFR 15.31, using an extrapolation factor of 40dB/decade at frequencies below 30MHz and 20dB/decade at or above 30MHz

Example: from 15.209(a) the limit for 1.705MHz – 30MHz is $30\mu\text{V/m}$ (=29.54 $\text{dB}\mu\text{V/m}$) at 30m

$$\text{Limit@3m} = \text{Limit@30m} + 40 \log \left(\frac{30}{3} \right) = 29.54 + 40.00 = 69.54 \text{ dB}\mu\text{V/m at 3m}$$

Example: from 15.209(a) the limit for 1GHz – 18GHz is $500\mu\text{V/m}$ (=53.98 $\text{dB}\mu\text{V/m}$) at 3m

$$\text{Limit@1m} = \text{Limit@3m} + 20 \log \left(\frac{3}{1} \right) = 53.98 + 9.54 = 63.52 \text{ dB}\mu\text{V/m at 1m}$$

3.4 Description of Test Methods and Equipment Setup

3.4.1 General Description

Testing was performed in accordance with the various requirements of ANSI C63.4 and ANSI C63.10. Any deviations from the test methods are described in section 3.7

Where different arrangements of equipment were used for different types of measurements, these are tabulated in section 3.4.2 and details of each arrangement are included in subsequent sections

3.4.2 Test Equipment Setup Used by Test Type

FCC 47 CFR Rule Part	Test Description	Test Equipment Used
15.207	AC Power Line Conducted Emissions (Intentional Radiators)	Conducted Emissions
15.209	Radiated Emissions (Intentional Radiators)	SAC5
15.247 (d)	Out of Band Emissions	CTE
15.247 (d)	Band Edge Compliance (Authorized band)	CTE
15.247 (d)	Band Edge Compliance (Restricted band)	SAC 5
15.247 (a)(1)	20dB Bandwidth	CTE
15.247 (a)(1)	Carrier (Hopping Channel) Separation	CTE
15.247 (a)(1)	Number of Hopping Channels	CTE
15.247 (a)(1)	Time of Occupancy (Dwell Time)	CTE
15.247 (a)(2)	6dB Bandwidth	CTE
15.247 (b)	Peak Conducted Output Power	CTE
15.247 (e)	Power Spectral Density	CTE


3.4.3 Test Equipment Setup – CTE System

The Comprehensive Test Environment (CTE) system consists of a number of instruments (see section 5.1.1) mounted in a rack together with automated relays and interconnecting hardware. The instruments and other equipment are controlled from a standard PC running software provided by the manufacturer. The RF output of the EUT is connected to the test system via a coaxial cable.

Tests are in the form of pre-defined scripts that can be loaded on the PC. The scripts, as well as the hardware setup, have been verified for conformance with the relevant test specifications.


Losses in the cables and interconnects have been measured using the system's own automated routines and are compensated for automatically. Any additional loss in RF adapter cables supplied together with the EUT can be compensated for using the known characteristics of that adapter.

CTE Block Diagram

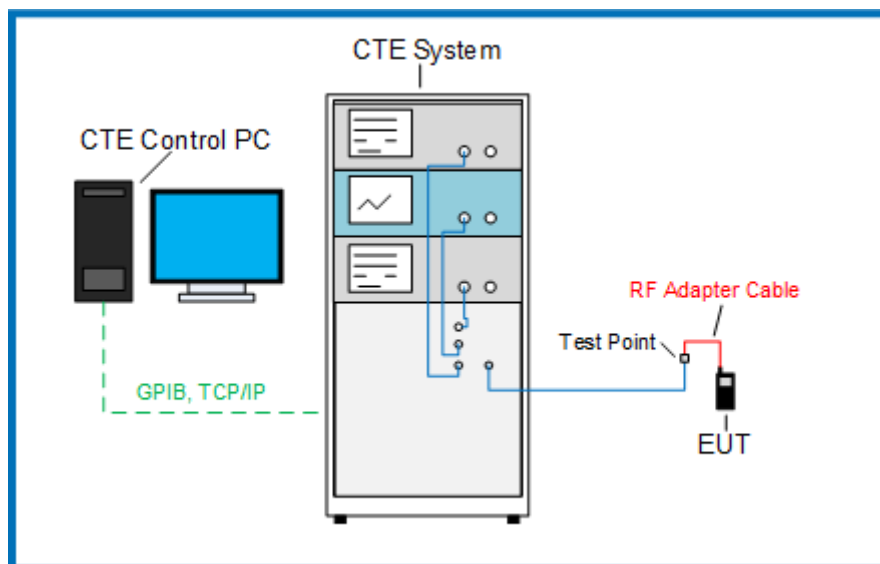

3.4.4 Test Equipment Setup – Conducted Emissions


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The LISNs provide 50Ω/ 50μH of coupling impedance for the measuring instrument.
- The lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10 dB under the prescribed limits could not be reported.

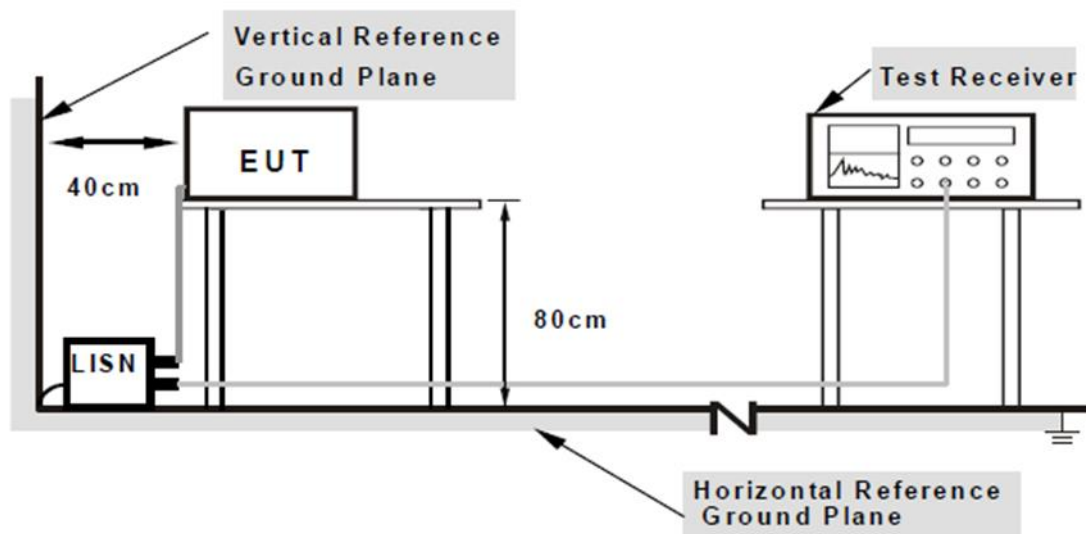


3.4.5 Test Equipment Setup – SAC 5 (Radiated Emissions and Restricted Band Edge)

- For frequency range 30MHz-1GHz Log-Periodic Antenna was used. Antenna elevated from 100 cm from floor to 400 cm from floor, and was placed at 3 m from center of turntable in tilted position. The equipment under test (EUT) was placed at the middle of the turntable at 150 cm height from floor. The antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.
- For frequency range 1GHz-18GHz horn Antenna was used. Antenna elevated from 100 cm from floor to 200 cm from floor, and was placed at 3 m from center of turntable. The equipment under test (EUT) was placed at the middle of the turntable at 150 cm height from floor. The antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.
- For frequency range 18GHz-40GHz double horn Antenna was used. Antenna's height was adjusted to 150 cm from floor, and 1 m distance to center of turntable. The equipment under test (EUT) was placed at the middle of the turntable on at 150 cm height from floor.
- For all frequency ranges the turntable was rotated 360° for obtaining the maximum emission.


SAC 5 Test Setup Configuration 30MHz – 1GHz

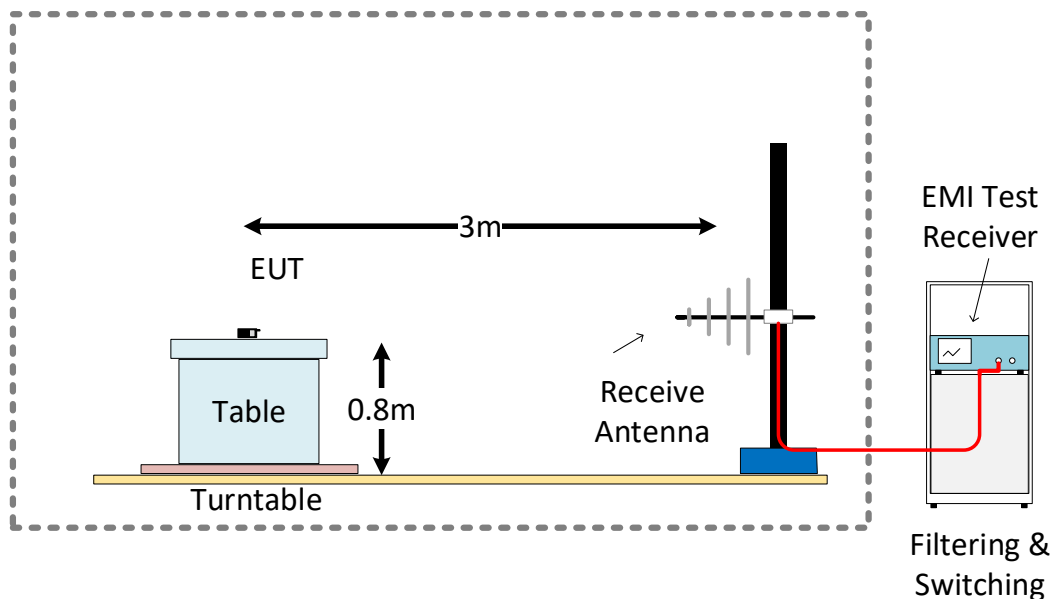

SAC 5 Test Setup Configuration 1GHz – 18GHz

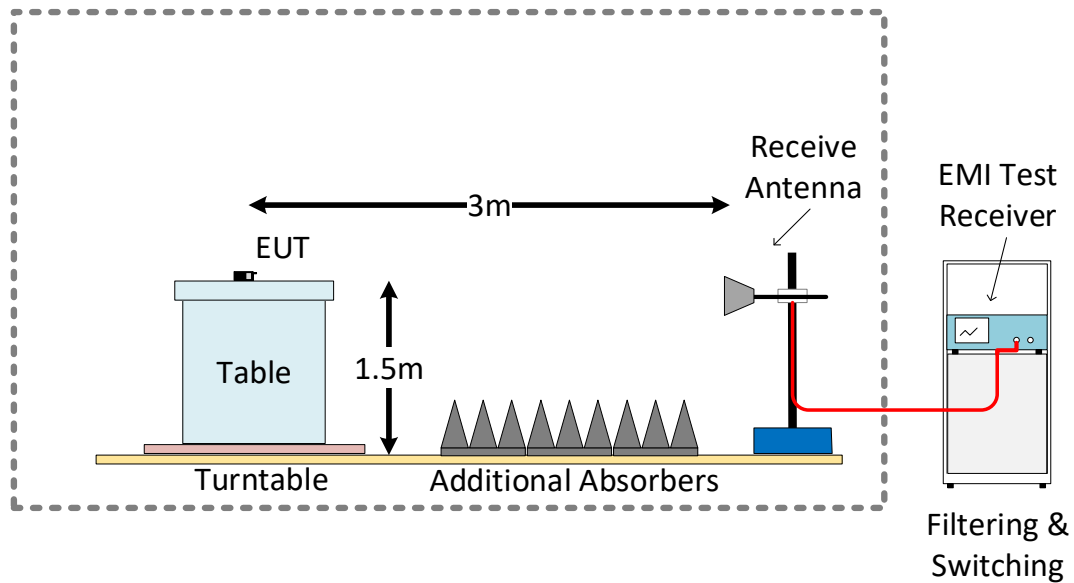

SAC 5 Test Setup Configuration 18GHz – 40GHz

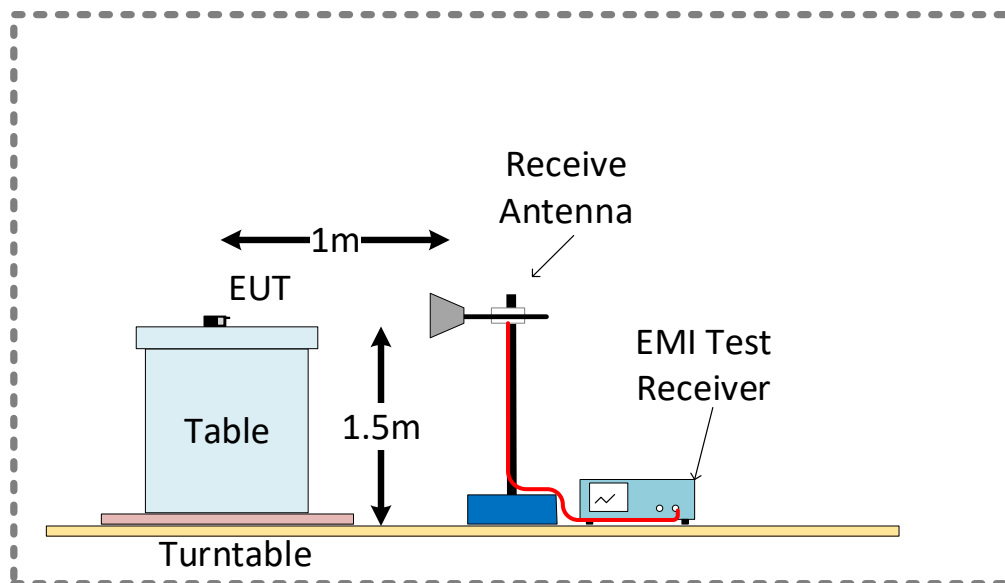

3.5 EUT Configuration During Test

N/A

3.6 EUT Operation Modes

Operation mode	Description
1	Continuous Transmit – Device is set to transmit random data continuously
2	DTM – Device is controlled by the test equipment using Bluetooth Low Energy Direct Test Mode

3.7 Deviations from the Test Standard

None

3.8 Environmental Conditions

3.8.1 Environmental Conditions – CTE System

Environmental Conditions Log - CTE

Date	Time	Temperature (°C)	Relative Humidity (%)
2020.11.12	10:35	20.5	37

3.8.2 Environmental Conditions – SAC5 (Radiated Emissions)

Environmental Conditions Log – SAC5

Date	Time	Temperature (°C)	Relative Humidity (%)
2020.10.05	07:45	19.2	60
2020.10.08	08:30	18.7	62
2020.10.20	07:10	18.4	48
2020.10.21	08:58	18.7	48
2020.10.22	10:12	19.2	50

4. TEST RESULTS

4.1 Test Results – AC Power Line Conducted Emissions (Intentional Transmitter)

4.1.1 AC Power Line Conducted Emissions (Intentional) – Test Summary

Requirement is not applicable as the device has no wired connections.

4.2 Test Results – Radiated Emissions (Intentional Transmitter)


4.2.1 Radiated Emissions (Intentional) – Test Summary

Test Specification		FCC 47 CFR 15.209 (Part 15 Subpart C)	
Test Engineer & Date		Joel Efraimsson Simon Palmhager Niall Forrester	2020.10.07 – 2020.10.27
EUT and Ancillary Equipment IDs		A002932488-001 A002921813-002 A002921813-003 A002921813-004	
EUT Wireless Configuration(s)		Bluetooth Low Energy (2402 MHz – 2480 MHz)	
EUT Hardware Configuration(s)		-	
Overall Result		PASS	
Test Parameter	Wireless Configuration	Frequency Range	Result
Radiated Emissions	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	18 GHz – 40 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	18 GHz – 40 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	9 kHz – 30 MHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	30 MHz – 1 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	1 GHz – 18 GHz	PASS
Radiated Emissions	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	18 GHz – 40 GHz	PASS


4.2.2 Radiated Emissions (Intentional) – Test Details

Low Channel

Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Loop Antenna Parallel to Axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-002	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

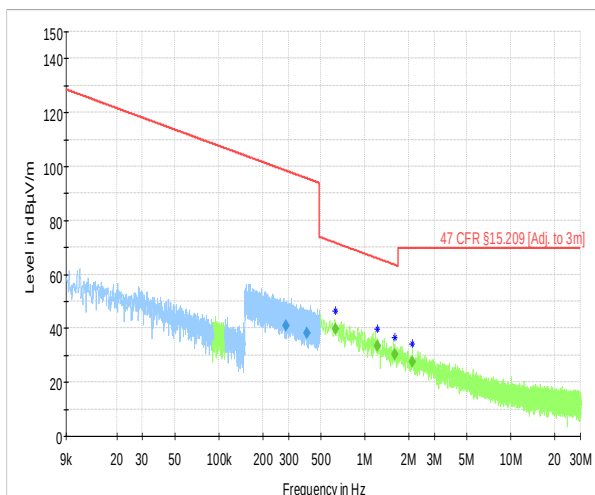


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK
 Preview Result 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

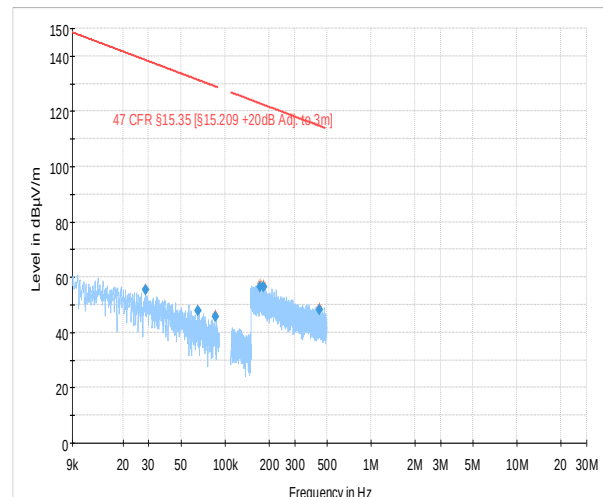


Preview Result 1-PK+
 47 CFR §15.35 (S15.209 +20dB Adj. to 3m)
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.288485	40.89	---	---	98.40	57.51	1000.0	9.000	100.0	H	135.0
0.400687	38.04	---	---	95.55	57.50	1000.0	9.000	100.0	H	139.0
0.627537	---	39.88	---	71.65	31.77	1000.0	9.000	100.0	H	179.0
1.225407	---	33.37	---	65.84	32.46	1000.0	9.000	100.0	H	225.0
1.606776	---	30.32	---	63.49	33.17	1000.0	9.000	100.0	H	191.0
2.104533	---	27.68	---	69.54	41.86	1000.0	9.000	100.0	H	45.0
0.028715	---	---	55.47	138.44	82.97	1000.0	0.200	100.0	H	203.0
0.065560	---	---	47.73	131.27	83.54	1000.0	0.200	100.0	H	112.0
0.086252	---	---	45.78	128.89	83.11	1000.0	0.200	100.0	H	203.0
0.173803	---	---	56.38	122.80	66.42	1000.0	9.000	100.0	H	135.0
0.183001	---	---	56.64	122.36	65.72	1000.0	9.000	100.0	H	-41.0
0.442317	---	---	48.28	114.69	66.41	1000.0	9.000	100.0	H	45.0

Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Loop Antenna Perpendicular to Axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-002	
Ancillary Equipment	-	
Test Engineer	Joel Efraimsson	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

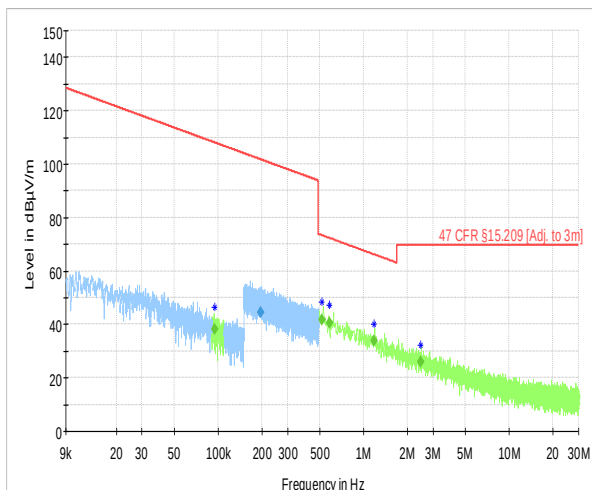


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 [Adj. to 3m]
 Final_Result QPK

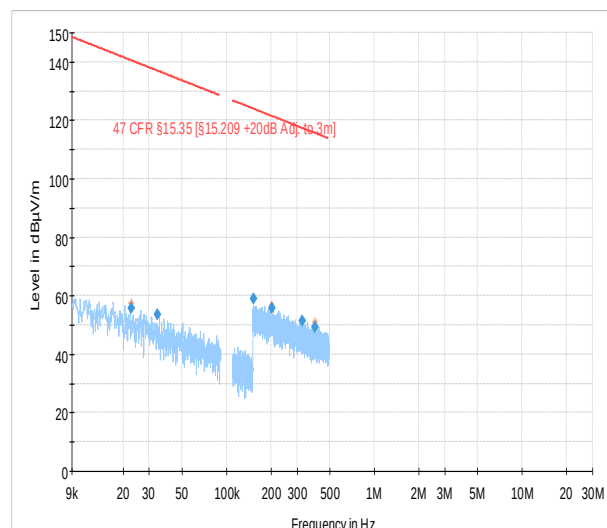


Preview Result 1-PK+
 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.094764	---	38.17	---	101.35	57.05	1000.0	9.000	100.0	H	167.0
0.197193	44.57	---	---	96.29	57.42	1000.0	9.000	100.0	H	45.0
0.517067	---	41.87	---	69.12	31.88	1000.0	9.000	100.0	H	307.0
0.584122	---	40.65	---	65.17	32.63	1000.0	9.000	100.0	H	167.0
1.175003	---	33.71	---	63.38	33.02	1000.0	9.000	100.0	H	127.0
2.466237	---	26.11	---	69.54	42.39	1000.0	9.000	100.0	H	135.0
0.022724	---	---	55.76	140.48	84.72	1000.0	0.200	100.0	H	63.0
0.034199	---	---	53.53	136.92	83.40	1000.0	0.200	100.0	H	292.0
0.152816	---	---	58.83	123.92	65.09	1000.0	9.000	100.0	H	280.0
0.202217	---	---	55.66	121.49	65.83	1000.0	9.000	100.0	H	113.0
0.325317	---	---	51.49	117.36	65.87	1000.0	9.000	100.0	H	203.0
0.394760	---	---	49.22	115.68	66.46	1000.0	9.000	100.0	H	315.0

Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Loop Antenna Parallel to floor	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-002	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

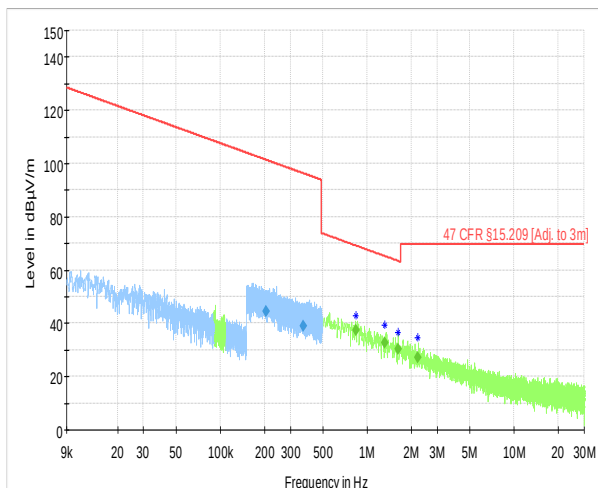


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 [Adj. to 3m]
 Final_Result QPK
 Preview Result 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

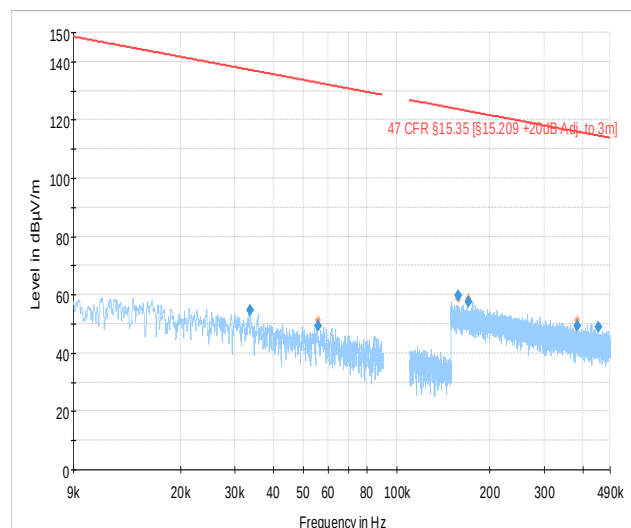

Preview Result 1-PK+
 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
 Critical_Freqs PK+
 Final_Result PK+


Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.205465	44.30	---	---	101.35	57.05	1000.0	9.000	100.0	H	167.0
0.367731	38.87	---	---	96.29	57.42	1000.0	9.000	100.0	H	45.0
0.839851	---	37.24	---	69.12	31.88	1000.0	9.000	100.0	H	307.0
1.323756	---	32.54	---	65.17	32.63	1000.0	9.000	100.0	H	167.0
1.626450	---	30.36	---	63.38	33.02	1000.0	9.000	100.0	H	127.0
2.214085	---	27.15	---	69.54	42.39	1000.0	9.000	100.0	H	135.0
0.033484	---	---	54.61	137.11	82.50	1000.0	0.200	100.0	H	268.0
0.055587	---	---	49.25	132.71	83.45	1000.0	0.200	100.0	H	139.0
0.158111	---	---	59.66	123.63	63.96	1000.0	9.000	100.0	H	-27.0
0.170200	---	---	57.63	122.99	65.36	1000.0	9.000	100.0	H	35.0
0.382981	---	---	49.38	115.94	66.56	1000.0	9.000	100.0	H	268.0
0.449035	---	---	48.87	114.56	65.69	1000.0	9.000	100.0	H	268.0

Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002932488-001	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-20
Chamber details	Chamber: SAC 5	

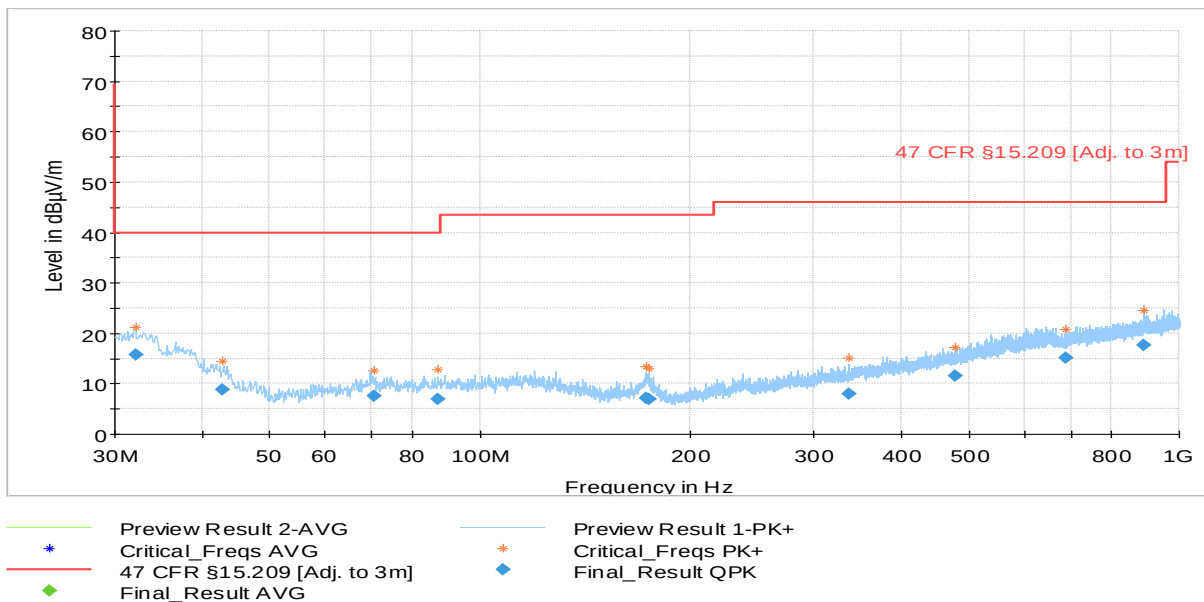


Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
32.135520	15.68	---	40.00	24.32	1000.0	120.000	404.0	H
42.699280	8.92	---	40.00	31.08	1000.0	120.000	353.0	H
70.350080	7.55	---	40.00	32.45	1000.0	120.000	175.0	V
87.138800	6.96	---	40.00	33.04	1000.0	120.000	175.0	V
173.016680	7.21	---	43.52	36.31	1000.0	120.000	275.0	H
174.050800	6.84	---	43.52	36.69	1000.0	120.000	270.0	H
337.236520	7.96	---	46.02	38.06	1000.0	120.000	370.0	H
478.604560	11.65	---	46.02	34.37	1000.0	120.000	125.0	H
689.439760	15.04	---	46.02	30.98	1000.0	120.000	170.0	V
889.073400	17.65	---	46.02	28.37	1000.0	120.000	320.0	H

Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002932488-001	
Ancillary Equipment	-	
Test Engineer	Joel Efraimsson	Date: 2020-10-21
Chamber details	Chamber: SAC 5	

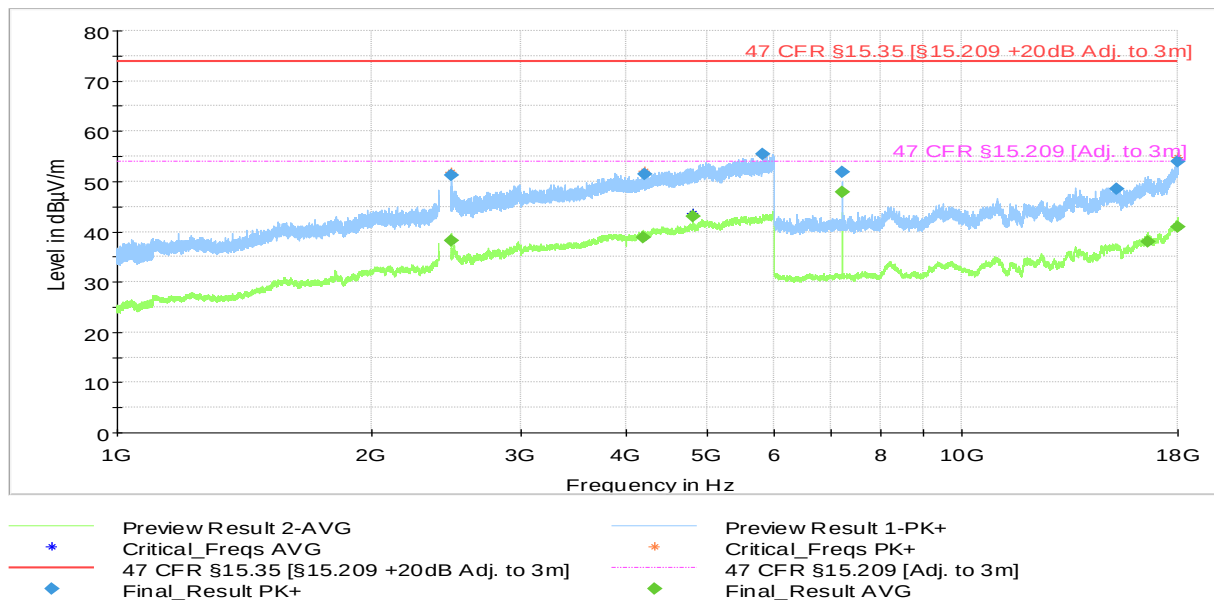

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2483.580977	51.23	---	73.98	22.75	1000.0	1000.000	197.0	V	131.0
2483.635000	---	38.27	53.98	15.71	1000.0	1000.000	120.0	V	252.0
4187.764000	---	38.81	53.98	15.17	1000.0	1000.000	100.0	H	-22.0
4214.585000	51.45	---	73.98	22.53	1000.0	1000.000	175.0	V	200.0
4803.988000	---	43.01	53.98	10.97	1000.0	1000.000	100.0	H	252.0
5805.703000	55.38	---	73.98	18.60	1000.0	1000.000	137.0	V	89.0
7206.049000	---	47.94	53.98	6.04	1000.0	1000.000	158.0	H	-22.0
7206.058000	51.82	---	73.98	22.16	1000.0	1000.000	169.0	H	-22.0
15238.644000	48.49	---	73.98	25.49	1000.0	1000.000	100.0	H	248.0
16572.502000	---	37.98	53.98	16.00	1000.0	1000.000	125.0	V	248.0
17983.952000	---	41.03	53.98	12.95	1000.0	1000.000	100.0	H	202.0
17996.952160	53.93	---	73.98	20.05	1000.0	1000.000	175.0	V	232.0



Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002932488-001	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-20
Chamber details	Chamber: SAC 5	

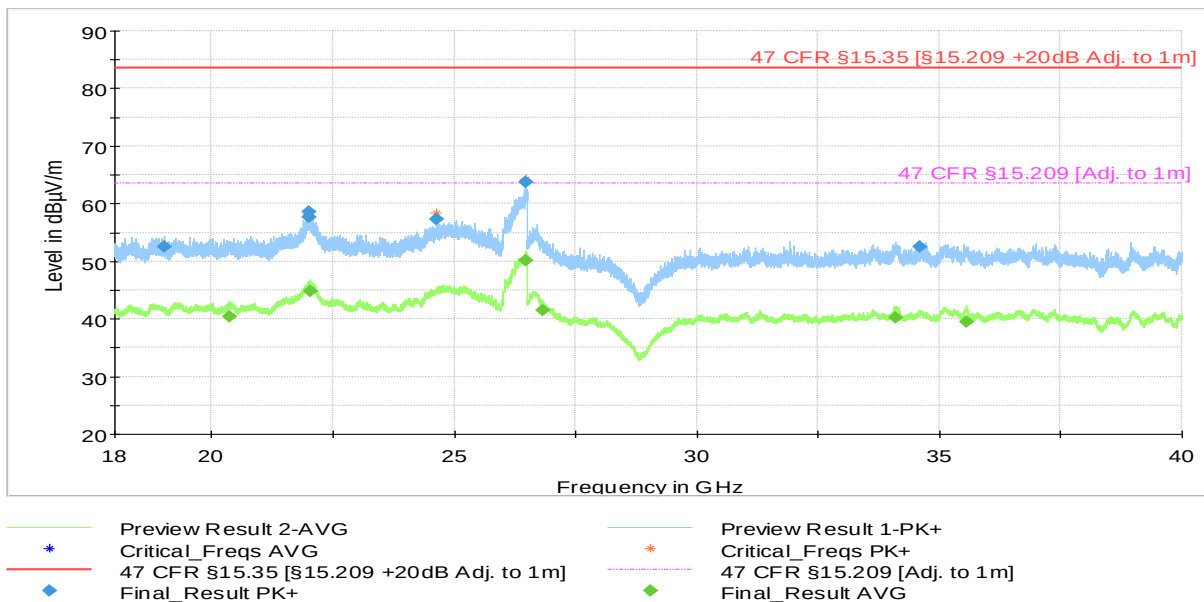

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
19033.858000	52.54	---	83.52	30.98	1000.0	1000.000	155.0	H	36.0
20363.458000	---	40.46	63.52	23.06	1000.0	1000.000	155.0	V	158.0
21989.705000	57.71	---	83.52	25.81	1000.0	1000.000	155.0	V	42.0
21992.627000	58.56	---	83.52	24.96	1000.0	1000.000	155.0	V	52.0
22035.837000	---	44.88	63.52	18.64	1000.0	1000.000	155.0	V	8.0
24617.585000	57.36	---	83.52	26.16	1000.0	1000.000	155.0	V	102.0
26470.869000	63.64	---	83.52	19.89	1000.0	1000.000	155.0	V	146.0
26475.726000	---	50.20	63.52	13.32	1000.0	1000.000	155.0	V	-4.0
26829.533000	---	41.57	63.52	21.96	1000.0	1000.000	155.0	H	126.0
34107.086000	---	40.27	63.52	23.26	1000.0	1000.000	155.0	H	202.0
34584.040000	52.61	---	83.52	30.92	1000.0	1000.000	155.0	V	262.0
35545.109000	---	39.52	63.52	24.00	1000.0	1000.000	155.0	H	68.0


Mid Channel

Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Loop Antenna Parallel to Axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

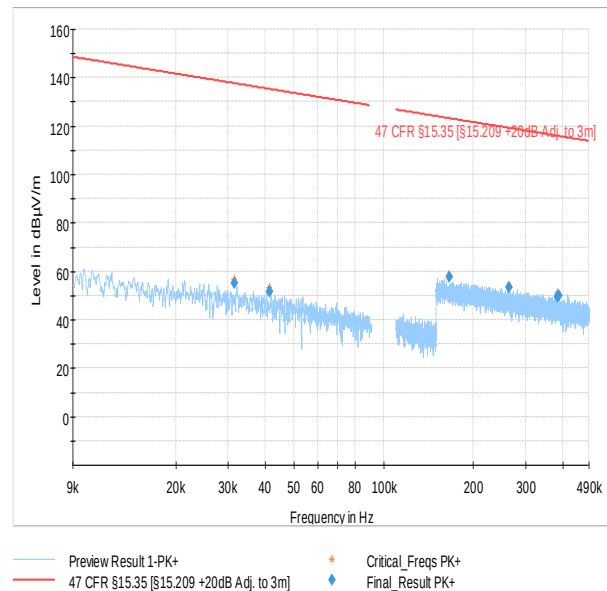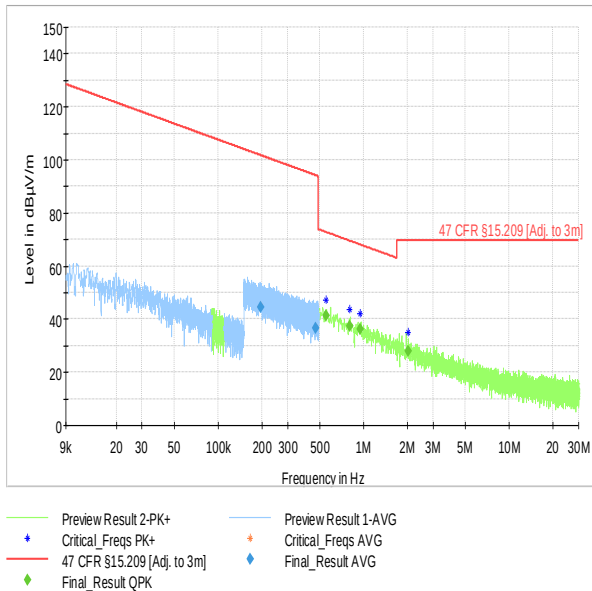


Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.196376	44.66	---	---	101.74	57.08	1000.0	9.000	100.0	H	192.0
0.467841	36.76	---	---	94.20	57.44	1000.0	9.000	100.0	H	257.0
0.551624	---	41.28	---	72.77	31.49	1000.0	9.000	100.0	H	49.0
0.802543	---	37.51	---	69.52	32.00	1000.0	9.000	100.0	H	229.0
0.942763	---	36.12	---	68.12	31.99	1000.0	9.000	100.0	H	45.0
2.020813	---	28.14	---	69.54	41.40	1000.0	9.000	100.0	H	-41.0
0.031521	---	---	55.17	137.63	82.47	1000.0	0.200	100.0	H	167.0
0.041244	---	---	51.84	135.30	83.46	1000.0	0.200	100.0	H	10.0
0.166215	---	---	57.53	123.19	65.66	1000.0	9.000	100.0	H	202.0
0.263748	---	---	53.54	119.18	65.64	1000.0	9.000	100.0	H	191.0
0.382748	---	---	49.36	115.95	66.58	1000.0	9.000	100.0	H	1.0
0.388472	---	---	50.00	115.82	65.82	1000.0	9.000	100.0	H	225.0

Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Loop Antenna Perpendicular to Axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

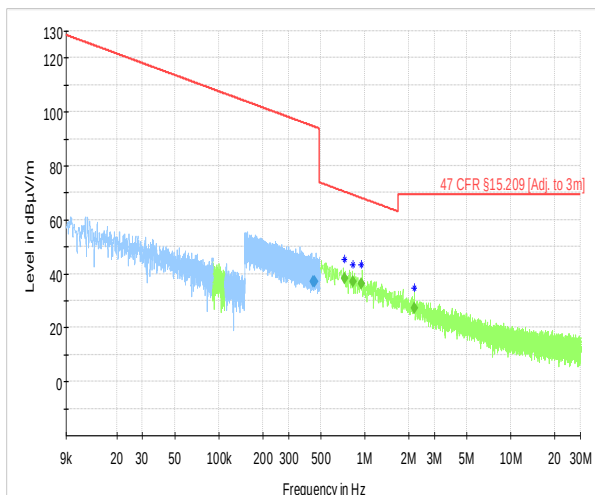


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK

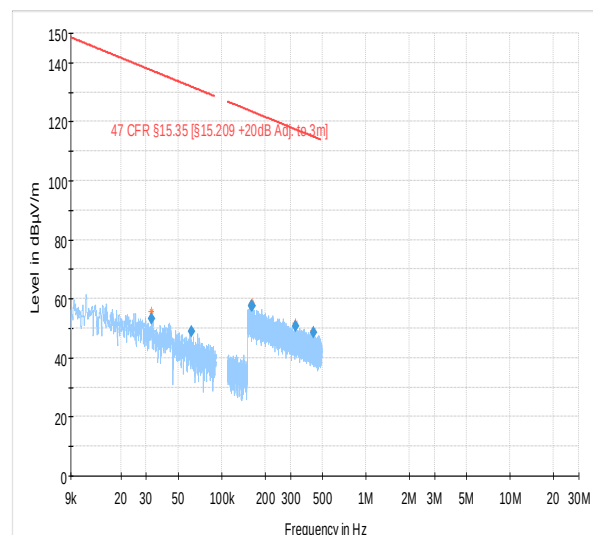


Preview Result 1-PK+
 47 CFR §15.35 (S15.209 +20dB Adj. to 3m)
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.444947	37.25	---	---	94.64	57.39	1000.0	9.000	100.0	H	-45.0
0.451666	37.05	---	---	94.51	57.46	1000.0	9.000	100.0	H	-14.0
0.726760	---	38.42	---	70.38	31.95	1000.0	9.000	100.0	H	-13.0
0.833598	---	37.27	---	69.19	31.92	1000.0	9.000	100.0	H	205.0
0.941739	---	36.19	---	68.13	31.93	1000.0	9.000	100.0	H	168.0
2.196048	---	27.27	---	69.54	42.28	1000.0	9.000	100.0	H	225.0
0.032547	---	---	53.20	137.35	84.16	1000.0	0.200	100.0	H	135.0
0.061662	---	---	48.91	131.80	82.90	1000.0	0.200	100.0	H	268.0
0.160113	---	---	57.49	123.52	66.02	1000.0	9.000	100.0	H	165.0
0.163449	---	---	57.55	123.34	65.79	1000.0	9.000	100.0	H	88.0
0.326642	---	---	50.78	117.32	66.55	1000.0	9.000	100.0	H	140.0
0.435149	---	---	48.69	114.83	66.15	1000.0	9.000	100.0	H	225.0

Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Loop Antenna Parallel to floor	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

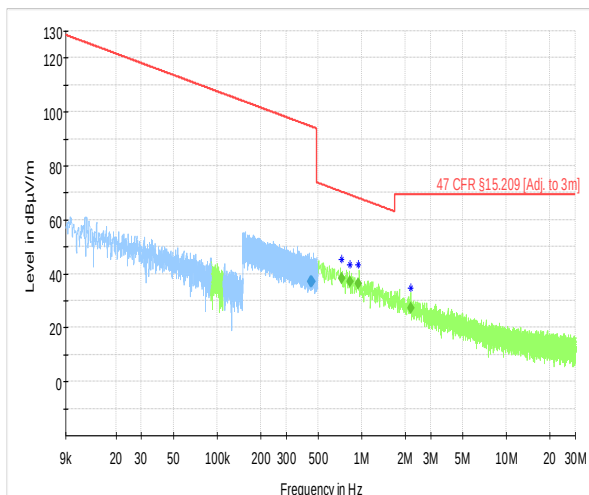


— Preview Result 2-PK+
— Preview Result 1-AVG
— 47 CFR §15.209 (Adj. to 3m)
♦ Final_Result QPK
♦ Final_Result AVG
♦ Critical_Freqs PK+
♦ Critical_Freqs AVG

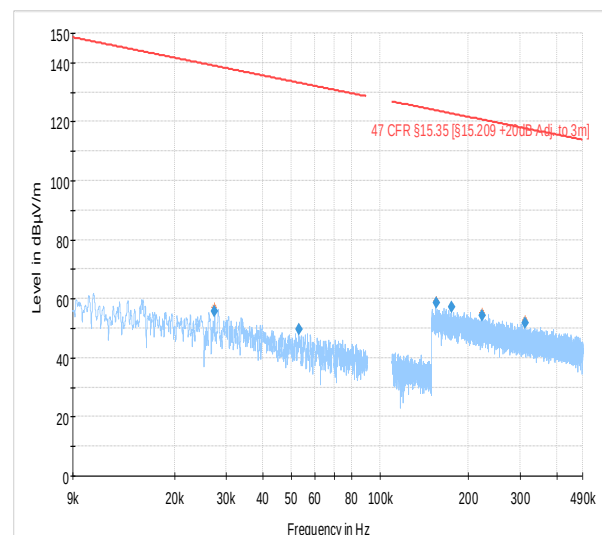

— Preview Result 1-PK+
— 47 CFR §15.35 (S15.209 +20dB Adj. to 3m)
♦ Final_Result PK+
♦ Critical_Freqs PK+


Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.444947	37.25	---	---	94.64	57.39	1000.0	9.000	100.0	H	-45.0
0.451666	37.05	---	---	94.51	57.46	1000.0	9.000	100.0	H	-14.0
0.726760	---	38.42	---	70.38	31.95	1000.0	9.000	100.0	H	-13.0
0.833598	---	37.27	---	69.19	31.92	1000.0	9.000	100.0	H	205.0
0.941739	---	36.19	---	68.13	31.93	1000.0	9.000	100.0	H	168.0
2.196048	---	27.27	---	69.54	42.28	1000.0	9.000	100.0	H	225.0
0.027232	---	---	55.68	138.90	83.22	1000.0	0.200	100.0	H	315.0
0.053103	---	---	49.71	133.10	83.39	1000.0	0.200	100.0	H	-2.0
0.155841	---	---	58.57	123.75	65.18	1000.0	9.000	100.0	H	135.0
0.175766	---	---	57.16	122.71	65.55	1000.0	9.000	100.0	H	229.0
0.222526	---	---	54.49	120.66	66.17	1000.0	9.000	100.0	H	191.0
0.312747	---	---	51.94	117.70	65.76	1000.0	9.000	100.0	H	190.0

Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Joel Efraimsson	Date: 2020-10-08
Chamber details	Chamber: SAC 5	

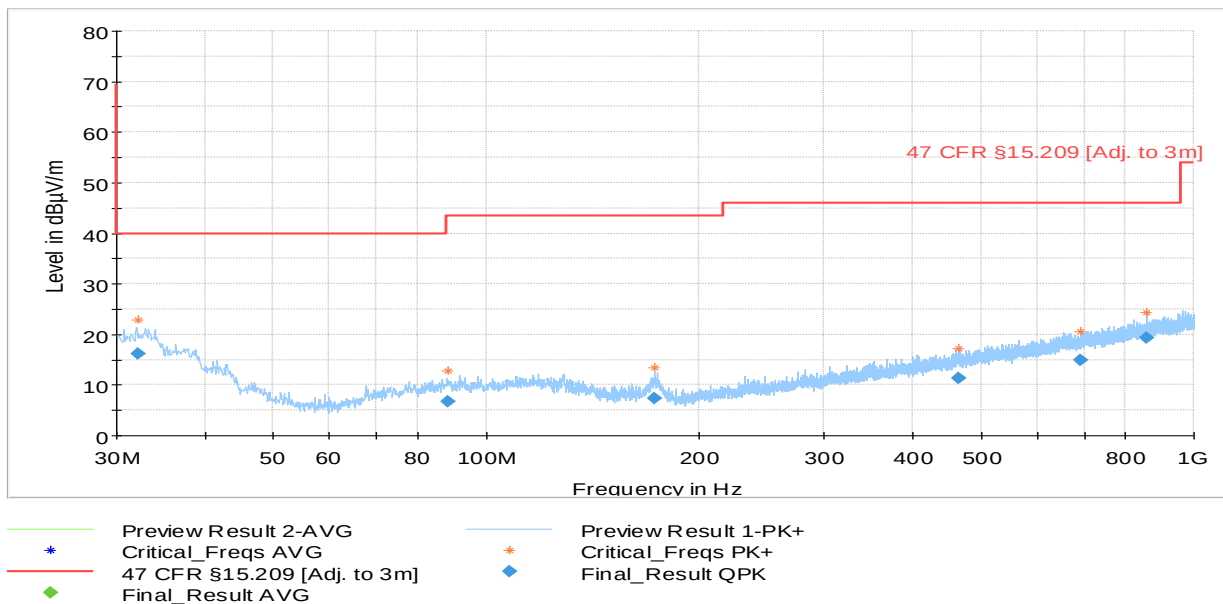


Frequency (MHz)	QuasiPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
32.121480	16.09	---	40.00	23.91	1000.0	120.000	383.0	V	310.0
88.324640	6.65	---	43.52	36.87	1000.0	120.000	354.0	V	296.0
173.081080	7.28	---	43.52	36.24	1000.0	120.000	100.0	H	278.0
464.562440	11.43	---	46.02	34.59	1000.0	120.000	133.0	H	202.0
692.561600	14.83	---	46.02	31.19	1000.0	120.000	304.0	V	244.0
857.685320	19.38	---	46.02	26.64	1000.0	120.000	321.0	H	-22.0

Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-27
Chamber details	Chamber: SAC 5	

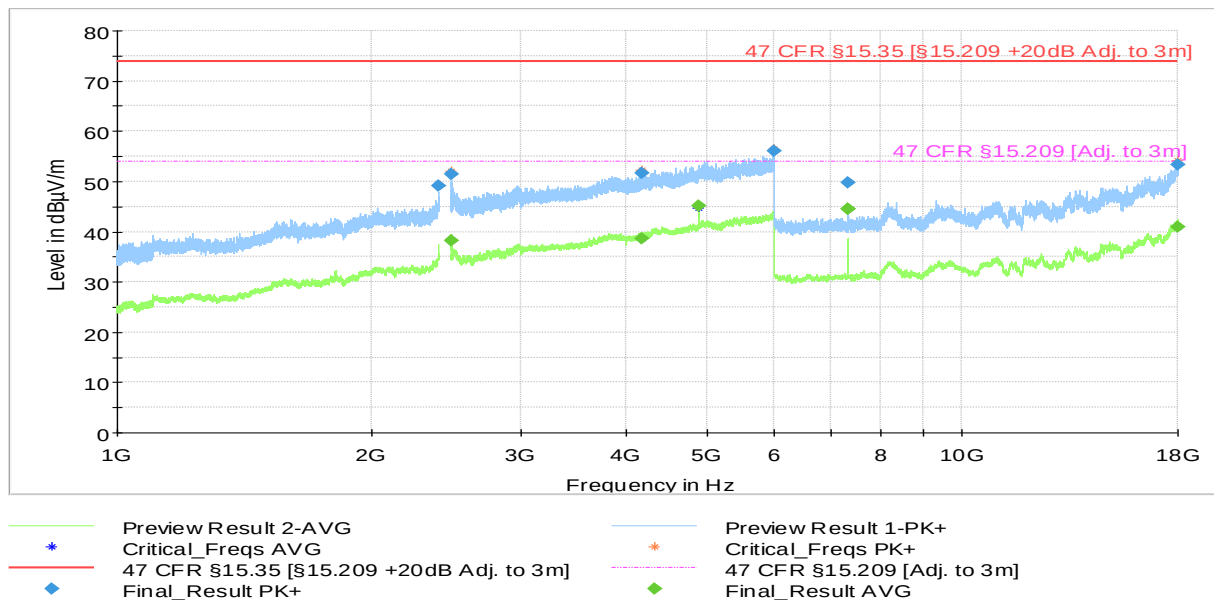

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2399.904069	49.17	---	73.98	24.81	1000.0	1000.000	159.0	V	110.0
2483.546798	51.54	---	73.98	22.44	1000.0	1000.000	125.0	H	246.0
2483.572744	---	38.31	53.98	15.67	1000.0	1000.000	125.0	V	245.0
4171.649000	51.56	---	73.98	22.42	1000.0	1000.000	125.0	V	234.0
4180.606000	---	38.65	53.98	15.33	1000.0	1000.000	100.0	H	190.0
4879.980000	---	45.25	53.98	8.73	1000.0	1000.000	127.0	H	41.0
5984.650000	56.04	---	73.98	17.94	1000.0	1000.000	175.0	H	54.0
7319.877000	49.72	---	73.98	24.26	1000.0	1000.000	125.0	H	22.0
7320.033000	---	44.57	53.98	9.41	1000.0	1000.000	125.0	H	22.0
7320.070000	---	44.59	53.98	9.39	1000.0	1000.000	125.0	H	22.0
17966.487000	53.34	---	73.98	20.64	1000.0	1000.000	210.0	V	266.0
17988.094000	---	40.90	53.98	13.08	1000.0	1000.000	125.0	V	68.0


Test mode condition	Bluetooth Low Energy 1M, Mid channel (2440 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-003	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-20
Chamber details	Chamber: SAC 5	

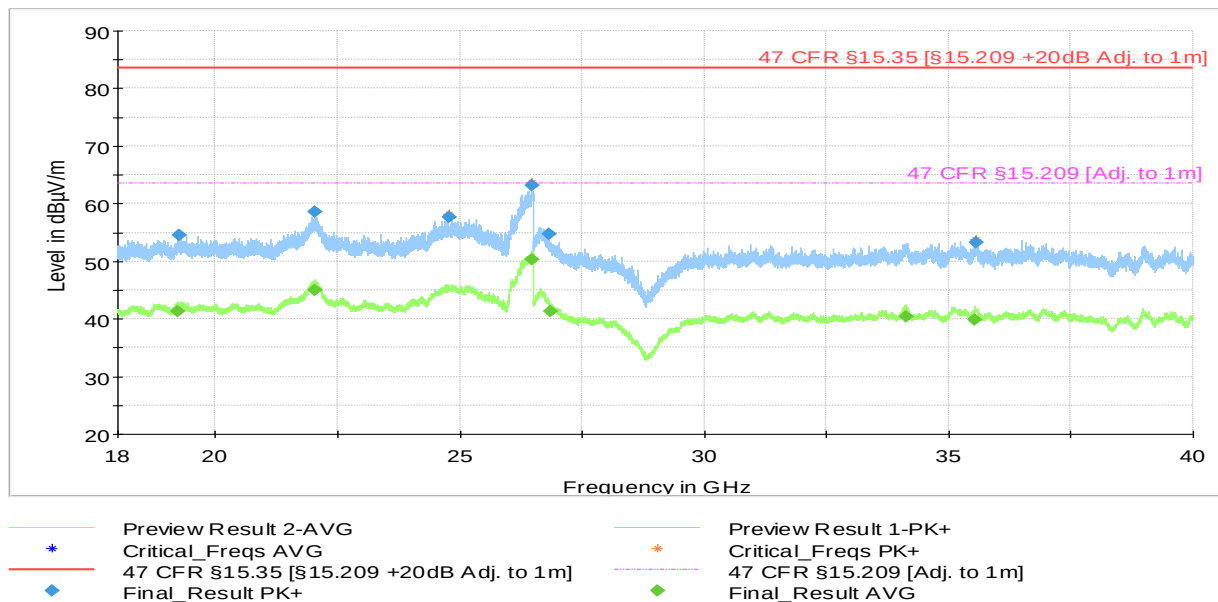


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
19240.876000	---	41.37	63.52	22.15	1000.0	1000.000	155.0	V	12.0
19243.328000	54.49	---	83.52	29.03	1000.0	1000.000	155.0	V	172.0
22037.283000	---	44.95	63.52	18.57	1000.0	1000.000	155.0	V	262.0
22040.608000	58.52	---	83.52	25.00	1000.0	1000.000	155.0	V	296.0
24764.094000	57.58	---	83.52	25.94	1000.0	1000.000	155.0	V	112.0
26462.343000	63.24	---	83.52	20.28	1000.0	1000.000	155.0	V	352.0
26481.702000	---	50.29	63.52	13.23	1000.0	1000.000	155.0	V	82.0
26835.366000	54.80	---	83.52	28.72	1000.0	1000.000	155.0	V	52.0
26847.353000	---	41.36	63.52	22.16	1000.0	1000.000	155.0	H	232.0
34116.663000	---	40.32	63.52	23.20	1000.0	1000.000	155.0	V	292.0
35540.782000	---	39.89	63.52	23.63	1000.0	1000.000	155.0	H	-8.0
35561.557000	53.19	---	83.52	30.33	1000.0	1000.000	155.0	H	232.0

High Channel

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Loop Antenna Parallel to axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

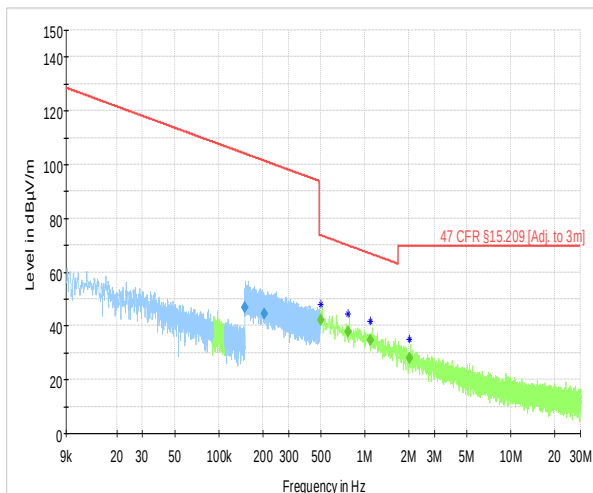


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK
 Preview Result 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

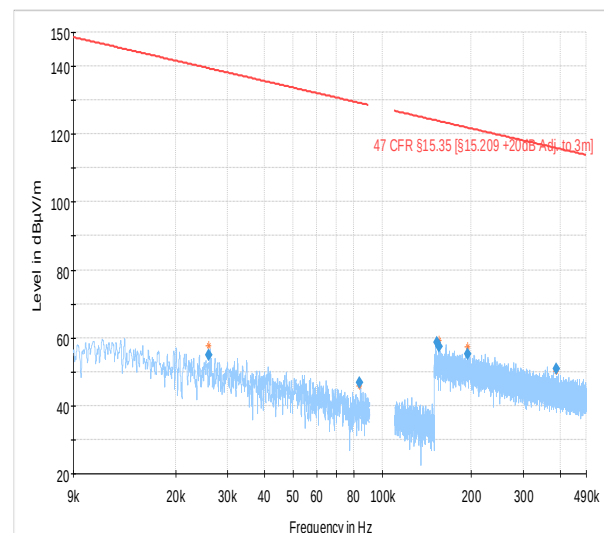


Preview Result 1-PK+
 47 CFR §15.35 (S15.209 +20dB Adj. to 3m)
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.151320	46.81	---	---	104.01	57.20	1000.0	9.000	100.0	H	102.0
0.204023	44.39	---	---	101.41	57.02	1000.0	9.000	100.0	H	77.0
0.499455	---	42.18	---	73.63	31.45	1000.0	9.000	100.0	H	-1.0
0.764679	---	37.98	---	69.94	31.96	1000.0	9.000	100.0	H	229.0
1.088851	---	34.68	---	66.87	32.18	1000.0	9.000	100.0	H	315.0
2.029195	---	27.94	---	69.54	41.60	1000.0	9.000	100.0	H	135.0
0.025782	---	---	54.99	139.38	84.39	1000.0	0.200	100.0	H	305.0
0.083547	---	---	46.68	129.17	82.48	1000.0	0.200	100.0	H	292.0
0.153315	---	---	58.51	123.89	65.38	1000.0	9.000	100.0	H	-14.0
0.155791	---	---	57.42	123.75	66.33	1000.0	9.000	100.0	H	-2.0
0.194523	---	---	55.34	121.83	66.49	1000.0	9.000	100.0	H	315.0
0.388149	---	---	50.79	115.82	65.03	1000.0	9.000	100.0	H	-45.0

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Loop Antenna Perpendicular to axis	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

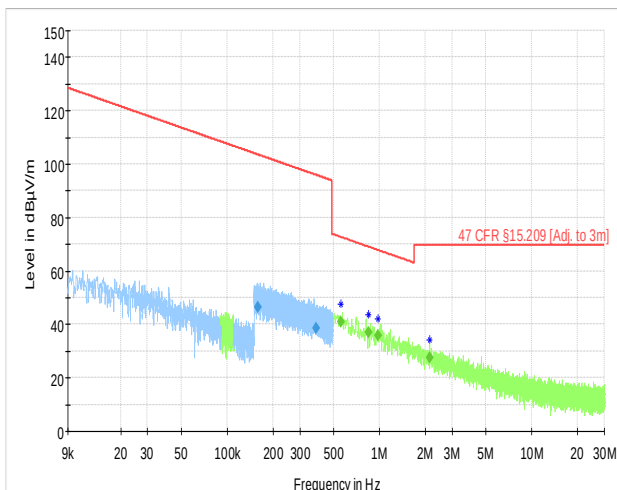


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 [Adj. to 3m]
 Final_Result QPK
 Preview Result 1-AVG
 Critical_Freqs AVG
 Final_Result AVG

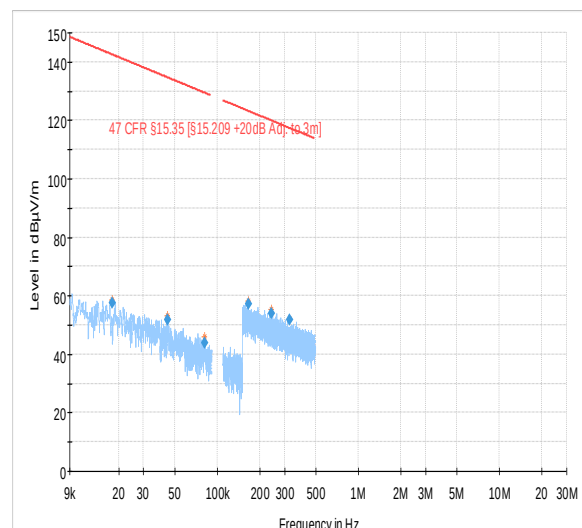


Preview Result 1-PK+
 47 CFR §15.35 [§15.209 +20dB Adj. to 3m]
 Critical_Freqs PK+
 Final_Result PK+

Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.159607	46.40	---	---	103.54	57.15	1000.0	9.000	100.0	H	154.0
0.382469	38.43	---	---	95.95	57.53	1000.0	9.000	100.0	H	256.0
0.557769	---	41.03	---	72.68	31.65	1000.0	9.000	100.0	H	225.0
0.846451	---	37.08	---	69.05	31.98	1000.0	9.000	100.0	H	225.0
0.976532	---	35.82	---	67.81	31.99	1000.0	9.000	100.0	H	244.0
2.130886	---	27.45	---	69.54	42.09	1000.0	9.000	100.0	H	45.0
0.018056	---	---	57.66	142.47	84.81	1000.0	0.200	100.0	H	135.0
0.044252	---	---	51.67	134.69	83.02	1000.0	0.200	100.0	H	229.0
0.081724	---	---	43.73	129.36	85.63	1000.0	0.200	100.0	H	135.0
0.166433	---	---	57.08	123.18	66.10	1000.0	9.000	100.0	H	-41.0
0.240769	---	---	54.10	119.97	65.87	1000.0	9.000	100.0	H	63.0
0.326739	---	---	51.67	117.32	65.65	1000.0	9.000	100.0	H	135.0

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Loop Antenna Parallel to floor	
Sweep frequency	9 kHz-30 MHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-07
Chamber details	Chamber: SAC 5	

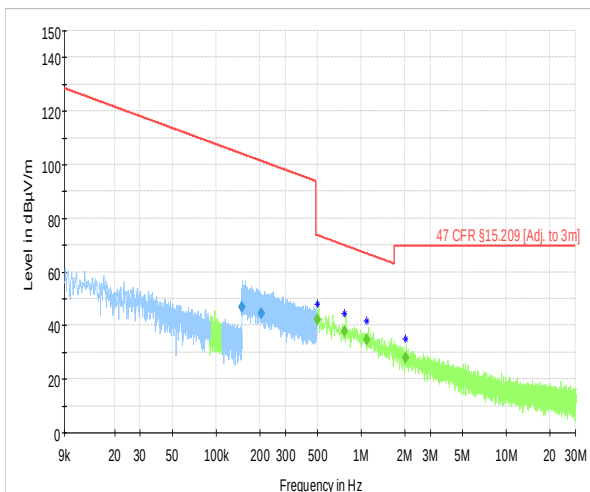


Preview Result 2-PK+
 Critical_Freqs PK+
 47 CFR §15.209 (Adj. to 3m)
 Final_Result QPK

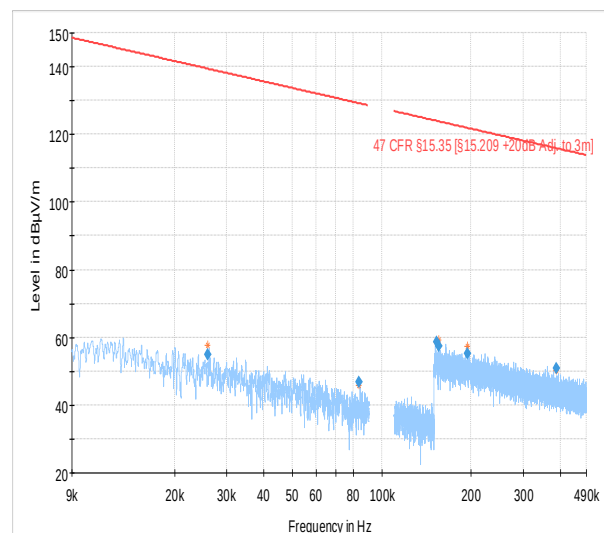

Preview Result 1-PK+
 47 CFR §15.35 (Adj. to 3m)
 Critical_Freqs PK+
 Final_Result PK+


Frequency (MHz)	Average (dBuV/m)	QuasiPeak (dBuV/m)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
0.151320	46.81	---	---	104.01	57.20	1000.0	9.000	100.0	H	102.0
0.204023	44.39	---	---	101.41	57.02	1000.0	9.000	100.0	H	77.0
0.499455	---	42.18	---	73.63	31.45	1000.0	9.000	100.0	H	-1.0
0.764679	---	37.98	---	69.94	31.96	1000.0	9.000	100.0	H	229.0
1.088851	---	34.68	---	66.87	32.18	1000.0	9.000	100.0	H	315.0
2.029195	---	27.94	---	69.54	41.60	1000.0	9.000	100.0	H	135.0
0.025782	---	---	54.99	139.38	84.39	1000.0	0.200	100.0	H	305.0
0.083547	---	---	46.68	129.17	82.48	1000.0	0.200	100.0	H	292.0
0.153315	---	---	58.51	123.89	65.38	1000.0	9.000	100.0	H	-14.0
0.155791	---	---	57.42	123.75	66.33	1000.0	9.000	100.0	H	-2.0
0.194523	---	---	55.34	121.83	66.49	1000.0	9.000	100.0	H	315.0
0.388149	---	---	50.79	115.82	65.03	1000.0	9.000	100.0	H	-45.0

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	30 MHz – 1 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Simon Palmhager	Date: 2020-10-20
Chamber details	Chamber: SAC 5	

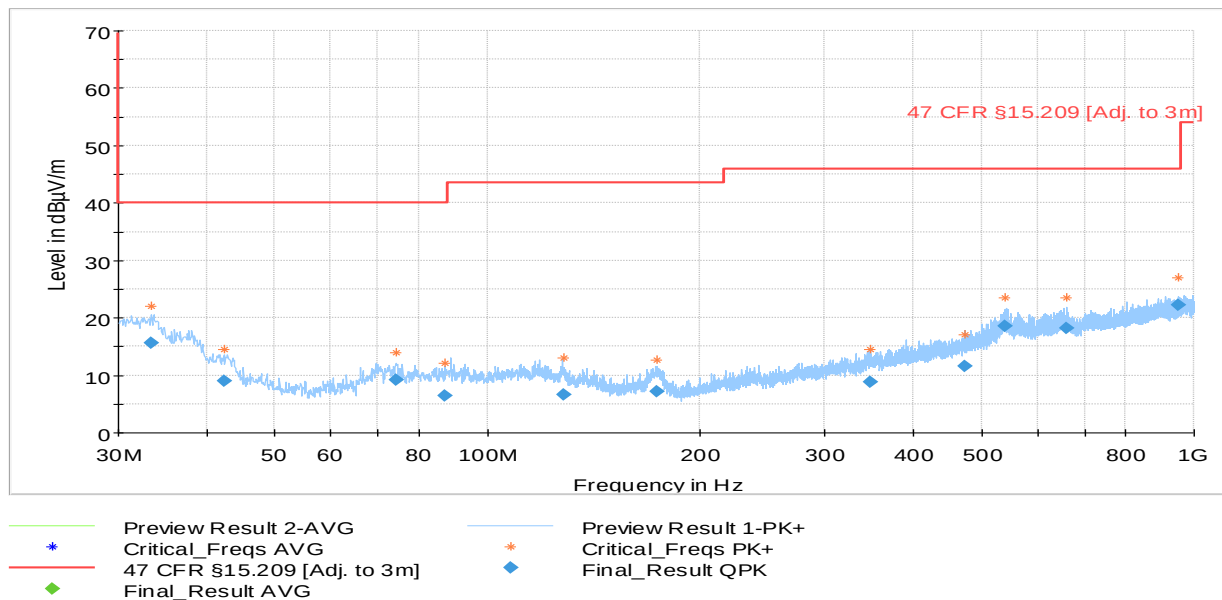


Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
33.397400	15.63	40.00	24.37	1000.0	120.000	275.0	V	-22.0
42.307920	9.09	40.00	30.91	1000.0	120.000	125.0	H	-18.0
74.117360	9.11	40.00	30.89	1000.0	120.000	125.0	V	40.0
86.961280	6.41	40.00	33.59	1000.0	120.000	183.0	V	202.0
128.093080	6.69	43.52	36.83	1000.0	120.000	325.0	V	278.0
173.821280	7.13	43.52	36.39	1000.0	120.000	375.0	V	292.0
348.847040	8.82	46.02	37.20	1000.0	120.000	410.0	V	158.0
472.839440	11.64	46.02	34.38	1000.0	120.000	183.0	H	85.0
540.836760	18.47	46.02	27.55	1000.0	120.000	225.0	H	296.0
659.106360	18.24	46.02	27.78	1000.0	120.000	175.0	H	292.0
951.475880	22.22	46.02	23.80	1000.0	120.000	354.0	V	52.0
33.397400	15.63	40.00	24.37	1000.0	120.000	275.0	V	-22.0

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Joel Efraimsson	Date: 2020-10-21
Chamber details	Chamber: SAC 5	

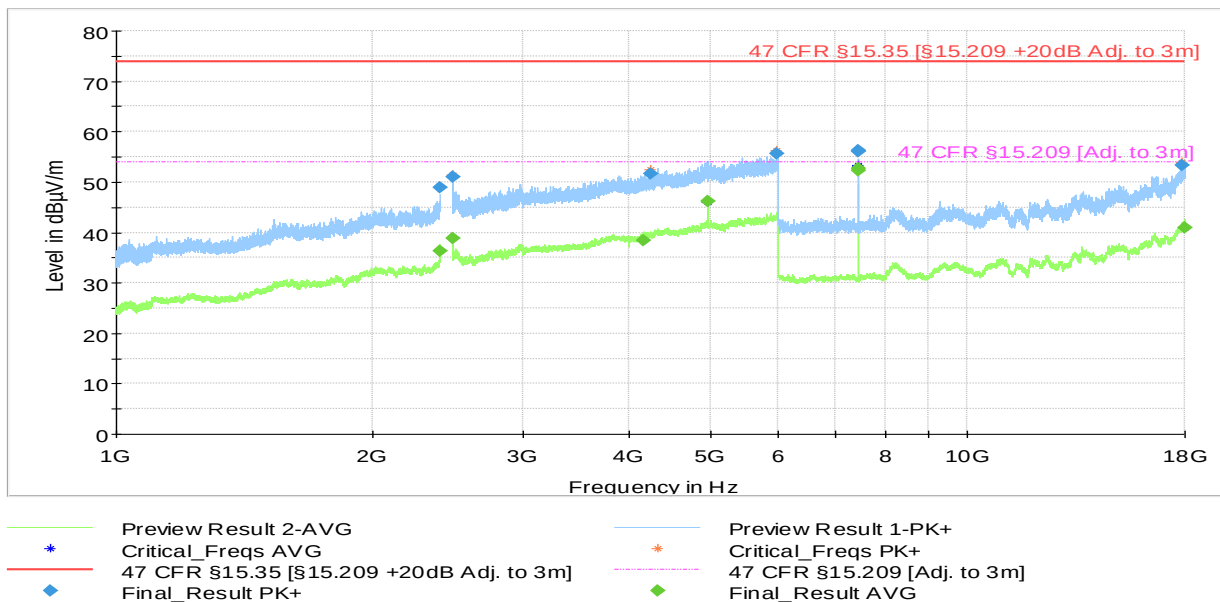

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2399.943500	49.01	---	73.98	24.97	1000.0	1000.000	207.0	H	131.0
2399.980000	---	36.30	53.98	17.68	1000.0	1000.000	175.0	H	177.0
2483.509500	---	38.75	53.98	15.23	1000.0	1000.000	125.0	H	338.0
2483.904637	50.94	---	73.98	23.04	1000.0	1000.000	125.0	V	290.0
4162.573000	---	38.36	53.98	15.62	1000.0	1000.000	100.0	H	-22.0
4240.397000	51.70	---	73.98	22.28	1000.0	1000.000	125.0	H	248.0
4960.006000	---	46.11	53.98	7.87	1000.0	1000.000	127.0	H	-18.0
5967.901000	55.66	---	73.98	18.32	1000.0	1000.000	175.0	V	189.0
7440.084000	---	52.39	53.98	1.59	1000.0	1000.000	100.0	H	-5.0
7440.091000	---	52.62	53.98	1.36	1000.0	1000.000	100.0	H	-4.0
7440.169000	56.25	---	73.98	17.73	1000.0	1000.000	135.0	H	-18.0
7440.192000	56.16	---	73.98	17.82	1000.0	1000.000	135.0	H	-18.0

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	18 GHz – 40 GHz	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-20
Chamber details	Chamber: SAC 5	

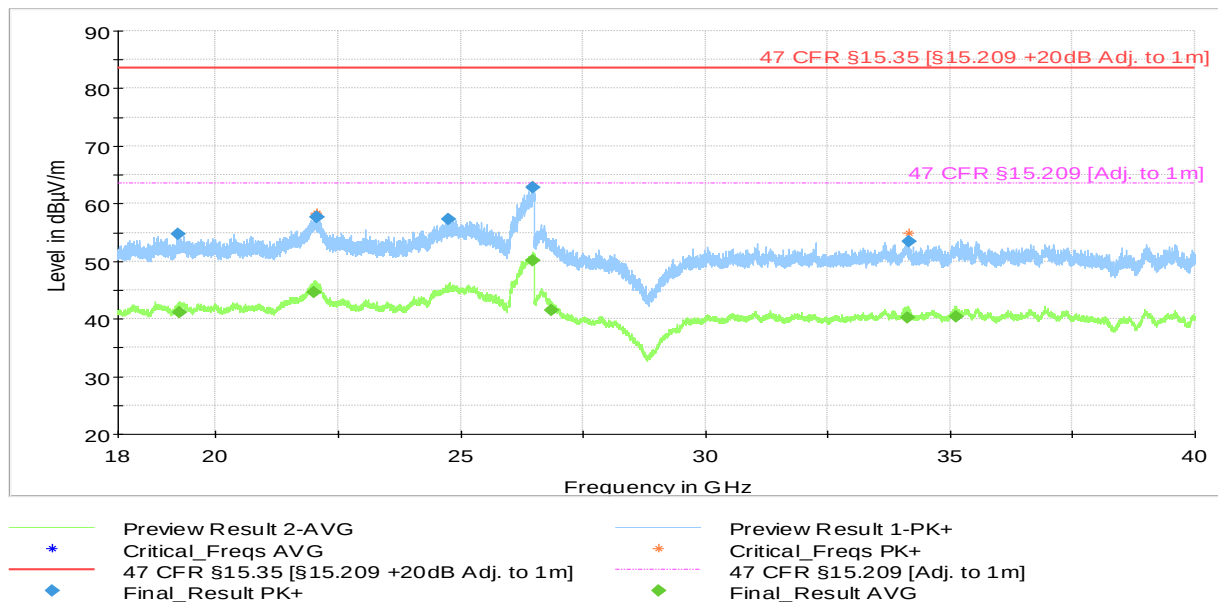

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
19234.864000	54.70	---	83.52	28.82	1000.0	1000.000	155.0	V	22.0
19249.873000	---	41.12	63.52	22.41	1000.0	1000.000	155.0	V	186.0
21990.458000	---	44.60	63.52	18.92	1000.0	1000.000	155.0	V	82.0
22054.798000	57.72	---	83.52	25.80	1000.0	1000.000	155.0	V	236.0
22063.201000	57.68	---	83.52	25.84	1000.0	1000.000	155.0	V	232.0
24745.480000	57.31	---	83.52	26.21	1000.0	1000.000	155.0	H	236.0
26465.649000	62.85	---	83.52	20.67	1000.0	1000.000	155.0	H	116.0
26476.590000	---	50.13	63.52	13.39	1000.0	1000.000	155.0	V	-4.0
26838.824000	---	41.42	63.52	22.10	1000.0	1000.000	155.0	H	192.0
34136.617000	---	40.22	63.52	23.30	1000.0	1000.000	155.0	V	22.0
34147.463000	53.51	---	83.52	30.01	1000.0	1000.000	155.0	V	112.0
35126.395000	---	40.33	63.52	23.19	1000.0	1000.000	155.0	H	8.0


4.3 Test Results – Out of Band Emissions

4.3.1 Out of Band Emissions – Test Summary

Test Specification		47 CFR 15.247 (d)			
Test Engineer & Date		Niall Forrester		2020.11.12	
EUT and Ancillary Equipment IDs		A002921813_006			
EUT Operation Mode(s)		DTM			
EUT Wireless Configuration(s)		Bluetooth Low Energy 1M/2M (See below for details)			
EUT Hardware Configuration(s)		Power from lab power supply			
Overall Result		PASS			

Test Parameter	Wireless Configuration	Tx Pwr (dBm)	Measured Lvl (dBm)	Limit (dBm)	Result
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	-6.28	-50.00	-26.28	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 2M Low Channel (GFSK 2402 MHz)	-6.22	-47.29	-26.22	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	-5.79	-50.58	-25.79	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 2M Mid Channel (GFSK 2440 MHz)	-5.80	-43.83	-25.80	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	-6.83	-49.22	-26.83	PASS
Spurious Emissions (30 MHz – 25 GHz)	Bluetooth Low Energy 2M High Channel (GFSK 2480 MHz)	-6.78	-48.40	-26.78	PASS

4.3.2 Out of Band Emissions – Test Details (Worst Case Plot)

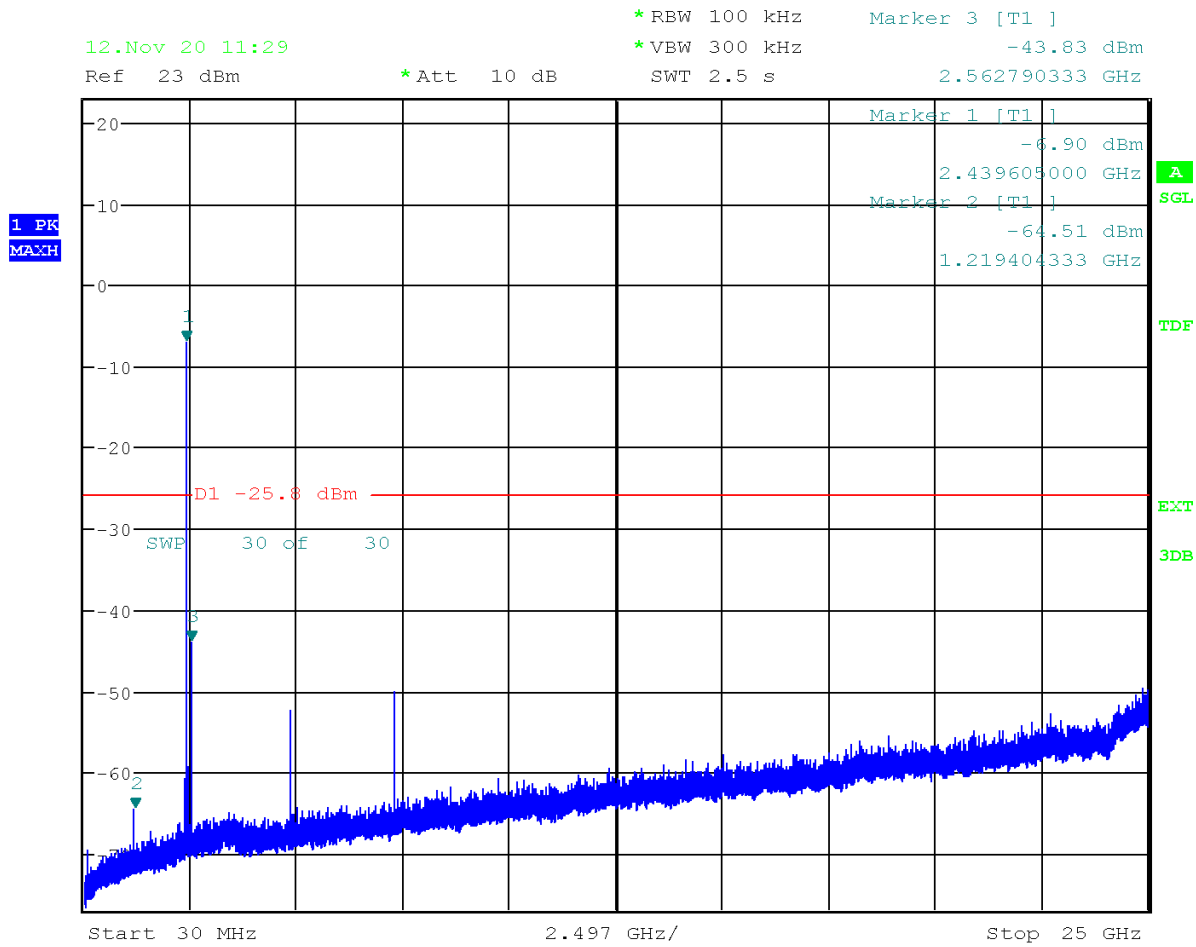

Date: 12.NOV.2020 11:29:59


4.4 Test Results – Band Edge Compliance (Authorized Band)

4.4.1 Band Edge Compliance (Authorized Band) – Test Summary

Test Specification	47 CFR 15.247 (d)			
Test Engineer & Date	Niall Forrester		2020.11.12	
EUT and Ancillary Equipment IDs	A002921813_006			
EUT Operation Mode(s)	DTM			
EUT Wireless Configuration(s)	Bluetooth Low Energy 1M/2M (See below for details)			
EUT Hardware Configuration(s)	Power from lab power supply			
Overall Result	PASS			

Test Parameter	Wireless Configuration	Measured Level (dBm)	Limit (dBm)	Result
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	-49.90	-26.26	PASS
Emissions at Band Edge (Auth. Band – Low Edge)	Bluetooth Low Energy 2M Low Channel (GFSK 2402 MHz)	-48.85	-26.26	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	-42.39	-26.87	PASS
Emissions at Band Edge (Auth. Band – High Edge)	Bluetooth Low Energy 2M High Channel (GFSK 2480 MHz)	-41.88	-26.89	PASS

4.4.2 Band Edge Compliance (Authorized Band) – Test Details (Worst Case Plot)

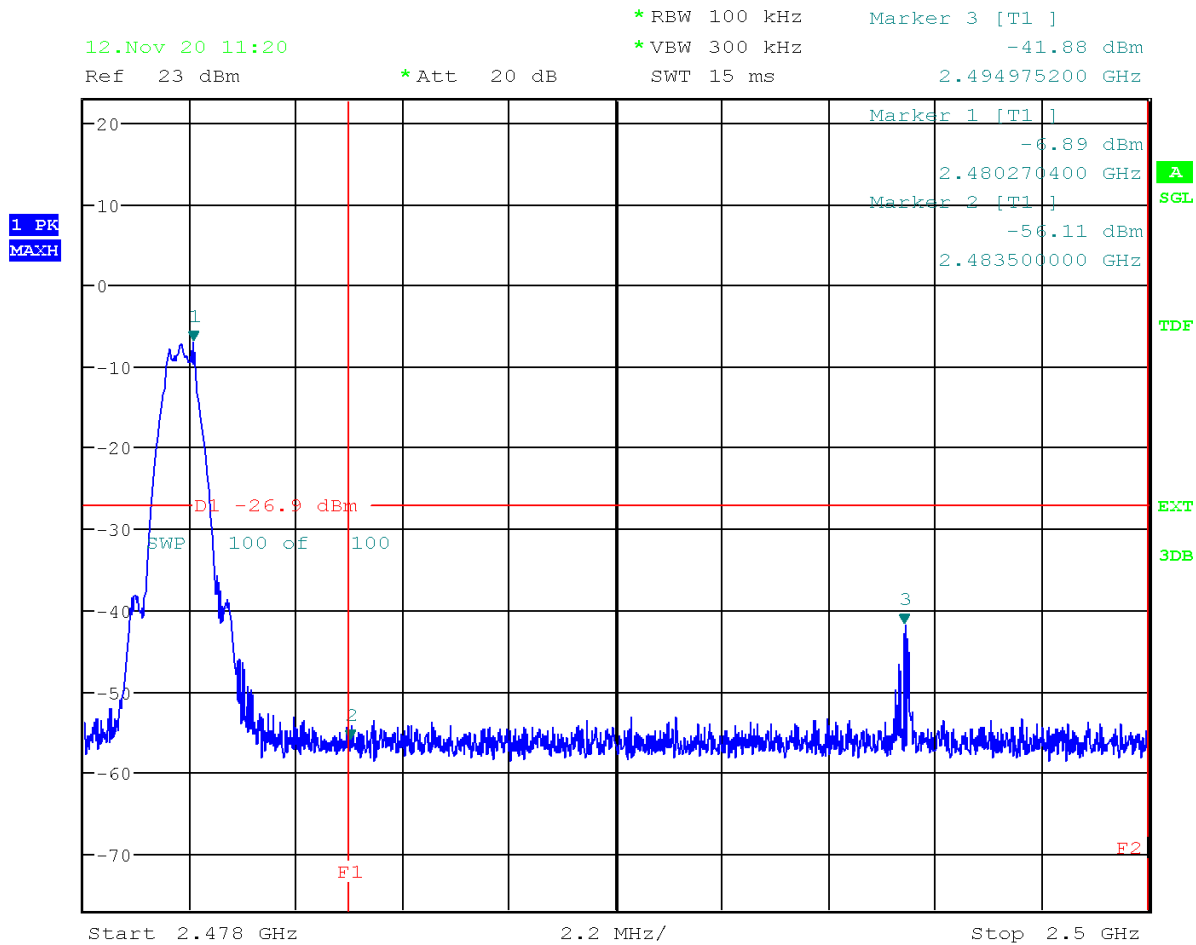

Date: 12.NOV.2020 11:20:52

4.5 Test Results – Band Edge Compliance (Restricted Band)

4.5.1 Band Edge Compliance (Restricted Band) – Test Summary


Test Specification	47 CFR 15.209 & 15.247 (d)	
Test Engineer & Date	Niall Forrester	2020.10.05
EUT and Ancillary Equipment IDs	A002921813-002 A002921813-004	
EUT Operation Mode(s)	Continuous Transmit	
EUT Wireless Configuration(s)	Bluetooth Low Energy 1M (Low and High channels)	
EUT Hardware Configuration(s)	Power from lab power supply	
Overall Result	PASS	
Test Parameter	Wireless Configuration	Result*
Emissions at Band Edge (Rest. Band – Low Edge)	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	PASS
Emissions at Band Edge (Rest. Band – High Edge)	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	PASS

* For detailed measurements, see tables and graphs in sections below

4.5.2 Band Edge Compliance (Restricted Band) – Test Details

Restricted Band – Low Edge


Test mode condition	Bluetooth Low Energy 1M, Low channel (2402 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz Lower Band Edge	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-002	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-05
Chamber details	Chamber: SAC 5	

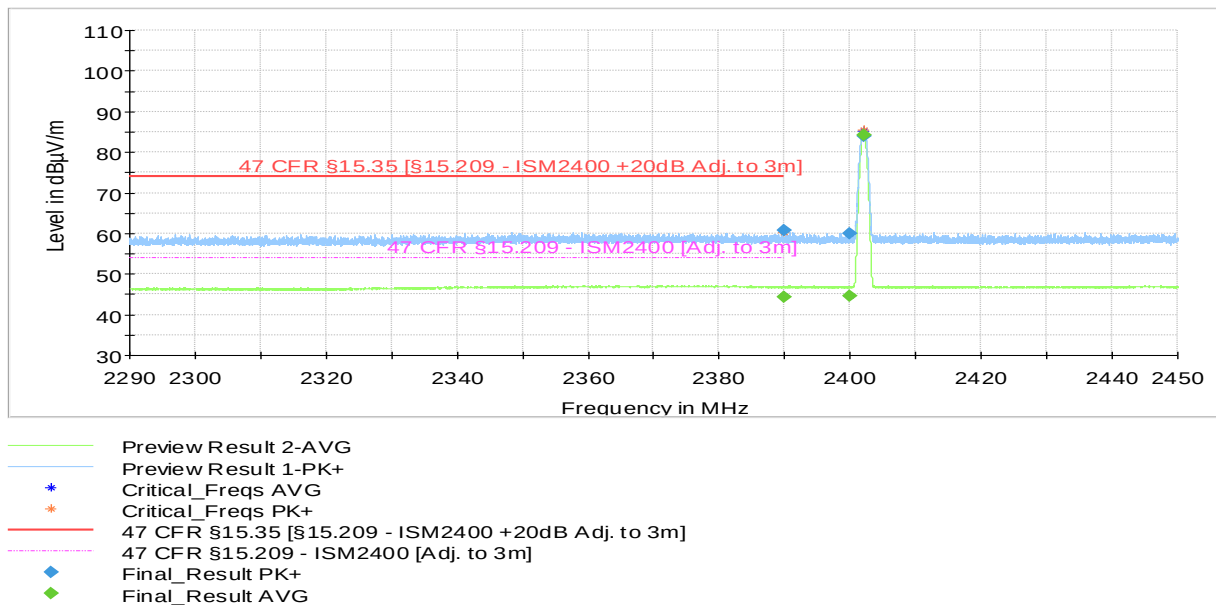

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2390.000000	---	44.46	53.98	9.52	1000.0	1000.000	111.0	H	296.0
2390.000000	60.66	---	73.98	13.32	1000.0	1000.000	100.0	H	228.0
2400.000000	---	44.48	---	---	1000.0	1000.000	181.0	H	103.0
2400.000000	59.94	---	---	---	1000.0	1000.000	100.0	H	19.0
2402.032000	---	84.25	---	---	1000.0	1000.000	169.0	H	81.0
2402.032000	83.88	---	---	---	1000.0	1000.000	169.0	H	92.0

Restricted Band – High Edge

Test mode condition	Bluetooth Low Energy 1M, High channel (2480 MHz)	
Antenna orientation	Horizontal and Vertical	
Sweep frequency	1 GHz – 18 GHz Lower Band Edge	
Standard	47 CFR FCC Part 15 subpart C	
EUT	A002921813-004	
Ancillary Equipment	-	
Test Engineer	Niall Forrester	Date: 2020-10-05
Chamber details	Chamber: SAC 5	

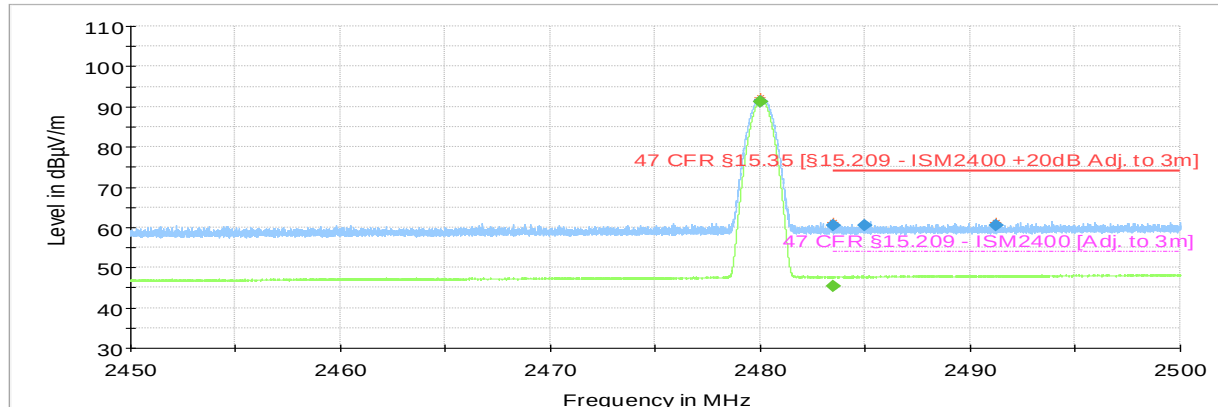

- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs AVG
- Critical_Freqs PK+
- 47 CFR §15.35 [§15.209 - ISM2400 +20dB Adj. to 3m]
- 47 CFR §15.209 - ISM2400 [Adj. to 3m]
- Final_Result PK+
- Final_Result AVG

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
2480.015000	---	91.12	---	---	1000.0	1000.000	122.0	H	45.0
2480.015000	91.28	---	---	---	1000.0	1000.000	121.0	H	44.0
2483.500000	---	45.31	53.98	8.67	1000.0	1000.000	145.0	H	59.0
2483.500000	60.39	---	73.98	13.59	1000.0	1000.000	168.0	H	0.0
2484.970000	60.59	---	73.98	13.39	1000.0	1000.000	101.0	V	129.0
2491.240000	60.54	---	73.98	13.44	1000.0	1000.000	101.0	V	31.0

4.6 Test Results – 20dB Bandwidth

4.6.1 20dB Bandwidth – Test Summary

Requirement is not applicable as the device is non-hopping

4.7 Test Results – Carrier (Hopping Channel) Separation

4.7.1 Carrier (Hopping Channel) Separation – Test Summary

Requirement is not applicable as the device is non-hopping

4.8 Test Results – Number of Hopping Channels

4.8.1 Number of Hopping Channels – Test Summary

Requirement is not applicable as the device is non-hopping

4.9 Test Results – Time of Occupancy (Dwell Time)

4.9.1 Time of Occupancy (Dwell Time) – Test Summary

Requirement is not applicable as the device is non-hopping


4.10 Test Results – 6dB Bandwidth

4.10.1 6dB Bandwidth – Test Summary

Test Specification		47 CFR 15.247 (a)(2)		
Test Engineer & Date		Niall Forrester	2020.11.12	
EUT and Ancillary Equipment IDs		A002921813_006		
EUT Operation Mode(s)		DTM		
EUT Wireless Configuration(s)		Bluetooth Low Energy 1M/2M (See below for details)		
EUT Hardware Configuration(s)		Power from lab power supply		
Overall Result		PASS		

Test Parameter	Wireless Configuration	Measured Level (kHz)	Limit Min (kHz)	Result
6dB Bandwidth	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	667.20	500	PASS
6dB Bandwidth	Bluetooth Low Energy 2M Low Channel (GFSK 2402 MHz)	681.60	500	PASS
6dB Bandwidth	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	686.40	500	PASS
6dB Bandwidth	Bluetooth Low Energy 2M Mid Channel (GFSK 2440 MHz)	681.60	500	PASS
6dB Bandwidth	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	676.80	500	PASS
6dB Bandwidth	Bluetooth Low Energy 2M High Channel (GFSK 2480 MHz)	681.60	500	PASS

4.10.2 6dB Bandwidth – Test Details (Worst Case Plot)

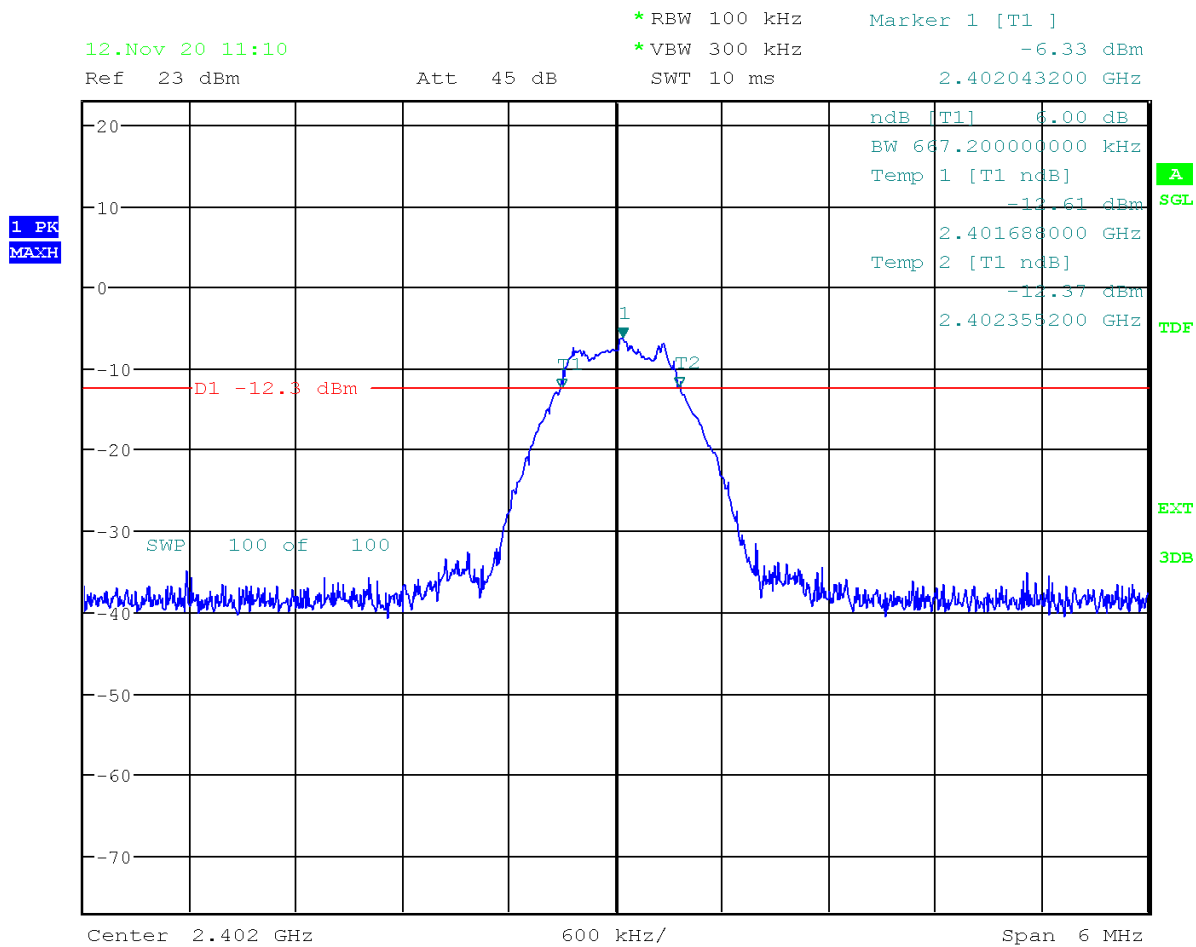

Date: 12.NOV.2020 11:10:17


4.11 Test Results – Peak Conducted Output Power

4.11.1 Peak Conducted Output Power – Test Summary

Test Specification	47 CFR 15.247(b)					
Test Engineer & Date	Niall Forrester			2020.11.12		
EUT and Ancillary Equipment IDs	A002921813_006					
EUT Operation Mode(s)	DTM					
EUT Wireless Configuration(s)	Bluetooth Low Energy 1M/2M (See below for details)					
EUT Hardware Configuration(s)	Power from lab power supply					
Overall Result	PASS					

Test Parameter	Wireless Configuration	Measured Level (dBm)			Limit (dBm)	Result
		Low 1.5V	Nom 2.0V	High 3.5V		
Peak Conducted Output Power	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	-5.34	-5.35	-5.36	30	PASS
Peak Conducted Output Power	Bluetooth Low Energy 2M Low Channel (GFSK 2402 MHz)	-5.36	-5.27	-5.42	30	PASS
Peak Conducted Output Power	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	-4.97	-5.08	-4.95	30	PASS
Peak Conducted Output Power	Bluetooth Low Energy 2M Mid Channel (GFSK 2440 MHz)	-4.91	-5.03	-4.92	30	PASS
Peak Conducted Output Power	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	-5.92	-5.93	-5.95	30	PASS
Peak Conducted Output Power	Bluetooth Low Energy 2M High Channel (GFSK 2480 MHz)	-5.87	-5.97	-5.94	30	PASS

4.11.2 Peak Conducted Output Power – Test Details (Worst Case Plot)

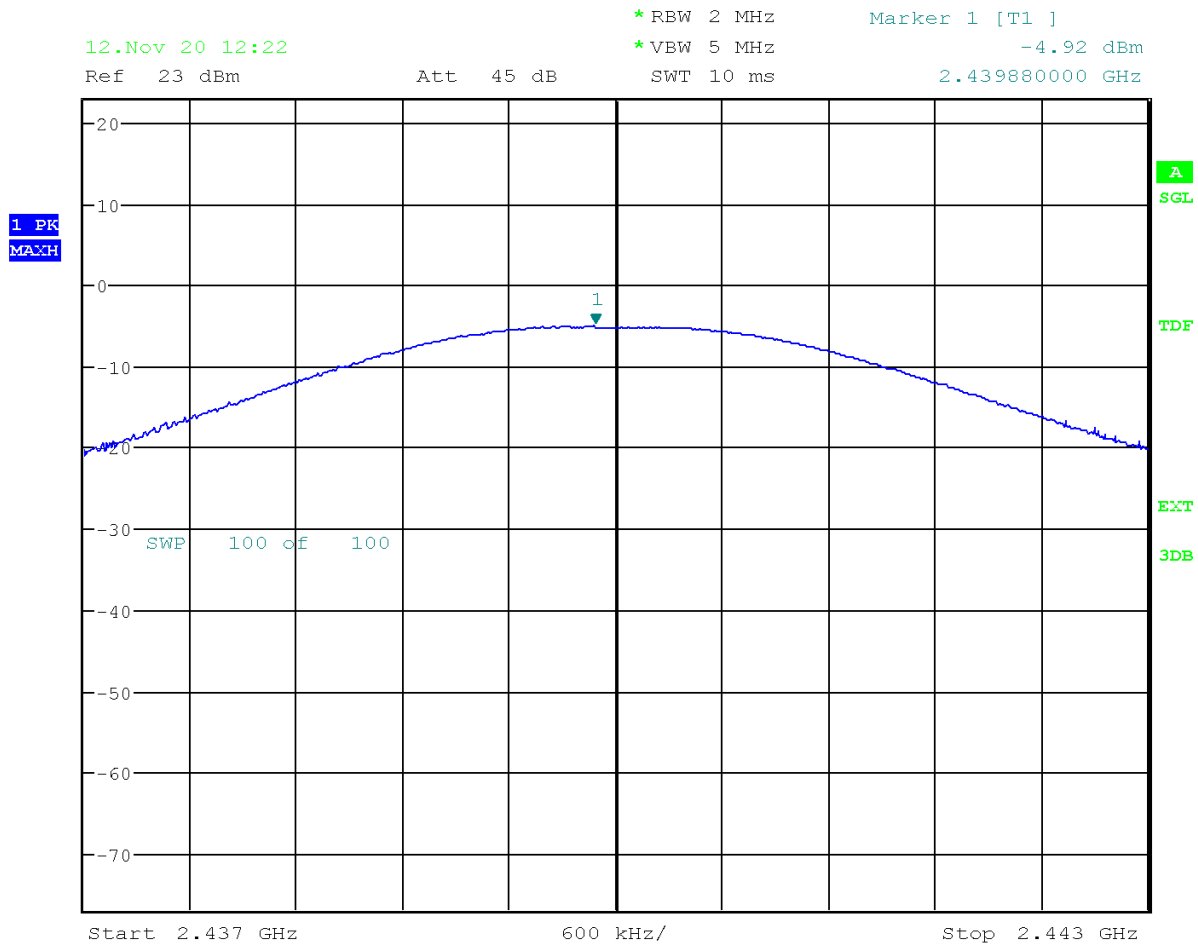

Date: 12.NOV.2020 12:22:26


4.12 Test Results – Power Spectral Density

4.12.1 Power Spectral Density – Test Summary

Test Specification		47 CFR 15.247(e)			
Test Engineer & Date		Niall Forrester		2020.11.12	
EUT and Ancillary Equipment IDs		A002921813_006			
EUT Operation Mode(s)		DTM			
EUT Wireless Configuration(s)		Bluetooth Low Energy 1M/2M (See below for details)			
EUT Hardware Configuration(s)		Power from lab power supply			
Overall Result		PASS			

Test Parameter	Wireless Configuration	Measured (dBm/3kHz)	Low Limit (dBm/3kHz)	High Limit (dBm/3kHz)	Result
Power Density	Bluetooth Low Energy 1M Low Channel (GFSK 2402 MHz)	-19.12	-30	8	PASS
Power Density	Bluetooth Low Energy 2M Low Channel (GFSK 2402 MHz)	-19.63	-30	8	PASS
Power Density	Bluetooth Low Energy 1M Mid Channel (GFSK 2440 MHz)	-18.17	-30	8	PASS
Power Density	Bluetooth Low Energy 2M Mid Channel (GFSK 2440 MHz)	-17.68	-30	8	PASS
Power Density	Bluetooth Low Energy 1M High Channel (GFSK 2480 MHz)	-19.18	-30	8	PASS
Power Density	Bluetooth Low Energy 2M High Channel (GFSK 2480 MHz)	-19.05	-30	8	PASS

4.12.2 Power Spectral Density – Test Details

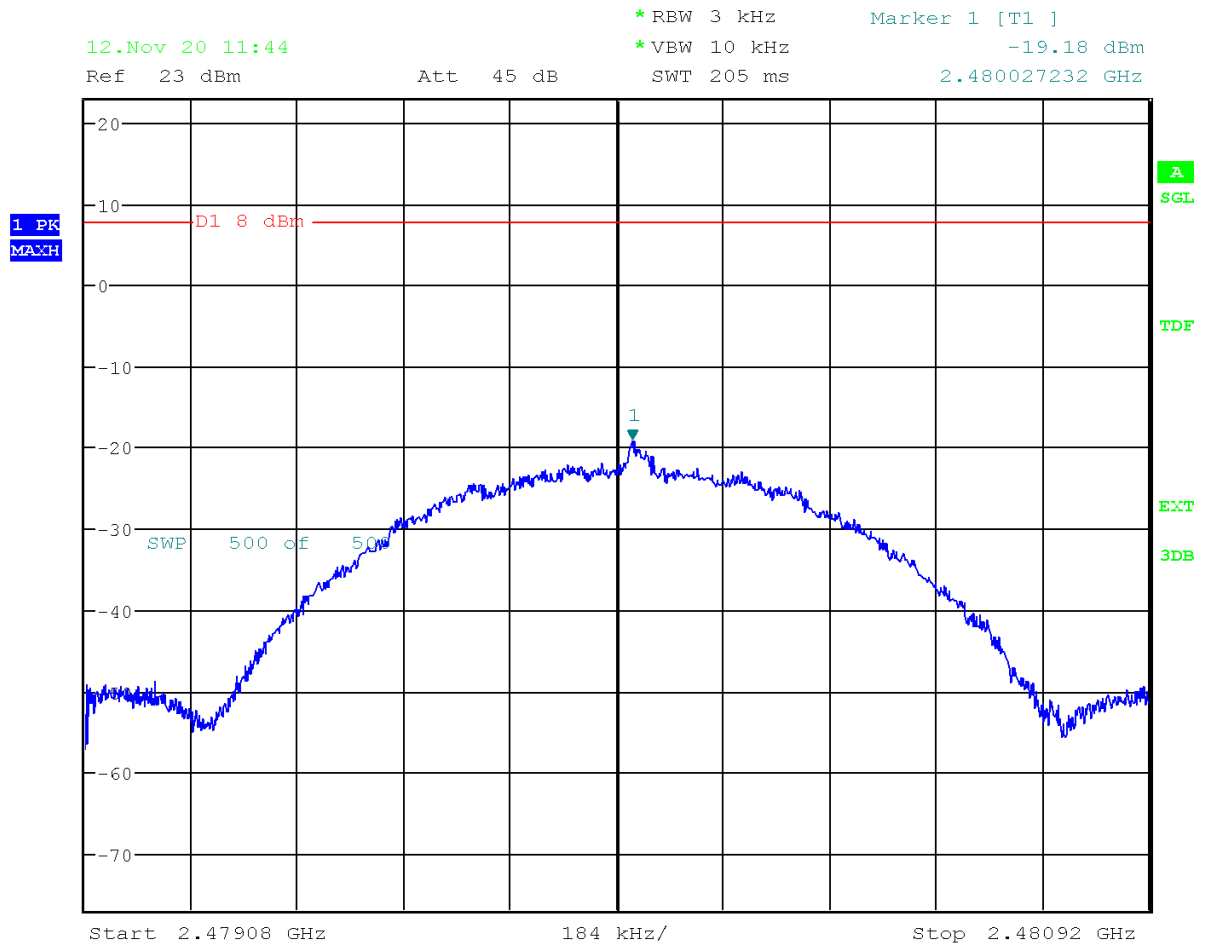

Date: 12.NOV.2020 11:44:54

5. TEST EQUIPMENT STATUS

5.1 List of Hardware with Calibration Dates

5.1.1 Hardware List – CTE System

Type	Manufacturer	Model	Serial Number / ID	Calibration Date	Calibration Due
Comprehensive Testing Environment	TÜV Rheinland LGA Products	HWE 6000	00139	N/A	N/A
Bluetooth Signaling Unit	Rohde & Schwarz	CMW500	163750 2711468	16.07.2020	16.07.2021
Spectrum Analyzer	Rohde & Schwarz	FSU26	100308 2704108	14.07.2020	14.07.2021
Vector Signal Generator	Rohde & Schwarz	SMU200A	101584 2704111	04.08.2020	04.08.2021
Power Supply	Keithley	2303	1198722 2717714	24.07.2020	24.07.2021
Multimeter	Keithley	2700	1035251 2704115	09.07.2020	09.07.2021
Average Power Sensor	Rohde & Schwarz	NRP-Z31	102145 2704104	17.07.2020	17.07.2021
Temperature Chamber	Vötsch	VT4002	58566081940010 2717693	N/A	N/A
Temp. & Humidity Logger	Lufft	Opus 20	113.0118.0802.033 2771025	31.07.2020	31.07.2022

5.1.2 Hardware List – Conducted Emissions System

Type	Manufacturer	Model	Serial Number / ID	Calibration Date	Calibration Due
Two-Line V-network	Rohde & Schwarz	ENV216	101090 2704076	2020.07.16	2021.07.16
Test Receiver 9KHz to 3.5 GHz	Rohde & Schwarz	ESR3	101674 2704016	2020.07.17	2021.07.17

5.1.3 Hardware List – SAC5 System

Type	Manufacturer	Model	Serial Number / ID	Calibration Date	Calibration Due
EMI Test Receiver	Rohde & Schwarz	ESW44	101760 2881044	2020.07.17	2021.07.17
Ultra Broadband Antenna	Rohde & Schwarz	HL562E	100988 2823181	2019.07.23	2021.07.23
Double Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF907	102678 2823164	2019.07.15	2021.07.15
Control Device	Maturo	NCD	NCD/393/2372.01	N/A	N/A
Open Switch & Control Unit	Rohde & Schwarz	OSP150	100081 2884198	2020.08.04	2021.08.04
Open Switch & Control Unit	Rohde & Schwarz	OSP120	100084 2761253	2020.08.04	2021.08.04
Shielded Filter Unit	Rohde & Schwarz	OSP-F Extension 1	101333 2761265	2020.08.04	2021.08.04
Shielded Filter Unit	Rohde & Schwarz	OSP-F Extension 2	101335 2761266	2020.08.04	2021.08.04
Shielded Filter Unit	Rohde & Schwarz	OSP-F Base Unit	101330 2761262	2020.08.04	2021.08.04
Humidity Temperature Probe	Lufft	OPUS 20	1236.0118.0802.033 2771042	2020.07.31	2022.07.31

5.2 Software / Firmware Versions

Equipment	Software / Firmware Name	Version
Comprehensive Testing Environment (CTE)	CTE – TMF CTE – WLAN	V47.5 V41.5
Conducted Emissions System	EMC 32	V10.60.10
SAC 5	EMC 32	V10.60.10

6. MEASUREMENT UNCERTAINTY

6.1 Measurement Uncertainty for CTE

Parameter	Uncertainty (Coverage Factor k=2)
Maximum Output Power (15.247b)	±0.51 dB
6dB / 20dB Channel Bandwidth & 99% Occupied bandwidth (15.247a)	<5%
Carrier Frequency Separation (15.247a)	N/A
Number of Hopping Channels (15.247a)	N/A
Time of Occupancy – Dwell Time (15.247a)	N/A
Band Edge Compliance of Conducted Emissions (15.247a)	±1.04 dB
Conducted Spurious Emissions (15.247d)	±2.98 dB
Power Spectral Density (15.247e)	±0.51 dB

6.2 Measurement Uncertainty for Conducted Emissions

Parameter	Uncertainty (Coverage Factor k=2)
Conducted emissions with LISN 150KHz to 30 MHz	2.98 dB

6.3 Measurement Uncertainty for SAC 5 (Radiated Emissions & Band Edge)

Parameter	Uncertainty (Coverage Factor k=2)
Field Strength 10 Hz -9 kHz	3.38 dB
Field Strength 9 kHz -30 MHz	3.38 dB
Field Strength 30 MHz -1000 MHz	3.38 dB
Field Strength 1 GHz -18 GHz	4.88 dB
Field Strength 18 GHz - 40 GHz	5.14 dB

7. PHOTOGRAPHS

See Appendix 1