



Test Report No.:
FCC2023-0070-RF1

RF Test Report

FCC ID : 2AYXT61100002
EUT : Pod 4
MODEL : 10504
BRAND NAME : Eight Sleep
APPLICANT : Eight Sleep Inc
Classification of Test : N/A

CVC Testing Technology Co., Ltd.



CVC Testing Technology Co., Ltd.

Test Report No.: FCC2023-0070-RF1

Page 2 of 52

Applicant		Name: Eight Sleep Inc Address: 212 W 35th Street, Floor 4, New York, NY 10123	
Manufacturer		Name: BoShiJie Technology Co., Ltd Address: Boshijie Industrial Park, No. 1 Huifeng West Third Road, Zhongkai High-tech Zone, Huizhou City, Guangdong, China. 516006	
Equipment Under Test		Product Name: Pod 4 Model/Type: 10504 Brand Name: Eight Sleep Serial NO.: N/A Sample NO.: 2-1	
Date of Receipt.	2023.12.11	Date of Testing	2023.12.11 ~ 2024.01.30
Test Specification		Test Result	
FCC Part 15, Subpart C (15.247)		PASS	
Evaluation of Test Result		The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2024.01.31	
Tested by:  Lu Wei Ji Name Signature		Tested by:  Xu Zhen Fei Name Signature	Approved by:  Chen Hua Wen Name Signature
Other Aspects: NONE.			
Abbreviations: OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST LOCATION	7
2 GENERAL INFORMATION	8
2.1 GENERAL PRODUCT INFORMATION	8
2.2 OTHER INFORMATION	10
2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.5 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	19
3.3 6DB BANDWIDTH MEASUREMENT	44
3.4 CONDUCTED OUTPUT POWER	45
3.5 POWER SPECTRAL DENSITY MEASUREMENT	46
3.6 OUT OF BAND EMISSION MEASUREMENT	47
3.7 OCCUPIED BANDWIDTH MEASUREMENT	48
3.8 ANTENNA REQUIREMENT	49
4 PHOTOGRAPHS OF TEST SETUP	50
5 PHOTOGRAPHS OF THE EUT	51



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2023-0070-RF1	Original release	2024.01.31



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC 15.207	AC Power Conducted Emission	PASS	See section 3.1
FCC 15.247(d) FCC 15.209	Radiated Emissions	PASS	See section 3.2
FCC 15.247(d) RSS-247 5.5	Out of band Emission Measurement	PASS	Appendix E&F&G of FCC2023-0070-RF1-A1&A2
FCC 15.247(a)(2) RSS-247 5.2(a)	6dB bandwidth	PASS	Appendix A of FCC2023-0070-RF1-A1&A2
---	Occupied Bandwidth Measurement	PASS	Appendix B of FCC2023-0070-RF1-A1&A2
FCC 15.247(b)	Conducted Output power	PASS	Appendix C of FCC2023-0070-RF1-A1&A2
FCC 15.247(e)	Power Spectral Density	PASS	Appendix D of FCC2023-0070-RF1-A1&A2
FCC 15.203 FCC 15.247(b)	Antenna Requirement	PASS	See section 3.8



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
WIFI & Bluetooth Test System 1					/
Communication Shielded Room 1	4m*3m*3m	CRTDSWKS44301	VGDS-0699	CRT	2024/04/24
Spectrum Analyzer	FSV40	101579	DZ-000239-3	R&S	2024/04/22
Comprehensive Test Instrument	CMW500	137779	DZ-000220	R&S	2024/07/04
LTE Comprehensive Test Instrument	E7515A	MY58010639	DZ-000173	KEYSIGHT	2024/03/27
Analog Signal Generator	SMA100B	103663	DZ-000239-2	R&S	2024/08/17
Vector Signal Generator	SMBV100B	101757	DZ-000239-1	R&S	2024/05/29
Programmable DC Power Supply	E3642A	MY59108106	DZ-000242-2	KEYSIGHT	2024/08/03
Radiation Spurious Test System					/
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
Loop Antenna	FMZB1513	1513-170	EM-000384	SCHWARZBECK	2024/02/22
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2024/02/22
EMI Test Receiver (3M)	N9038A-508	MY532290079	EM-000397	Agilent	2024/06/10
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2024/02/24
Waveguide Horn Antenna	BBHA9120B	602	EM-000383	SCHWARZBECK	2024/08/05
Waveguide Horn Antenna	HF906	360306/008	WKNA-0024-8	R&S	2024/06/04
Comprehensive tester	CMW500	159000	DZ-000240-2	R&S	2024/12/12
Conducted emission					/
EMI Test Receiver	ESW44	103123	EM-000698	R&S	2024-06-10
EMI Test Receiver	ESR3	102394	VG DY-0705	R&S	2024-02-22
LISN	NSLK 8127	8127644	VG DY-0150	SCHWARZBECK	2024-07-27
LISN	NSLK 8128	8128-316	VG DY-0149	SCHWARZBECK	2024-07-27
DC LISN	PVDC8301-017	PVDC8301#17	VG DY-0692	SCHWARZBECK	2024-09-27
LISN	NSLK 8129	8129-268	EM-000388	SCHWARZBECK	2024-02-22
Plus Limiter (#1)	VTSD 9561 F-N	00515	VG DY-0808	SCHWARZBECK	2024-03-03
Plus Limiter (#2)	VTSD 9561	9561-F017	VG DY-0152	SCHWARZBECK	2024-09-03
Impedance Stabilization Network	ISN T800	27095	WKNE-0195	TESEQ	2024-07-27
Impedance Stabilization Network	NTFM8158	8158-0092	VG DY-0356	SCHWARZBECK	2024-05-29
Impedance Stabilization Network	NTFM8131	#184	EM-000498	SCHWARZBECK	2024-05-29
Voltage Probe	TK9420	9420-499	VG DY-0128	SCHWARZBECK	2024-02-22
Power Divider	4901.17.B	22643830	DB-0016	HUBER+SUHNER	2024-07-17
Shielding Room(#1)	GP1A	001	WKNF-0001	LEINING	2024-08-07



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	ITEM	FREQUENCY	UNCERTAINTY
1	Conducted emissions	9kHz~30MHz	±2.66dB
2	Radiated emissions	9KHz ~ 30MHz	±0.769dB
		30MHz ~ 1GMHz	±0.877dB
		1GHz ~ 18GHz	±0.777dB
		18GHz ~ 40GHz	±1.315dB
3	Occupied Bandwidth	/	+/-1.86%

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou,Guangdong,510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

CNAS(Test firm designation number: L0095)



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	Pod4												
BRAND	N/A												
TEST MODEL	10504												
ADDITIONAL MODEL	N/A												
POWER SUPPLY	AC 100~240V												
MODULATIONTECHNOLOGY	DSSS, OFDM, DTS												
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM GFSK for BT-LE												
OPERATING FREQUENCY	2412MHz ~ 2462MHz for 11b/g/n(HT20) 2422MHz ~ 2452MHz for 11n(HT40) 2402MHz ~ 2480MHz for BT-LE												
NUMBER OF CHANNEL	802.11b/g/n(HT20): 11 802.11n(HT40): 7 BT-LE:40												
PEAK OUTPUT POWER	24.76dBm for WiFi(Maximum) 3.17dBm for BT-LE(Maximum)												
PEAK EIRP	21.91dBm for WiFi(Maximum) 1.90dBm for BT-LE(Maximum)												
ANTENNA TYPE(Note 4)	WiFi Antenna: ANT1:PCB antenna with gain-2.21dBi ANT2:PCB antenna with gain-3.02dBi BLE Antenna: PCB antenna with gain-1.27dBi												
FIX FREQUENCY SOFTWARE	adb												
I/O PORTS	Refer to user’s manual												
CABLE SUPPLIED	N/A												
Note:													
1. For more detailed features description, please refer to the manufacturer’s specifications or the User's Manual.													
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.													
3. EUT photo refer to report (Report NO.: FCC2023-0070-EUT).													
4. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.													
5. There are two power supplies, from different manufacturers.													
<table><tr><th colspan="3">Power supply information</th></tr><tr><th>No.</th><th>Manufacturer</th><th>MODEL</th></tr><tr><td>1</td><td>Megmeet</td><td>MAP400-24</td></tr><tr><td>2</td><td>Meanwell</td><td>EPP-400-24</td></tr></table>		Power supply information			No.	Manufacturer	MODEL	1	Megmeet	MAP400-24	2	Meanwell	EPP-400-24
Power supply information													
No.	Manufacturer	MODEL											
1	Megmeet	MAP400-24											
2	Meanwell	EPP-400-24											



6. EUT provides a complete transmitter and a receiver.

MODULATION MODE	802.11b	802.11g	802.11n	BT-LE
TX FUNCTION	SISO	SISO	2TX/2RX	SISO



2.2 OTHER INFORMATION

Operating frequency of each channel

2.4G WIFI							
802.11b/g/n(HT20)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)		
1	2412	5	2432	9	2452		
2	2417	6	2437	10	2457		
3	2422	7	2442	11	2462		
4	2427	8	2447				
802.11n(HT40)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)		
3	2422	6	2437	9	2452		
4	2427	7	2442				
5	2432	8	2447				
BT-LE(1 Mbps+2Mbps)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1. The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore only the data of the test channels were recorded in this report.
2. By means of test software which provided by manufacture, the power levels during the tests were set

2.4G							
802.11b		802.11g		802.11n		BT-LE	
FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING	FREQUENCY (MHZ)	POWER SETTING
2412	14	2412	16	2412	14	2402	default
2437	14	2437	16	2437	14	2440	default
2462	14	2462	16	2462	14	2480	default



2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	2.4G WIFI Function
B	√	√	√	√	BT Function

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ The worst case was found when positioned on x axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0 Mbps
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0 Mbps
A	802.11n(HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
A	802.11n(HT40)	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	1.0 Mbps
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	2.0 Mbps



POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) + BT-LE Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE PARAMETER
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0 Mbps
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0 Mbps
A	802.11n(HT20)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
A	802.11n(HT40)	3 to 9	1, 6, 11	OFDM	BPSK	MCS0
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	1.0 Mbps
B	BT-LE	0 to 39	0,19, 39	DTS	GFSK	2.0 Mbps

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	24deg. C, 55%RH	AC 110V	Li Jialing
RE≥1G	24deg. C, 55%RH	AC 110V	Li Jialing
PLC	24deg. C, 55%RH	AC 110V	Li Jialing
APCM	25deg. C, 58%RH	AC 110V	Li Jialing



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, Subpart C. Section 15.247
KDB 558074 D01 15.247 Meas Guidance v05r02
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Training and tests:

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	Laptop	Lenovo	K4e-ARE120	MP20kshe	Lab		
Support Cable							
NO	Description	Quantity (Number)	Length (cm)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by

3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit


Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


3.1.2 Measurement procedure


- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


3.1.3 Test setup

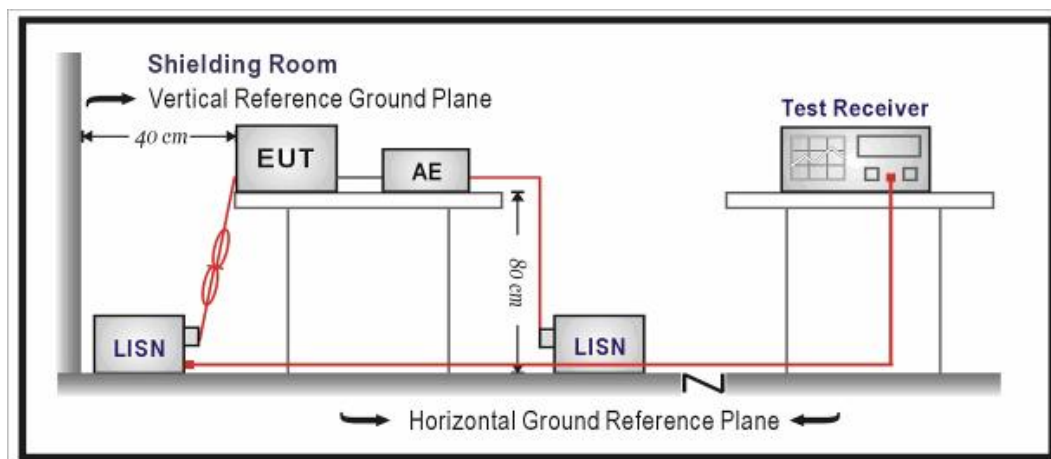


3.1.4 Test results

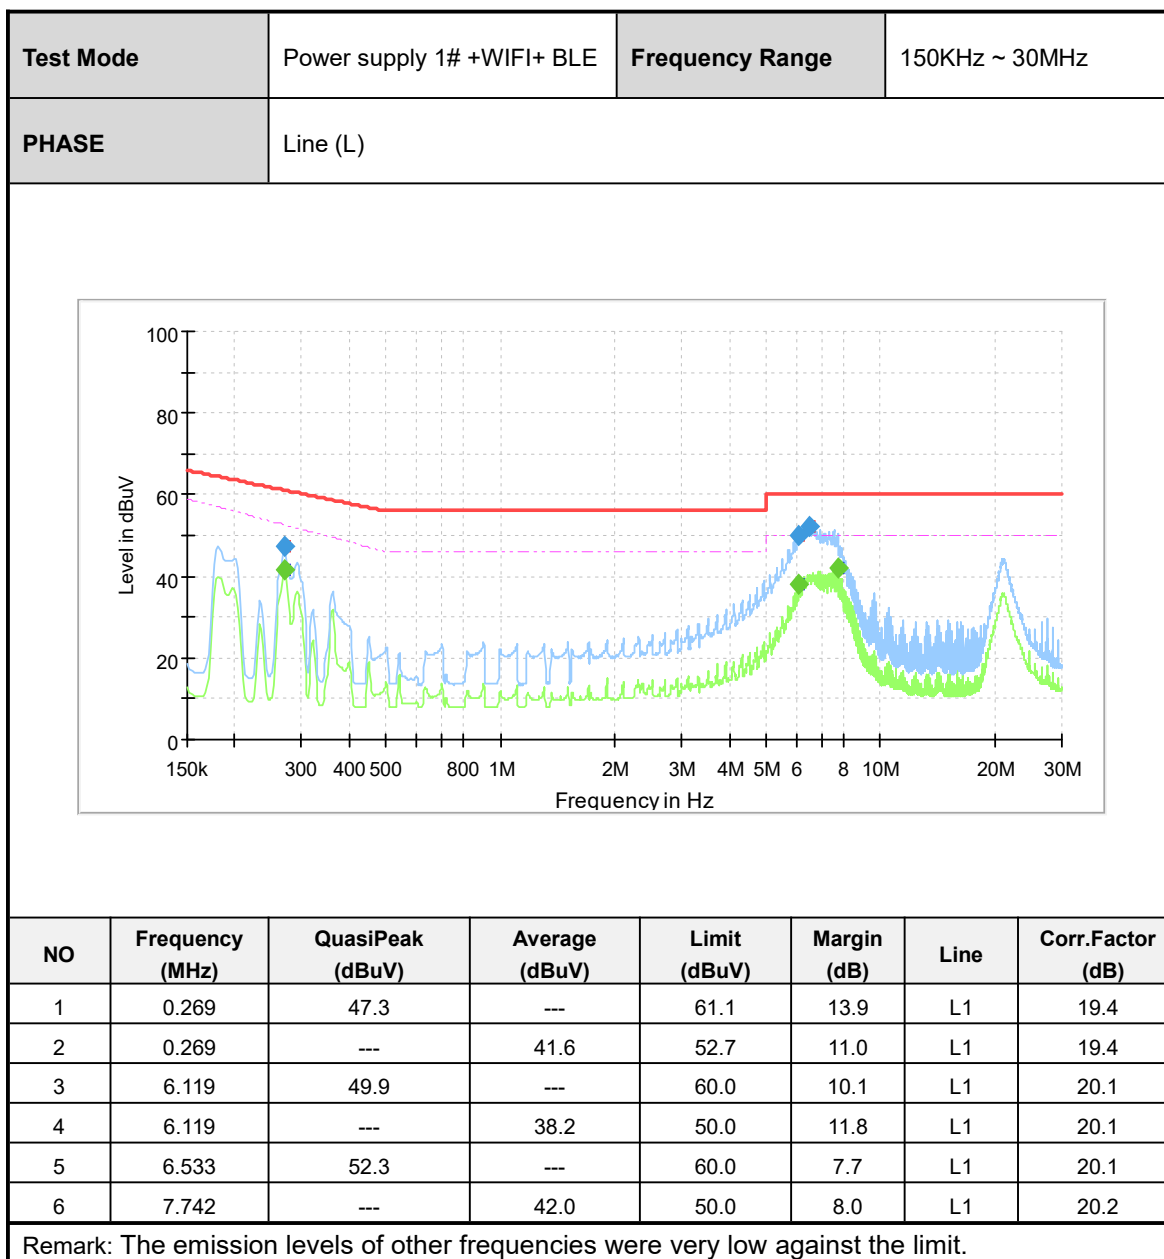

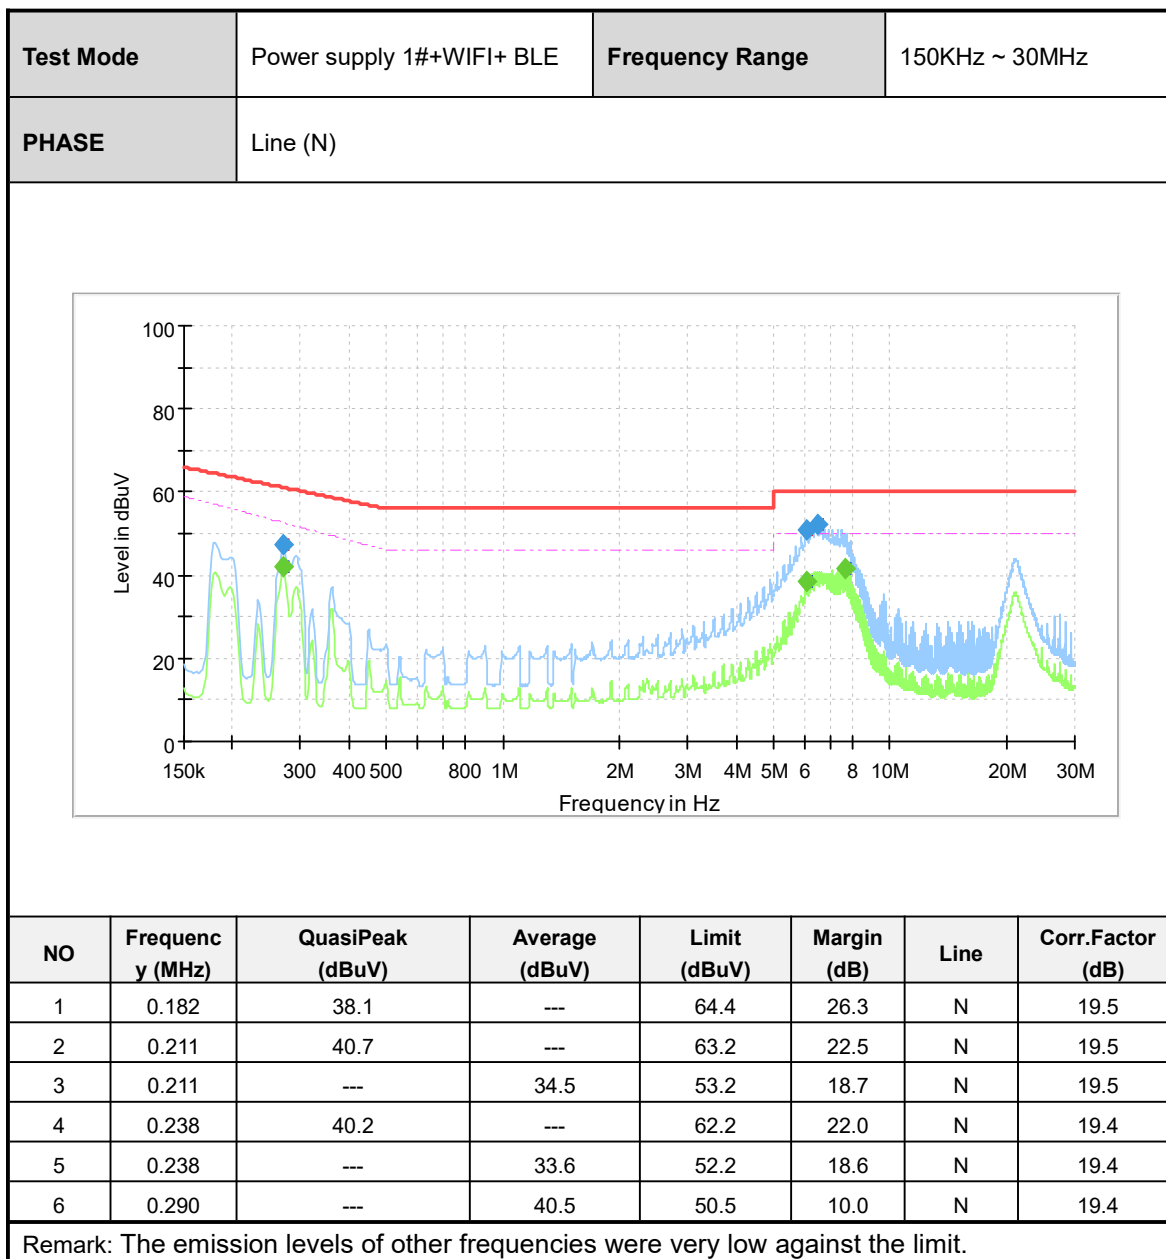

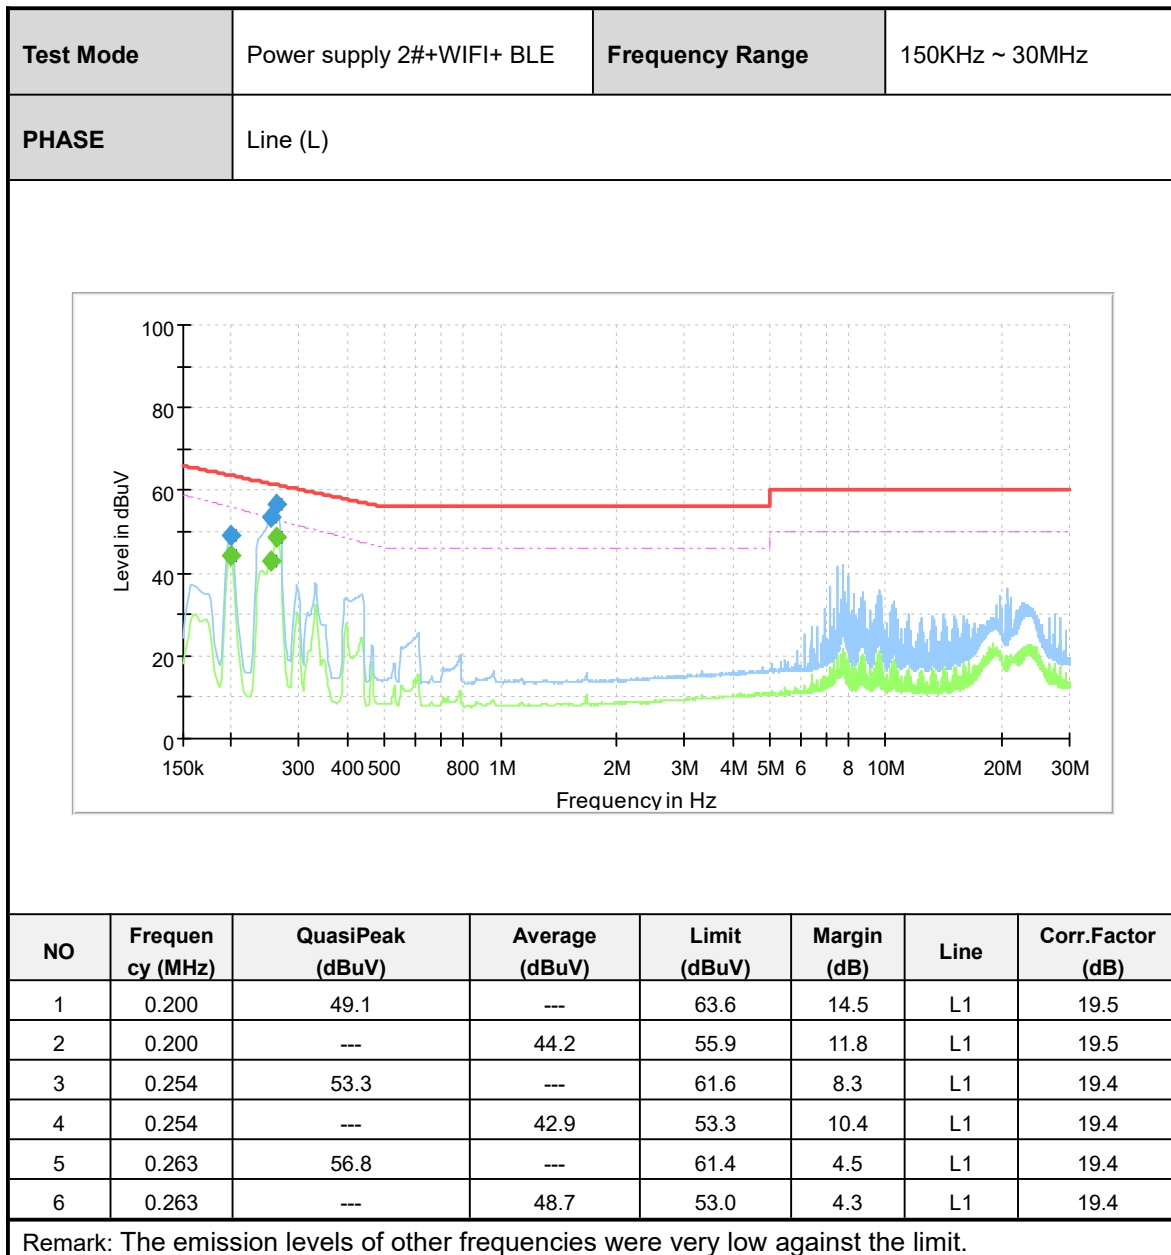

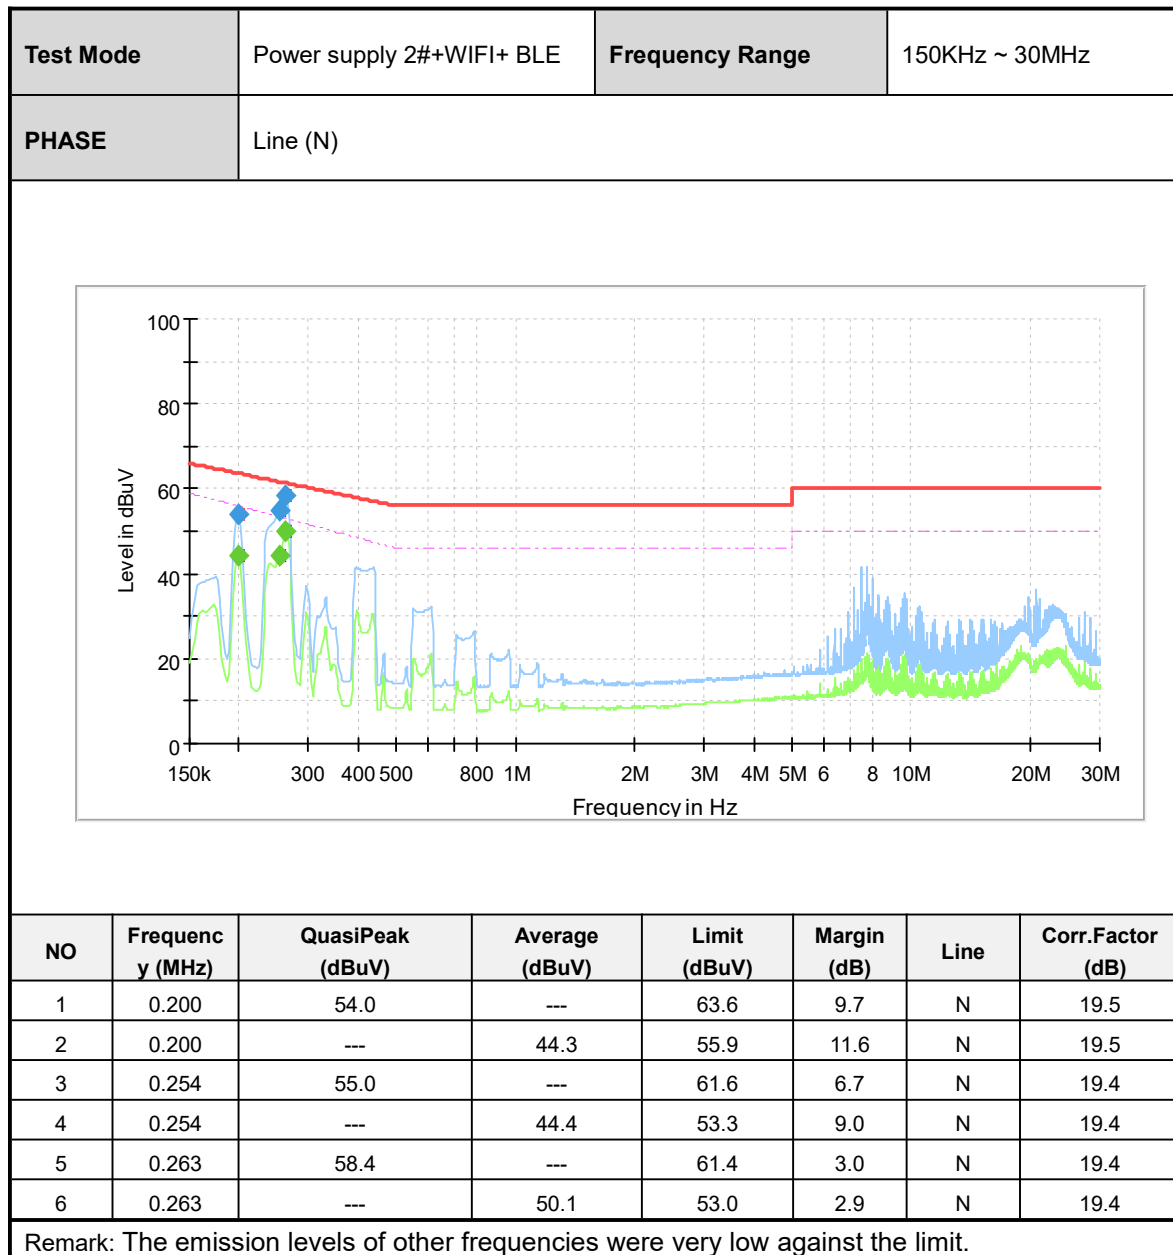



3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.2.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.2.2 Measurement procedure


- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.2.3 Test setup


Below 30MHz Test Setup:

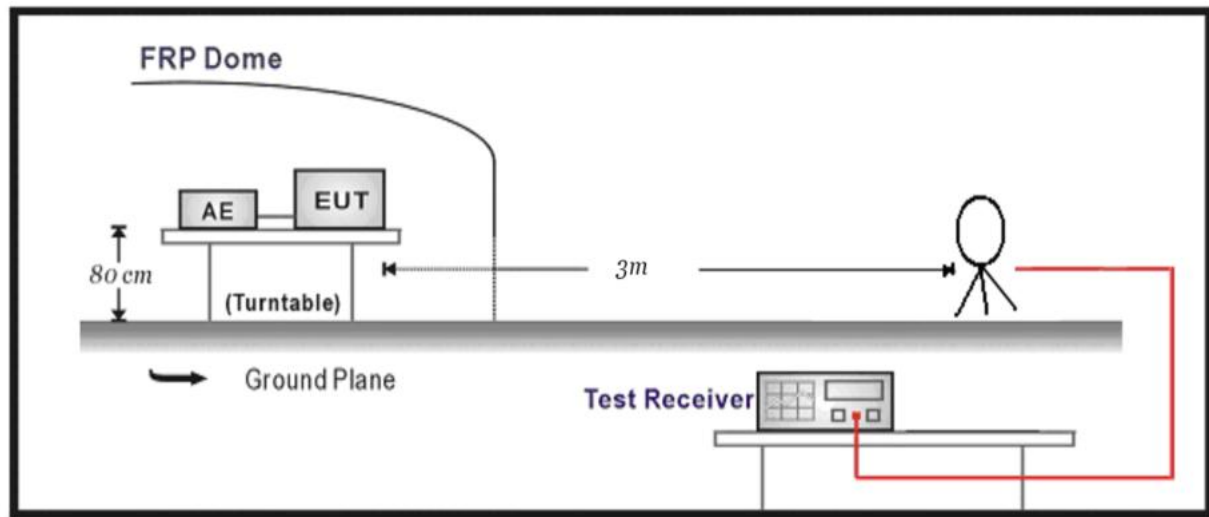

Below 1GHz Test Setup:

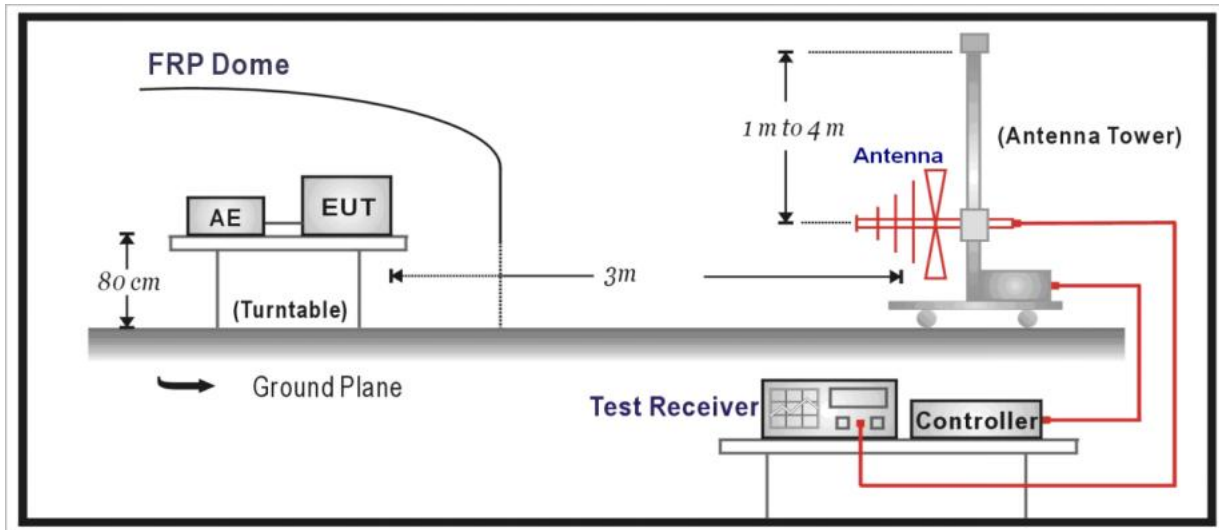



Above 1GHz Test Setup:

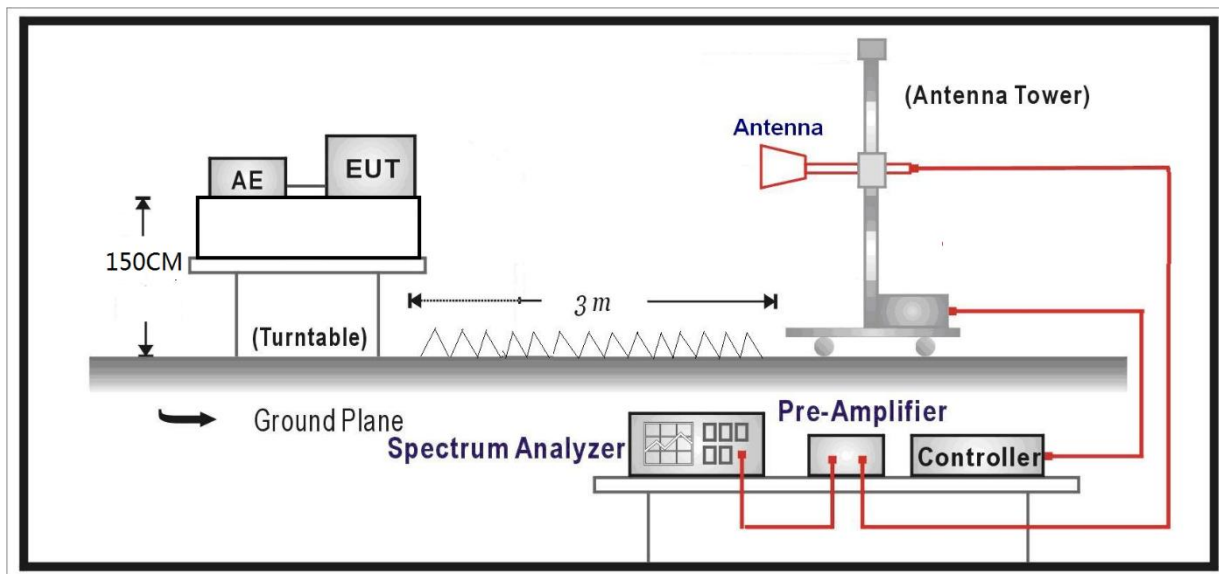



3.2.4 Test results

BELOW 1GHz WORST-CASE DATA:

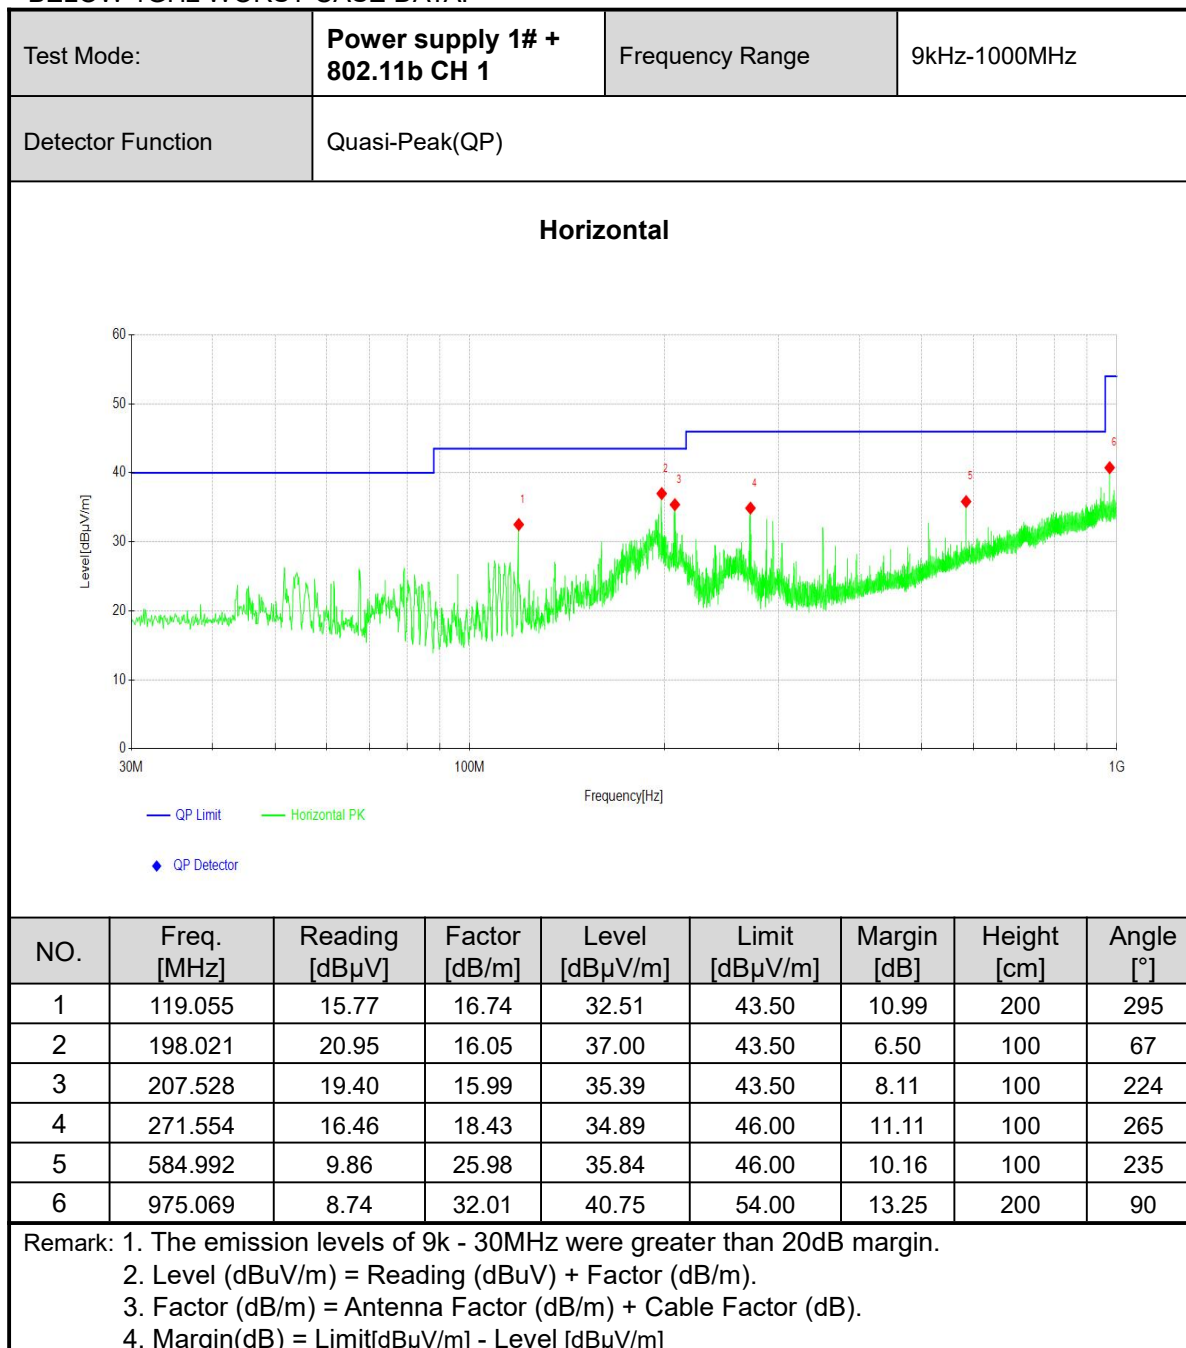

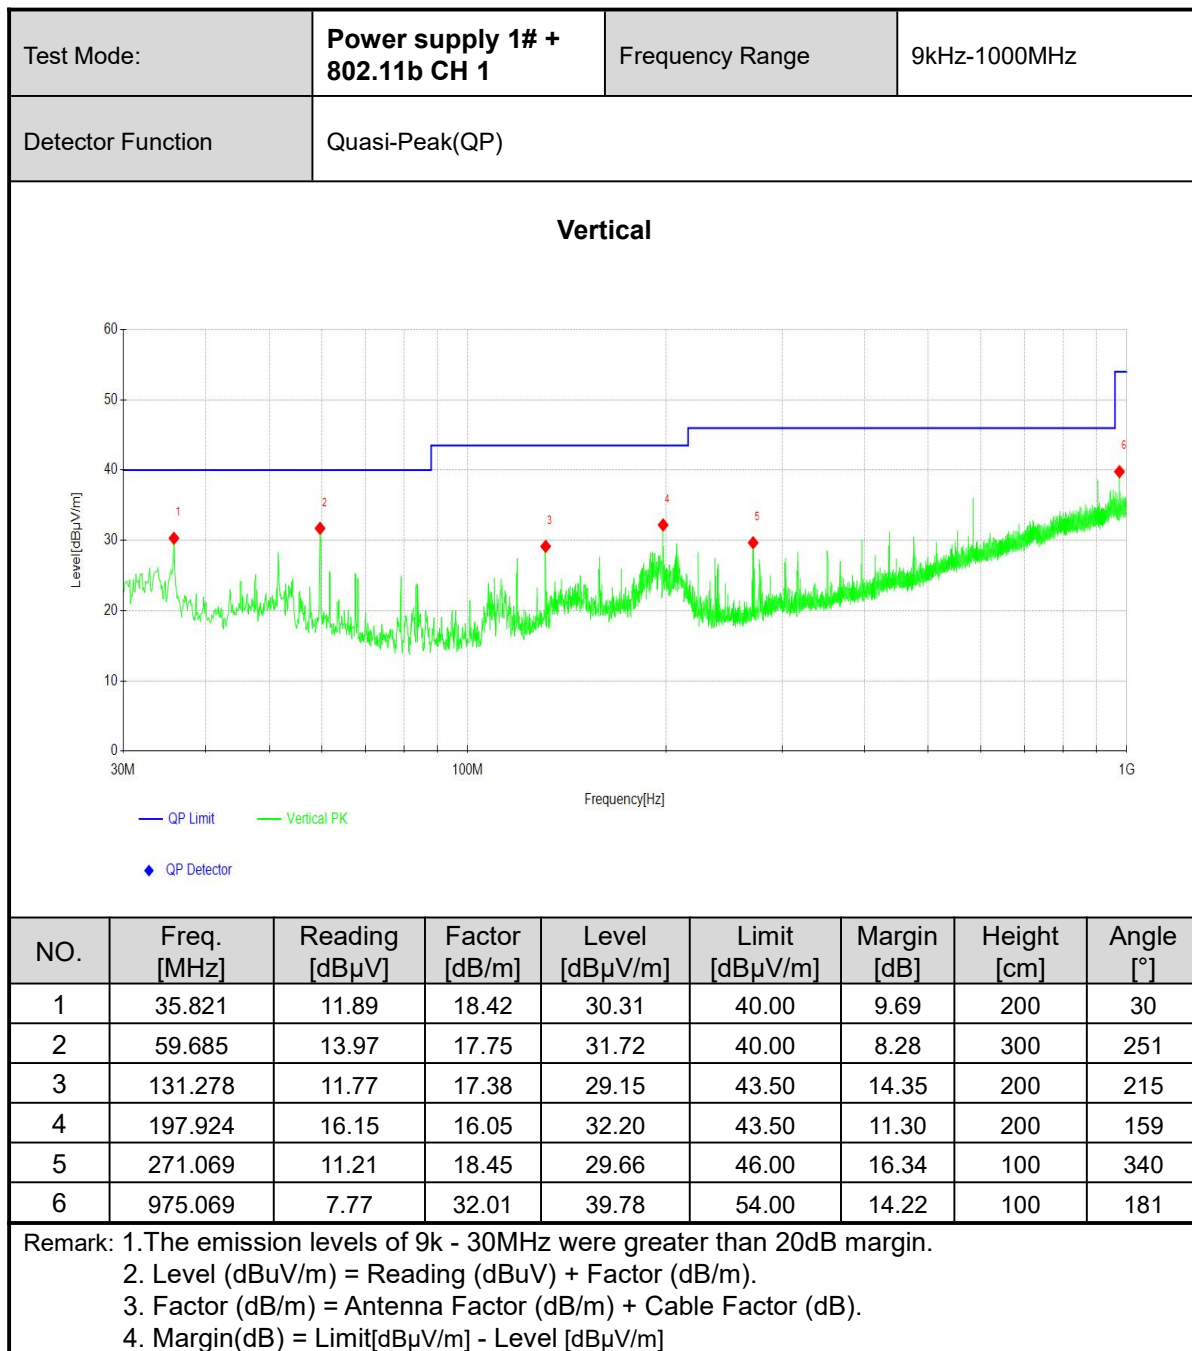

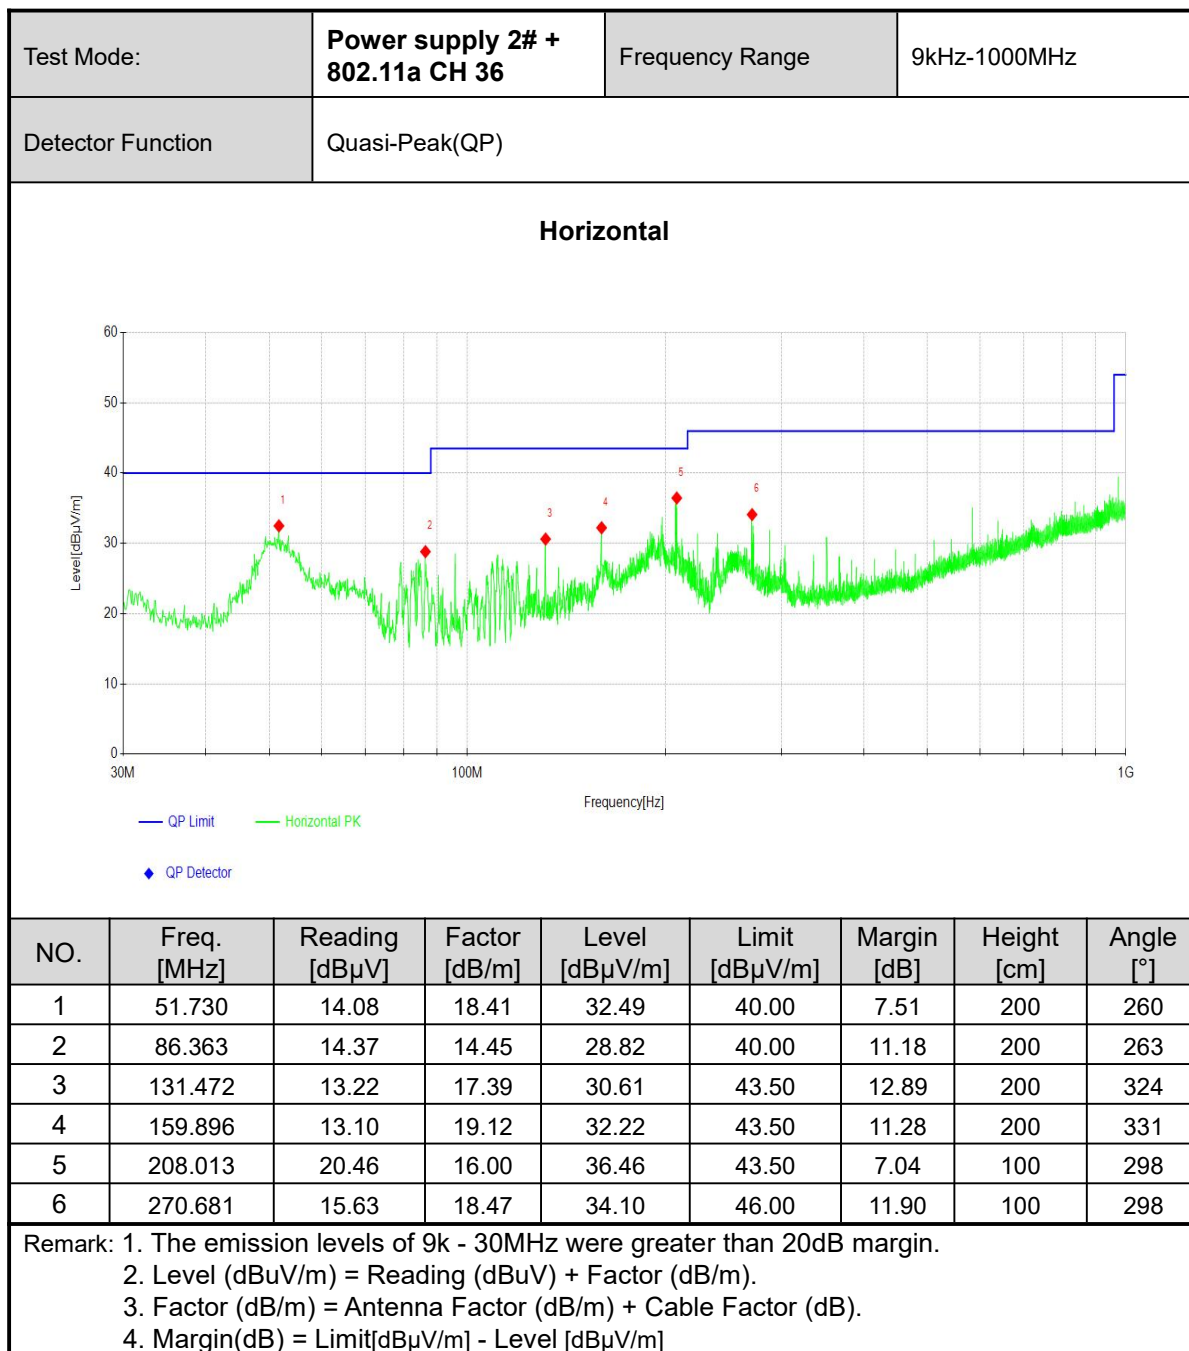

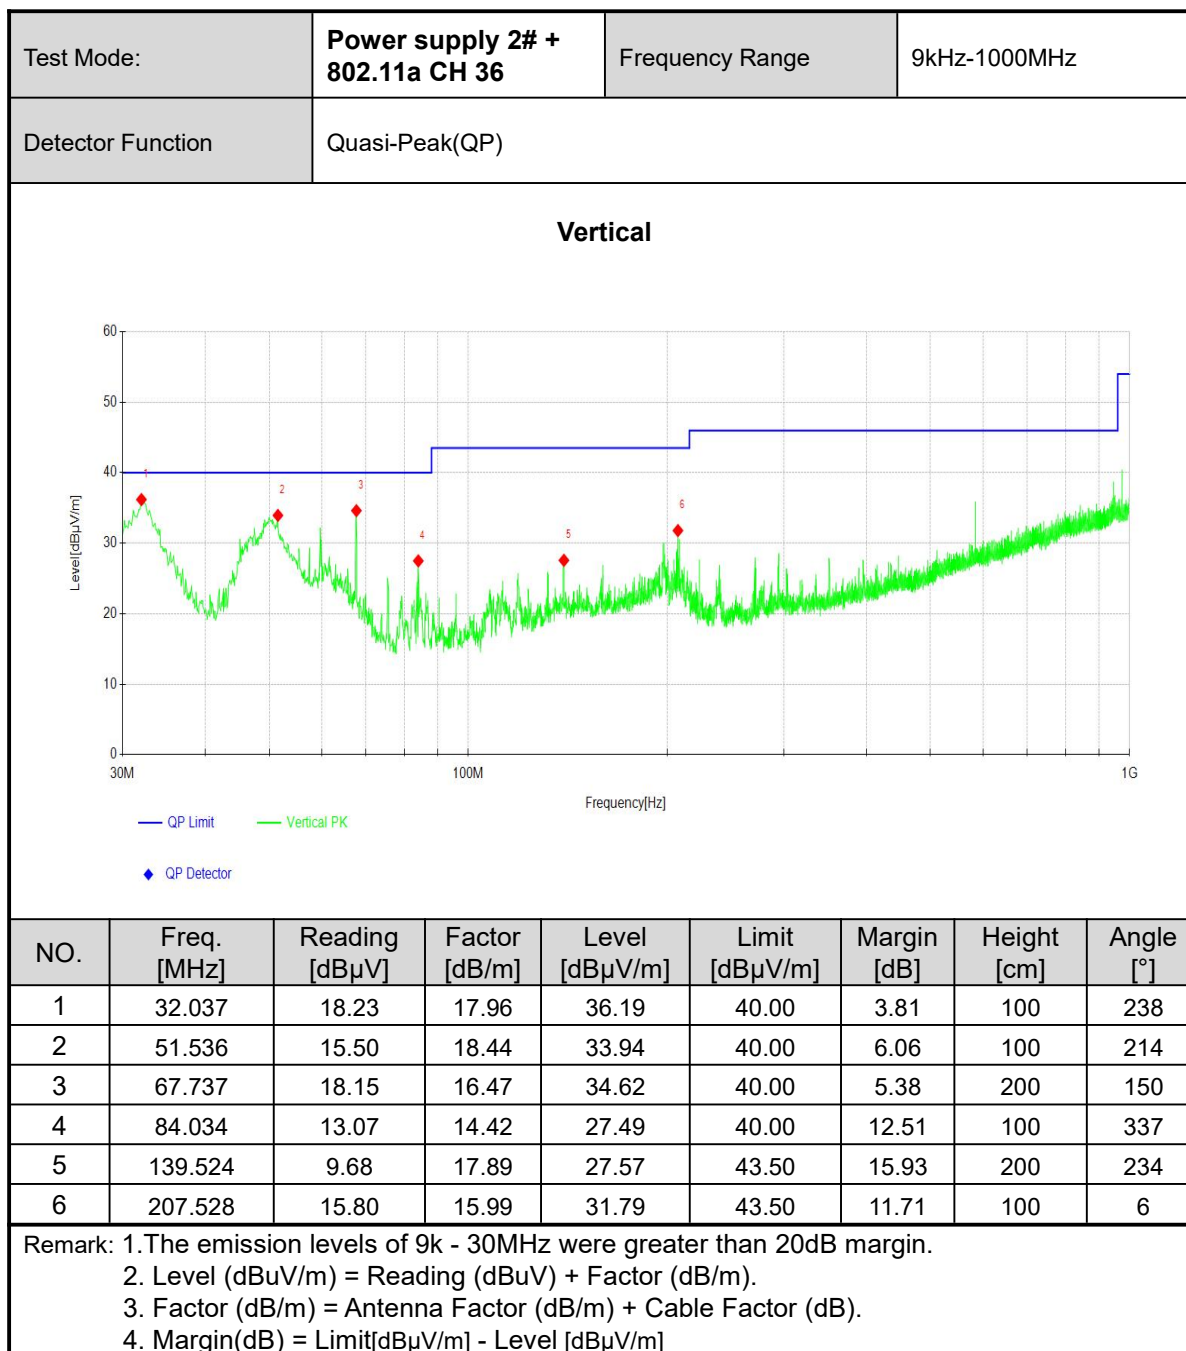



ABOVE 1GHz DATA

Channel	802.11b CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2382.83	40.82	-0.25	40.57	54.00	13.43	AV	Horizontal
2	2384.51	50.54	-0.22	50.32	74.00	23.68	PK	Horizontal
3	2390.00	39.72	-0.15	39.57	54.00	14.43	AV	Horizontal
4	2390.00	50.21	-0.15	50.06	74.00	23.94	PK	Horizontal
5	2412.85	97.02	0.16	97.18			PK	Horizontal
6	2412.98	94.89	0.17	95.06			AV	Horizontal
7	2376.80	50.99	-0.28	50.71	74.00	23.29	PK	Vertical
8	2378.83	40.40	-0.29	40.11	54.00	13.89	AV	Vertical
9	2390.00	48.74	-0.15	48.59	74.00	25.41	PK	Vertical
10	2390.00	40.39	-0.15	40.24	54.00	13.76	AV	Vertical
11	2411.07	94.29	0.14	94.43			AV	Vertical
12	2411.10	96.44	0.14	96.58			PK	Vertical
13	4824.00	40.33	9.68	50.01	54.00	3.99	AV	Horizontal
14	4824.00	45.40	9.68	55.08	74.00	18.92	PK	Horizontal
15	7236.00	40.74	12.39	53.13	74.00	20.87	PK	Horizontal
16	7236.00	37.16	12.39	49.55	54.00	4.45	AV	Horizontal
17	9648.00	19.11	13.13	32.24	54.00	21.76	AV	Horizontal
18	9648.00	27.27	13.13	40.40	74.00	33.60	PK	Horizontal
19	4824.00	44.75	9.68	54.43	74.00	19.57	PK	Vertical
20	4824.00	39.15	9.68	48.83	54.00	5.17	AV	Vertical
21	7236.00	41.86	12.39	54.25	74.00	19.75	PK	Vertical
22	7236.00	38.54	12.39	50.93	54.00	3.07	AV	Vertical
23	9648.00	28.80	13.13	41.93	74.00	32.07	PK	Vertical
24	9648.00	19.98	13.13	33.11	54.00	20.89	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11b CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	44.20	9.71	53.91	74.00	20.09	PK	Horizontal
2	4874.00	39.09	9.71	48.80	54.00	5.20	AV	Horizontal
3	7311.00	37.20	11.03	48.23	54.00	5.77	AV	Horizontal
4	7311.00	40.47	11.03	51.50	74.00	22.50	PK	Horizontal
5	9748.00	26.67	13.24	39.91	74.00	34.09	PK	Horizontal
6	9748.00	18.51	13.24	31.75	54.00	22.25	AV	Horizontal
7	4874.00	44.72	9.71	54.43	74.00	19.57	PK	Vertical
8	4874.00	38.81	9.71	48.52	54.00	5.48	AV	Vertical
9	7311.00	43.08	11.03	54.11	74.00	19.89	PK	Vertical
10	7311.00	39.52	11.03	50.55	54.00	3.45	AV	Vertical
11	9748.00	28.14	13.24	41.38	74.00	32.62	PK	Vertical
12	9748.00	19.58	13.24	32.82	54.00	21.18	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11b CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2460.97	103.74	0.59	104.33			AV	Vertical
2	2461.07	105.58	0.59	106.17			PK	Vertical
3	2483.50	47.39	0.45	47.84	74.00	26.16	PK	Vertical
4	2483.50	40.84	0.45	41.29	54.00	12.71	AV	Vertical
5	2484.44	41.38	0.50	41.88	54.00	12.12	AV	Vertical
6	2485.31	49.93	0.53	50.46	74.00	23.54	PK	Vertical
7	2460.92	103.32	0.59	103.91			AV	Horizontal
8	2461.10	105.17	0.60	105.77			PK	Horizontal
9	2483.50	47.57	0.45	48.02	74.00	25.98	PK	Horizontal
10	2483.50	40.48	0.45	40.93	54.00	13.07	AV	Horizontal
11	2488.13	42.83	0.64	43.47	54.00	10.53	AV	Horizontal
12	2488.22	50.90	0.64	51.54	74.00	22.46	PK	Horizontal
13	4924.09	46.38	10.14	56.52	74.00	17.48	PK	Vertical
14	4924.09	42.21	10.14	52.35	54.00	1.65	AV	Vertical
15	7386.00	27.13	9.80	36.93	54.00	17.07	AV	Vertical
16	7386.00	31.95	9.80	41.75	74.00	32.25	PK	Vertical
17	9848.00	18.88	13.24	32.12	54.00	21.88	AV	Vertical
18	9848.00	27.02	13.24	40.26	74.00	33.74	PK	Vertical
19	4926.00	41.91	10.07	51.98	74.00	22.02	PK	Horizontal
20	4926.00	34.44	10.07	44.51	54.00	9.49	AV	Horizontal
21	7386.00	29.04	9.80	38.84	74.00	35.16	PK	Horizontal
22	7386.00	22.03	9.80	31.83	54.00	22.17	AV	Horizontal
23	9848.00	27.37	13.24	40.61	74.00	33.39	PK	Horizontal
24	9848.00	19.06	13.24	32.30	54.00	21.70	AV	Horizontal

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.88	56.03	-0.19	55.84	74.00	18.16	PK	Vertical
2	2388.93	43.59	-0.16	43.43	54.00	10.57	AV	Vertical
3	2390.00	43.53	-0.15	43.38	54.00	10.62	AV	Vertical
4	2390.00	57.76	-0.15	57.61	74.00	16.39	PK	Vertical
5	2410.62	100.92	0.14	101.06			PK	Vertical
6	2413.05	93.16	0.17	93.33			AV	Vertical
7	2382.70	41.46	-0.25	41.21	54.00	12.79	AV	Horizontal
8	2383.47	51.35	-0.24	51.11	74.00	22.89	PK	Horizontal
9	2390.00	49.04	-0.15	48.89	74.00	25.11	PK	Horizontal
10	2390.00	40.52	-0.15	40.37	54.00	13.63	AV	Horizontal
11	2412.55	100.45	0.16	100.61			PK	Horizontal
12	2412.67	93.36	0.16	93.52			AV	Horizontal
13	4824.00	36.72	9.68	46.40	54.00	7.60	AV	Horizontal
14	4824.00	44.05	9.68	53.73	74.00	20.27	PK	Horizontal
15	7236.00	39.23	12.39	51.62	54.00	2.38	AV	Horizontal
16	7236.00	47.74	12.39	60.13	74.00	13.87	PK	Horizontal
17	9648.00	18.94	13.13	32.07	54.00	21.93	AV	Horizontal
18	9648.00	26.78	13.13	39.91	74.00	34.09	PK	Horizontal
19	4824.00	34.74	9.68	44.42	54.00	9.58	AV	Vertical
20	4824.00	42.95	9.68	52.63	74.00	21.37	PK	Vertical
21	7236.00	46.73	12.39	59.12	74.00	14.88	PK	Vertical
22	7236.00	38.58	12.39	50.97	54.00	3.03	AV	Vertical
23	9648.00	19.44	13.13	32.57	54.00	21.43	AV	Vertical
24	9648.00	29.13	13.13	42.26	74.00	31.74	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	35.08	9.71	44.79	54.00	9.21	AV	Horizontal
2	4874.00	42.86	9.71	52.57	74.00	21.43	PK	Horizontal
3	7311.00	37.26	11.03	48.29	54.00	5.71	AV	Horizontal
4	7311.00	44.08	11.03	55.11	74.00	18.89	PK	Horizontal
5	9748.00	18.63	13.24	31.87	54.00	22.13	AV	Horizontal
6	9748.00	27.56	13.24	40.80	74.00	33.20	PK	Horizontal
7	4874.00	34.98	9.71	44.69	54.00	9.31	AV	Vertical
8	4874.00	42.78	9.71	52.49	74.00	21.51	PK	Vertical
9	7311.00	39.77	11.03	50.80	54.00	3.20	AV	Vertical
10	7311.00	46.53	11.03	57.56	74.00	16.44	PK	Vertical
11	9748.00	19.71	13.24	32.95	54.00	21.05	AV	Vertical
12	9748.00	27.13	13.24	40.37	74.00	33.63	PK	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11g CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2463.84	95.88	0.67	96.55			AV	Horizontal
2	2464.11	102.14	0.68	102.82			PK	Horizontal
3	2483.50	48.06	0.45	48.51	74.00	25.49	PK	Horizontal
4	2483.50	40.30	0.45	40.75	54.00	13.25	AV	Horizontal
5	2484.04	55.92	0.48	56.40	74.00	17.60	PK	Horizontal
6	2484.17	42.31	0.47	42.78	54.00	11.22	AV	Horizontal
7	2460.44	103.72	0.57	104.29			AV	Vertical
8	2464.12	109.91	0.68	110.59			PK	Vertical
9	2483.50	59.45	0.45	59.90	74.00	14.10	PK	Vertical
10	2483.50	48.95	0.45	49.40	54.00	4.60	AV	Vertical
11	2484.29	50.03	0.48	50.51	54.00	3.49	AV	Vertical
12	2485.23	62.70	0.53	63.23	74.00	10.77	PK	Vertical
13	4926.00	34.46	10.07	44.53	54.00	9.47	AV	Horizontal
14	4926.00	42.76	10.07	52.83	74.00	21.17	PK	Horizontal
15	7386.00	49.20	9.80	59.00	74.00	15.00	PK	Horizontal
16	7386.00	40.90	9.80	50.70	54.00	3.30	AV	Horizontal
17	9848.00	18.33	13.24	31.57	54.00	22.43	AV	Horizontal
18	9848.00	27.07	13.24	40.31	74.00	33.69	PK	Horizontal
19	4926.00	42.95	10.07	53.02	74.00	20.98	PK	Vertical
20	4926.00	34.85	10.07	44.92	54.00	9.08	AV	Vertical
21	7386.00	38.46	9.80	48.26	54.00	5.74	AV	Vertical
22	7386.00	47.96	9.80	57.76	74.00	16.24	PK	Vertical
23	9848.00	27.64	13.24	40.88	74.00	33.12	PK	Vertical
24	9848.00	19.57	13.24	32.81	54.00	21.19	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 1	Frequency	2412MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.08	49.37	-0.20	49.17	54.00	4.83	AV	Horizontal
2	2388.02	65.52	-0.18	65.34	74.00	8.66	PK	Horizontal
3	2390.00	59.04	-0.15	58.89	74.00	15.11	PK	Horizontal
4	2390.00	48.96	-0.15	48.81	54.00	5.19	AV	Horizontal
5	2412.86	106.52	0.16	106.68			PK	Horizontal
6	2413.26	99.25	0.17	99.42			AV	Horizontal
7	2387.99	54.05	-0.18	53.87	74.00	20.13	PK	Vertical
8	2388.90	44.02	-0.16	43.86	54.00	10.14	AV	Vertical
9	2390.00	51.59	-0.15	51.44	74.00	22.56	PK	Vertical
10	2390.00	42.57	-0.15	42.42	54.00	11.58	AV	Vertical
11	2410.46	101.62	0.14	101.76			PK	Vertical
12	2410.94	94.43	0.14	94.57			AV	Vertical
13	4824.00	35.10	9.68	44.78	54.00	9.22	AV	Horizontal
14	4824.00	43.79	9.68	53.47	74.00	20.53	PK	Horizontal
15	7236.00	37.65	12.39	50.04	54.00	3.96	AV	Horizontal
16	7236.00	45.14	12.39	57.53	74.00	16.47	PK	Horizontal
17	9648.00	19.57	13.13	32.70	54.00	21.30	AV	Horizontal
18	9648.00	27.10	13.13	40.23	74.00	33.77	PK	Horizontal
19	4824.00	42.08	9.68	51.76	74.00	22.24	PK	Vertical
20	4824.00	35.41	9.68	45.09	54.00	8.91	AV	Vertical
21	7236.00	38.72	12.39	51.11	74.00	22.89	PK	Vertical
22	7236.00	30.09	12.39	42.48	54.00	11.52	AV	Vertical
23	9648.00	27.17	13.13	40.30	74.00	33.70	PK	Vertical
24	9648.00	19.16	13.13	32.29	54.00	21.71	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4844.00	42.33	9.94	52.27	74.00	21.73	PK	Horizontal
2	4874.00	34.85	9.71	44.56	54.00	9.44	AV	Horizontal
3	7309.81	34.75	11.04	45.79	54.00	8.21	AV	Horizontal
4	7310.98	42.85	11.03	53.88	74.00	20.12	PK	Horizontal
5	9688.00	28.00	13.15	41.15	74.00	32.85	PK	Horizontal
6	9748.00	18.24	13.24	31.48	54.00	22.52	AV	Horizontal
7	4874.00	43.14	9.71	52.85	74.00	21.15	PK	Vertical
8	4874.00	35.03	9.71	44.74	54.00	9.26	AV	Vertical
9	7306.30	43.86	11.11	54.97	74.00	19.03	PK	Vertical
10	7311.00	33.62	11.03	44.65	54.00	9.35	AV	Vertical
11	9748.00	18.65	13.24	31.89	54.00	22.11	AV	Vertical
12	9748.00	27.28	13.24	40.52	74.00	33.48	PK	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n20 CH 11	Frequency	2462MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2464.69	106.13	0.69	106.82			PK	Horizontal
2	2464.96	99.70	0.71	100.41			AV	Horizontal
3	2483.50	54.02	0.45	54.47	74.00	19.53	PK	Horizontal
4	2483.50	45.52	0.45	45.97	54.00	8.03	AV	Horizontal
5	2483.85	55.94	0.47	56.41	74.00	17.59	PK	Horizontal
6	2484.20	46.33	0.47	46.80	54.00	7.20	AV	Horizontal
7	2459.67	99.10	0.56	99.66			AV	Vertical
8	2460.10	106.02	0.56	106.58			PK	Vertical
9	2483.50	58.22	0.45	58.67	74.00	15.33	PK	Vertical
10	2483.50	49.09	0.45	49.54	54.00	4.46	AV	Vertical
11	2484.17	50.01	0.47	50.48	54.00	3.52	AV	Vertical
12	2485.55	61.91	0.54	62.45	74.00	11.55	PK	Vertical
13	4926.00	42.09	10.07	52.16	74.00	21.84	PK	Horizontal
14	4926.00	34.02	10.07	44.09	54.00	9.91	AV	Horizontal
15	7383.53	28.44	9.87	38.31	54.00	15.69	AV	Horizontal
16	7383.53	36.07	9.87	45.94	74.00	28.06	PK	Horizontal
17	9848.00	27.02	13.24	40.26	74.00	33.74	PK	Horizontal
18	9848.00	18.77	13.24	32.01	54.00	21.99	AV	Horizontal
19	4926.00	42.83	10.07	52.90	74.00	21.10	PK	Vertical
20	4926.00	34.07	10.07	44.14	54.00	9.86	AV	Vertical
21	7385.87	40.15	9.82	49.97	74.00	24.03	PK	Vertical
22	7386.00	29.65	9.80	39.45	54.00	14.55	AV	Vertical
23	9848.00	19.20	13.24	32.44	54.00	21.56	AV	Vertical
24	9848.00	26.36	13.24	39.60	74.00	34.40	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n40 CH 3	Frequency	2422MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.54	50.98	-0.19	50.79	54.00	3.21	AV	Horizontal
2	2387.34	63.70	-0.18	63.52	74.00	10.48	PK	Horizontal
3	2390.00	60.72	-0.15	60.57	74.00	13.43	PK	Horizontal
4	2390.00	50.66	-0.15	50.51	54.00	3.49	AV	Horizontal
5	2430.89	102.42	0.37	102.79			PK	Horizontal
6	2431.02	95.90	0.37	96.27			AV	Horizontal
7	2388.17	51.06	-0.17	50.89	54.00	3.11	AV	Vertical
8	2388.40	61.20	-0.17	61.03	74.00	12.97	PK	Vertical
9	2390.00	57.40	-0.15	57.25	74.00	16.75	PK	Vertical
10	2390.00	48.45	-0.15	48.30	54.00	5.70	AV	Vertical
11	2424.07	93.13	0.30	93.43			AV	Vertical
12	2429.07	99.42	0.35	99.77			PK	Vertical
13	4844.00	34.66	9.94	44.60	54.00	9.40	AV	Horizontal
14	4844.00	42.95	9.94	52.89	74.00	21.11	PK	Horizontal
15	7254.82	39.59	12.23	51.82	74.00	22.18	PK	Horizontal
16	7259.50	31.03	12.18	43.21	54.00	10.79	AV	Horizontal
17	9688.00	19.36	13.15	32.51	54.00	21.49	AV	Horizontal
18	9688.00	26.49	13.15	39.64	74.00	34.36	PK	Horizontal
19	4844.00	42.52	9.94	52.46	74.00	21.54	PK	Vertical
20	4844.00	34.52	9.94	44.46	54.00	9.54	AV	Vertical
21	7260.67	38.64	12.16	50.80	74.00	23.20	PK	Vertical
22	7266.00	27.62	12.00	39.62	54.00	14.38	AV	Vertical
23	9688.00	18.97	13.15	32.12	54.00	21.88	AV	Vertical
24	9688.00	27.50	13.15	40.65	74.00	33.35	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n40 CH 6	Frequency	2437MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4874.00	34.38	9.71	44.09	54.00	9.91	AV	Horizontal
2	4874.00	43.16	9.71	52.87	74.00	21.13	PK	Horizontal
3	7311.00	28.14	11.03	39.17	54.00	14.83	AV	Horizontal
4	7311.00	36.12	11.03	47.15	74.00	26.85	PK	Horizontal
5	9748.00	18.46	13.24	31.70	54.00	22.30	AV	Horizontal
6	9748.00	26.49	13.24	39.73	74.00	34.27	PK	Horizontal
7	4874.00	42.86	9.71	52.57	74.00	21.43	PK	Vertical
8	4874.00	35.02	9.71	44.73	54.00	9.27	AV	Vertical
9	7311.00	26.81	11.03	37.84	54.00	16.16	AV	Vertical
10	7311.00	34.50	11.03	45.53	74.00	28.47	PK	Vertical
11	9748.00	26.38	13.24	39.62	74.00	34.38	PK	Vertical
12	9748.00	18.99	13.24	32.23	54.00	21.77	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	802.11n40 CH 9	Frequency	2452MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2454.64	96.61	0.56	97.17			AV	Horizontal
2	2454.78	103.51	0.56	104.07			PK	Horizontal
3	2483.50	48.95	0.45	49.40	54.00	4.60	AV	Horizontal
4	2483.50	56.81	0.45	57.26	74.00	16.74	PK	Horizontal
5	2486.55	49.91	0.58	50.49	54.00	3.51	AV	Horizontal
6	2487.97	61.07	0.63	61.70	74.00	12.30	PK	Horizontal
7	2456.73	95.17	0.56	95.73			AV	Vertical
8	2457.36	102.15	0.57	102.72			PK	Vertical
9	2483.50	47.93	0.45	48.38	54.00	5.62	AV	Vertical
10	2483.50	56.96	0.45	57.41	74.00	16.59	PK	Vertical
11	2488.62	60.05	0.67	60.72	74.00	13.28	PK	Vertical
12	2489.64	50.74	0.70	51.44	54.00	2.56	AV	Vertical
13	4904.00	43.07	10.10	53.17	74.00	20.83	PK	Horizontal
14	4904.00	34.41	10.10	44.51	54.00	9.49	AV	Horizontal
15	7343.74	36.96	10.57	47.53	74.00	26.47	PK	Horizontal
16	7349.60	27.97	10.41	38.38	54.00	15.62	AV	Horizontal
17	9808.00	27.39	13.20	40.59	74.00	33.41	PK	Horizontal
18	9954.28	19.76	13.71	33.47	54.00	20.53	AV	Horizontal
19	4904.00	42.11	10.10	52.21	74.00	21.79	PK	Vertical
20	4904.00	34.65	10.10	44.75	54.00	9.25	AV	Vertical
21	7337.89	27.42	10.70	38.12	54.00	15.88	AV	Vertical
22	7339.06	35.75	10.68	46.43	74.00	27.57	PK	Vertical
23	9808.00	26.99	13.20	40.19	74.00	33.81	PK	Vertical
24	9808.00	18.85	13.20	32.05	54.00	21.95	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2372.63	40.37	-0.27	40.10	54.00	13.90	AV	Horizontal
2	2373.67	50.69	-0.27	50.42	74.00	23.58	PK	Horizontal
3	2390.00	39.52	-0.15	39.37	54.00	14.63	AV	Horizontal
4	2390.00	49.83	-0.15	49.68	74.00	24.32	PK	Horizontal
5	2401.97	90.50	-0.04	90.46			AV	Horizontal
6	2402.21	91.31	-0.02	91.29			PK	Horizontal
7	2374.18	51.06	-0.27	50.79	74.00	23.21	PK	Vertical
8	2375.76	40.83	-0.27	40.56	54.00	13.44	AV	Vertical
9	2390.00	39.28	-0.15	39.13	54.00	14.87	AV	Vertical
10	2390.00	48.50	-0.15	48.35	74.00	25.65	PK	Vertical
11	2402.13	92.68	-0.03	92.65			AV	Vertical
12	2402.21	93.44	-0.02	93.42			PK	Vertical
13	4804.00	34.78	9.29	44.07	54.00	9.93	AV	Horizontal
14	4804.00	42.39	9.29	51.68	74.00	22.32	PK	Horizontal
15	7206.00	19.59	12.81	32.40	54.00	21.60	AV	Horizontal
16	7206.00	27.85	12.81	40.66	74.00	33.34	PK	Horizontal
17	9608.00	19.30	13.32	32.62	54.00	21.38	AV	Horizontal
18	9608.00	27.16	13.32	40.48	74.00	33.52	PK	Horizontal
19	4804.00	42.21	9.29	51.50	74.00	22.50	PK	Vertical
20	4804.00	34.69	9.29	43.98	54.00	10.02	AV	Vertical
21	7206.00	25.68	12.81	38.49	74.00	35.51	PK	Vertical
22	7206.00	18.56	12.81	31.37	54.00	22.63	AV	Vertical
23	9608.00	25.70	13.32	39.02	74.00	34.98	PK	Vertical
24	9608.00	18.72	13.32	32.04	54.00	21.96	AV	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 19	Frequency	2440MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4880.00	34.55	9.79	44.34	54.00	9.66	AV	Horizontal
2	4880.00	43.39	9.79	53.18	74.00	20.82	PK	Horizontal
3	7320.00	28.16	11.02	39.18	74.00	34.82	PK	Horizontal
4	7320.00	20.15	11.02	31.17	54.00	22.83	AV	Horizontal
5	9760.00	18.99	13.25	32.24	54.00	21.76	AV	Horizontal
6	9760.00	26.58	13.25	39.83	74.00	34.17	PK	Horizontal
7	4880.00	34.37	9.79	44.16	54.00	9.84	AV	Vertical
8	4880.00	42.47	9.79	52.26	74.00	21.74	PK	Vertical
9	7320.00	29.87	11.02	40.89	74.00	33.11	PK	Vertical
10	7320.00	20.58	11.02	31.60	54.00	22.40	AV	Vertical
11	9760.00	19.29	13.25	32.54	54.00	21.46	AV	Vertical
12	9760.00	27.07	13.25	40.32	74.00	33.68	PK	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 1Mbps CH 39	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2479.86	89.60	0.32	89.92			AV	Horizontal
2	2480.22	90.37	0.32	90.69			PK	Horizontal
3	2483.50	45.20	0.45	45.65	74.00	28.35	PK	Horizontal
4	2483.50	37.23	0.45	37.68	54.00	16.32	AV	Horizontal
5	2486.39	38.11	0.57	38.68	54.00	15.32	AV	Horizontal
6	2487.89	47.23	0.63	47.86	74.00	26.14	PK	Horizontal
7	2479.79	95.80	0.32	96.12			AV	Vertical
8	2480.20	96.54	0.32	96.86			PK	Vertical
9	2483.50	36.90	0.45	37.35	54.00	16.65	AV	Vertical
10	2483.50	44.22	0.45	44.67	74.00	29.33	PK	Vertical
11	2485.08	38.27	0.52	38.79	54.00	15.21	AV	Vertical
12	2486.91	49.48	0.59	50.07	74.00	23.93	PK	Vertical
13	4960.00	41.87	10.70	52.57	74.00	21.43	PK	Horizontal
14	4960.00	34.45	10.70	45.15	54.00	8.85	AV	Horizontal
15	7440.00	29.01	9.75	38.76	74.00	35.24	PK	Horizontal
16	7440.00	20.64	9.75	30.39	54.00	23.61	AV	Horizontal
17	9920.00	28.08	13.83	41.91	74.00	32.09	PK	Horizontal
18	9920.00	19.19	13.83	33.02	54.00	20.98	AV	Horizontal
19	4960.00	34.78	10.70	45.48	54.00	8.52	AV	Vertical
20	4960.00	41.93	10.70	52.63	74.00	21.37	PK	Vertical
21	7440.00	21.15	9.75	30.90	54.00	23.10	AV	Vertical
22	7440.00	29.36	9.75	39.11	74.00	34.89	PK	Vertical
23	9920.00	19.07	13.83	32.90	54.00	21.10	AV	Vertical
24	9920.00	27.49	13.83	41.32	74.00	32.68	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 0	Frequency	2402MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2373.79	40.44	-0.27	40.17	54.00	13.83	AV	Horizontal
2	2377.26	50.53	-0.28	50.25	74.00	23.75	PK	Horizontal
3	2390.00	39.45	-0.15	39.30	54.00	14.70	AV	Horizontal
4	2390.00	47.88	-0.15	47.73	74.00	26.27	PK	Horizontal
5	2402.05	89.09	-0.04	89.05			AV	Horizontal
6	2402.54	91.42	-0.02	91.40			PK	Horizontal
7	2371.86	40.40	-0.27	40.13	54.00	13.87	AV	Vertical
8	2373.23	50.55	-0.27	50.28	74.00	23.72	PK	Vertical
9	2390.00	48.21	-0.15	48.06	74.00	25.94	PK	Vertical
10	2390.00	39.35	-0.15	39.20	54.00	14.80	AV	Vertical
11	2402.17	91.34	-0.02	91.32			AV	Vertical
12	2402.49	93.78	-0.02	93.76			PK	Vertical
13	4804.00	43.18	9.29	52.47	74.00	21.53	PK	Horizontal
14	4804.00	35.05	9.29	44.34	54.00	9.66	AV	Horizontal
15	7206.00	19.56	12.81	32.37	54.00	21.63	AV	Horizontal
16	7206.00	27.09	12.81	39.90	74.00	34.10	PK	Horizontal
17	9608.00	27.92	13.32	41.24	74.00	32.76	PK	Horizontal
18	9608.00	19.53	13.32	32.85	54.00	21.15	AV	Horizontal
19	4804.00	34.95	9.29	44.24	54.00	9.76	AV	Vertical
20	4804.00	43.27	9.29	52.56	74.00	21.44	PK	Vertical
21	7206.00	19.66	12.81	32.47	54.00	21.53	AV	Vertical
22	7206.00	27.36	12.81	40.17	74.00	33.83	PK	Vertical
23	9608.00	19.01	13.32	32.33	54.00	21.67	AV	Vertical
24	9608.00	26.64	13.32	39.96	74.00	34.04	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 19	Frequency	2440MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4880.00	43.12	9.79	52.91	74.00	21.09	PK	Horizontal
2	4880.00	34.31	9.79	44.10	54.00	9.90	AV	Horizontal
3	7320.00	20.38	11.02	31.40	54.00	22.60	AV	Horizontal
4	7320.00	28.13	11.02	39.15	74.00	34.85	PK	Horizontal
5	9760.00	27.76	13.25	41.01	74.00	32.99	PK	Horizontal
6	9760.00	18.89	13.25	32.14	54.00	21.86	AV	Horizontal
7	4880.00	42.19	9.79	51.98	74.00	22.02	PK	Vertical
8	4880.00	34.42	9.79	44.21	54.00	9.79	AV	Vertical
9	7320.00	28.83	11.02	39.85	74.00	34.15	PK	Vertical
10	7320.00	20.24	11.02	31.26	54.00	22.74	AV	Vertical
11	9760.00	26.15	13.25	39.40	74.00	34.60	PK	Vertical
12	9760.00	18.87	13.25	32.12	54.00	21.88	AV	Vertical

Remark: 1. The emission levels of other frequencies were greater than 20dB margin.
2. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).
3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]



Channel	BT-LE 2Mbps CH 39	Frequency	2480MHz
Frequency Range	Above 1G	Detector Function	PK/AV

Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2479.94	88.50	0.31	88.81			AV	Horizontal
2	2480.52	90.40	0.34	90.74			PK	Horizontal
3	2483.50	45.43	0.45	45.88	74.00	28.12	PK	Horizontal
4	2483.50	36.59	0.45	37.04	54.00	16.96	AV	Horizontal
5	2485.53	38.07	0.54	38.61	54.00	15.39	AV	Horizontal
6	2488.78	47.39	0.68	48.07	74.00	25.93	PK	Horizontal
7	2479.96	94.55	0.31	94.86			AV	Vertical
8	2480.48	96.69	0.34	97.03			PK	Vertical
9	2483.50	37.31	0.45	37.76	54.00	16.24	AV	Vertical
10	2483.50	46.01	0.45	46.46	74.00	27.54	PK	Vertical
11	2484.99	38.78	0.52	39.30	54.00	14.70	AV	Vertical
12	2487.81	50.23	0.62	50.85	74.00	23.15	PK	Vertical
13	4960.00	34.26	10.70	44.96	54.00	9.04	AV	Horizontal
14	4960.00	42.82	10.70	53.52	74.00	20.48	PK	Horizontal
15	7440.00	20.94	9.75	30.69	54.00	23.31	AV	Horizontal
16	7440.00	29.61	9.75	39.36	74.00	34.64	PK	Horizontal
17	9920.00	18.85	13.83	32.68	54.00	21.32	AV	Horizontal
18	9920.00	27.22	13.83	41.05	74.00	32.95	PK	Horizontal
19	4960.00	34.10	10.70	44.80	54.00	9.20	AV	Vertical
20	4960.00	42.28	10.70	52.98	74.00	21.02	PK	Vertical
21	7440.00	30.53	9.75	40.28	74.00	33.72	PK	Vertical
22	7440.00	21.52	9.75	31.27	54.00	22.73	AV	Vertical
23	9920.00	19.14	13.83	32.97	54.00	21.03	AV	Vertical
24	9920.00	26.42	13.83	40.25	74.00	33.75	PK	Vertical

Remark:1. The emission levels of other frequencies were greater than 20dB margin.

2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]

3.3 6DB BANDWIDTH MEASUREMENT


3.3.1 Limits

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 Measurement procedure

- Set resolution bandwidth (RBW) = 100KHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.3 Test setup

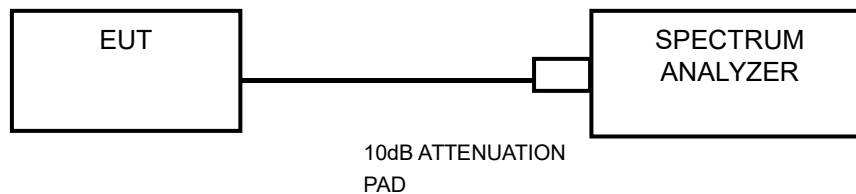

3.4 CONDUCTED OUTPUT POWER


3.4.1 Limits

For DTS employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W,

3.4.2 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.4.3 Test setup

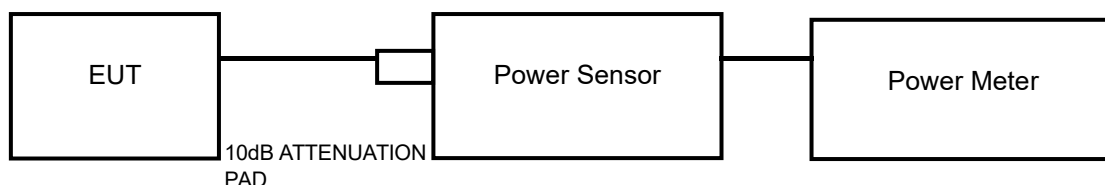

3.5 POWER SPECTRAL DENSITY MEASUREMENT


3.5.1 Limits

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 Measurement procedure

- Set instrument center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set RBW to: 3KHz
- Set VBW $\geq 3 \times$ RBW.
- Detector = peak
- Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- Sweep time = auto couple.
- Use the peak marker function to determine the maximum amplitude level.

3.5.3 Test setup

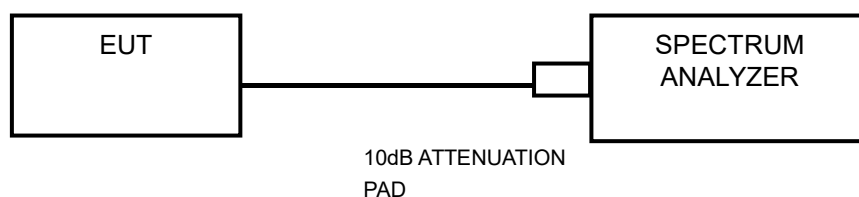

3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 Limits

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 Measurement procedure


Measurement Procedure -Reference Level

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHzband segment within the fundamental EBW.

Measurement Procedure –Unwanted Emission Level

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Set span to encompass the spectrum to be examined
- Detector = peak.
- Trace Mode = max hold.
- Sweep = auto couple.

3.6.3 Test setup

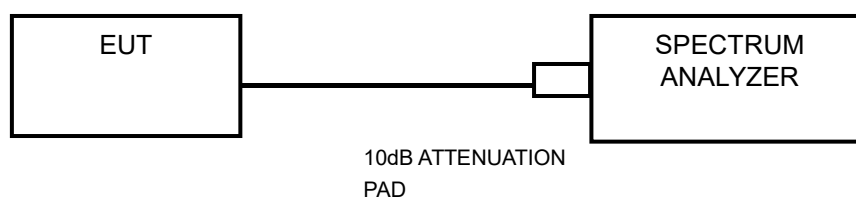


3.7 OCCUPIED BANDWIDTH MEASUREMENT

3.7.1 Measurement procedure

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.7.2 TEST SETUP





3.8 ANTENNA REQUIREMENT

3.8.1 LIMITS OFFREQUENCY STABILITY

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b) , if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 ANTENNA ANTI-REPLACEMENT CONSTRUCTION

The antenna used for this product is PCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device

3.8.3 ANTENNA GAIN

WiFi Antenna:

ANT1:PCB antenna with gain-2.21dBi

ANT2:PCB antenna with gain-3.02dBi

BLE Antenna:

PCB antenna with gain-1.27dBi

The maximum peak gain of the transmit antenna less than 6dBi



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Setup Photo).

,



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----



Important

- (1) The test report is valid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

Address of the laboratory: CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663

Tel: 020-32293888

FAX: 020-32293889

E-mail: office@cvc.org.cn