



FCC RF Test Report

APPLICANT : Jabil, Inc.
EQUIPMENT : Container Fill-level Sensing
BRAND NAME : JABIL
MODEL NAME : NCC1701
FCC ID : 2AYZ5-NCC1701
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 19, 2020 and testing was completed on Dec. 07, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
2.5 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 Antenna Requirements.....	32
4 LIST OF MEASURING EQUIPMENT	33
5 UNCERTAINTY OF EVALUATION	34
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR122208B	Rev. 01	Initial issue of report	Mar. 24, 2021

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Not Required	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.61 dB at 7308.000 MHz
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
Remark: Not required means after assessing, test items are not necessary to carry out.					

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Jabil, Inc.

6375 San Ignacio Ave, San Jose ,California, United States.

1.2 Manufacturer

Jabil, Inc.

6375 San Ignacio Ave, San Jose ,California, United States.

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Container Fill-level Sensing
Brand Name	JABIL
Model Name	NCC1701
FCC ID	2AYZ5-NCC1701
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v4.2 LE
HW Version	DVT
SW Version	V02.01.01
EUT Stage	Identical Prototype

Remark:

The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 11.71 dBm (0.0148 W) 802.11g : 13.12 dBm (0.0205 W) 802.11n HT20 : 13.49 dBm (0.0223 W) 802.11n HT40 : 13.43 dBm (0.0220 W)
Antenna Type / Gain	PCB Antenna type with gain -0.057 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel


Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

2.3 Connection Diagram of Test System

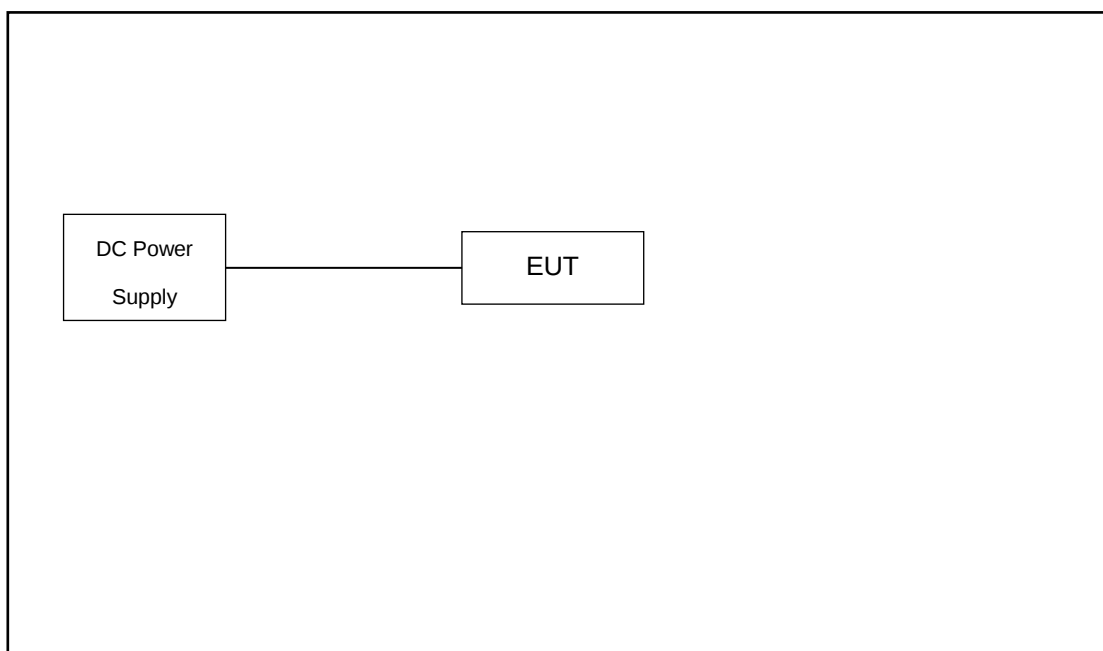

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW INSTEK	GPD-2303S	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss

Offset = RF cable loss

Following shows an offset computation example with cable loss 4.8 dB.

Offset(dB) = RF cable loss(dB)

= 4.8 (dB)

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

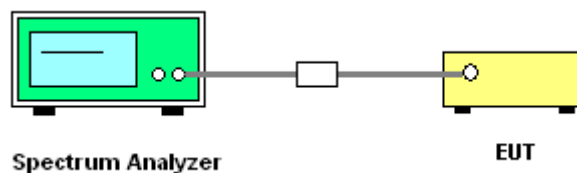

3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

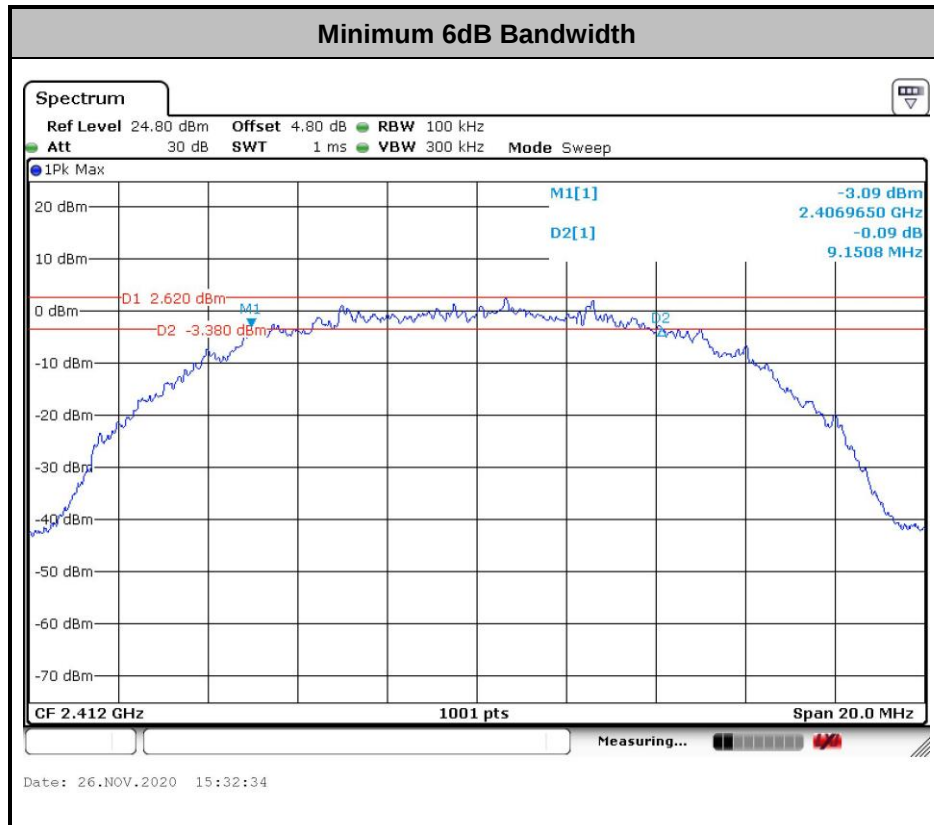

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

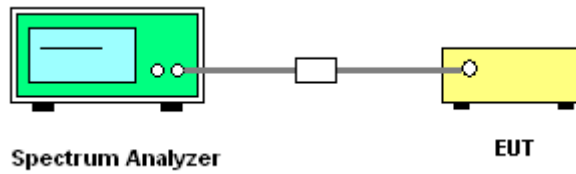

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

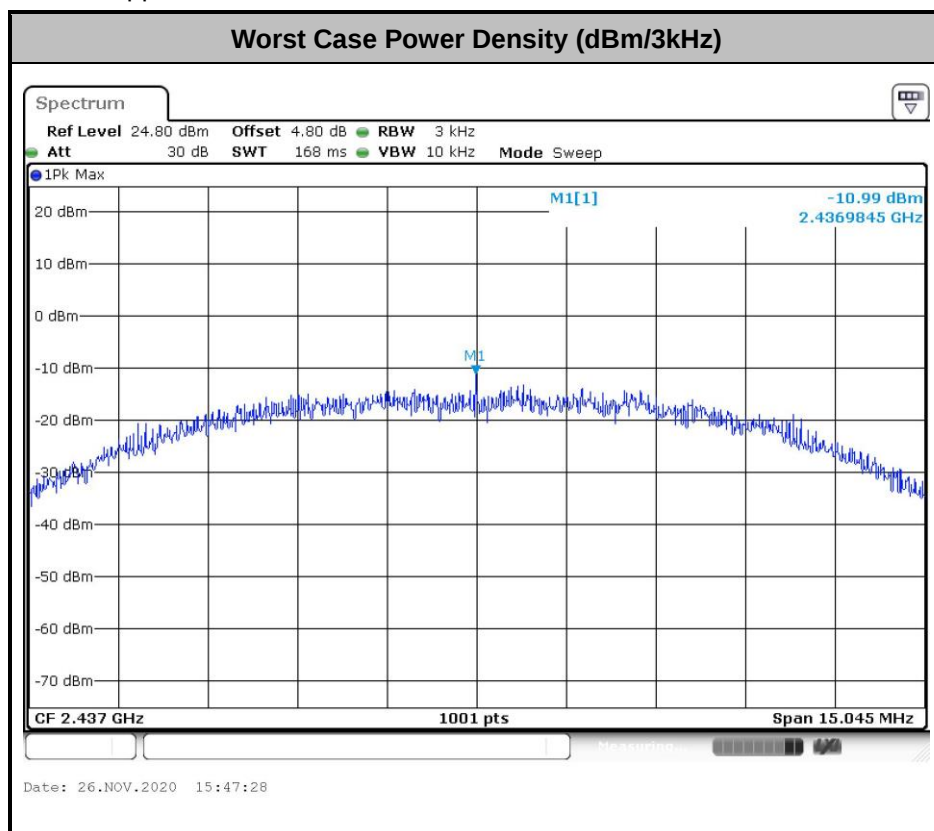

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

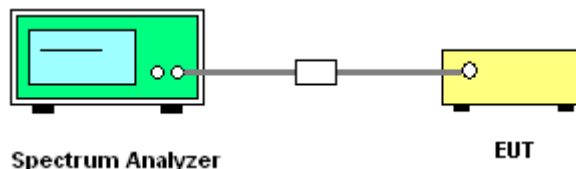




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	heyong	Temperature :	21~25°C
		Relative Humidity :	51~54%


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

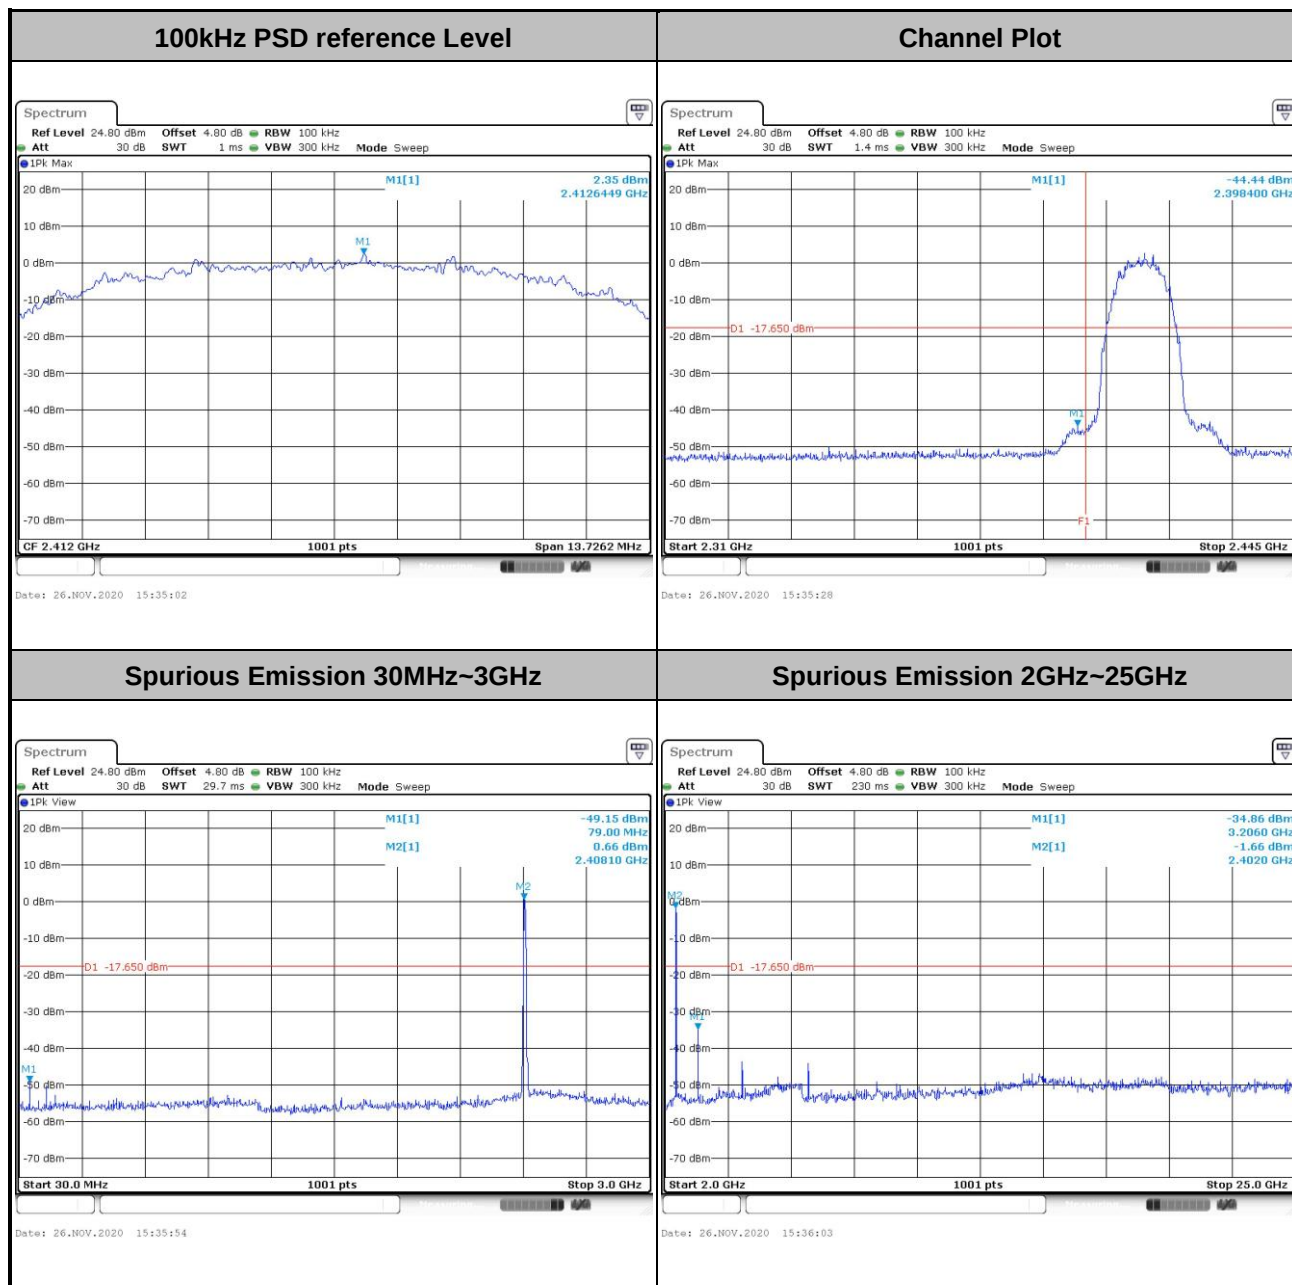




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

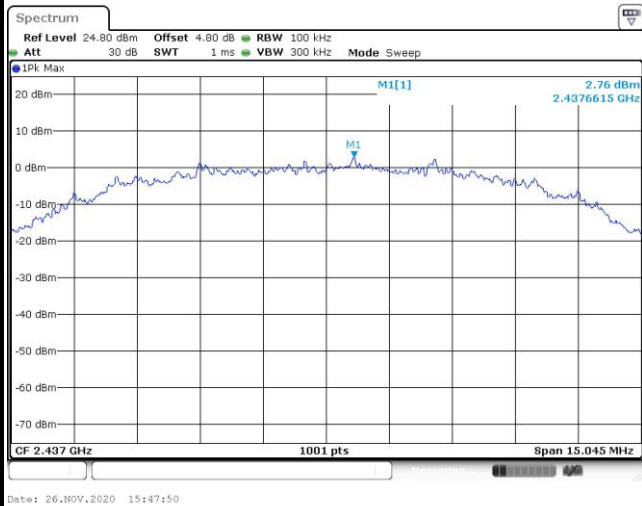


Channel Plot

Spurious Emission 30MHz~3GHz

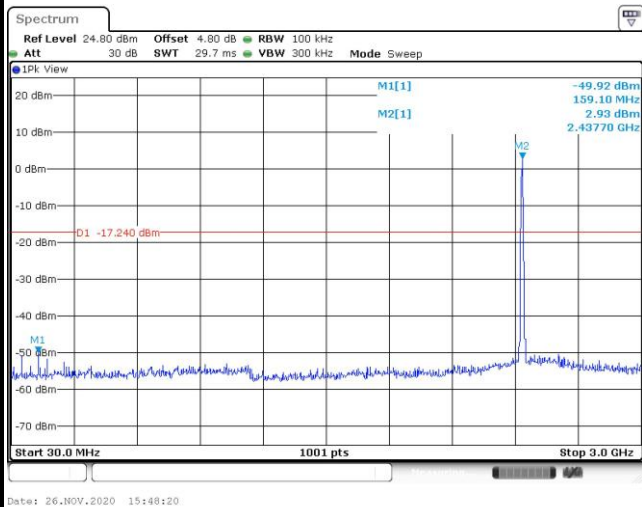


Spurious Emission 2GHz~25GHz

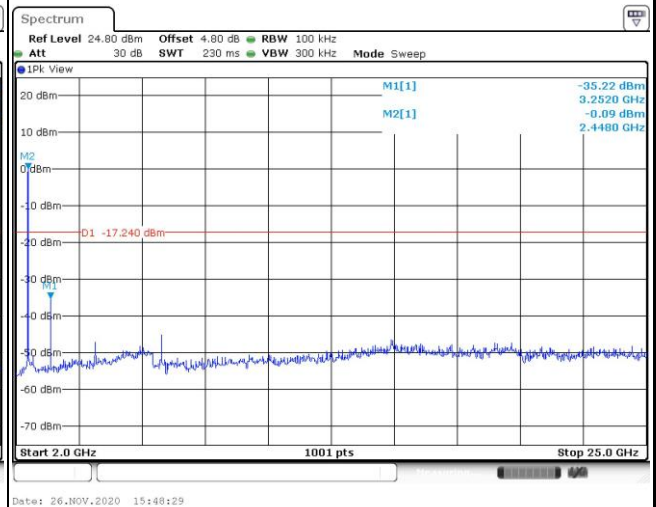




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

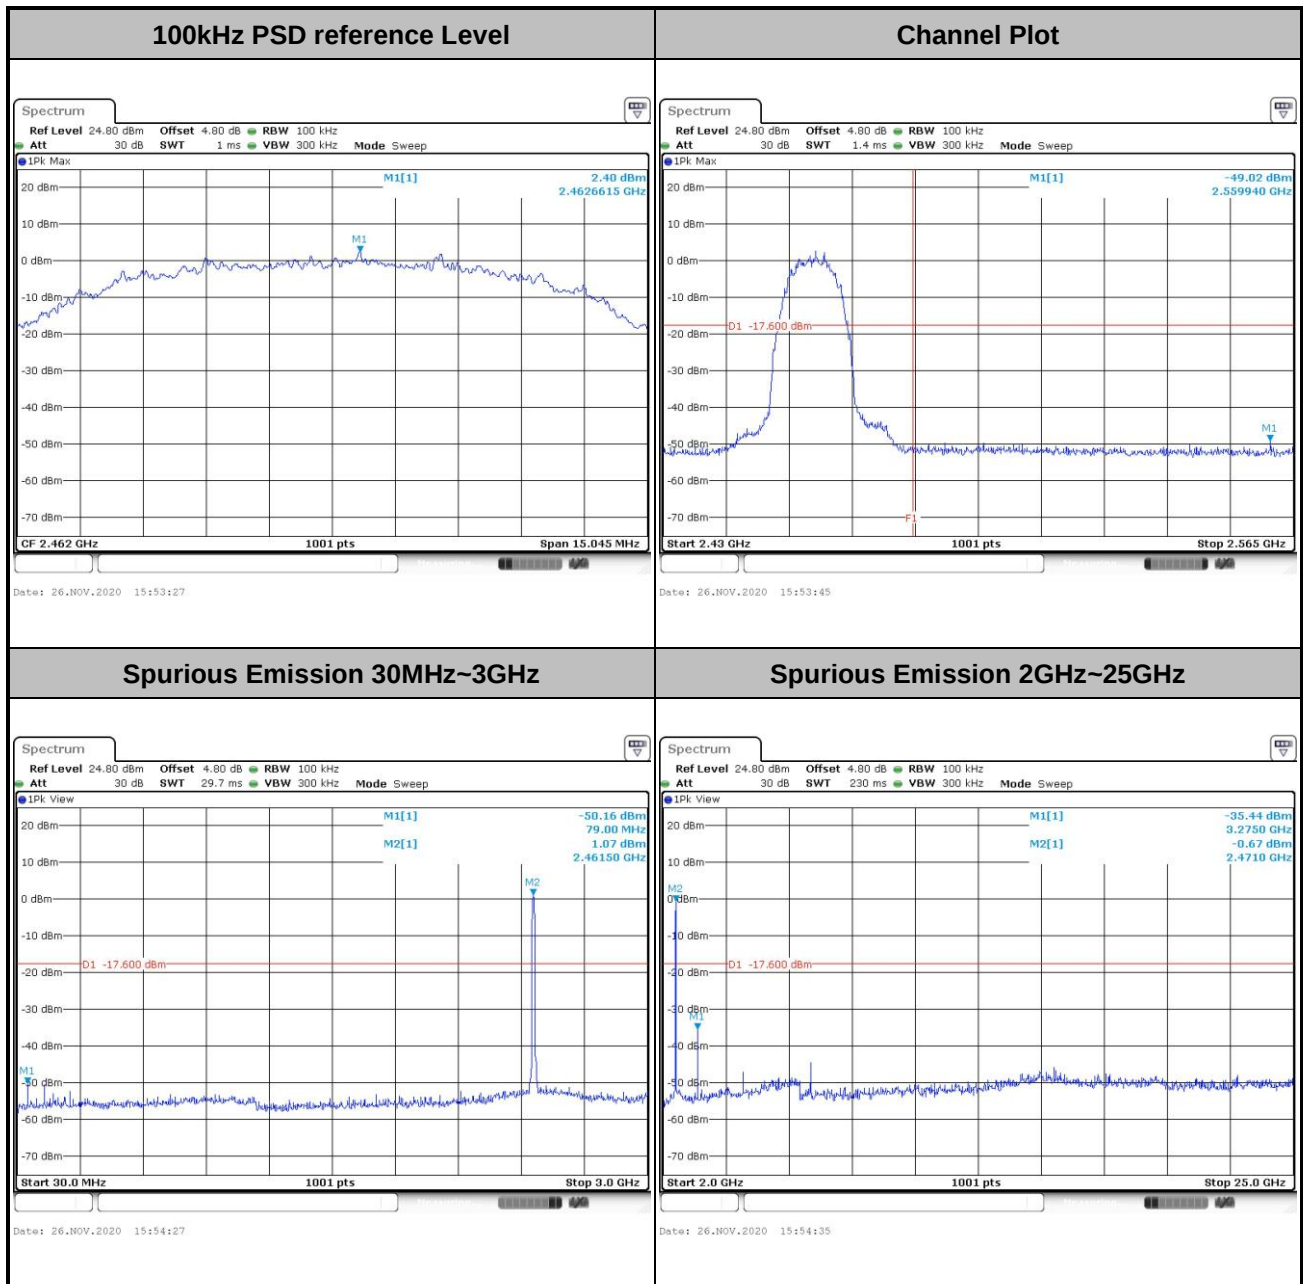




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

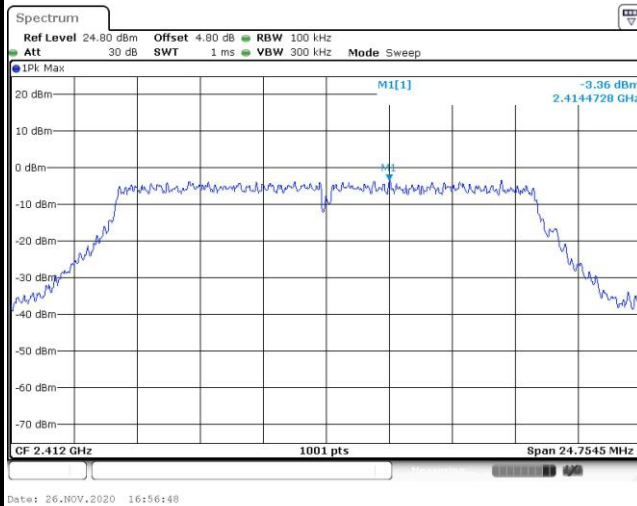


Channel Plot

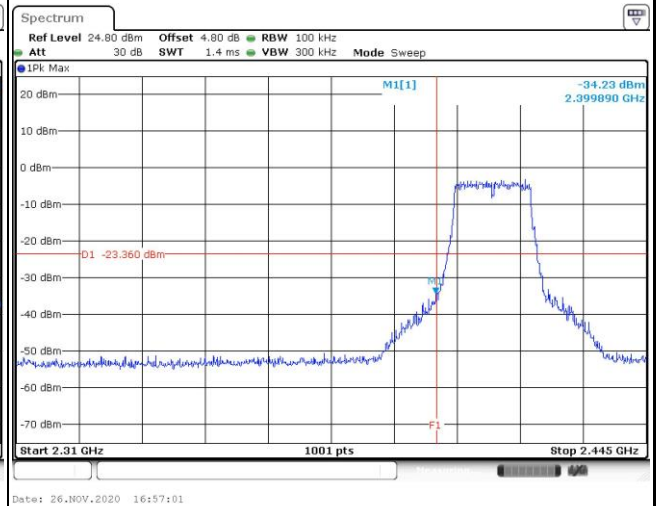

Spurious Emission 30MHz~3GHz

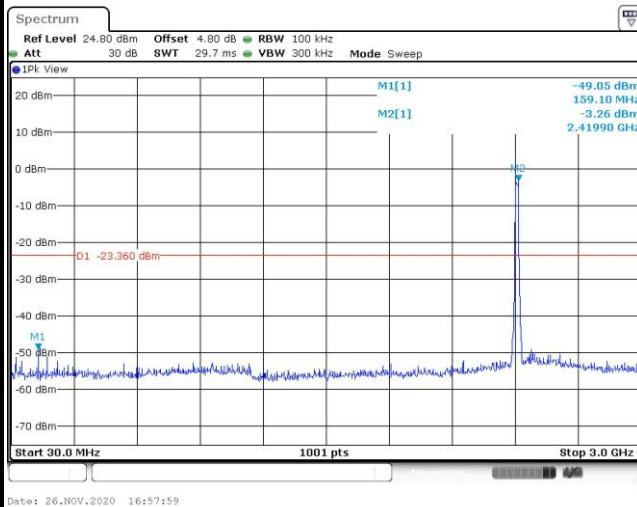


Spurious Emission 2GHz~25GHz

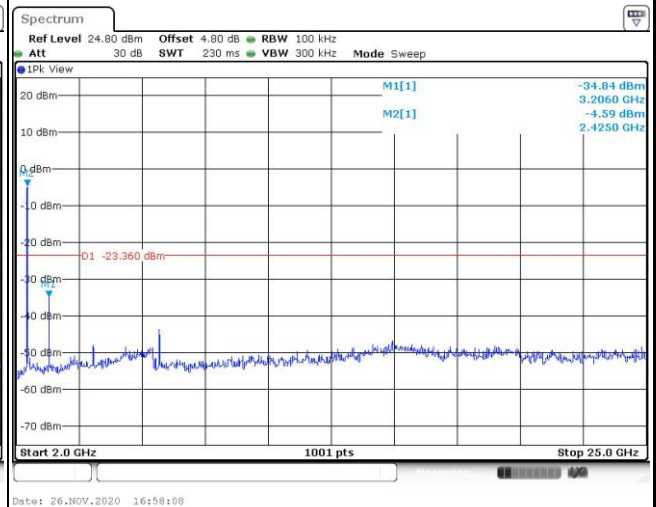




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

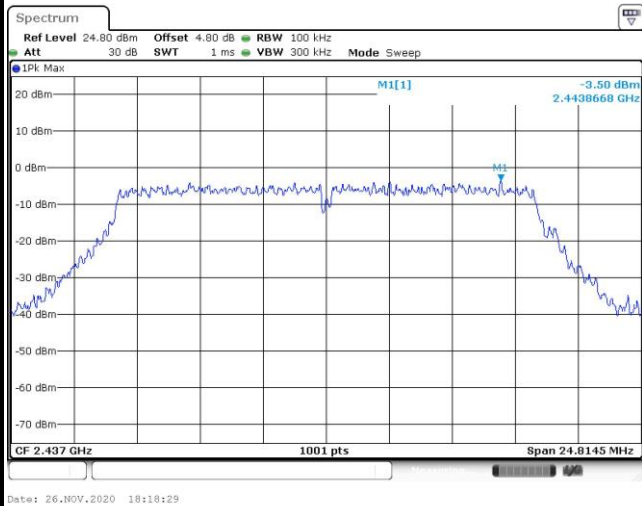


Channel Plot

Spurious Emission 30MHz~3GHz

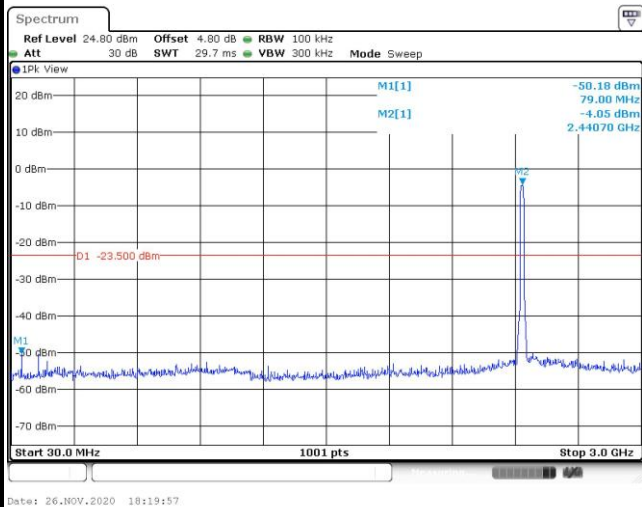


Spurious Emission 2GHz~25GHz

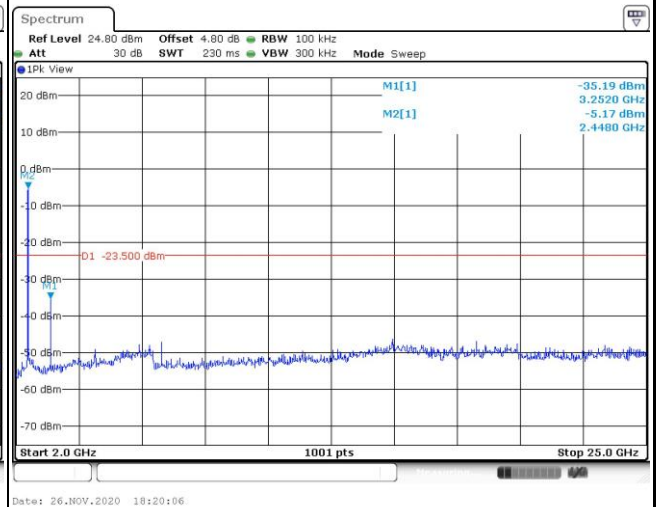



Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

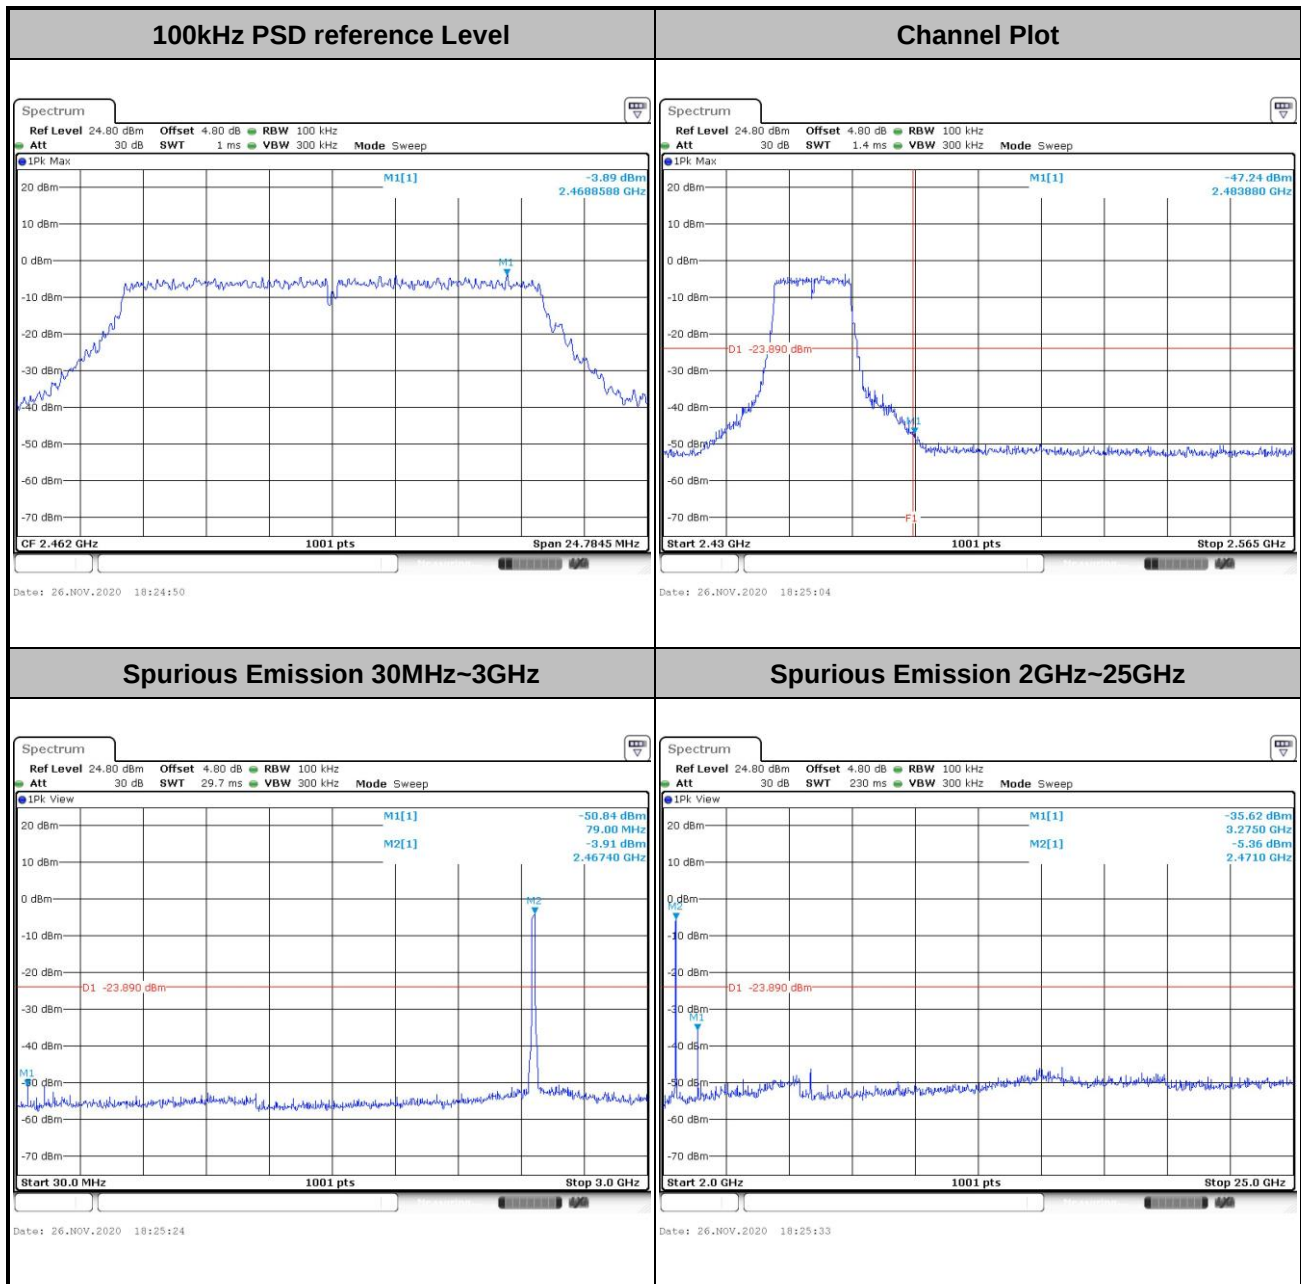





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

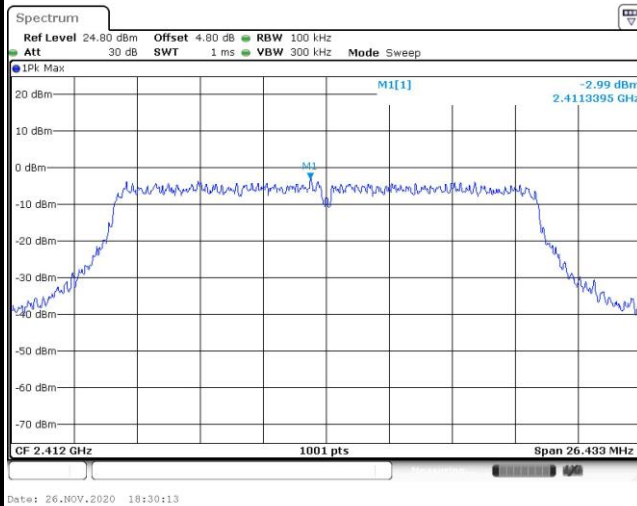


Channel Plot

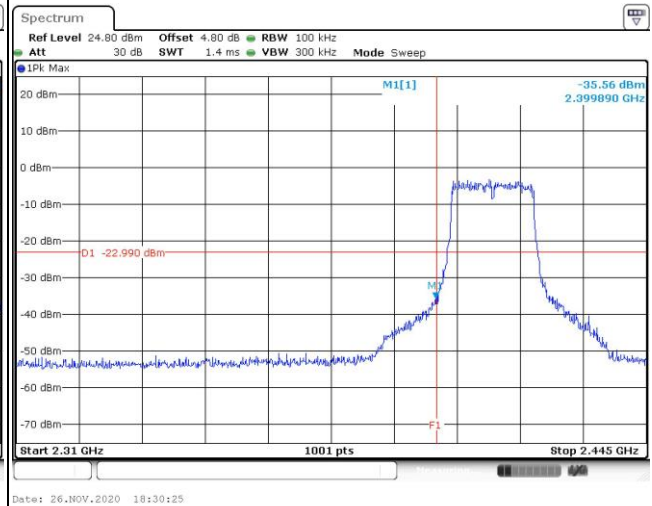

Spurious Emission 30MHz~3GHz

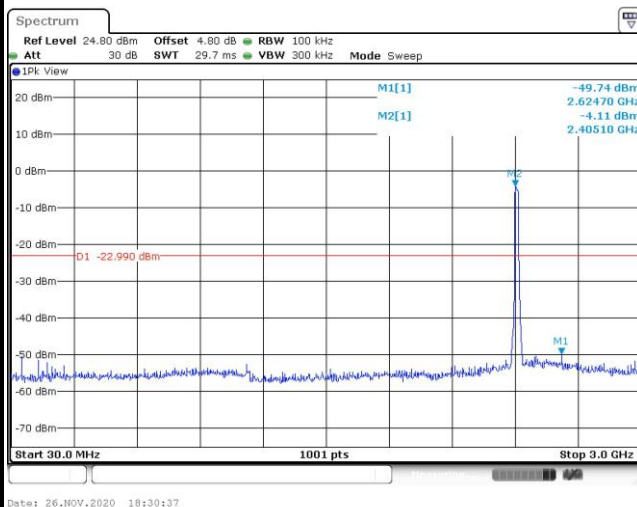


Spurious Emission 2GHz~25GHz

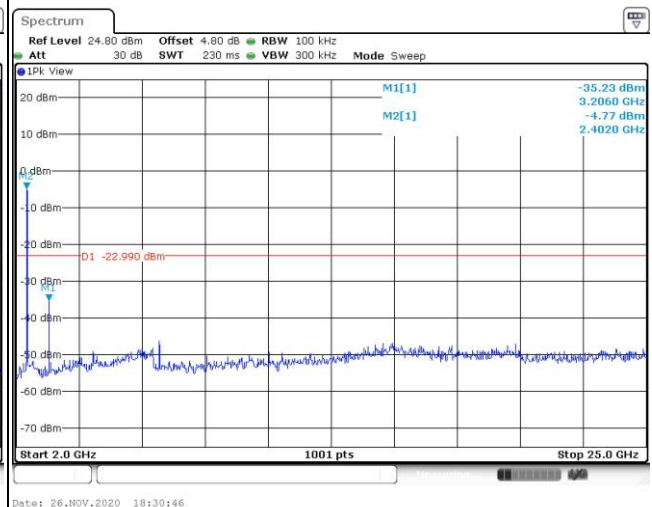



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

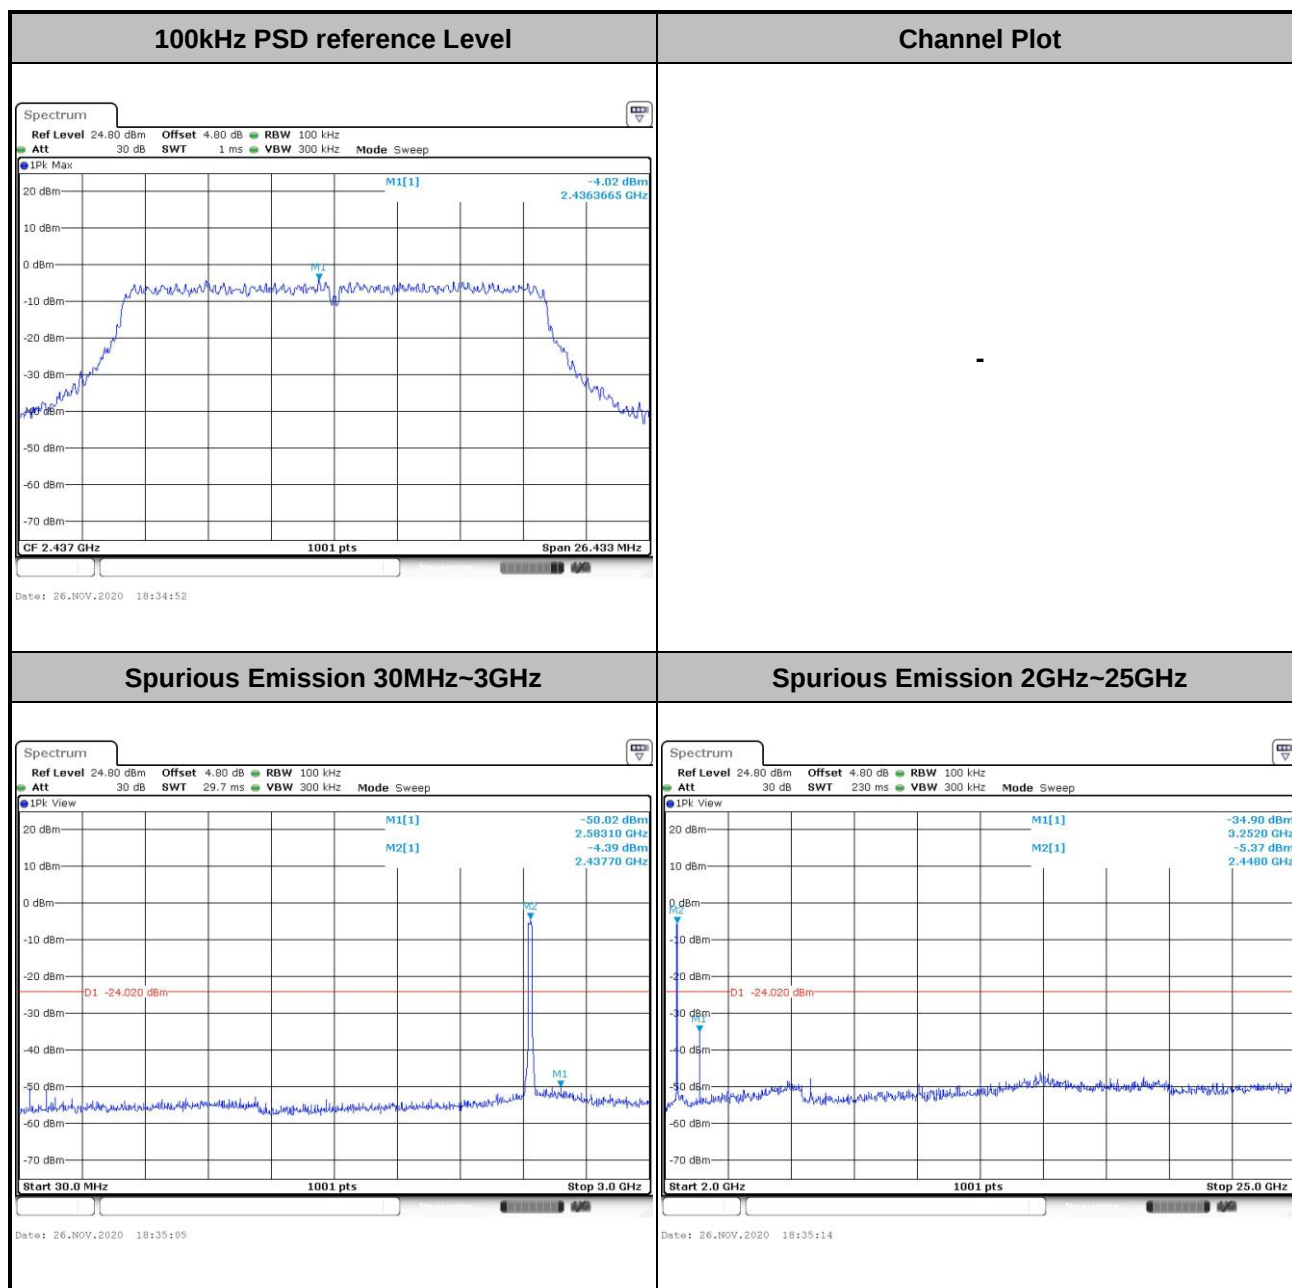





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

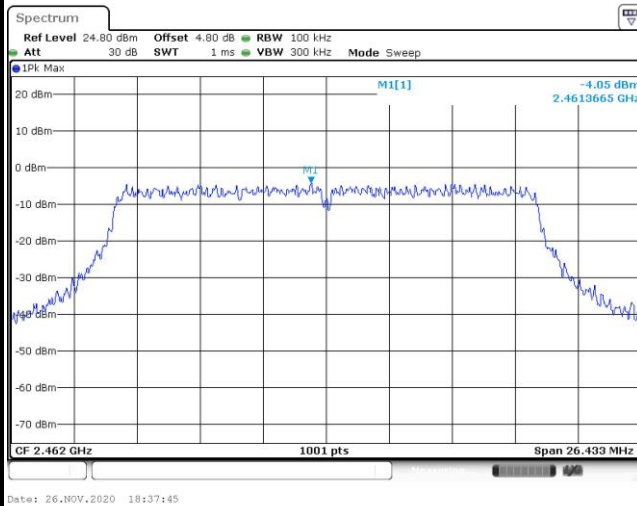


Channel Plot

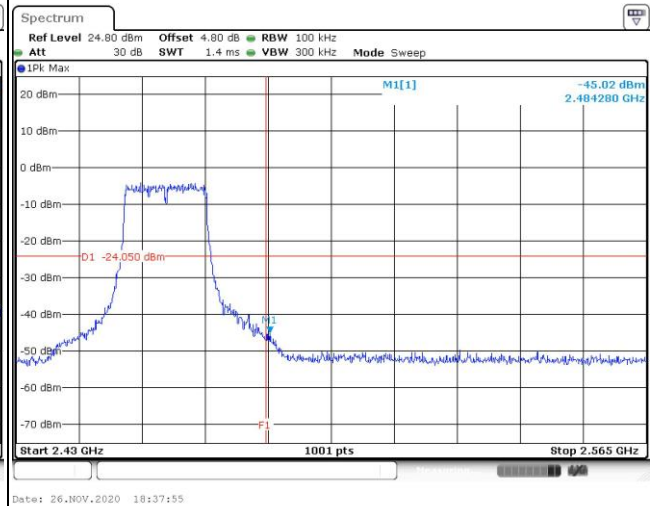

Spurious Emission 30MHz~3GHz

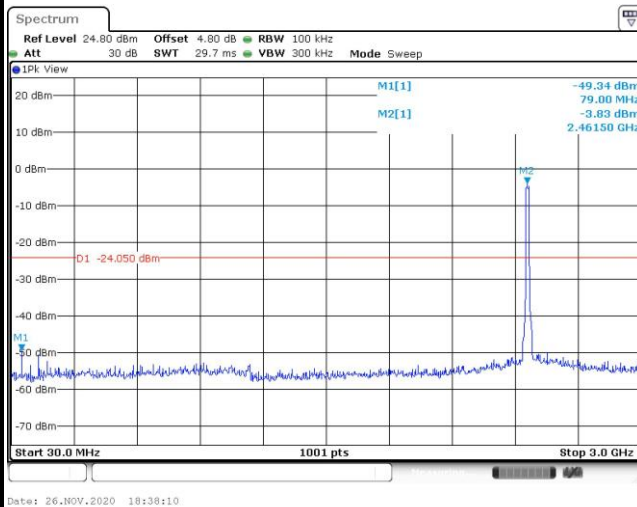

Spurious Emission 2GHz~25GHz

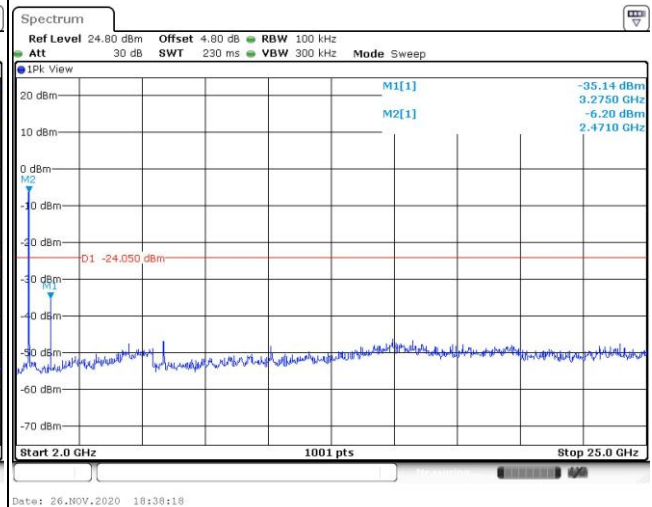





Test Mode : 802.11n HT40

Test Channel : 03


100kHz PSD reference Level

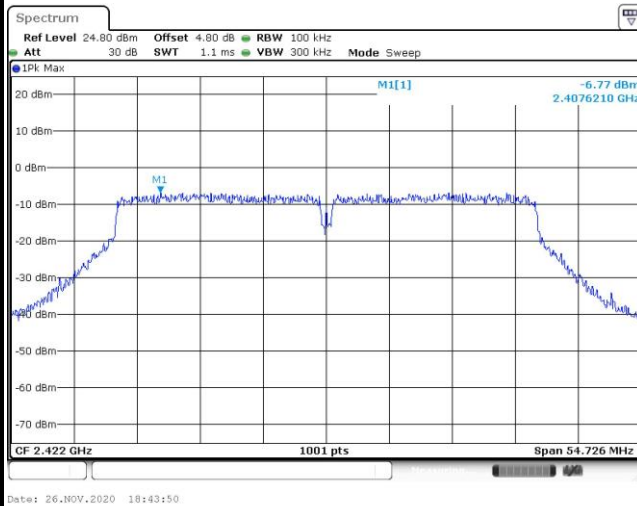


Channel Plot

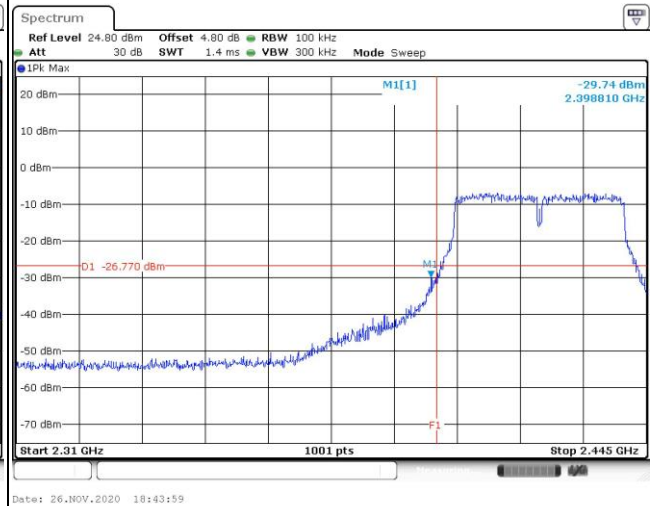

Spurious Emission 30MHz~3GHz

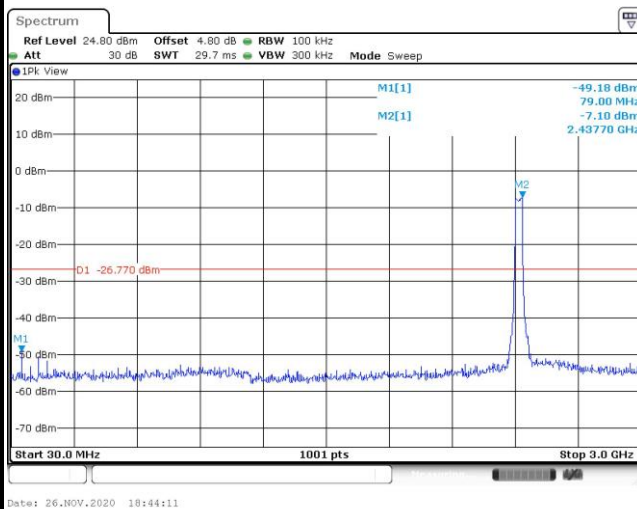


Spurious Emission 2GHz~25GHz

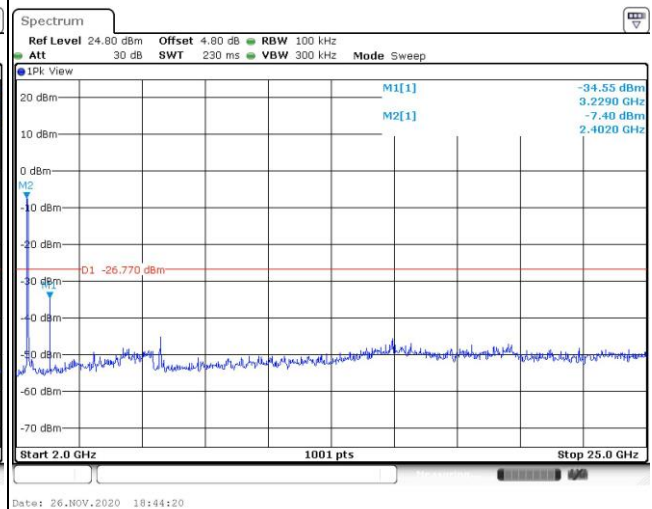



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

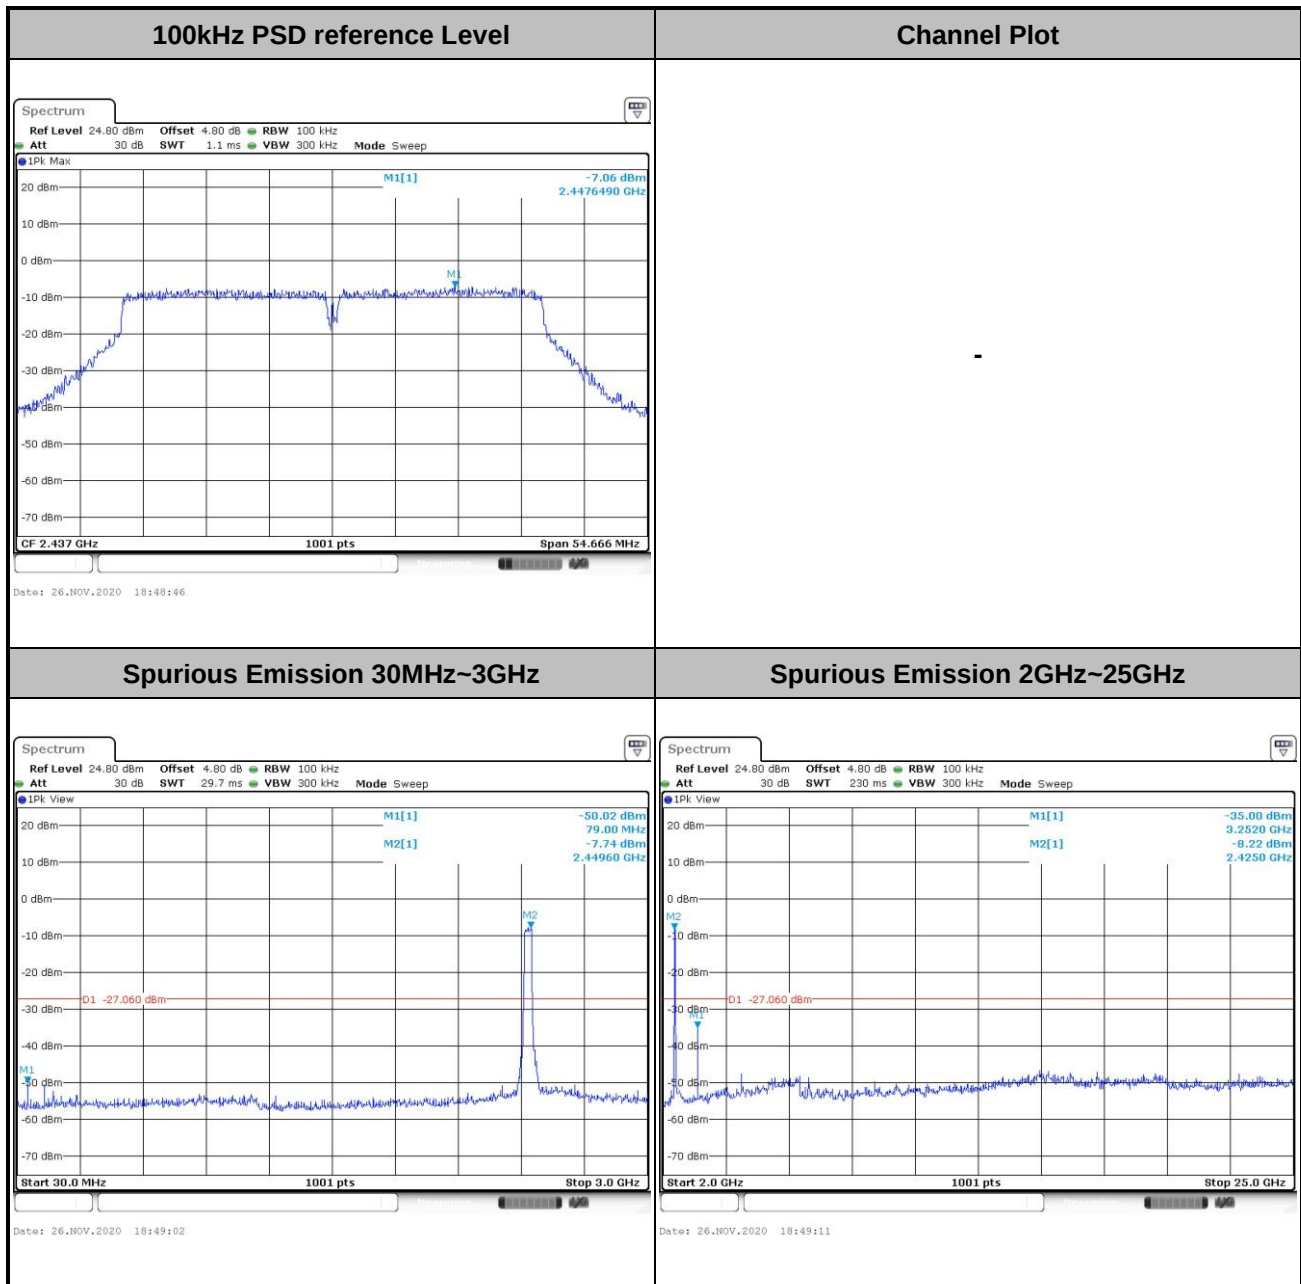





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

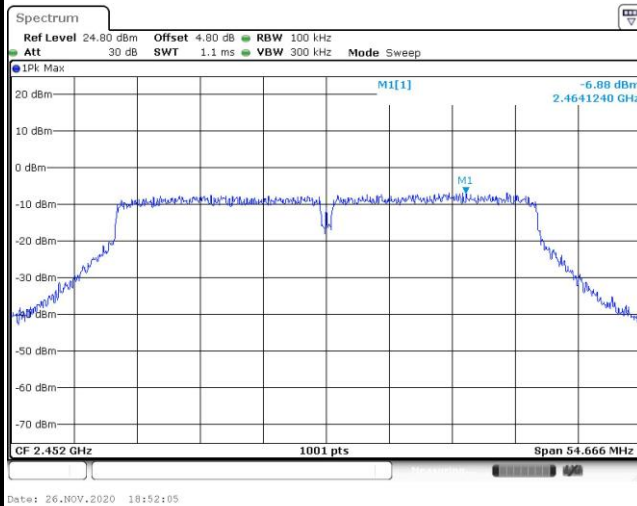


Channel Plot

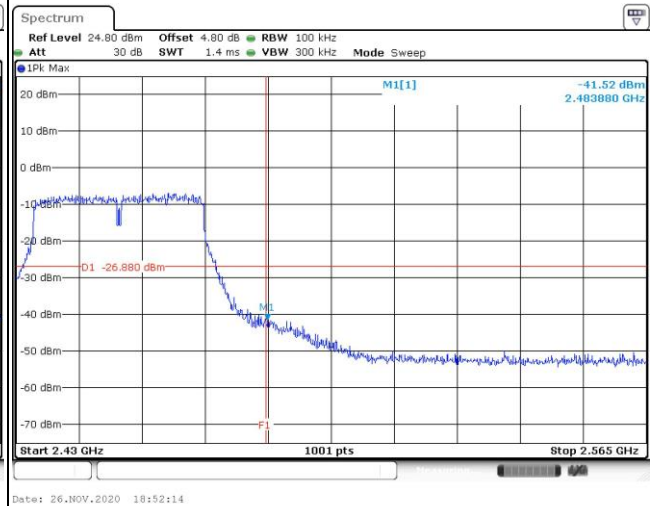

Spurious Emission 30MHz~3GHz

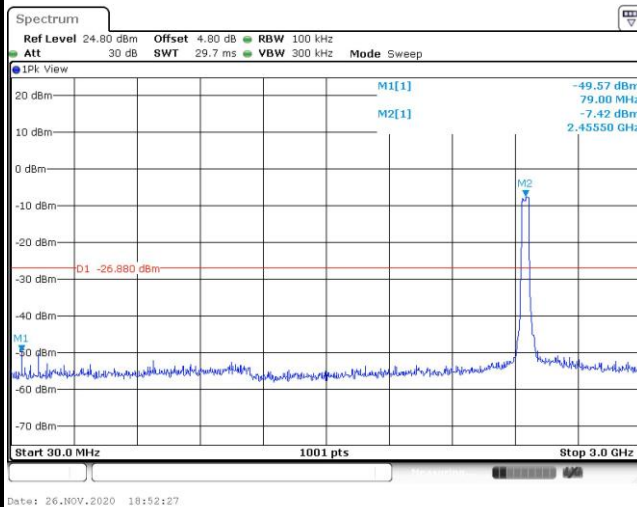

Spurious Emission 2GHz~25GHz

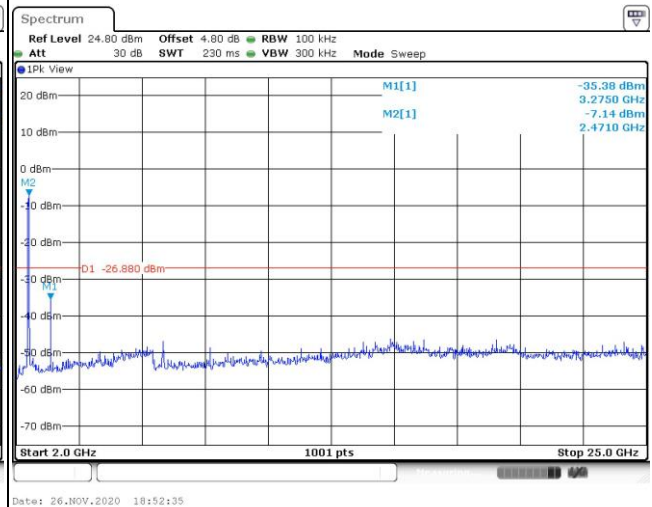

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

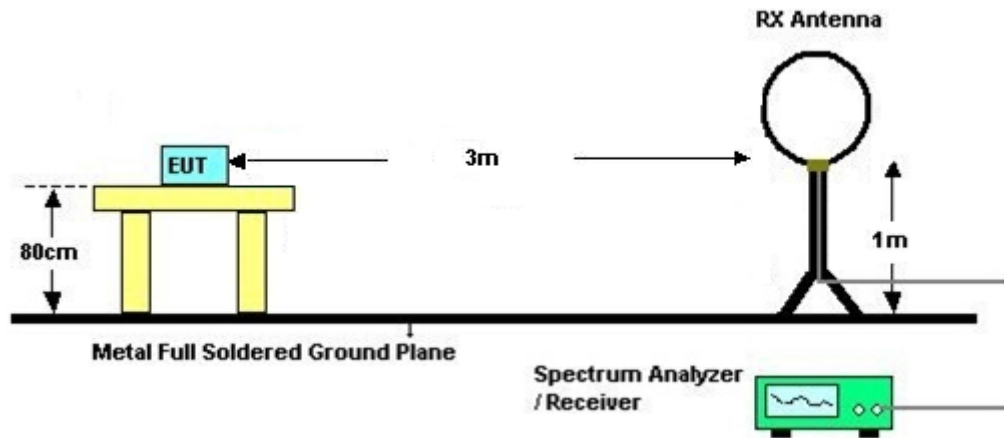

For radiated emissions from 30MHz to 1GHz

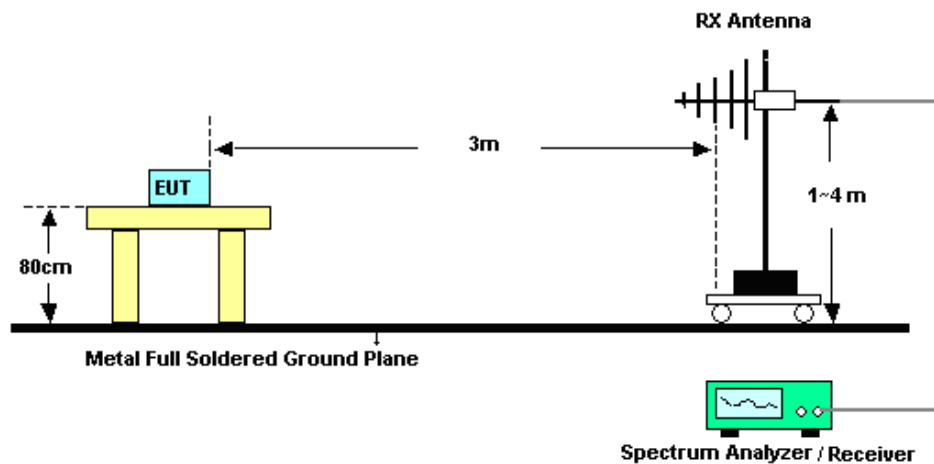

For radiated emissions above 1GHz

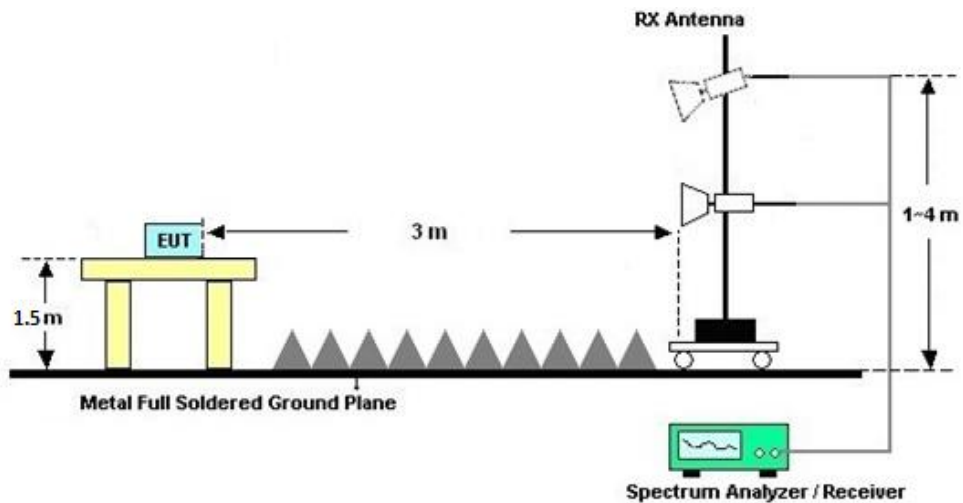



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

The frequency range of radiated spurious radiation is up to 10th harmonic (30 MHz to 26 GHz), and only the worse frequency points are shown in the report.

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Dec. 07, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr.15, 2020	Dec. 07, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 1, 2020	Dec. 07, 2020	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May. 30, 2020	Dec. 07, 2020	May. 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Dec. 07, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jun. 05, 2020	Dec. 07, 2020	Jun. 04, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 14, 2020	Dec. 07, 2020	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Dec. 07, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 17, 2020	Dec. 07, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Dec. 07, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 07, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 07, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 07, 2020	NCR	Radiation (03CH05-KS)
High Pass Filter	Wainwright Instruments GmbH	WHKX12-2805-3000-18000-40ST	2	3G High Pass	Jun. 16, 2020	Dec. 07, 2020	Jun. 15, 2021	Radiation (03CH05-KS)
High Pass Filter	Wainwright Instruments GmbH	WHKX10-5850-6500-18000-40ST	1	6.5G High Pass	Jun. 16, 2020	Dec. 07, 2020	Jun. 15, 2021	Radiation (03CH05-KS)
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 14, 2020	Nov. 26, 2020~Dec. 01, 2020	Apr. 13, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Nov. 26, 2020~Dec. 01, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Nov. 26, 2020~Dec. 01, 2020	Jan. 07, 2021	Conducted (TH01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	heyong	Temperature:	21~25	°C
Test Date:	2020/11/6~2020/12/01	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.24	9.15	0.50	Pass
11b	1Mbps	1	6	2437	13.29	10.03	0.50	Pass
11b	1Mbps	1	11	2462	13.29	10.03	0.50	Pass
11g	6Mbps	1	1	2412	17.53	16.50	0.50	Pass
11g	6Mbps	1	6	2437	17.58	16.54	0.50	Pass
11g	6Mbps	1	11	2462	17.48	16.52	0.50	Pass
HT20	MCS0	1	1	2412	18.18	17.62	0.50	Pass
HT20	MCS0	1	6	2437	18.18	17.62	0.50	Pass
HT20	MCS0	1	11	2462	18.13	17.62	0.50	Pass
HT40	MCS0	1	3	2422	37.16	36.48	0.50	Pass
HT40	MCS0	1	6	2437	37.16	36.44	0.50	Pass
HT40	MCS0	1	9	2452	37.16	36.44	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	11.71	30.00	-0.06	11.65	36.00	Pass
11b	1Mbps	1	6	2437	11.16	30.00	-0.06	11.10	36.00	Pass
11b	1Mbps	1	11	2462	11.21	30.00	-0.06	11.15	36.00	Pass
11g	6Mbps	1	1	2412	13.12	30.00	-0.06	13.06	36.00	Pass
11g	6Mbps	1	6	2437	12.65	30.00	-0.06	12.59	36.00	Pass
11g	6Mbps	1	11	2462	12.73	30.00	-0.06	12.67	36.00	Pass
HT20	MCS0	1	1	2412	13.49	30.00	-0.06	13.43	36.00	Pass
HT20	MCS0	1	6	2437	12.93	30.00	-0.06	12.87	36.00	Pass
HT20	MCS0	1	11	2462	13.35	30.00	-0.06	13.29	36.00	Pass
HT40	MCS0	1	3	2422	13.43	30.00	-0.06	13.37	36.00	Pass
HT40	MCS0	1	6	2437	12.88	30.00	-0.06	12.82	36.00	Pass
HT40	MCS0	1	9	2452	12.96	30.00	-0.06	12.90	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	8.91
11b	1Mbps	1	6	2437	0.00	8.15
11b	1Mbps	1	11	2462	0.00	8.43
11g	6Mbps	1	1	2412	0.00	7.64
11g	6Mbps	1	6	2437	0.00	7.08
11g	6Mbps	1	11	2462	0.00	7.11
HT20	MCS0	1	1	2412	0.00	7.68
HT20	MCS0	1	6	2437	0.00	6.96
HT20	MCS0	1	11	2462	0.00	6.99
HT40	MCS0	1	3	2422	0.00	7.97
HT40	MCS0	1	6	2437	0.00	7.53
HT40	MCS0	1	9	2452	0.00	7.71

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-12.00	-0.06	8.00	Pass
11b	1Mbps	1	6	2437	-10.99	-0.06	8.00	Pass
11b	1Mbps	1	11	2462	-11.00	-0.06	8.00	Pass
11g	6Mbps	1	1	2412	-16.37	-0.06	8.00	Pass
11g	6Mbps	1	6	2437	-14.34	-0.06	8.00	Pass
11g	6Mbps	1	11	2462	-14.35	-0.06	8.00	Pass
HT20	MCS0	1	1	2412	-15.09	-0.06	8.00	Pass
HT20	MCS0	1	6	2437	-14.28	-0.06	8.00	Pass
HT20	MCS0	1	11	2462	-13.51	-0.06	8.00	Pass
HT40	MCS0	1	3	2422	-15.18	-0.06	8.00	Pass
HT40	MCS0	1	6	2437	-15.09	-0.06	8.00	Pass
HT40	MCS0	1	9	2452	-15.14	-0.06	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2383.19	57	-17	74	49.03	32.15	7.47	31.65	106	246	P	H
		2374.48	45.77	-8.23	54	37.81	32.15	7.47	31.66	106	246	A	H
	*	2414	104.55	-	-	96.49	32.18	7.53	31.65	106	246	P	H
	*	2412	97.02	-	-	88.96	32.18	7.53	31.65	106	246	A	H
		2379.55	56.31	-17.69	74	48.34	32.15	7.47	31.65	344	127	P	V
		2389.82	44.93	-9.07	54	36.88	32.2	7.5	31.65	344	127	A	V
	*	2412	102.25	-	-	94.19	32.18	7.53	31.65	344	127	P	V
	*	2412	94.64	-	-	86.58	32.18	7.53	31.65	344	127	A	V
802.11b CH 11 2462MHz		2485.66	58.67	-15.33	74	50.49	32.12	7.64	31.58	130	245	P	H
		2499.95	47.12	-6.88	54	38.91	32.1	7.67	31.56	130	245	A	H
	*	2462	104.76	-	-	96.62	32.13	7.61	31.6	130	245	P	H
	*	2462	96.84	-	-	88.7	32.13	7.61	31.6	130	245	A	H
		2492.5	56.71	-17.29	74	48.5	32.1	7.67	31.56	260	115	P	V
		2494.84	45.56	-8.44	54	37.35	32.1	7.67	31.56	260	115	A	V
	*	2462	100.86	-	-	92.72	32.13	7.61	31.6	260	115	P	V
	*	2462	93.16	-	-	85.02	32.13	7.61	31.6	260	115	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	50.93	-23.07	74	65.86	34.31	10.8	60.04	100	240	P	H
		4824	43.04	-10.96	54	57.97	34.31	10.8	60.04	100	240	A	H
		4824	53.41	-20.59	74	68.34	34.31	10.8	60.04	129	172	P	V
		4824	45.06	-8.94	54	59.99	34.31	10.8	60.04	129	172	A	V
802.11b CH 06 2437MHz		4872	49.47	-24.53	74	64.29	34.34	10.87	60.03	300	0	P	H
		7308	60.46	-13.54	74	71.65	35.94	13.38	60.51	100	219	P	H
		7308	51.39	-2.61	54	62.58	35.94	13.38	60.51	100	219	A	H
		4872	51.69	-22.31	74	66.51	34.34	10.87	60.03	338	156	P	V
		4872	42.77	-11.23	54	57.59	34.34	10.87	60.03	338	156	A	V
		7308	53.6	-20.4	74	64.79	35.94	13.38	60.51	333	307	P	V
		7308	45.18	-8.82	54	56.37	35.94	13.38	60.51	333	307	A	V
802.11b CH 11 2462MHz		4926	46.16	-27.84	74	60.88	34.36	10.94	60.02	300	0	P	H
		7386	58.51	-15.49	74	69.66	35.92	13.46	60.53	100	199	P	H
		7386	49.13	-4.87	54	60.28	35.92	13.46	60.53	100	199	A	H
		4926	49.27	-24.73	74	63.99	34.36	10.94	60.02	300	360	P	V
		7386	50.43	-23.57	74	61.58	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2376.3	57.25	-16.75	74	49.29	32.15	7.47	31.66	107	246	P	H
		2389.82	45.9	-8.1	54	37.85	32.2	7.5	31.65	107	246	A	H
	*	2414	101.18	-	-	93.12	32.18	7.53	31.65	107	246	P	H
	*	2418	93.3	-	-	85.22	32.18	7.53	31.63	107	246	A	H
		2373.96	56.43	-17.57	74	48.47	32.15	7.47	31.66	344	127	P	V
		2389.95	44.99	-9.01	54	36.94	32.2	7.5	31.65	344	127	A	V
	*	2418	98.87	-	-	90.79	32.18	7.53	31.63	344	127	P	V
	*	2418	91.05	-	-	82.97	32.18	7.53	31.63	344	127	A	V
802.11g CH 11 2462MHz		2497.18	58.55	-15.45	74	50.34	32.1	7.67	31.56	131	248	P	H
		2499.94	47.32	-6.68	54	39.11	32.1	7.67	31.56	131	248	A	H
	*	2456	100.9	-	-	92.76	32.13	7.61	31.6	131	248	P	H
	*	2458	92.85	-	-	84.71	32.13	7.61	31.6	131	248	A	H
		2492.38	57.43	-16.57	74	49.22	32.1	7.67	31.56	259	116	P	V
		2483.5	45.61	-8.39	54	37.43	32.12	7.64	31.58	259	116	A	V
	*	2464	97.96	-	-	89.82	32.13	7.61	31.6	259	116	P	V
	*	2468	89.92	-	-	81.78	32.13	7.61	31.6	259	116	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	47.22	-26.78	74	62.15	34.31	10.8	60.04	300	0	P	H
		4824	50.29	-23.71	74	65.22	34.31	10.8	60.04	300	360	P	V
802.11g CH 06 2437MHz		4872	47.66	-26.34	74	62.48	34.34	10.87	60.03	300	0	P	H
		7308	54.02	-19.98	74	65.21	35.94	13.38	60.51	100	307	P	H
		7308	43.41	-10.59	54	54.6	35.94	13.38	60.51	100	307	A	H
		4872	48.99	-25.01	74	63.81	34.34	10.87	60.03	300	360	P	V
		7308	55.83	-18.17	74	67.02	35.94	13.38	60.51	319	268	P	V
		7308	45.63	-8.37	54	56.82	35.94	13.38	60.51	319	268	A	V
802.11g CH 11 2462MHz		4926	43.85	-30.15	74	58.57	34.36	10.94	60.02	300	0	P	H
		7386	52.18	-21.82	74	63.33	35.92	13.46	60.53	106	196	P	H
		7386	42.46	-11.54	54	53.61	35.92	13.46	60.53	106	196	A	H
		4926	45.36	-28.64	74	60.08	34.36	10.94	60.02	300	360	P	V
		7386	45.83	-28.17	74	56.98	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2379.16	56.92	-17.08	74	48.95	32.15	7.47	31.65	110	244	P	H
		2389.95	46.37	-7.63	54	38.32	32.2	7.5	31.65	110	244	A	H
	*	2416	101.8	-	-	93.72	32.18	7.53	31.63	110	244	P	H
	*	2418	93.15	-	-	85.07	32.18	7.53	31.63	110	244	A	H
		2389.04	56.81	-17.19	74	48.76	32.2	7.5	31.65	302	128	P	V
		2389.95	45.45	-8.55	54	37.4	32.2	7.5	31.65	302	128	A	V
	*	2420	98.55	-	-	90.45	32.17	7.56	31.63	302	128	P	V
	*	2418	90.66	-	-	82.58	32.18	7.53	31.63	302	128	A	V
802.11n HT20 CH 11 2462MHz		2498.02	58.28	-15.72	74	50.07	32.1	7.67	31.56	131	247	P	H
		2500	47.27	-6.73	54	39.06	32.1	7.67	31.56	131	247	A	H
	*	2462	101.49	-	-	93.35	32.13	7.61	31.6	131	247	P	H
	*	2456	92.6	-	-	84.46	32.13	7.61	31.6	131	247	A	H
		2488.66	56.98	-17.02	74	48.79	32.1	7.67	31.58	260	114	P	V
		2483.5	45.66	-8.34	54	37.48	32.12	7.64	31.58	260	114	A	V
	*	2466	98.38	-	-	90.24	32.13	7.61	31.6	260	114	P	V
	*	2468	90.01	-	-	81.87	32.13	7.61	31.6	260	114	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	47.27	-26.73	74	62.2	34.31	10.8	60.04	300	0	P	H
		4824	50.34	-23.66	74	65.27	34.31	10.8	60.04	300	360	P	V
802.11n HT20 CH 06 2437MHz		4872	44.53	-29.47	74	59.35	34.34	10.87	60.03	300	0	P	H
		7308	53.52	-20.48	74	64.71	35.94	13.38	60.51	100	211	P	H
		7308	44.24	-9.76	54	55.43	35.94	13.38	60.51	100	211	A	H
		4872	48.12	-25.88	74	62.94	34.34	10.87	60.03	300	360	P	V
		7308	46.62	-27.38	74	57.81	35.94	13.38	60.51	300	360	P	V
802.11n HT20 CH 11 2462MHz		4926	42.54	-31.46	74	57.26	34.36	10.94	60.02	300	0	P	H
		7386	52.92	-21.08	74	64.07	35.92	13.46	60.53	100	213	P	H
		7386	42.17	-11.83	54	53.32	35.92	13.46	60.53	100	213	A	H
		4926	43.96	-30.04	74	58.68	34.36	10.94	60.02	300	360	P	V
		7386	46.17	-27.83	74	57.32	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.69	57.57	-16.43	74	49.52	32.2	7.5	31.65	101	193	P	H
		2389.95	47.22	-6.78	54	39.17	32.2	7.5	31.65	101	193	A	H
	*	2436	99.5	-	-	91.38	32.17	7.56	31.61	101	193	P	H
	*	2434	90.28	-	-	82.18	32.17	7.56	31.63	101	193	A	H
		2497.24	57.04	-16.96	74	48.83	32.1	7.67	31.56	101	193	P	H
		2499.94	46.07	-7.93	54	37.86	32.1	7.67	31.56	101	193	A	H
		2386.31	56.33	-17.67	74	48.28	32.2	7.5	31.65	304	127	P	V
		2389.95	46.3	-7.7	54	38.25	32.2	7.5	31.65	304	127	A	V
	*	2432	97.65	-	-	89.55	32.17	7.56	31.63	304	127	P	V
	*	2434	88.64	-	-	80.54	32.17	7.56	31.63	304	127	A	V
		2494.96	56.5	-17.5	74	48.29	32.1	7.67	31.56	304	127	P	V
		2491.24	45.39	-8.61	54	37.2	32.1	7.67	31.58	304	127	A	V
802.11n HT40 CH 09 2452MHz		2386.83	56.68	-17.32	74	48.63	32.2	7.5	31.65	176	200	P	H
		2387.74	45.67	-8.33	54	37.62	32.2	7.5	31.65	176	200	A	H
	*	2466	100.98	-	-	92.84	32.13	7.61	31.6	176	200	P	H
	*	2464	92.16	-	-	84.02	32.13	7.61	31.6	176	200	A	H
		2484.34	59.62	-14.38	74	51.44	32.12	7.64	31.58	176	200	P	H
		2483.5	49.37	-4.63	54	41.19	32.12	7.64	31.58	176	200	A	H
		2361.61	56.04	-17.96	74	48.15	32.11	7.44	31.66	131	34	P	V
		2389.17	45.14	-8.86	54	37.09	32.2	7.5	31.65	131	34	A	V
	*	2466	94.64	-	-	86.5	32.13	7.61	31.6	131	34	P	V
	*	2464	85.82	-	-	77.68	32.13	7.61	31.6	131	34	A	V
		2489.8	57.48	-16.52	74	49.29	32.1	7.67	31.58	131	34	P	V
		2483.56	46.25	-7.75	54	38.07	32.12	7.64	31.58	131	34	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4842	43.71	-30.29	74	58.6	34.32	10.82	60.03	300	0	P	H
		7266	52.23	-21.77	74	63.45	35.94	13.35	60.51	100	210	P	H
		7266	43.19	-10.81	54	54.41	35.94	13.35	60.51	100	210	A	H
		4842	46.94	-27.06	74	61.83	34.32	10.82	60.03	300	360	P	V
		7266	47.08	-26.92	74	58.3	35.94	13.35	60.51	300	360	P	V
802.11n HT40 CH 06 2437MHz		4872	42.68	-31.32	74	57.5	34.34	10.87	60.03	300	0	P	H
		7308	49.68	-24.32	74	60.87	35.94	13.38	60.51	300	0	P	H
		4872	45.31	-28.69	74	60.13	34.34	10.87	60.03	300	360	P	V
		7308	44.97	-29.03	74	56.16	35.94	13.38	60.51	300	360	P	V
802.11n HT40 CH 09 2452MHz		4902	41.63	-32.37	74	56.39	34.35	10.91	60.02	300	0	P	H
		7356	49.48	-24.52	74	60.64	35.93	13.43	60.52	300	0	P	H
		4902	42.9	-31.1	74	57.66	34.35	10.91	60.02	300	360	P	V
		7356	45.42	-28.58	74	56.58	35.93	13.43	60.52	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		30	18.98	-21.02	40	25.27	25.1	0.81	32.2	-	-	P	H
		143.49	16.81	-26.69	43.5	29.48	17.35	2.09	32.11	-	-	P	H
		157.07	17.37	-26.13	43.5	30.6	16.68	2.19	32.1	-	-	P	H
		186.17	16.28	-27.22	43.5	31.08	14.92	2.38	32.1	-	-	P	H
		726.46	27.44	-18.56	46	27.51	27.49	4.69	32.25	-	-	P	H
		908.82	28.79	-17.21	46	26.31	29.44	5.24	32.2	100	0	P	H
		30	24.74	-15.26	40	31.03	25.1	0.81	32.2	100	0	P	V
		49.4	22.81	-17.19	40	38.91	14.89	1.21	32.2	-	-	P	V
		88.2	15.37	-28.13	43.5	31.4	14.56	1.63	32.22	-	-	P	V
		260.86	16.93	-29.07	46	25.96	20.33	2.82	32.18	-	-	P	V
		853.53	27.55	-18.45	46	25.59	29.28	5.07	32.39	-	-	P	V
		962.17	29.12	-24.88	54	25.01	30.9	5.39	32.18	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz

802.11b

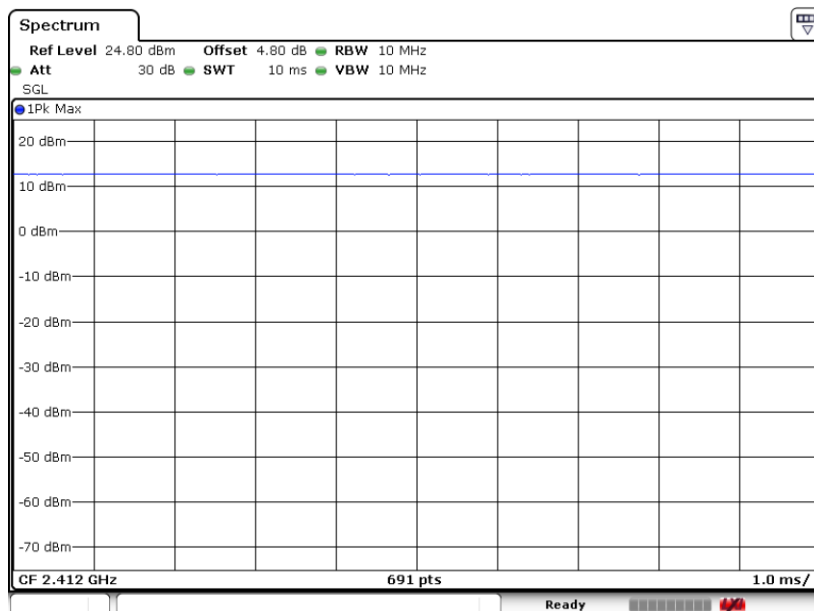




802.11g

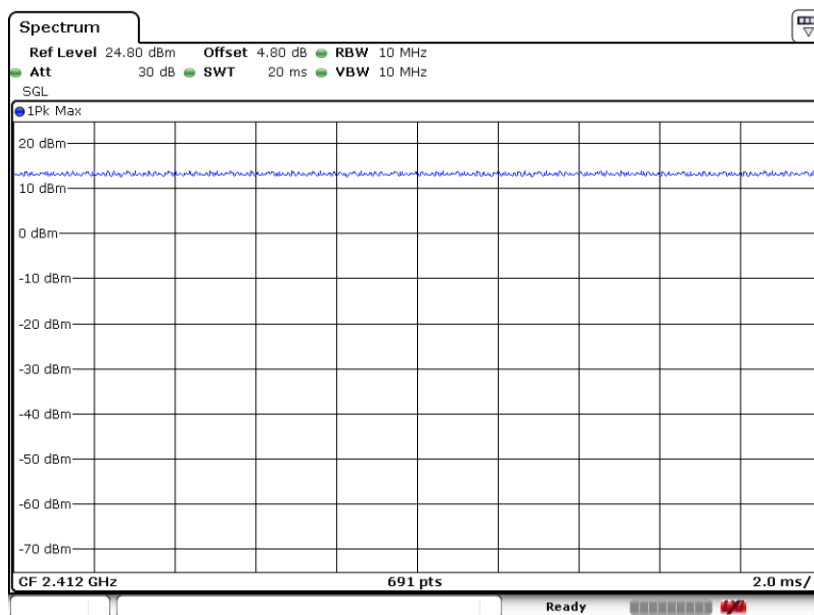

802.11n HT20

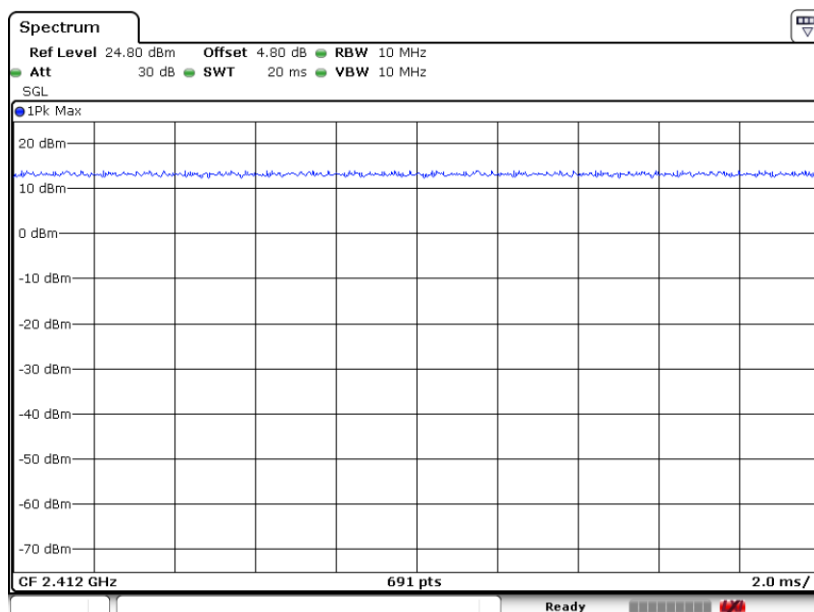



802.11n HT40

