



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03



中国认可
国际互认
检测
TESTING
CNAS L6785

TEST REPORT

Report No.: CQASZ20250300432E

Applicant: Shenzhen Inkbird Technology Co., Ltd.

Address of Applicant: Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China

Equipment Under Test (EUT):

EUT Name: WIRELESS BBQ THERMOMETER

Model No.: 12-BW, 14-BW, 11I-B, 11I-RB, 11S-B 12E-BW, 12I-B, 12I-BW, 12I-RB, 12I-RW, 13-B, 13-BW, 13-RB, 13-RW, 13E-B, 13E-BW, 13E-RB, 13E-RW, 14S-BW, 22-B, 22-BW, 31-BW, 31-RW, 31E-RB, 31E-RW, 33-BW 33-RW, 32-B, 32-BW, 32-RB, 32-RW, 32E-RB, 32E-RW 32E-BW, 33E-RW

Test Model No.: 12-BW

Brand Name: N/A

FCC ID: 2AYZD-12-BW

Standards: 47 CFR Part 15, Subpart B, Class B

Date of Receipt: 2025-3-4

Date of Test: 2025-3-4 to 2025-3-11

Date of Issue: 2025-4-17

Test Result: **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

(Joe Wang)

Reviewed By:

(Timo Lei)

Approved By:

(Jack Ai)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History of Report

Report No.	Version	Description	Issue Date
CQASZ20250300432E	Rev.01	Initial report	2025-4-17

2 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15B	ANSI C63.4-2014	PASS
Conducted Emission (150kHz to 30MHz)	47 CFR Part 15B	ANSI C63.4-2014	PASS

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement Range (MHz)
Below 1.705	30
1.705 to 108	1000
108 to 500	2000
500 to 1000	5000
Above 1000	5th harmonic of the highest frequency or 40GHz, whichever is lower

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 TEST ENVIRONMENT AND MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST LOCATION	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
4.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
4.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	6
5 EQUIPMENT LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 CONDUCTED EMISSIONS	9
6.2 RADIATED EMISSION	13
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	18
APPENDIX 2 PHOTOGRAPHS OF EUT	20

4 General Information

4.1 Client Information

Applicant:	Shenzhen Inkbird Technology Co., Ltd.
Address of Applicant:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Manufacturer:	Shenzhen Inkbird Technology Co., Ltd.
Address of Manufacturer:	Room 1803, Guowei Building, NO.68 Guowei Road, Xianhu Community, Liantang, Luohu District, Shenzhen, China
Factory:	Shenzhen Inkbird Technology Co., Ltd.
Address of Factory:	Room 501, Building 138, No. 71, Yiqing Road, Xianhu Community, Liantang Street, Luohu District, Shenzhen, China

4.2 General Description of EUT

Product Name:	WIRELESS BBQ THERMOMETER
Model No.:	12-BW, 14-BW, 11I-B, 11I-RB, 11S-B 12E-BW, 12I-B, 12I-BW, 12I-RB, 12I-RW, 13-B, 13-BW, 13-RB, 13-RW, 13E-B, 13E-BW, 13E-RB, 13E-RW, 14S-BW, 22-B, 22-BW, 31-BW, 31-RW, 31E-RB, 31E-RW, 33-BW 33-RW, 32-B, 32-BW, 32-RB, 32-RW, 32E-RB, 32E-RW 32E-BW, 33E-RW
Test Model No.:	12-BW
Trade Mark:	N/A
Power Supply:	Li-ion Battery: 2500mAh 3.7V/9.25Wh, Charging by Adapter DC 5.0V, 1.0A
Test Mode:	
Normal working:	Keep the EUT in Normal working
Charging mode:	Keep the EUT in Charging mode

Note:

Model No.: 12-BW, 14-BW, 11I-B, 11I-RB, 11S-B 12E-BW, 12I-B, 12I-BW, 12I-RB, 12I-RW, 13-B, 13-BW, 13-RB, 13-RW, 13E-B, 13E-BW, 13E-RB, 13E-RW, 14S-BW, 22-B, 22-BW, 31-BW, 31-RW, 31E-RB, 31E-RW, 33-BW 33-RW, 32-B, 32-BW, 32-RB, 32-RW, 32E-RB, 32E-RW 32E-BW, 33E-RW.

Only the model 12-BW was tested, since Their electrical circuit design, layout, components used and internal wiring are identical, Only the model names, product shape, product color is different.

4.3 Test Environment and Mode

Operating Environment:	
Radiated Emission	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emission	
Temperature:	25.5°C
Humidity:	55% RH
Atmospheric Pressure:	1009 mbar

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

1) support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
Adapter	MI	/	/	CQA

2) cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Conditions

None.

4.8 Other Information Requested by the Customer

None.

4.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Conduction emission	3.74dB (9kHz to 150kHz)
		3.34dB (150kHz to 30MHz)
2	Radiated emission	5.12dB (Below 1GHz)
		4.60dB (Above 1GHz)

3	Temperature	0.8°C
4	Humidity	2.0%

5 Equipment List

Conducted Emissions (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable (9KHz~300MHz)	CQA	N/A	C021	2024/9/2	2025/9/1

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No.	Cal Date	Cal Due Date
Loop antenna	SCHWARZBECK	FMZB 1516	CQA-060	2023/9/8	2026/9/7
Horn Antennaz	R&S	BBHA 9170	CQA-088	2023/11/1	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/1	2026/10/31
Bilog Antenna	R&S	HL562	CQA-011	2023/9/7	2026/9/6
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Preamplifier	MITEQ	PA5001	CQA-036	2024/9/2	2025/9/1
Coaxial cable (1GHz~40GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial cable (9KHz~1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1

Test Software:

Test Site	Manufacturer	Software brand
Radiated Emissions test software	Audix	e3
Conducted Emissions test software	Audix	e3

6 Test results and Measurement Data

6.1 Conducted Emissions

Test Requirement: 47 CFR Part 15B
Test Method: ANSI C63.4
Test frequency range: 150kHz to 30MHz
Limit:


Frequency range (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Procedure:

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

Test Setup:

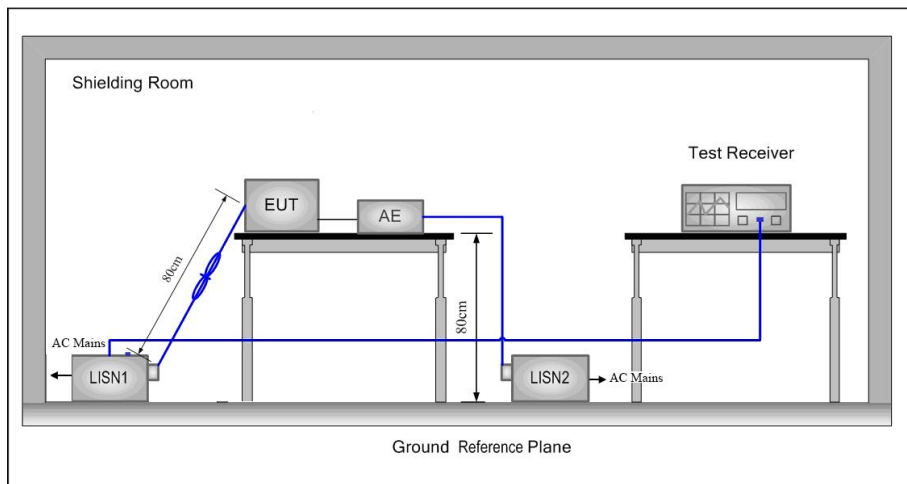

Instruments Used:

Test Mode:

Test Results:

Refer to section 5 for details

Charging mode


Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

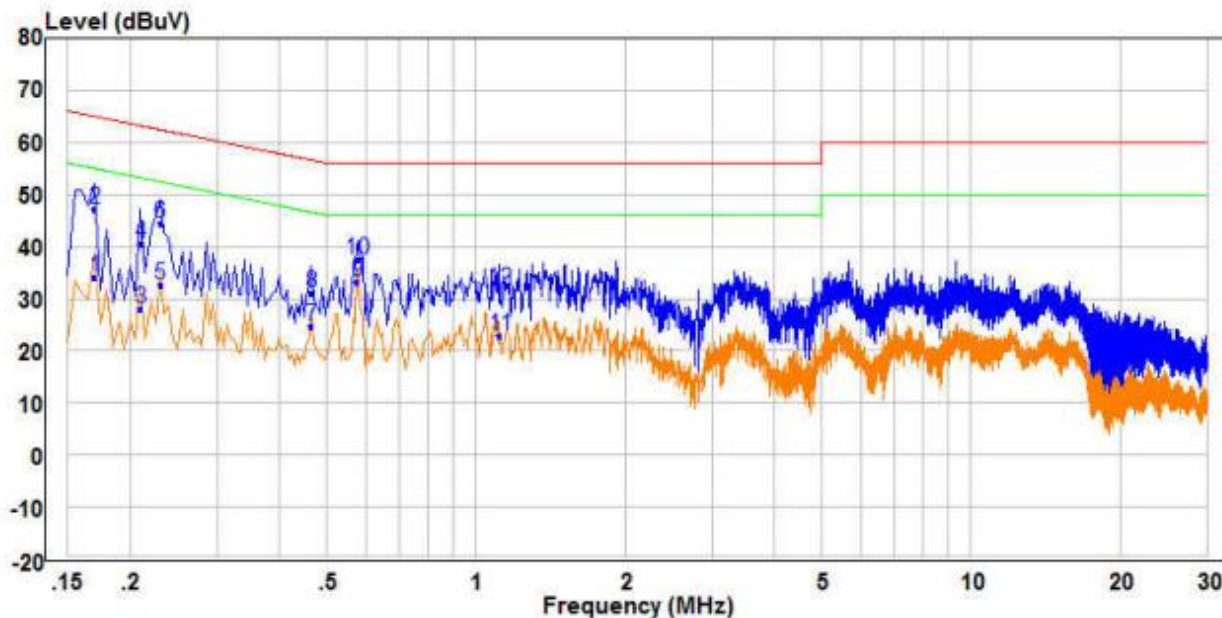

	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.170	24.57	9.49	34.06	54.96	-20.90	Average	Line
2 QP	0.170	37.63	9.49	47.12	64.96	-17.84	QP	Line
3	0.210	18.57	9.49	28.06	53.21	-25.15	Average	Line
4	0.210	31.04	9.49	40.53	63.21	-22.68	QP	Line
5	0.230	23.24	9.49	32.73	52.45	-19.72	Average	Line
6	0.230	34.85	9.49	44.34	62.45	-18.11	QP	Line
7	0.465	15.29	9.52	24.81	46.60	-21.79	Average	Line
8	0.465	21.64	9.52	31.16	56.60	-25.44	QP	Line
9 PP	0.575	23.53	9.66	33.19	46.00	-12.81	Average	Line
10	0.575	27.87	9.66	37.53	56.00	-18.47	QP	Line
11	1.115	13.38	9.53	22.91	46.00	-23.09	Average	Line
12	1.115	22.07	9.53	31.60	56.00	-24.40	QP	Line

Neutral Line:

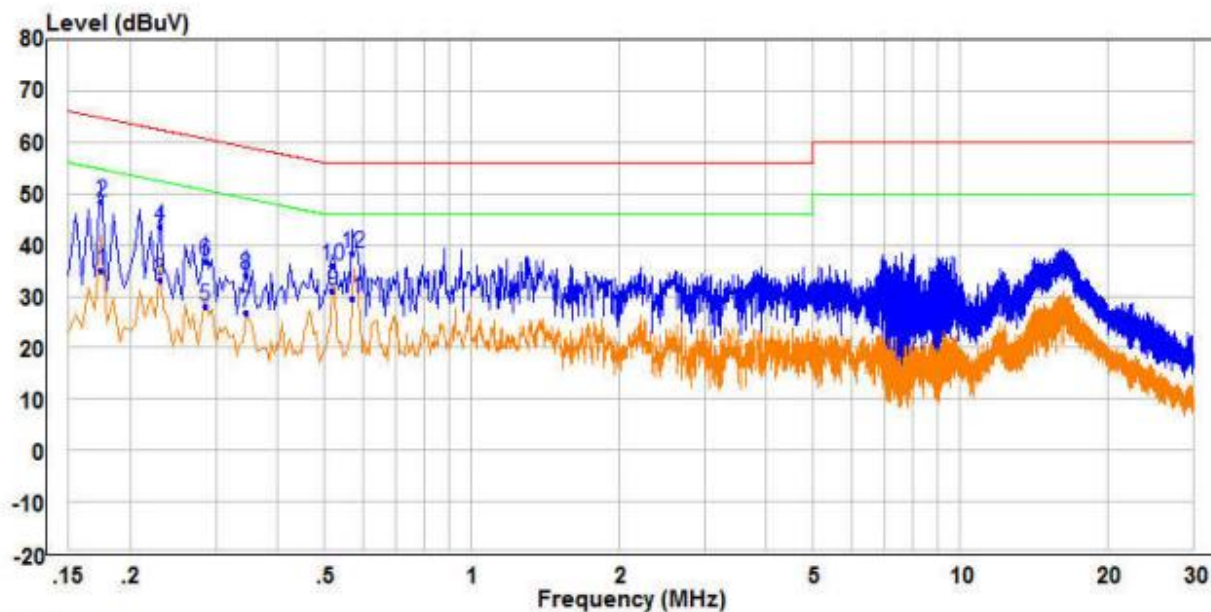

		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.175	25.49	9.65	35.14	54.72	-19.58	Average	Neutral
2	QP 0.175	38.82	9.65	48.47	64.72	-16.25	QP	Neutral
3	0.230	23.71	9.56	33.27	52.45	-19.18	Average	Neutral
4	0.230	34.03	9.56	43.59	62.45	-18.86	QP	Neutral
5	0.285	18.46	9.50	27.96	50.67	-22.71	Average	Neutral
6	0.285	27.30	9.50	36.80	60.67	-23.87	QP	Neutral
7	0.345	17.17	9.54	26.71	49.08	-22.37	Average	Neutral
8	0.345	24.60	9.54	34.14	59.08	-24.94	QP	Neutral
9	PP 0.520	21.30	9.72	31.02	46.00	-14.98	Average	Neutral
10	0.520	26.15	9.72	35.87	56.00	-20.13	QP	Neutral
11	0.570	19.77	9.77	29.54	46.00	-16.46	Average	Neutral
12	0.570	28.65	9.77	38.42	56.00	-17.58	QP	Neutral

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

6.2 Radiated Emission

Test Requirement: 47 CFR Part 15B

Test Method: ANSI C63.4

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Receiver setup:

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
Above 1GHz	Peak	1MHz	3MHz	Peak Value

Limit:

Frequency	Limit (dBμV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

Test Procedure:

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different from above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber (Above 18GHz the distance is 1 meter).
- Repeat above procedures until all frequencies measured was complete.

Test Setup:

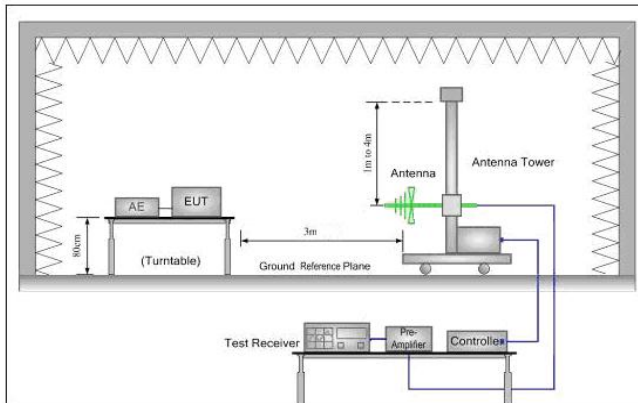


Figure 1. 30MHz to 1GHz

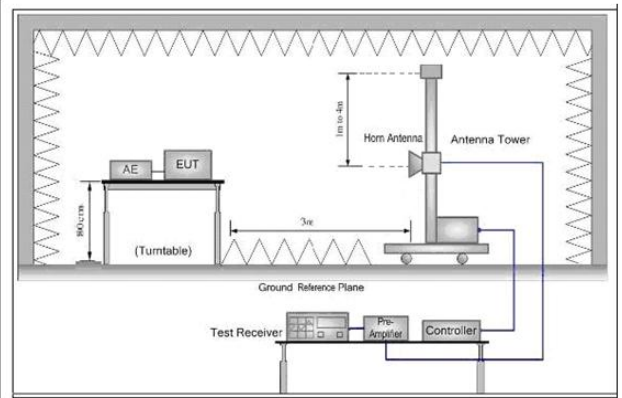


Figure 2. Above 1 GHz

Instruments Used:

Refer to section 5 for details

Test Mode:

Charging mode, Normal working

Test Status:


Pretest the EUT at different test mode and found the Charging mode which is worst case, the test worst case mode is recorded in the report.

Test Results:

Pass


Below 1GHz

Horizontal

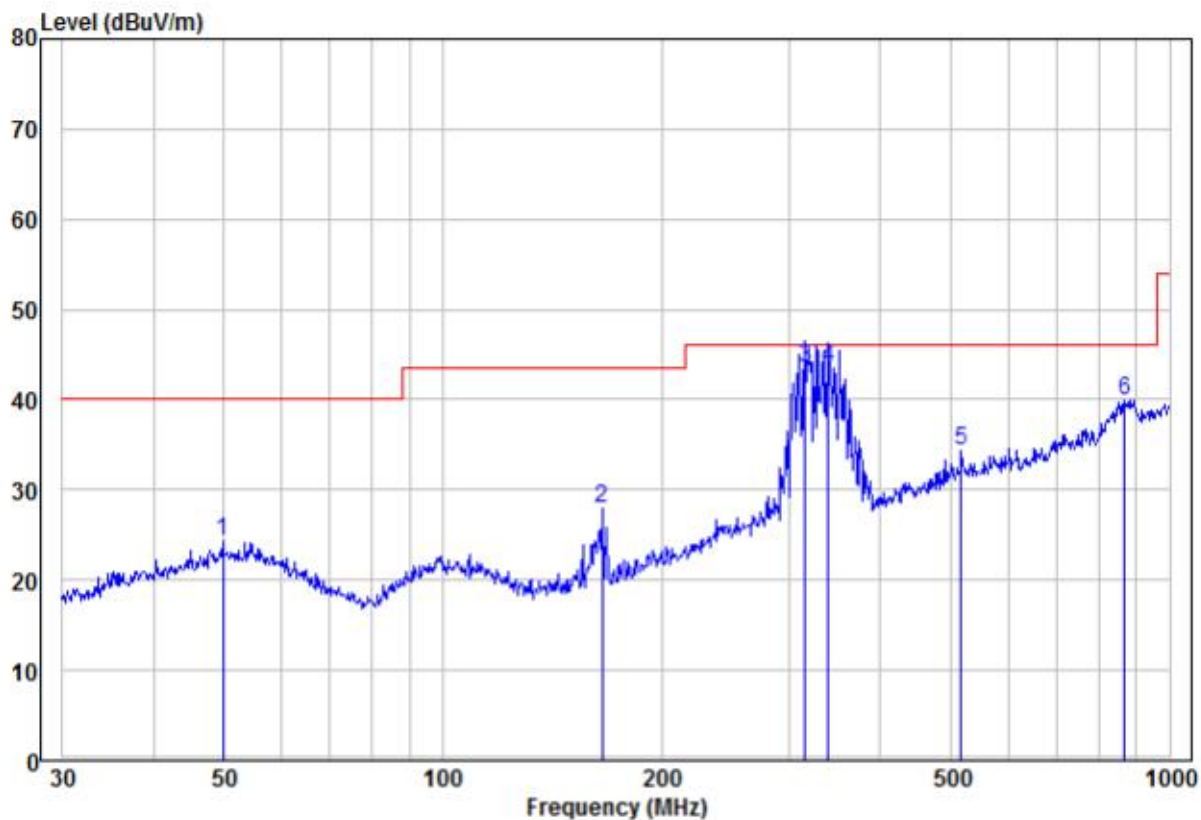

	Read			Limit	Over			APos	TPos
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			
1	49.88	10.49	13.75	24.24	40.00	-15.76	Peak	HORIZONTAL	100 32
2	165.49	17.54	10.50	28.04	43.50	-15.46	Peak	HORIZONTAL	100 46
3 pp	315.48	25.30	18.15	43.45	46.00	-2.55	QP	HORIZONTAL	100 99
4	339.59	24.71	18.73	43.44	46.00	-2.56	QP	HORIZONTAL	100 178
5	517.25	12.25	22.00	34.25	46.00	-11.75	Peak	HORIZONTAL	100 62
6 pk	869.13	10.59	29.34	39.93	46.00	-6.07	Peak	HORIZONTAL	100 21

Vertical

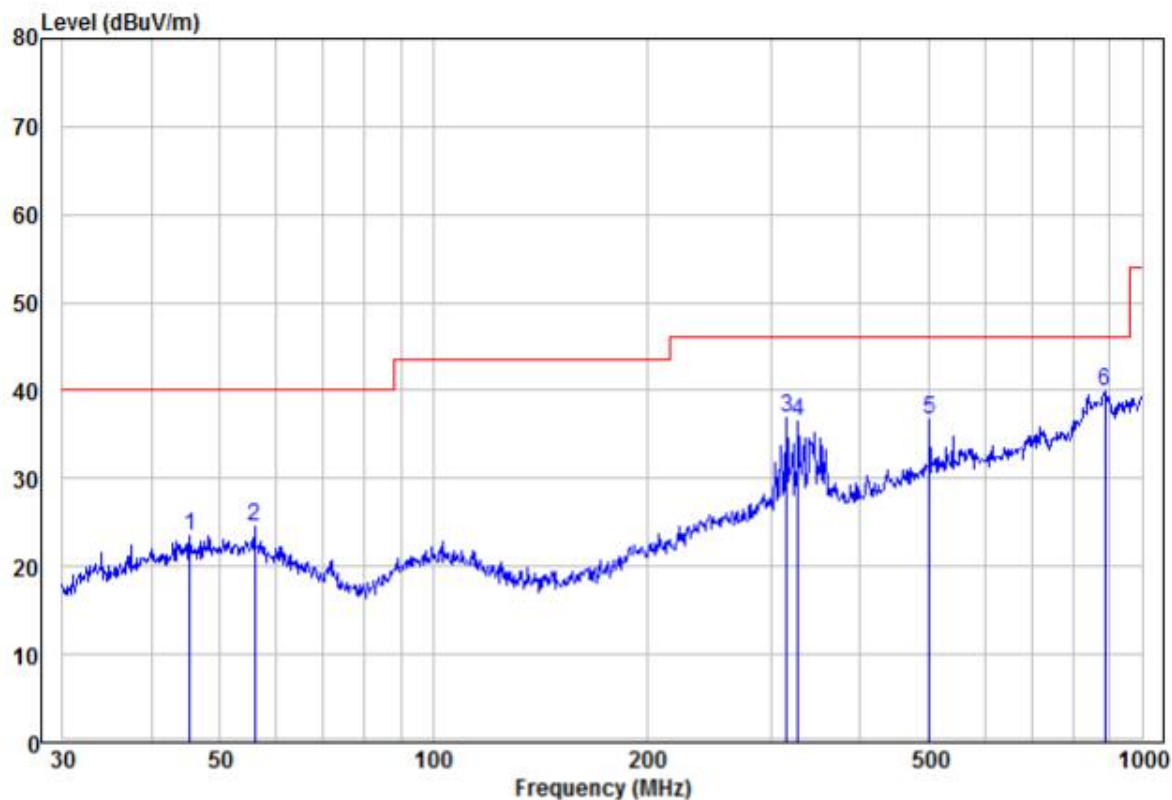

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase	APos	TPos
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB			cm	deg
1	45.38	10.46	12.98	23.44	40.00	-16.56	Peak	VERTICAL	100	58
2	56.00	10.97	13.64	24.61	40.00	-15.39	Peak	VERTICAL	100	48
3	315.48	18.67	18.15	36.82	46.00	-9.18	Peak	VERTICAL	100	156
4	326.74	18.14	18.42	36.56	46.00	-9.44	Peak	VERTICAL	100	5
5	501.18	14.86	21.84	36.70	46.00	-9.30	Peak	VERTICAL	100	23
6 pp	887.61	10.25	29.62	39.87	46.00	-6.13	Peak	VERTICAL	100	12

Above 1GHz

Class B: Above 1GHz: at 3M									
Ant.Pol	Frequen cy	Measurement (dBuV)		Limit 3m(dBuV/m)		Margin(dB)		Antenna Height	Table Angle
	MHz	PK	AV	PK	AV	PK	AV	(m)	(Degree)
Horizon tal	1178.86	50.58	37.07	74.00	54.00	-23.42	-16.93	1	31
	2102.37	51.92	36.12	74.00	54.00	-22.08	-17.88	1	162
	4445.65	57.79	39.03	74.00	54.00	-16.21	-14.97	1	61
Vertical	1630.83	51.34	35.20	74.00	54.00	-22.66	-18.80	1	225
	2368.26	54.81	35.46	74.00	54.00	-19.19	-18.54	1	43
	4502.14	57.41	38.75	74.00	54.00	-16.59	-15.25	1	154

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor


Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor .

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Radiated emission Test Setup (30MHz~1GHz)



Radiated emission Test Setup (Above 1GHz)

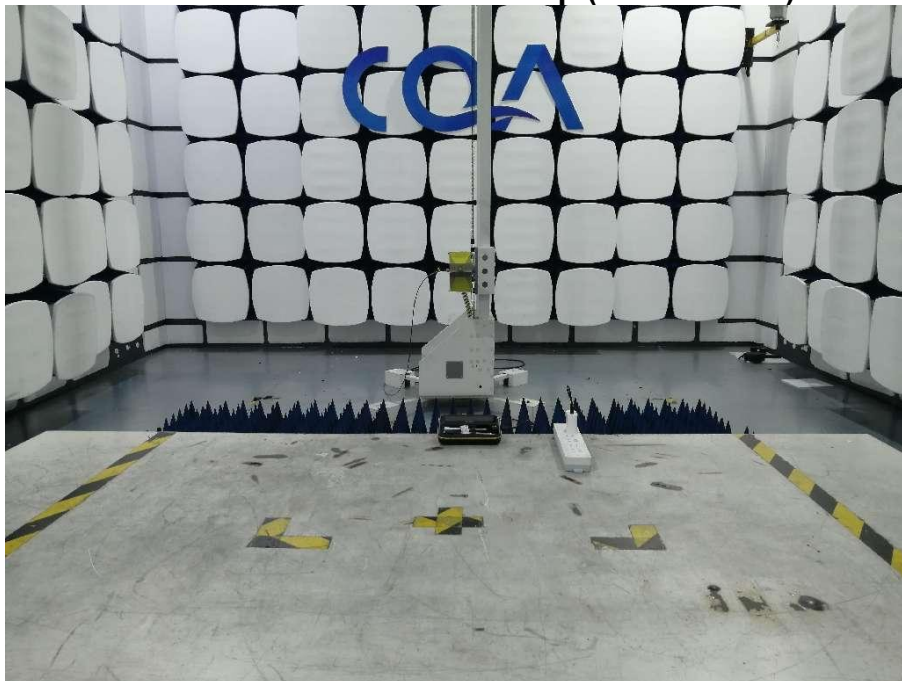

Conducted emission Test Setup



APPENDIX 2 PHOTOGRAPHS OF EUT





