



FCC RF Test Report

APPLICANT : Brammallite LLC
EQUIPMENT : Digital Receiver
MODEL NAME : B78C5E
FCC ID : 2AYZO-2783
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was completed on Mar. 16, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor



Approved by: Alex Wang / Manager

Sportun International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software.....	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system.....	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement.....	11
3.2 Output Power Measurement.....	20
3.3 Power Spectral Density Measurement.....	21
3.4 Conducted Band Edges and Spurious Emission Measurement	30
3.5 Radiated Band Edges and Spurious Emission Measurement	39
3.6 AC Conducted Emission Measurement.....	43
3.7 Antenna Requirements	45
4 LIST OF MEASURING EQUIPMENT.....	46
5 UNCERTAINTY OF EVALUATION.....	47
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS	
APPENDIX E. DUTY CYCLE PLOTS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.1	-	99% Bandwidth	-	N/A
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	N/A

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Brammallite LLC

1011 South Hamilton Road Chapel Hill, NC 27517

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Receiver
Model Name	B78C5E
FCC ID	2AYZO-2783
EUT supports Radios application	Bluetooth BR/EDR/LE

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v4.0 LE: 1.47 dBm (0.0014 W) Bluetooth v5.0 LE: 4.64 dBm (0.0029 W)
99% Occupied Bandwidth	Bluetooth v4.0 LE: 1.073MHz Bluetooth v5.0 LE: 2.068MHz
Antenna Type / Gain	Fixed internal Antenna with gain 3.5 dBi
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sportun International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	Rohde&Schwarz	EMC32	10.60.0.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y-Plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: Bluetooth Link + Display (60fps animation, continuous) + PPG (IR LED + HRM AFE) + Haptics + Battery + Accelerometer + Flash Write + USB Cable (Charging from Adapter)


Remark: For Radiated Test Cases, The tests were performed with Adapter and USB Cable for Sample 1 and the sample 2 is verified worse case.

2.3 Connection Diagram of Test System

<Radiation>

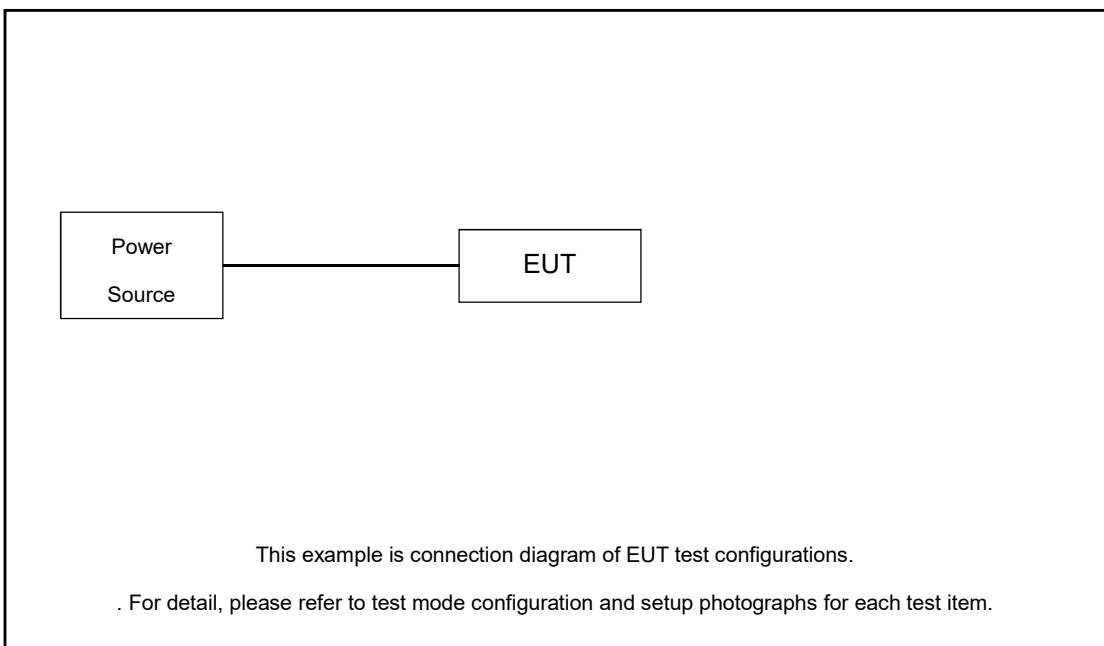

<Conduction>

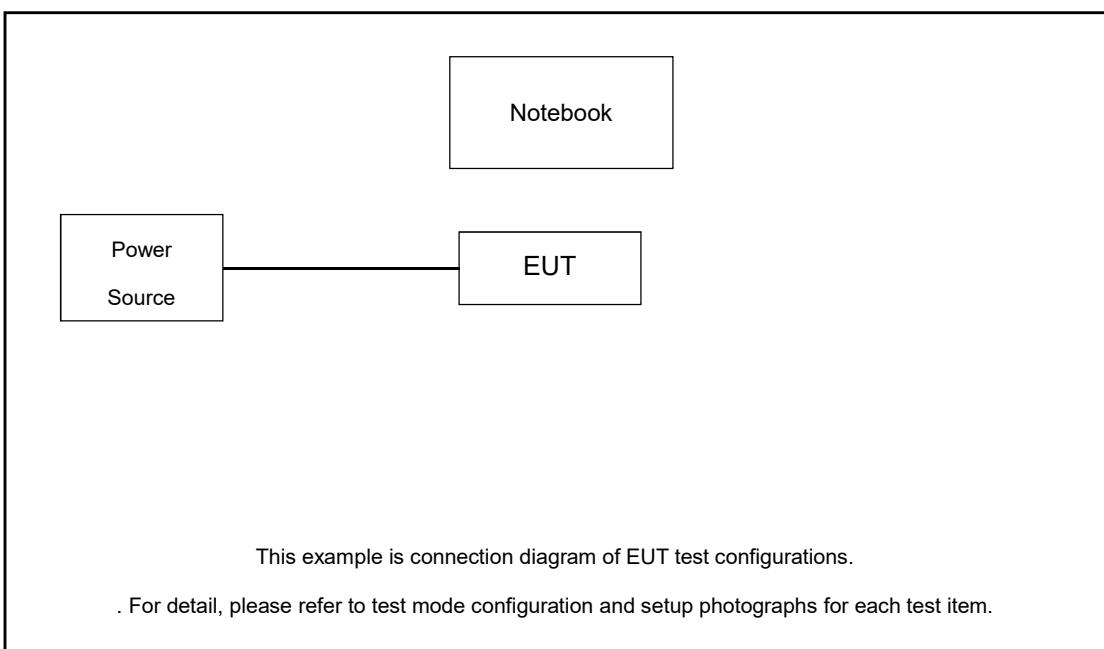



2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	G410	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
2.	Adapter	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.2 dB.

Offset(dB) = RF cable loss(dB).

= 6.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

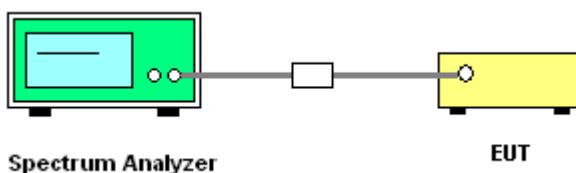


3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

Bluetooth v4.0 LE

6 dB Bandwidth Plot on Channel 00

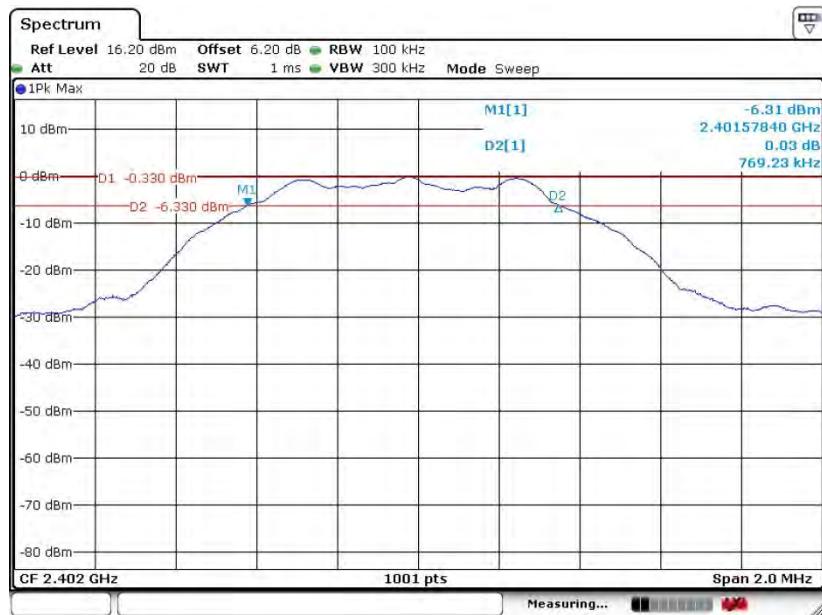


6 dB Bandwidth Plot on Channel 19

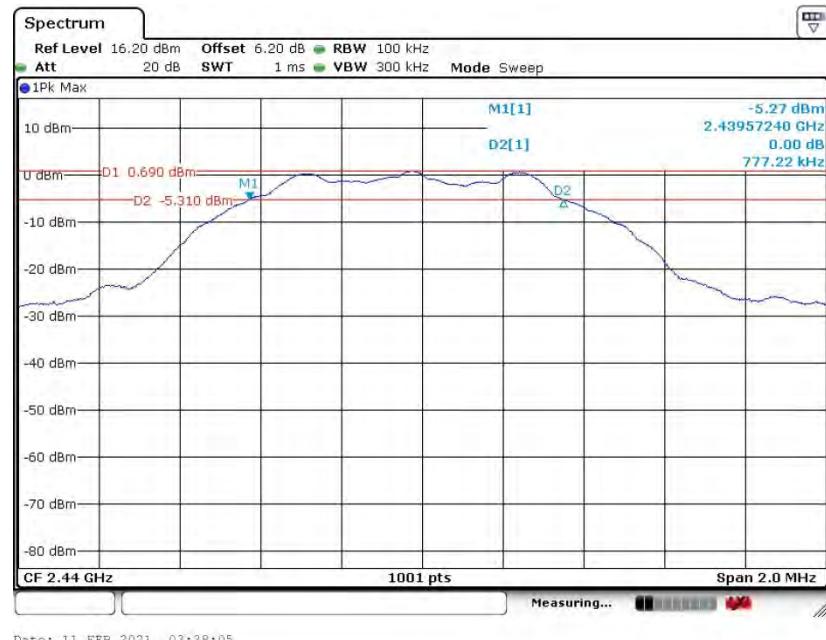

Date: 11.FEB.2021 03:38:05

6 dB Bandwidth Plot on Channel 39

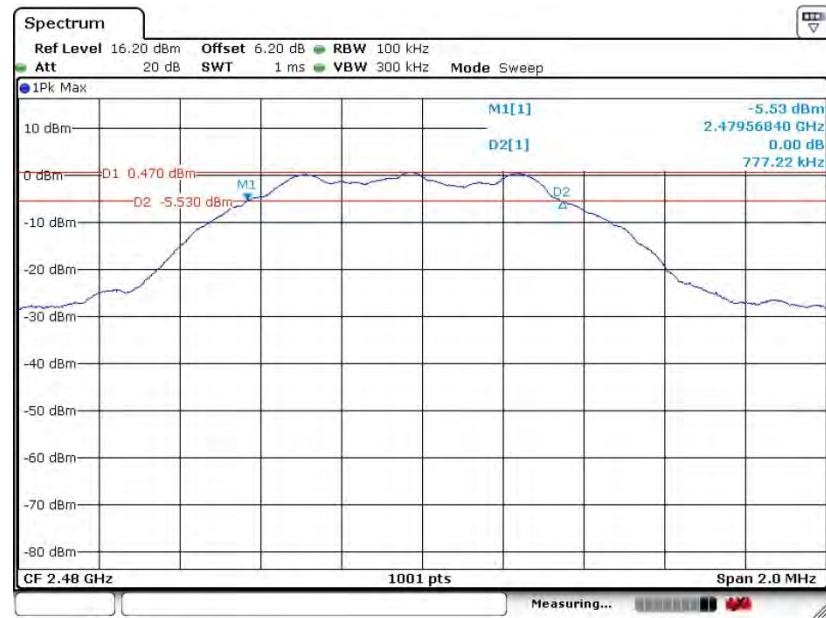


Date: 11.FEB.2021 04:03:46




Bluetooth v5.0 LE

6 dB Bandwidth Plot on Channel 00

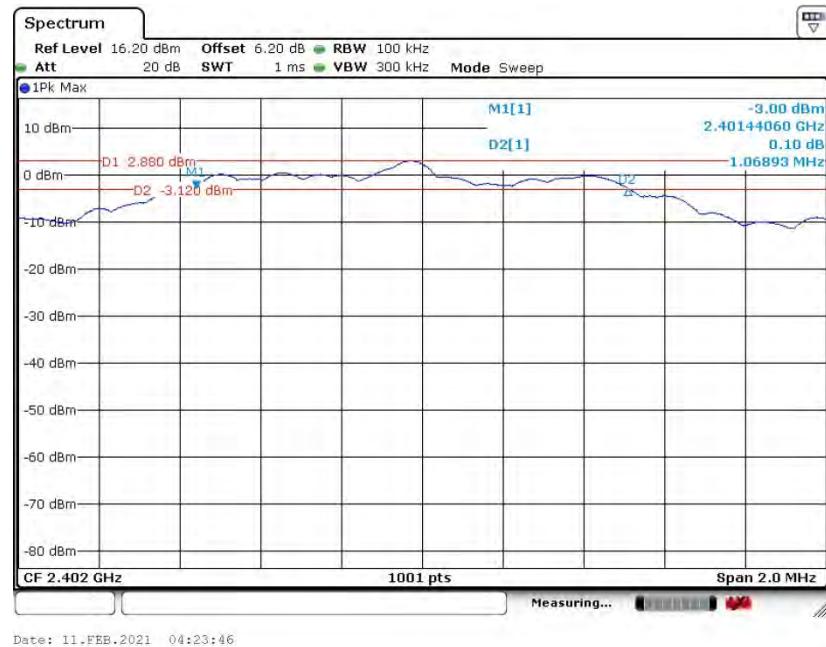




6 dB Bandwidth Plot on Channel 19

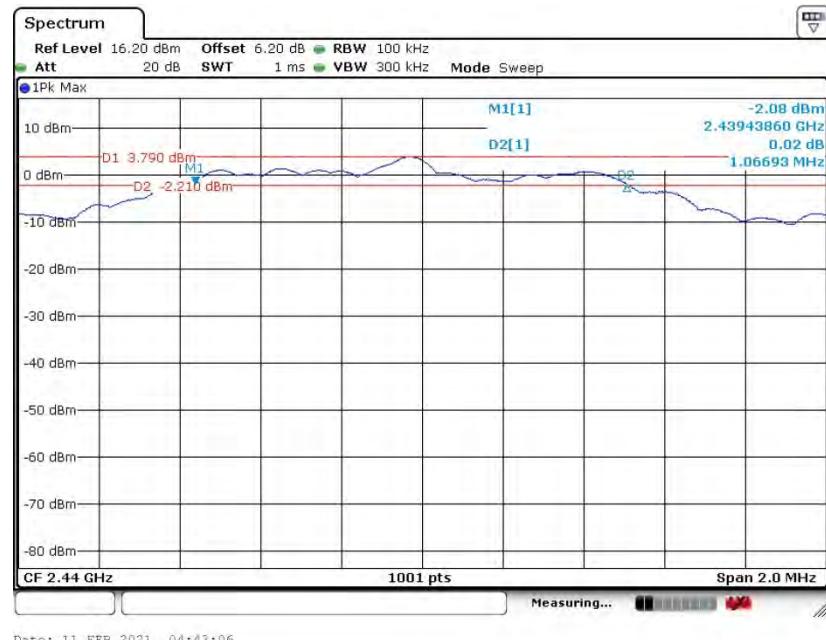

Date: 11.FEB.2021 04:43:06

6 dB Bandwidth Plot on Channel 39

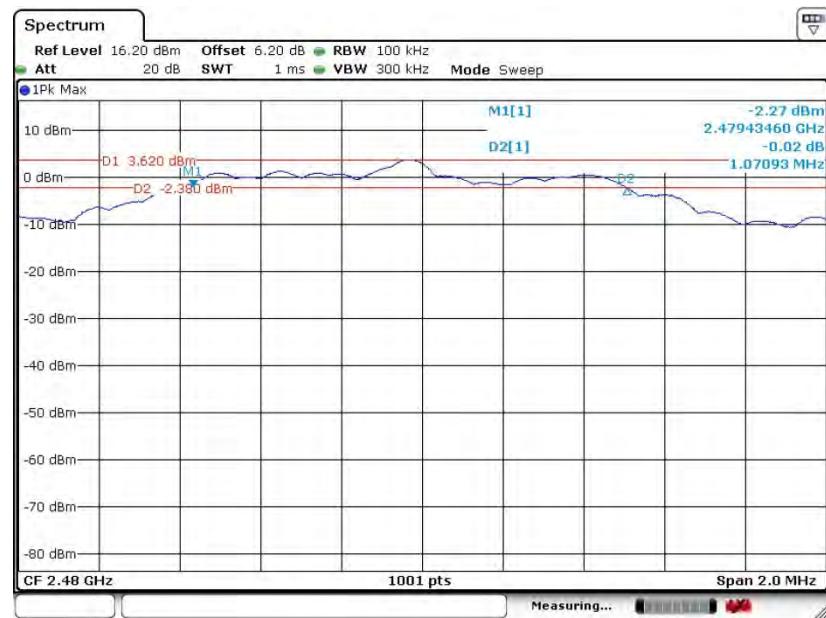


Date: 11.FEB.2021 05:04:11

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


Bluetooth v4.0 LE

99% Occupied Bandwidth Plot on Channel 00

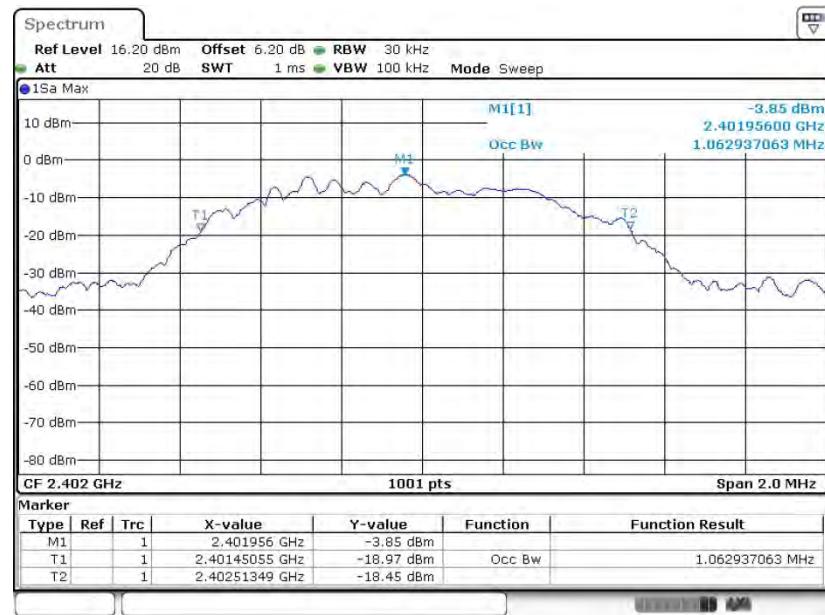




99% Occupied Bandwidth Plot on Channel 19

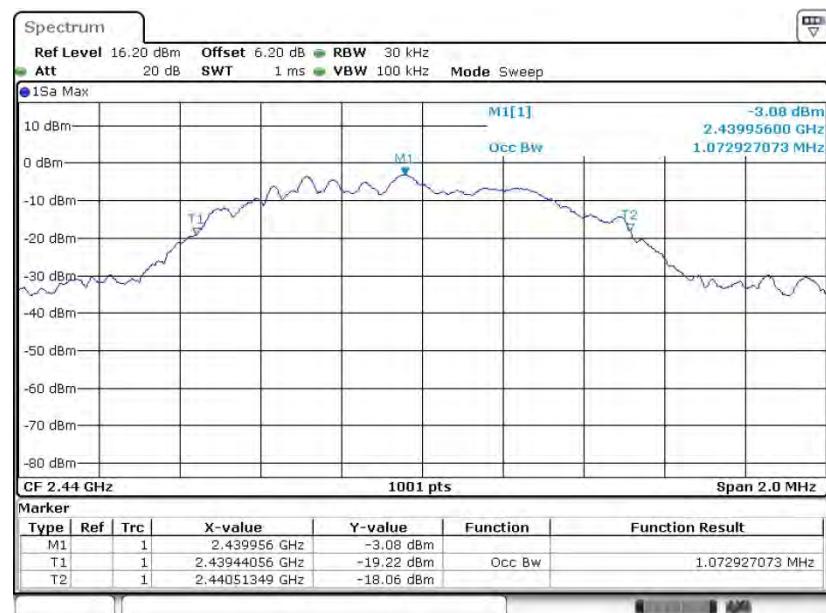


99% Occupied Bandwidth Plot on Channel 39

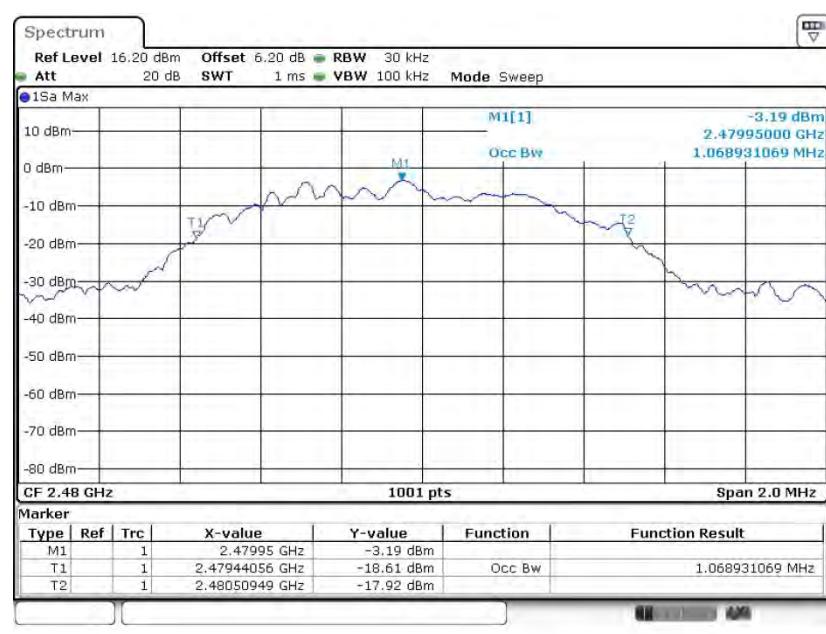




Bluetooth v5.0 LE

99% Occupied Bandwidth Plot on Channel 00

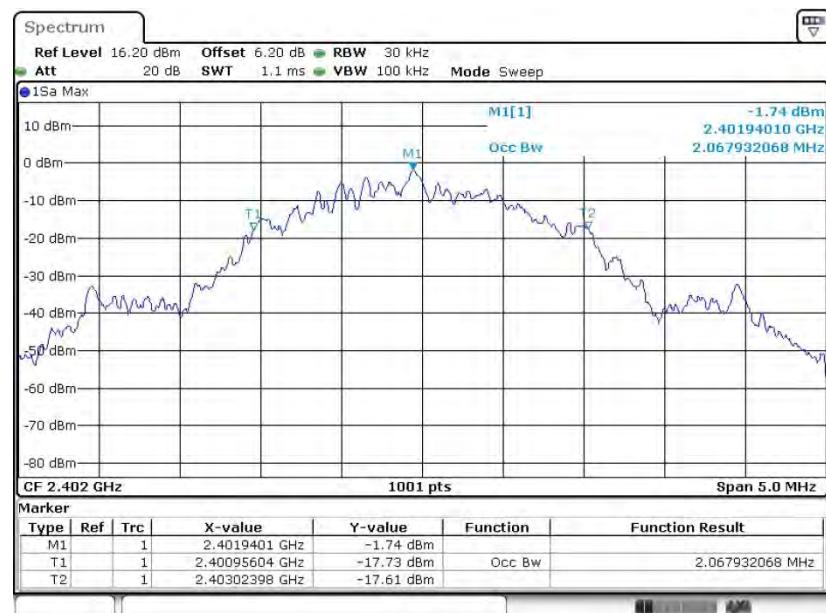




99% Occupied Bandwidth Plot on Channel 19

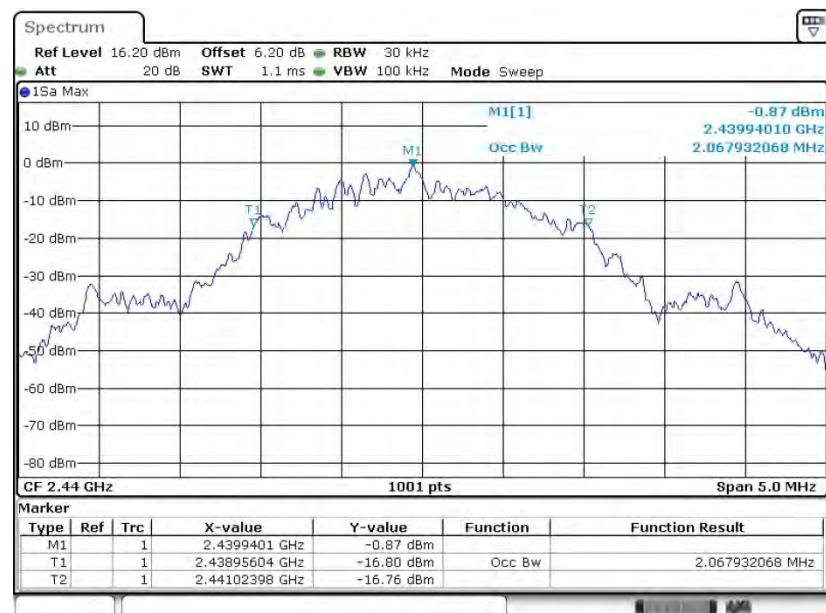

99% Occupied Bandwidth Plot on Channel 39

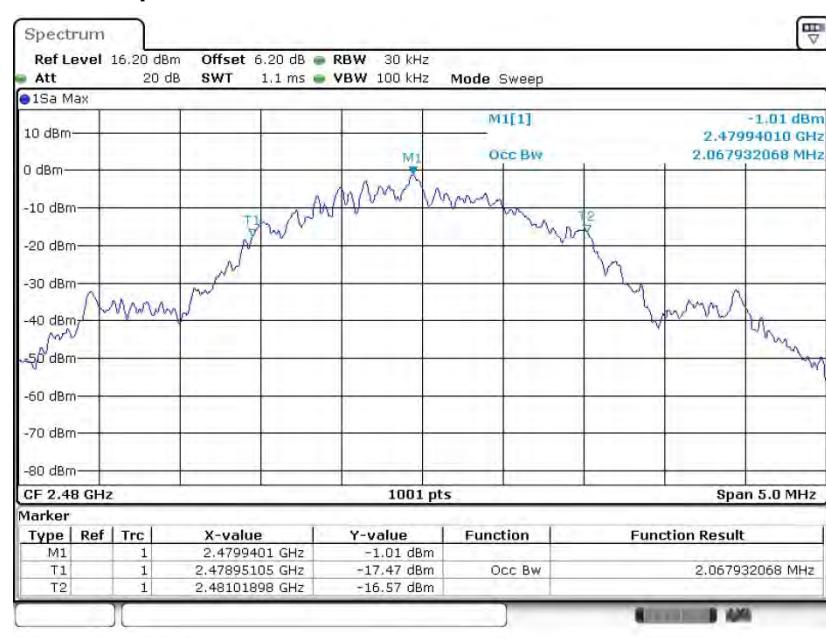

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

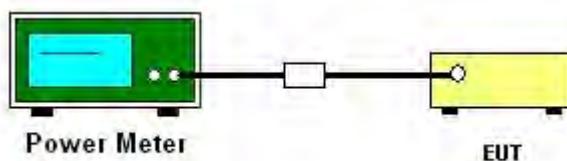

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

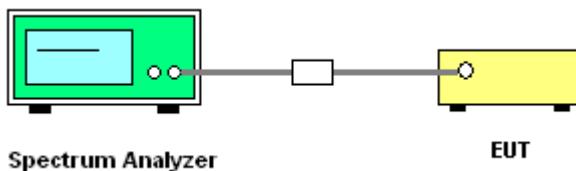


3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth v4.0 LE

PSD 100kHz Plot on Channel 00

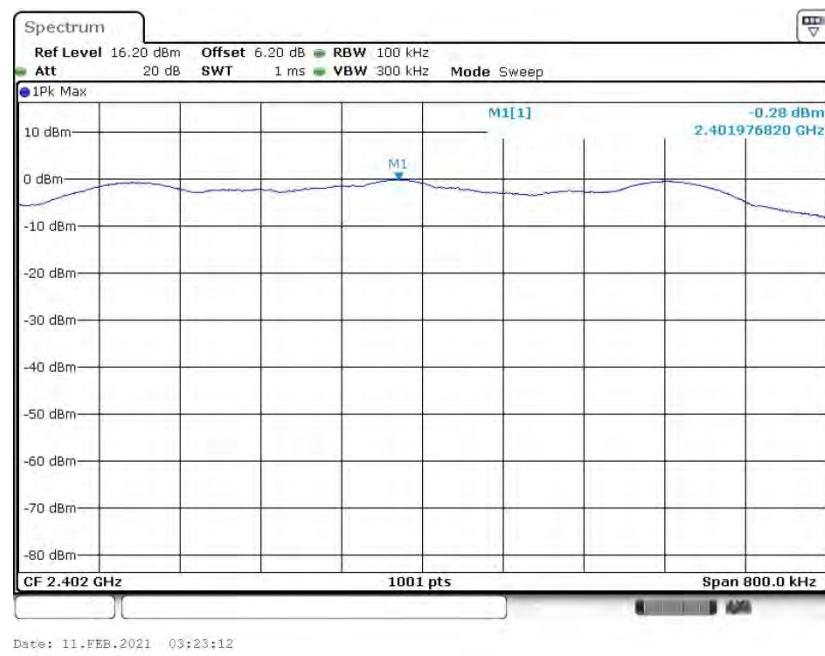


PSD 100kHz Plot on Channel 19

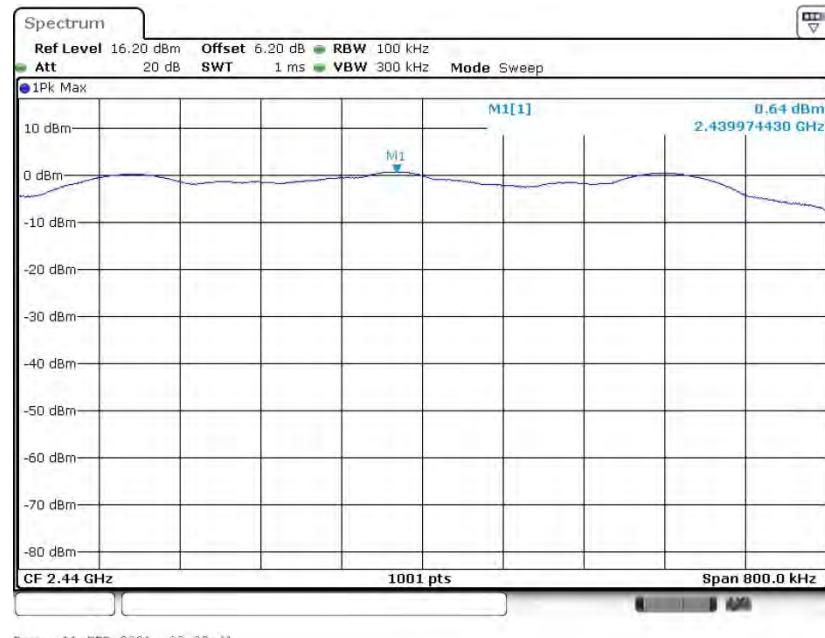




PSD 100kHz Plot on Channel 39

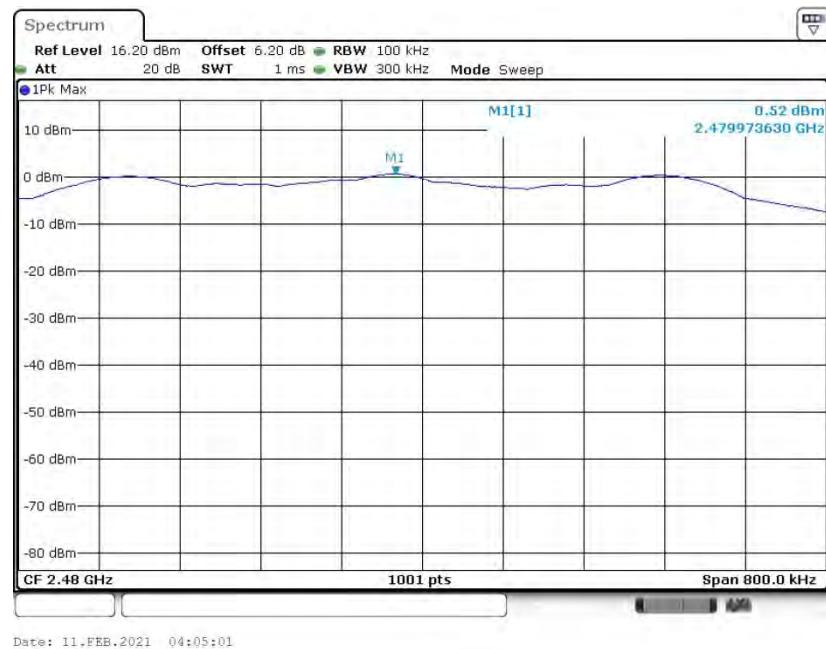




Bluetooth v5.0 LE

PSD 100kHz Plot on Channel 00

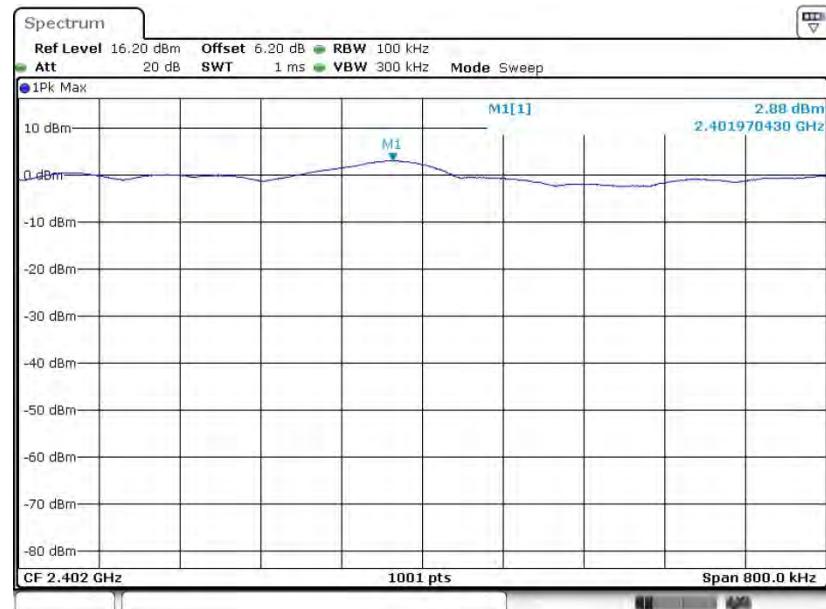


PSD 100kHz Plot on Channel 19

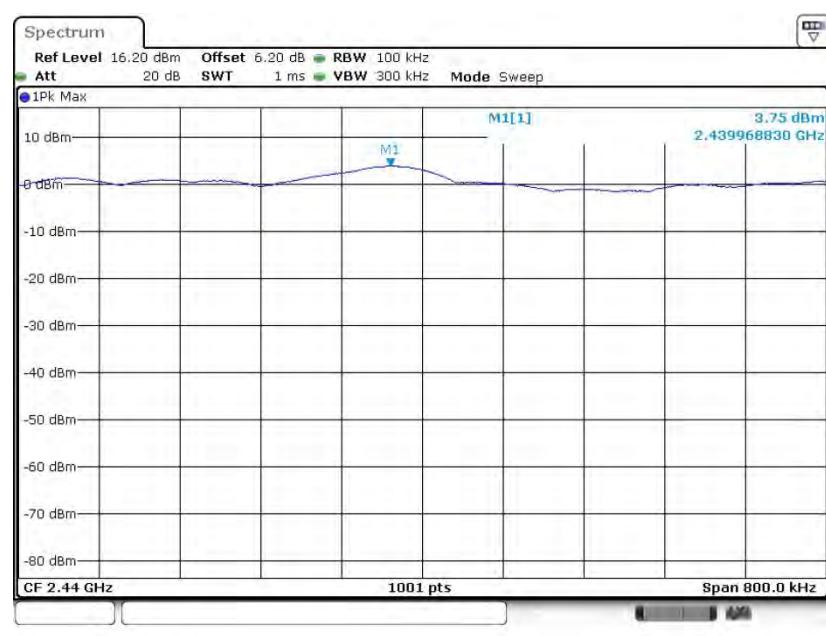



PSD 100kHz Plot on Channel 39

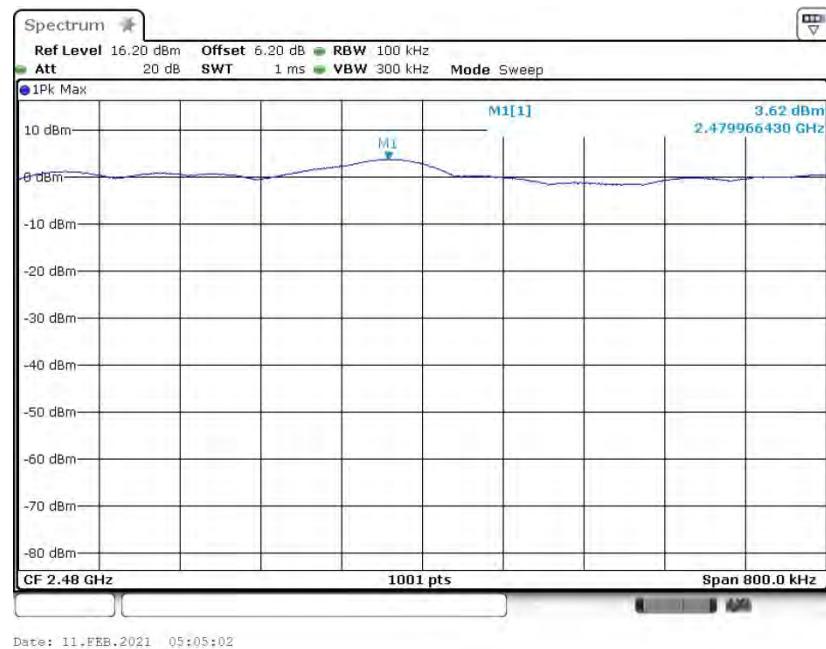


Date: 11.FEB.2021 05:05:02



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


Bluetooth v4.0 LE

PSD 3kHz Plot on Channel 00

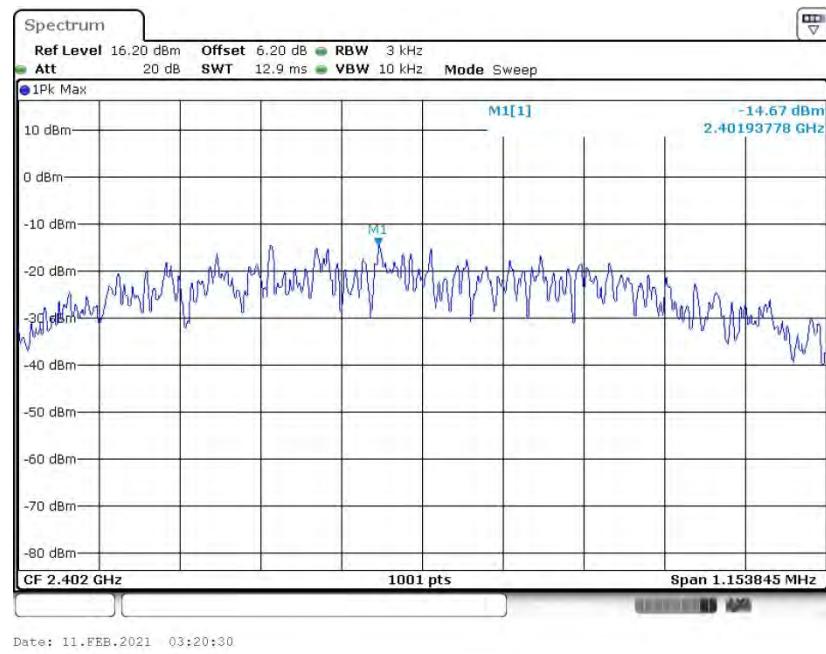

Date: 11.FEB.2021 03:20:30


PSD 3kHz Plot on Channel 19

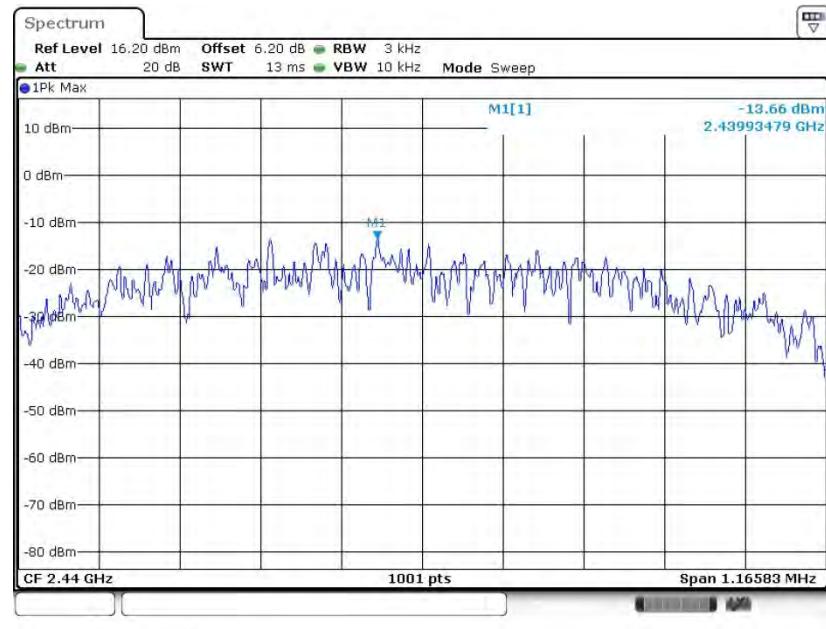

Date: 11.FEB.2021 03:39:06




PSD 3kHz Plot on Channel 39

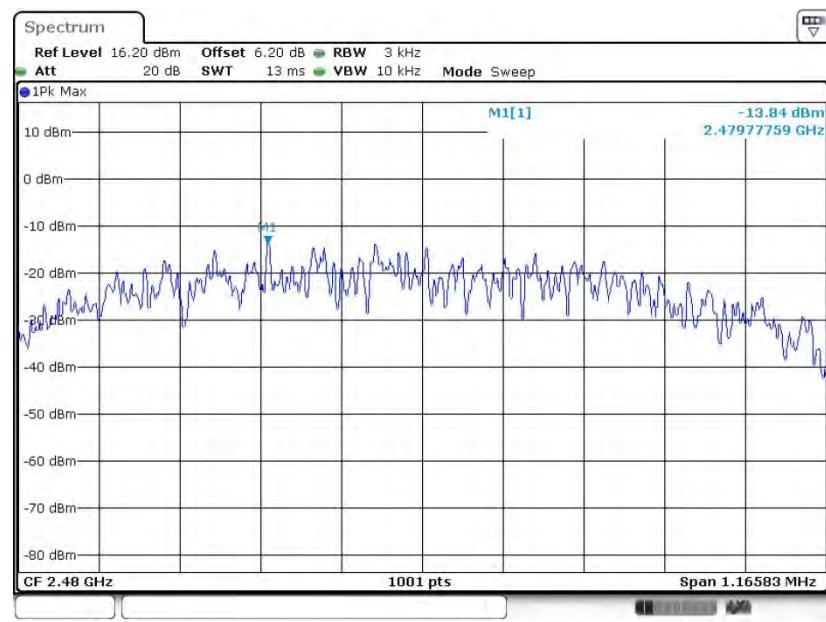




Bluetooth v5.0 LE

PSD 3kHz Plot on Channel 00

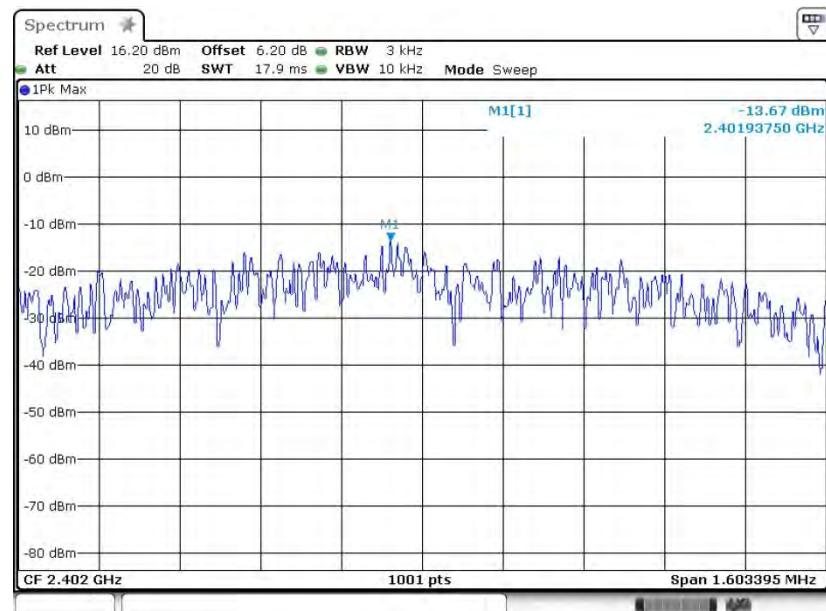


PSD 3kHz Plot on Channel 19

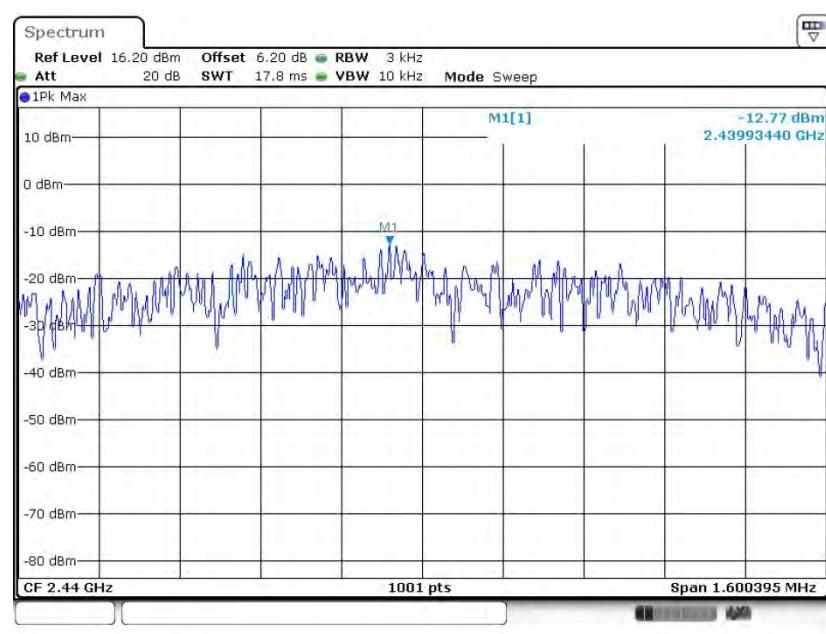



PSD 3kHz Plot on Channel 39

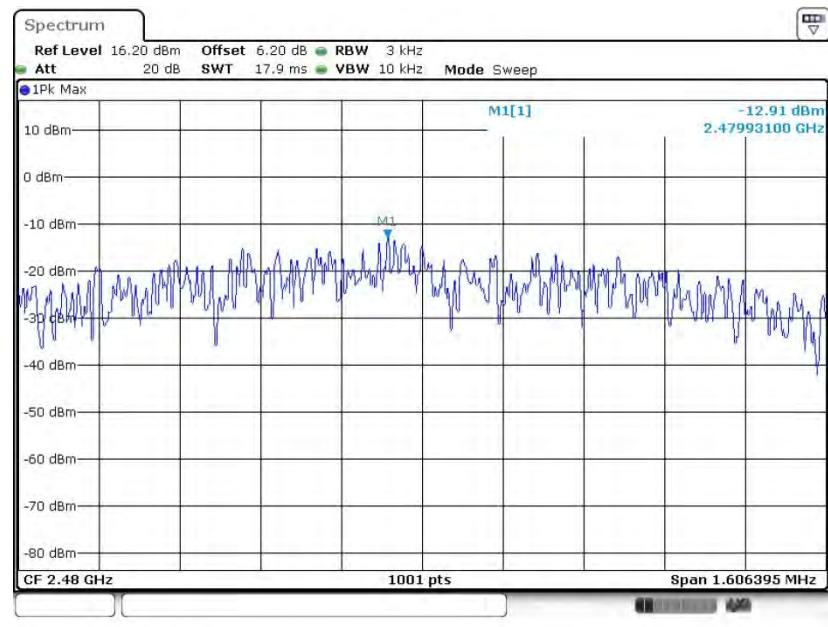

Date: 11.FEB.2021 05:04:38

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

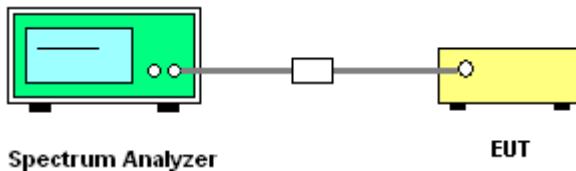


3.4.5 Test Result of Conducted Band Edges Plots

Bluetooth v4.0 LE

Low Band Edge Plot on Channel 00

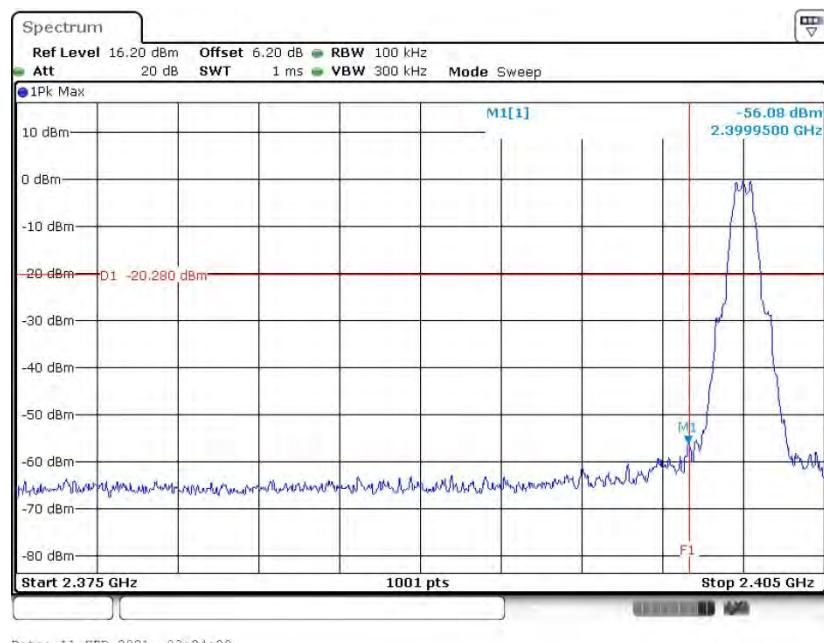


High Band Edge Plot on Channel 39

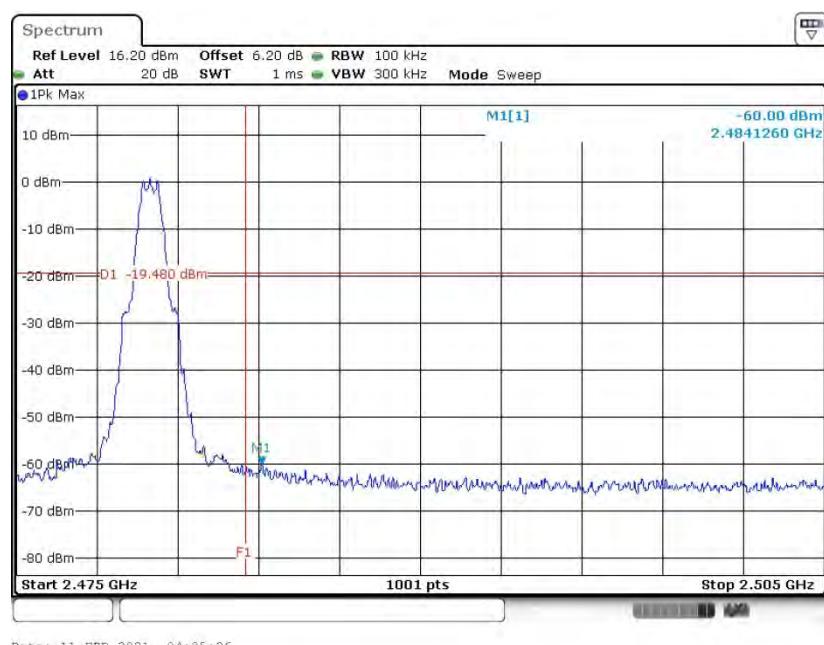




Bluetooth v5.0 LE

Low Band Edge Plot on Channel 00

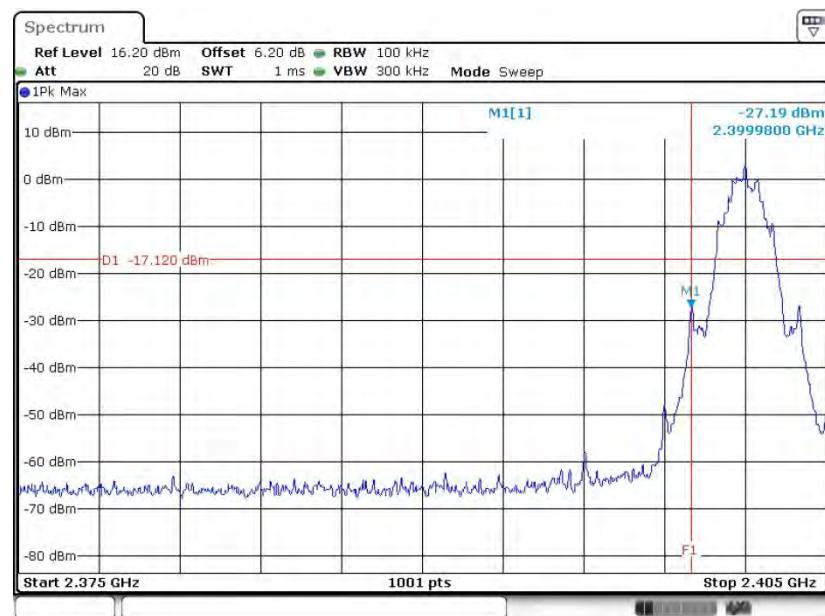

High Band Edge Plot on Channel 39

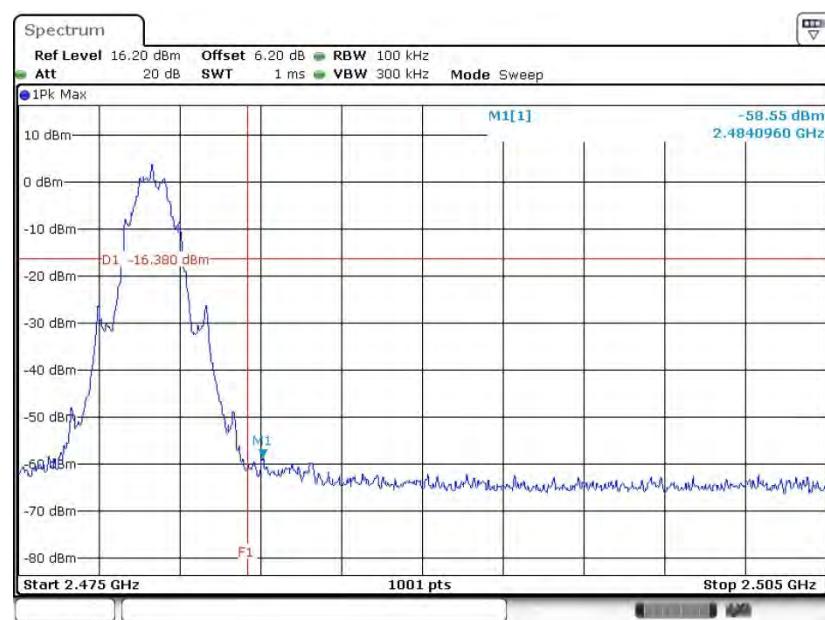




3.4.6 Test Result of Conducted Spurious Emission Plots

Bluetooth v4.0 LE


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

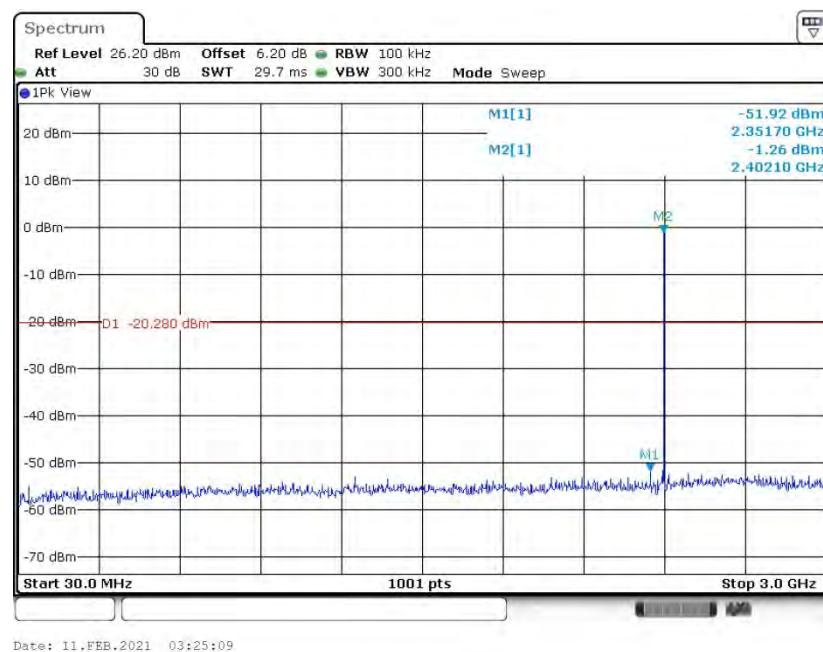

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

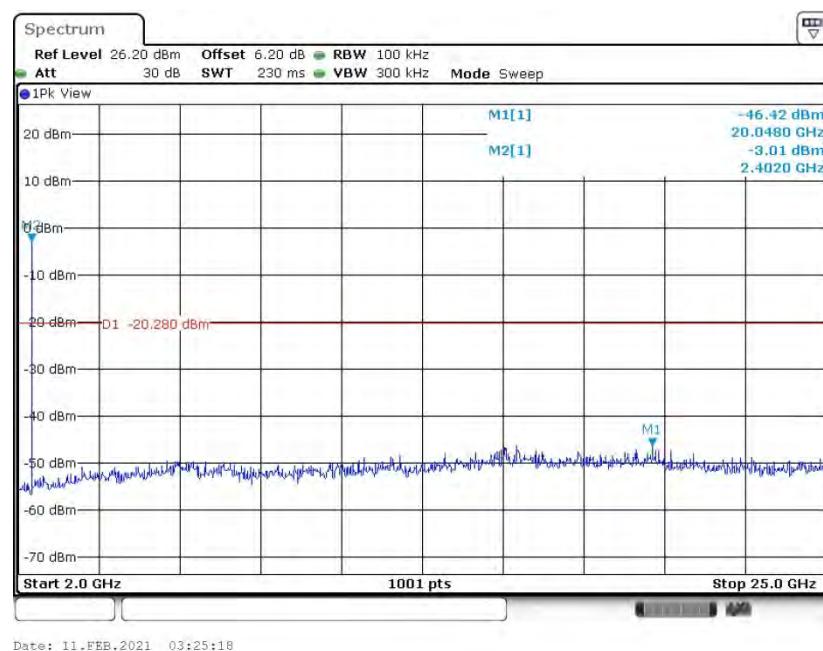




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

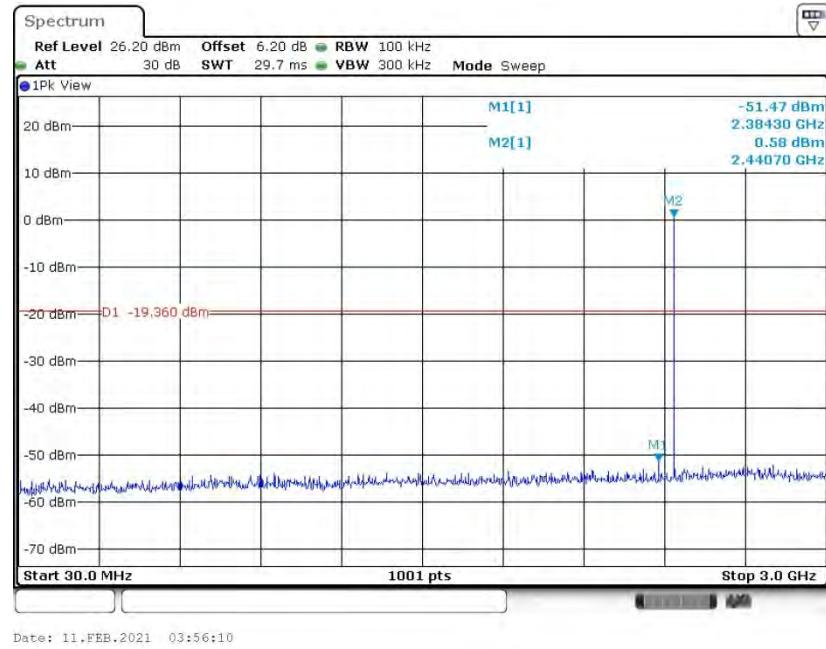

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 19

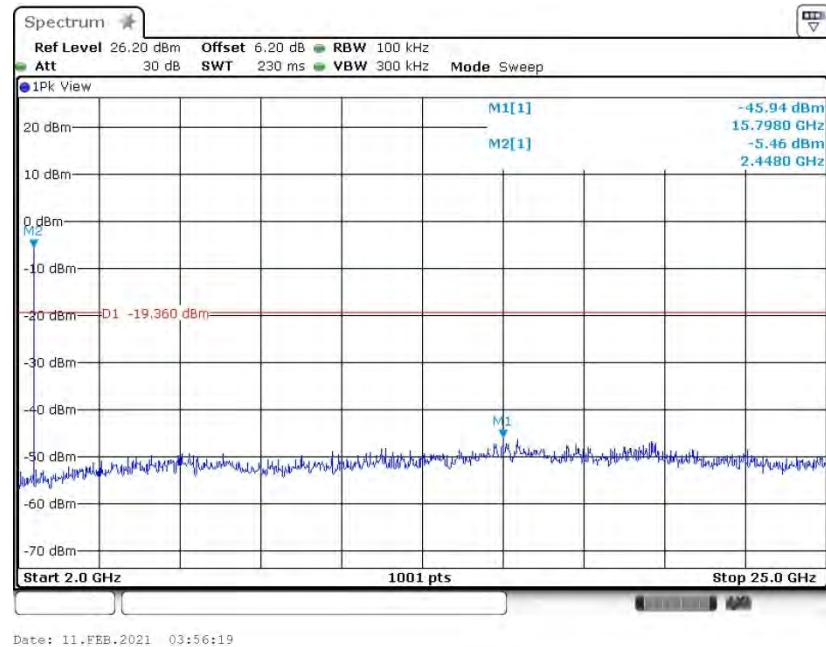




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

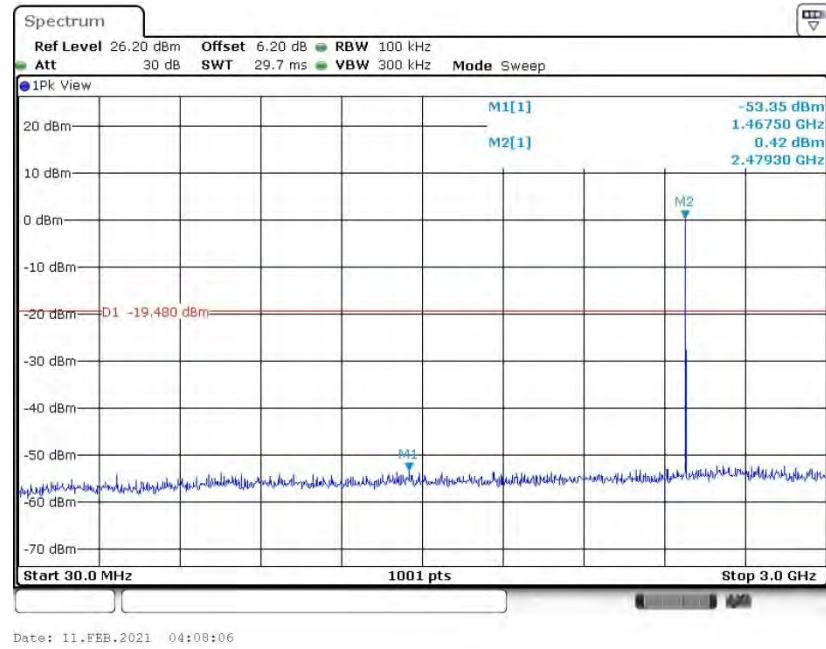

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

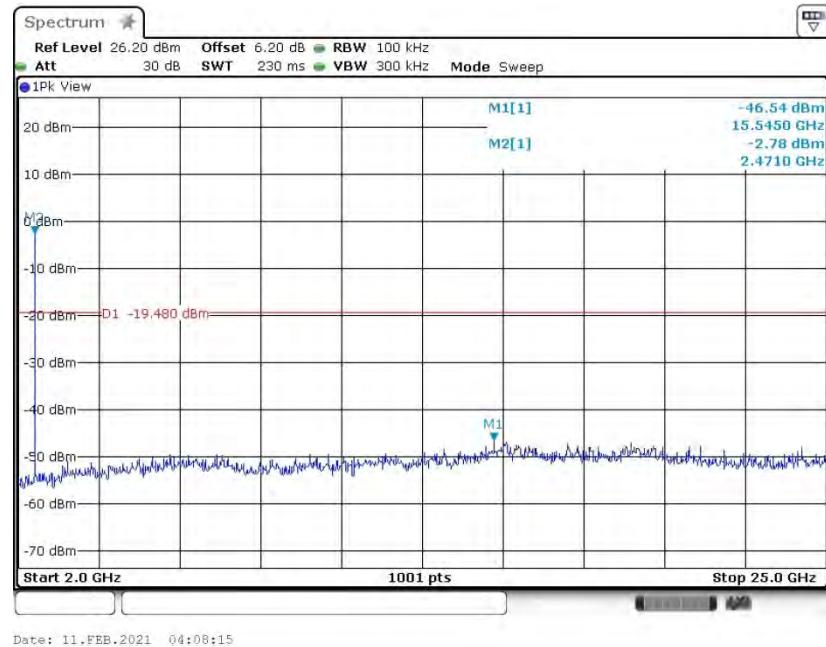




Bluetooth v5.0 LE


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 00

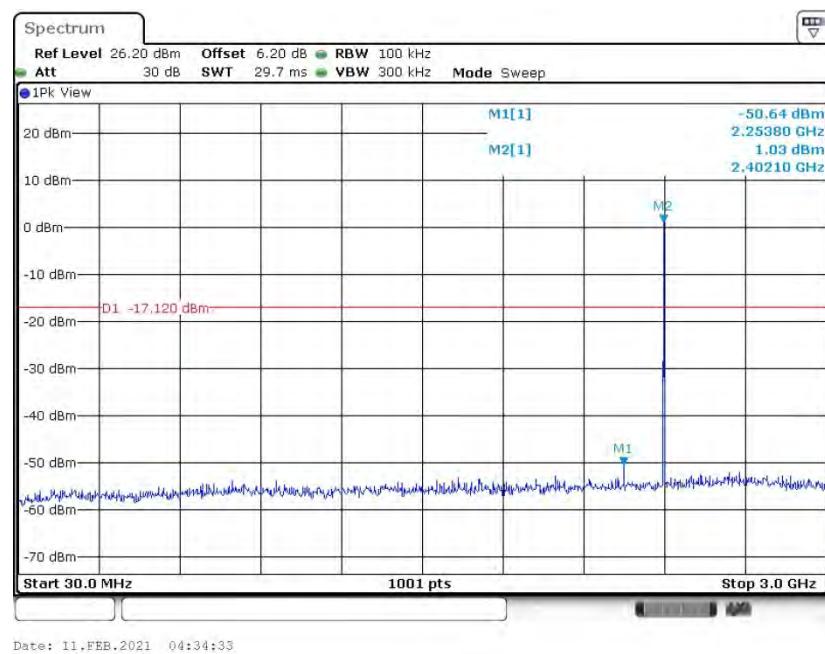

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps


GFSK Channel 00

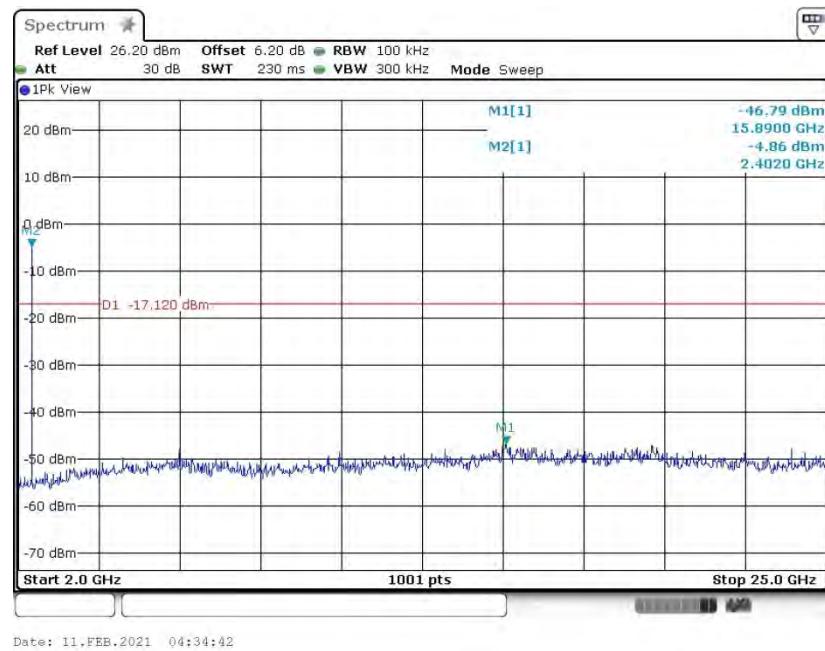




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 19

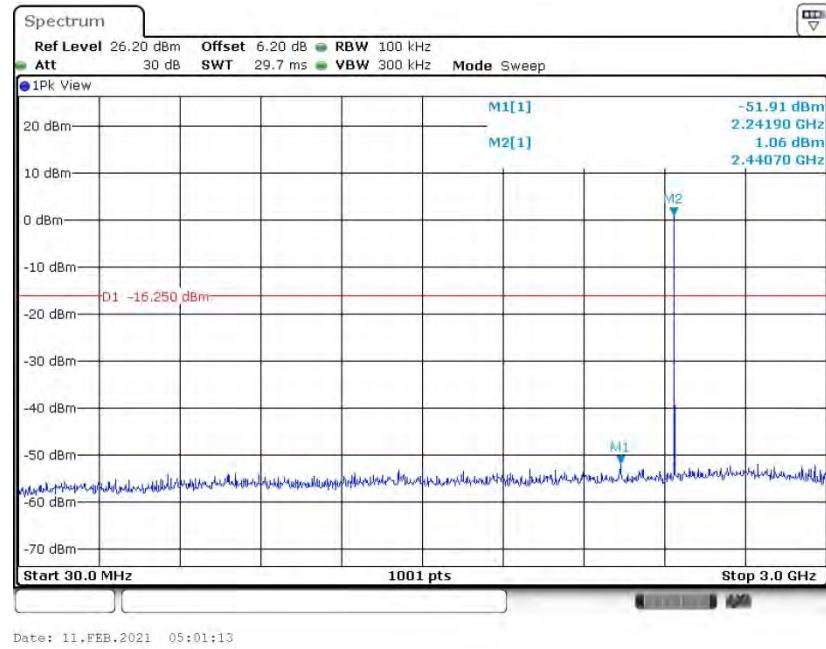

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps


GFSK Channel 19

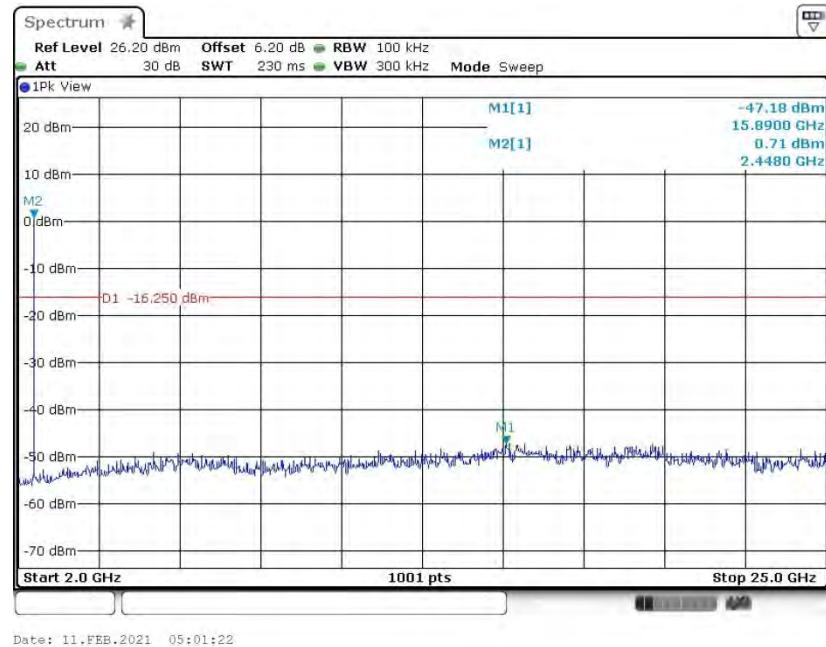




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

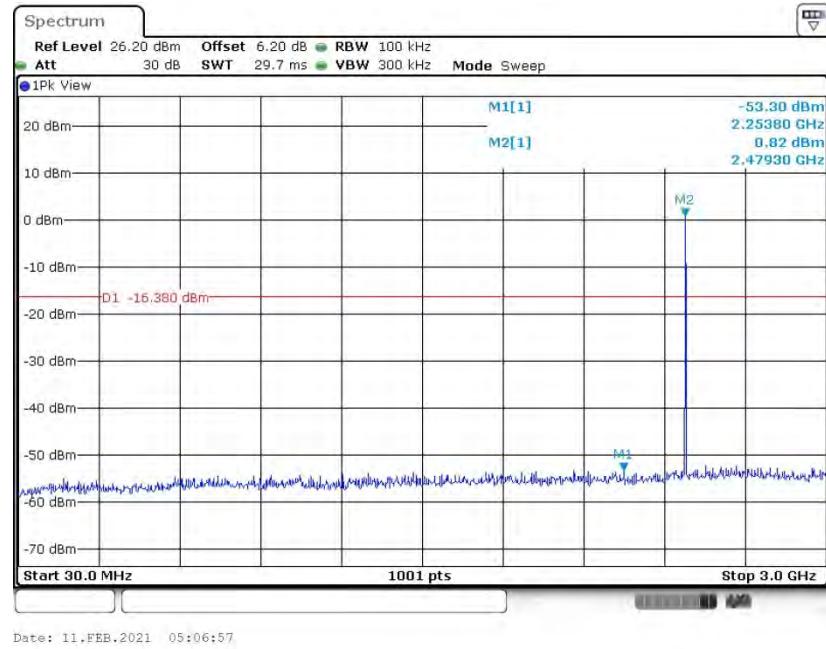

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps

GFSK Channel 39

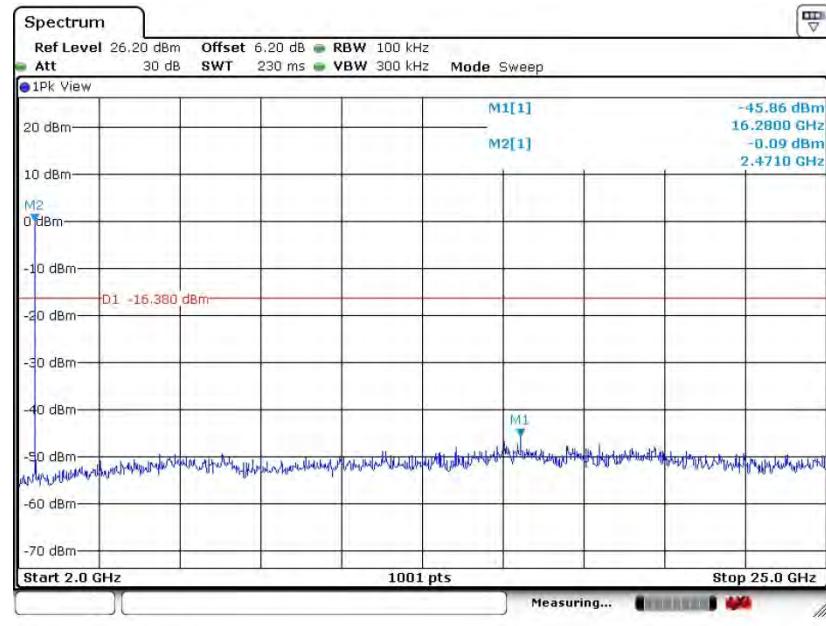



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

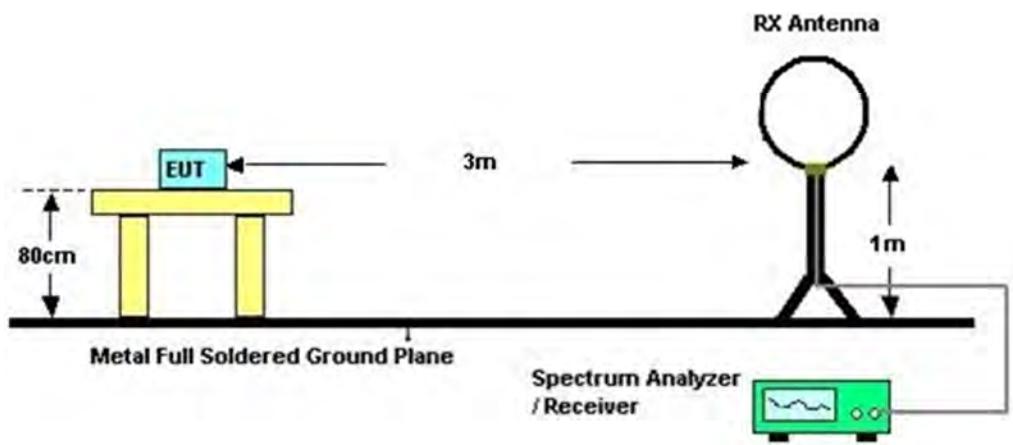

For radiated emissions from 30MHz to 1GHz

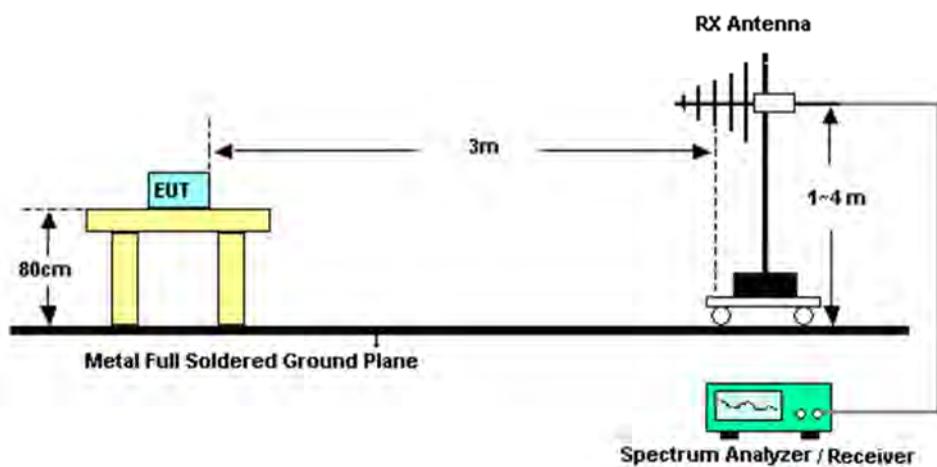

For radiated emissions above 1GHz

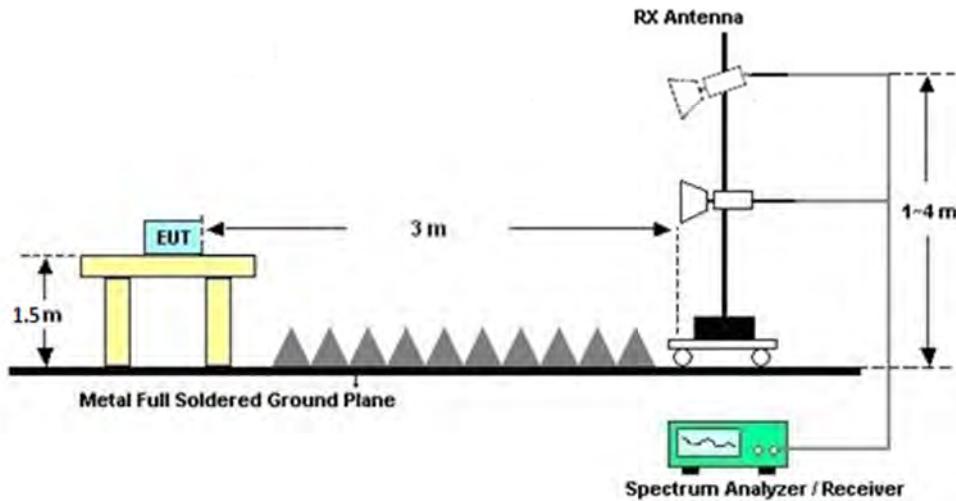



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C & D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C & D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

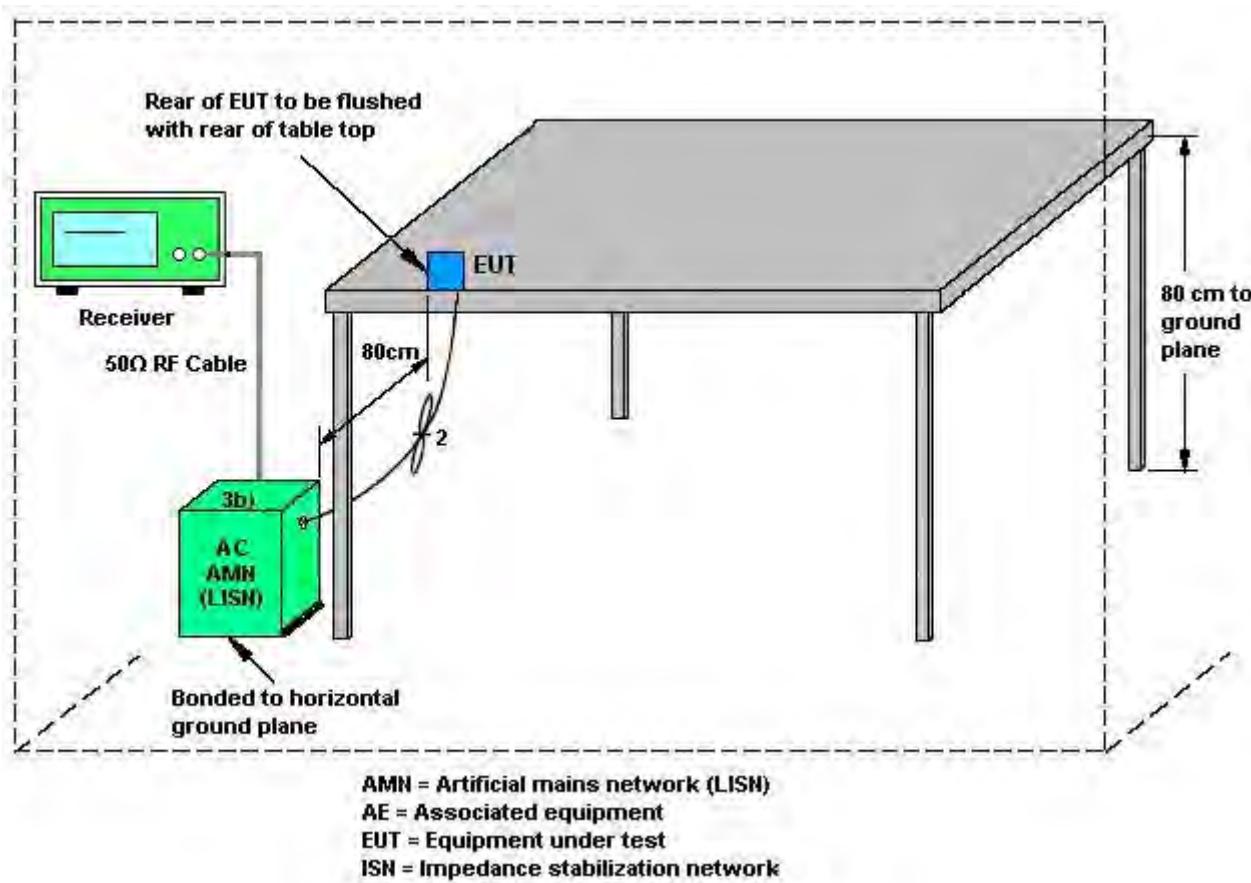

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Feb. 11, 2021	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Feb. 11, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Feb. 11, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Mar. 09, 2021	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 14, 2020	Mar. 09, 2021	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Mar. 09, 2021	Oct. 31, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 29, 2020	Mar. 09, 2021	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Mar. 09, 2021	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 06, 2020	Mar. 09, 2021	Nov. 05, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 14, 2020	Mar. 09, 2021	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 06, 2021	Mar. 09, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 06, 2021	Mar. 09, 2021	Jan. 05, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Mar. 09, 2021	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 09, 2021	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 09, 2021	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 09, 2021	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Mar. 16, 2021	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Mar. 16, 2021	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 27, 2020	Mar. 16, 2021	Oct. 26, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Mar. 16, 2021	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
--	---------------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	--------------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	--------------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
--	--------------



Appendix A. Conducted Test Results

Bluetooth v4.0 Low Energy

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2021/2/11	Relative Humidity:	40~51	%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.063	0.769	0.50	Pass
BLE	1Mbps	1	19	2440	1.073	0.777	0.50	Pass
BLE	1Mbps	1	39	2480	1.069	0.777	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.64	30.00	3.50	4.14	36.00	Pass
BLE	1Mbps	1	19	2440	1.26	30.00	3.50	4.76	36.00	Pass
BLE	1Mbps	1	39	2480	1.47	30.00	3.50	4.97	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	
BLE	1Mbps	1	0	2402	2.07	0.51	
BLE	1Mbps	1	19	2440	2.07	1.03	
BLE	1Mbps	1	39	2480	2.07	1.26	

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-0.28	-14.67	3.50	8.00	Pass
BLE	1Mbps	1	19	2440	0.64	-13.66	3.50	8.00	Pass
BLE	1Mbps	1	39	2480	0.52	-13.84	3.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

Bluetooth v5.0 Low Energy

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2021/2/11	Relative Humidity:	40~51	%

<u>TEST RESULTS DATA</u> <u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.068	1.069	0.50	Pass
BLE	2Mbps	1	19	2440	2.068	1.067	0.50	Pass
BLE	2Mbps	1	39	2480	2.068	1.071	0.50	Pass

<u>TEST RESULTS DATA</u> <u>Peak Power Table</u>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.11	30.00	3.50	7.61	36.00	Pass
BLE	2Mbps	1	19	2440	4.58	30.00	3.50	8.08	36.00	Pass
BLE	2Mbps	1	39	2480	4.64	30.00	3.50	8.14	36.00	Pass

<u>TEST RESULTS DATA</u> <u>Average Power Table</u> <u>(Reporting Only)</u>							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	
BLE	2Mbps	1	0	2402	4.89	3.96	
BLE	2Mbps	1	19	2440	4.89	4.42	
BLE	2Mbps	1	39	2480	4.89	4.59	

<u>TEST RESULTS DATA</u> <u>Peak Power Density</u>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.88	-13.67	3.50	8.00	Pass
BLE	2Mbps	1	19	2440	3.75	-12.77	3.50	8.00	Pass
BLE	2Mbps	1	39	2480	3.62	-12.91	3.50	8.00	Pass


Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
Test Voltage :	120Vac / 60Hz	Relative Humidity :	37~39%
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

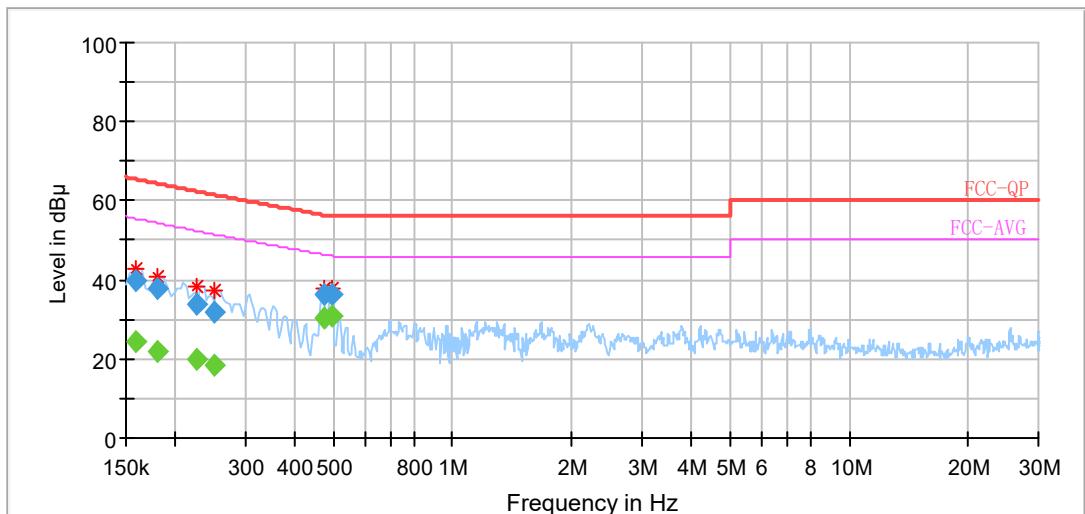


Final Result:

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158944	---	24.23	55.47	31.24	L1	OFF	20.1
0.158944	39.76	---	65.48	25.72	L1	OFF	20.1
0.180562	---	21.96	54.33	32.37	L1	OFF	20.0
0.180562	37.68	---	64.35	26.67	L1	OFF	20.0
0.226819	---	20.10	52.34	32.24	L1	OFF	19.9
0.226819	33.87	---	62.38	28.51	L1	OFF	19.9
0.249206	---	18.51	51.54	33.03	L1	OFF	19.9
0.249206	31.87	---	61.58	29.71	L1	OFF	19.9
0.473138	---	30.38	46.42	16.03	L1	OFF	19.8
0.473138	36.26	---	56.42	20.16	L1	OFF	19.8
0.495525	---	30.85	46.07	15.21	L1	OFF	19.8
0.495525	36.32	---	56.07	19.75	L1	OFF	19.8



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

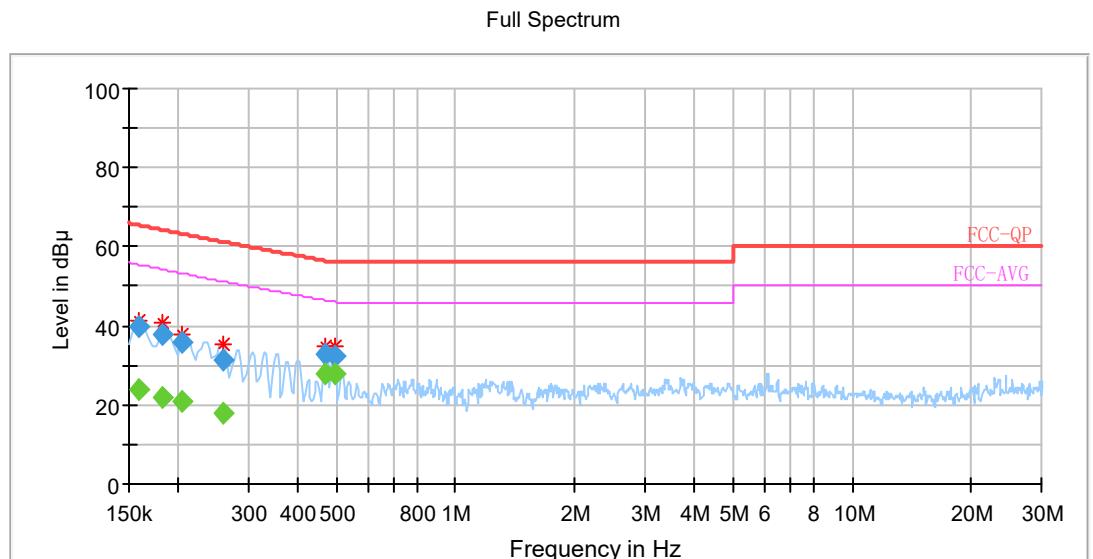**Final Result:**

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158944	---	23.99	55.47	31.49	N	OFF	20.2
0.158944	39.84	---	65.48	25.64	N	OFF	20.2
0.181331	---	22.05	54.29	32.24	N	OFF	20.2
0.181331	37.65	---	64.31	26.66	N	OFF	20.2
0.203719	---	20.97	53.27	32.30	N	OFF	20.2
0.203719	36.01	---	63.30	27.29	N	OFF	20.2
0.260456	---	17.97	51.17	33.20	N	OFF	20.1
0.260456	31.56	---	61.21	29.65	N	OFF	20.1
0.470888	---	27.85	46.45	18.60	N	OFF	19.9
0.470888	32.59	---	56.46	23.87	N	OFF	19.9
0.495524	---	27.79	46.07	18.27	N	OFF	19.9
0.495524	32.41	---	56.07	23.66	N	OFF	19.9



Appendix C. Radiated Spurious Emission

Bluetooth v4.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2354.2	56.75	-17.25	74	49.71	33.08	7.41	33.45	100	175	P	H
		2384.23	46.79	-7.21	54	39.51	33.29	7.44	33.45	100	175	A	H
	*	2402	94.95	-	-	87.42	33.5	7.47	33.44	100	175	P	H
	*	2402	94.01	-	-	86.48	33.5	7.47	33.44	100	175	A	H
		2367.07	56.18	-17.82	74	49.14	33.08	7.41	33.45	400	78	P	V
		2382.15	46.4	-7.6	54	39.12	33.29	7.44	33.45	400	78	A	V
	*	2402	91.25	-	-	83.72	33.5	7.47	33.44	400	78	P	V
	*	2402	90.27	-	-	82.74	33.5	7.47	33.44	400	78	A	V
BLE CH 19 2440MHz		2359.4	55.72	-18.28	74	48.68	33.08	7.41	33.45	299	198	P	H
		2386.18	46.26	-7.74	54	38.74	33.5	7.47	33.45	299	198	A	H
		2487.88	55.74	-18.26	74	48.87	32.73	7.56	33.42	299	198	P	H
		2499.52	45.83	-8.17	54	38.96	32.73	7.56	33.42	299	198	A	H
	*	2440	95.32	-	-	88.13	33.11	7.51	33.43	299	198	P	H
	*	2440	94.45	-	-	87.26	33.11	7.51	33.43	299	198	A	H
		2372.27	55.61	-18.39	74	48.33	33.29	7.44	33.45	135	68	P	V
		2388.91	46.22	-7.78	54	38.7	33.5	7.47	33.45	135	68	A	V
		2484.94	55.75	-18.25	74	48.77	32.86	7.55	33.43	135	68	P	V
		2490.7	45.78	-8.22	54	38.91	32.73	7.56	33.42	135	68	A	V
	*	2440	91.73	-	-	84.54	33.11	7.51	33.43	135	68	P	V
	*	2440	90.9	-	-	83.71	33.11	7.51	33.43	135	68	A	V



		2486.56	56.03	-17.97	74	49.04	32.86	7.55	33.42	124	338	P	H	
		2488.18	45.88	-8.12	54	39.01	32.73	7.56	33.42	124	338	A	H	
BLE CH 39 2480MHz		*	2480	94.19	-	-	87.21	32.86	7.55	33.43	124	338	P	H
		*	2480	93.46	-	-	86.48	32.86	7.55	33.43	124	338	A	H
		2494.72	55.47	-18.53	74	48.6	32.73	7.56	33.42	331	321	P	V	
		2491.96	45.75	-8.25	54	38.88	32.73	7.56	33.42	331	321	A	V	
		*	2480	90.53	-	-	83.55	32.86	7.55	33.43	331	321	P	V
		*	2480	89.72	-	-	82.74	32.86	7.55	33.43	331	321	A	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.57	-31.43	74	58.62	34.84	10.83	61.72	300	0	P	H
		4804	43.01	-30.99	74	59.06	34.84	10.83	61.72	300	360	P	V
BLE CH 19 2440MHz		4880	42.63	-31.37	74	58.62	34.83	10.89	61.71	300	0	P	H
		7320	42.92	-31.08	74	55.06	36.4	13.36	61.9	300	0	P	H
		4880	43.03	-30.97	74	59.02	34.83	10.89	61.71	300	360	P	V
		7320	43.02	-30.98	74	55.16	36.4	13.36	61.9	300	360	P	V
BLE CH 39 2480MHz		4960	42.43	-31.57	74	58.36	34.81	10.96	61.7	300	0	P	H
		7440	43.11	-30.89	74	55.04	36.47	13.5	61.9	300	0	P	H
		4960	43.14	-30.86	74	59.07	34.81	10.96	61.7	300	360	P	V
		7440	43.28	-30.72	74	55.21	36.47	13.5	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		30.97	19.05	-20.95	40	25.84	24.57	0.84	32.2	-	-	P	H	
		128.94	17.47	-26.03	43.5	30.03	17.6	1.98	32.14	-	-	P	H	
		171.62	21.11	-22.39	43.5	35.34	15.59	2.28	32.1	-	-	P	H	
		222.06	23.98	-22.02	46	38	15.52	2.6	32.14	-	-	P	H	
		308.39	25.88	-20.12	46	35.44	19.49	3.07	32.12	100	360	P	H	
		588.72	24.9	-21.1	46	27.27	25.71	4.22	32.3	-	-	P	H	
		32.91	30.6	-9.4	40	38.4	23.51	0.89	32.2	100	0	P	V	
		54.25	26.2	-13.8	40	43.73	13.4	1.27	32.2	-	-	P	V	
		206.54	21.75	-21.75	43.5	36.18	15.17	2.51	32.11	-	-	P	V	
		436.43	19.92	-26.08	46	25.72	22.78	3.65	32.23	-	-	P	V	
		734.22	26.22	-19.78	46	26.05	27.73	4.71	32.27	-	-	P	V	
		912.7	28.06	-17.94	46	25.43	29.58	5.25	32.2	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Bluetooth v5.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2389.69	56.13	-17.87	74	48.61	33.5	7.47	33.45	307	173	P	H
		2389.82	46.83	-7.17	54	39.31	33.5	7.47	33.45	307	173	A	H
	*	2402	94.17	-	-	86.64	33.5	7.47	33.44	307	173	P	H
	*	2402	92.93	-	-	85.4	33.5	7.47	33.44	307	173	A	H
		2387.87	56.64	-17.36	74	49.12	33.5	7.47	33.45	396	310	P	V
		2375.52	46.88	-7.12	54	39.6	33.29	7.44	33.45	396	310	A	V
	*	2402	87.64	-	-	80.11	33.5	7.47	33.44	396	310	P	V
	*	2402	86.37	-	-	78.84	33.5	7.47	33.44	396	310	A	V
BLE CH 19 2440MHz		2388	55.9	-18.1	74	48.38	33.5	7.47	33.45	298	197	P	H
		2375.91	46.92	-7.08	54	39.64	33.29	7.44	33.45	298	197	A	H
		2489.14	55.58	-18.42	74	48.71	32.73	7.56	33.42	298	197	P	H
		2488.3	46.18	-7.82	54	39.31	32.73	7.56	33.42	298	197	A	H
	*	2440	97.35	-	-	90.16	33.11	7.51	33.43	298	197	P	H
	*	2440	96.12	-	-	88.93	33.11	7.51	33.43	298	197	A	H
		2339.38	55.94	-18.06	74	49.15	32.87	7.38	33.46	100	103	P	V
		2382.54	46.77	-7.23	54	39.49	33.29	7.44	33.45	100	103	A	V
		2485.9	55.42	-18.58	74	48.43	32.86	7.55	33.42	100	103	P	V
		2490.7	46.11	-7.89	54	39.24	32.73	7.56	33.42	100	103	A	V
	*	2440	93.44	-	-	86.25	33.11	7.51	33.43	100	103	P	V
	*	2440	92.2	-	-	85.01	33.11	7.51	33.43	100	103	A	V



		2492.08	55.91	-18.09	74	49.04	32.73	7.56	33.42	300	27	P	H	
		2483.5	48.42	-5.58	54	41.44	32.86	7.55	33.43	300	27	A	H	
BLE CH 39 2480MHz		*	2480	98.39	-	-	91.41	32.86	7.55	33.43	300	27	P	H
		*	2480	97.12	-	-	90.14	32.86	7.55	33.43	300	27	A	H
			2493.58	56.09	-17.91	74	49.22	32.73	7.56	33.42	342	349	P	V
			2483.5	47.17	-6.83	54	40.19	32.86	7.55	33.43	342	349	A	V
		*	2480	94.08	-	-	87.1	32.86	7.55	33.43	342	349	P	V
		*	2480	92.83	-	-	85.85	32.86	7.55	33.43	342	349	A	V
Remark		1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	42.83	-31.17	74	58.88	34.84	10.83	61.72	300	0	P	H
		4804	43.53	-30.47	74	59.58	34.84	10.83	61.72	300	360	P	V
BLE CH 19 2440MHz		4880	42.62	-31.38	74	58.61	34.83	10.89	61.71	300	0	P	H
		7320	43	-31	74	55.14	36.4	13.36	61.9	300	0	P	H
		4880	43.04	-30.96	74	59.03	34.83	10.89	61.71	300	360	P	V
		7320	43.12	-30.88	74	55.26	36.4	13.36	61.9	300	360	P	V
BLE CH 39 2480MHz		4962	42.62	-31.38	74	58.55	34.81	10.96	61.7	300	0	P	H
		7440	43	-31	74	54.93	36.47	13.5	61.9	300	0	P	H
		4962	43.04	-30.96	74	58.97	34.81	10.96	61.7	300	360	P	V
		7440	43.22	-30.78	74	55.15	36.47	13.5	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
2.4GHz BLE LF		30.97	18.91	-21.09	40	25.7	24.57	0.84	32.2	-	-	P	H	
		157.07	19.14	-24.36	43.5	32.37	16.68	2.19	32.1	-	-	P	H	
		234.67	23.44	-22.56	46	35.99	16.95	2.67	32.17	-	-	P	H	
		309.36	26.13	-19.87	46	35.68	19.5	3.07	32.12	-	-	P	H	
		620.73	24.38	-21.62	46	26.22	26.09	4.33	32.26	-	-	P	H	
		936.95	27.74	-18.26	46	24.1	30.52	5.32	32.2	100	360	P	H	
		31.94	29.72	-10.28	40	37.02	24.04	0.86	32.2	100	0	P	V	
		54.25	24.72	-15.28	40	42.25	13.4	1.27	32.2	-	-	P	V	
		159.01	17.1	-26.4	43.5	30.44	16.56	2.2	32.1	-	-	P	V	
		210.42	21.29	-22.21	43.5	35.68	15.2	2.53	32.12	-	-	P	V	
		464.56	20.84	-25.16	46	25.97	23.36	3.77	32.26	-	-	P	V	
		806	25.54	-20.46	46	24.58	28.33	4.94	32.31	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Bluetooth v5.0 LE for Sample 2

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		2494.9	56.16	-17.84	74	49.29	32.73	7.56	33.42	180	347	P	H
		2483.5	48.02	-5.98	54	41.04	32.86	7.55	33.43	180	347	A	H
	*	2480	97.56	-	-	90.58	32.86	7.55	33.43	180	347	P	H
	*	2480	96.28	-	-	89.3	32.86	7.55	33.43	180	347	A	H
		2491.6	55.42	-18.58	74	48.55	32.73	7.56	33.42	255	272	P	V
		2485.78	46.18	-7.82	54	39.19	32.86	7.55	33.42	255	272	A	V
	*	2480	91.08	-	-	84.1	32.86	7.55	33.43	255	272	P	V
	*	2480	89.77	-	-	82.79	32.86	7.55	33.43	255	272	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		4962	42.63	-31.37	74	58.56	34.81	10.96	61.7	300	0	P	H
		7440	43.18	-30.82	74	55.11	36.47	13.5	61.9	300	0	P	H
		4962	42.16	-31.84	74	58.09	34.81	10.96	61.7	300	360	P	V
		7440	42.28	-31.72	74	54.21	36.47	13.5	61.9	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
			Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dB μ V/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dB μ V/m) – Limit Line(dB μ V/m)

For Peak Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dB μ V) – 35.86 (dB)

= 55.45 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 55.45(dB μ V/m) – 74(dB μ V/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dB μ V/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dB μ V) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dB μ V) – 35.86 (dB)

= 43.54 (dB μ V/m)

2. Over Limit(dB)

= Level(dB μ V/m) – Limit Line(dB μ V/m)

= 43.54(dB μ V/m) – 54(dB μ V/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Note symbol


-L	Low channel location
-R	High channel location




Bluetooth v4.0 LE

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)








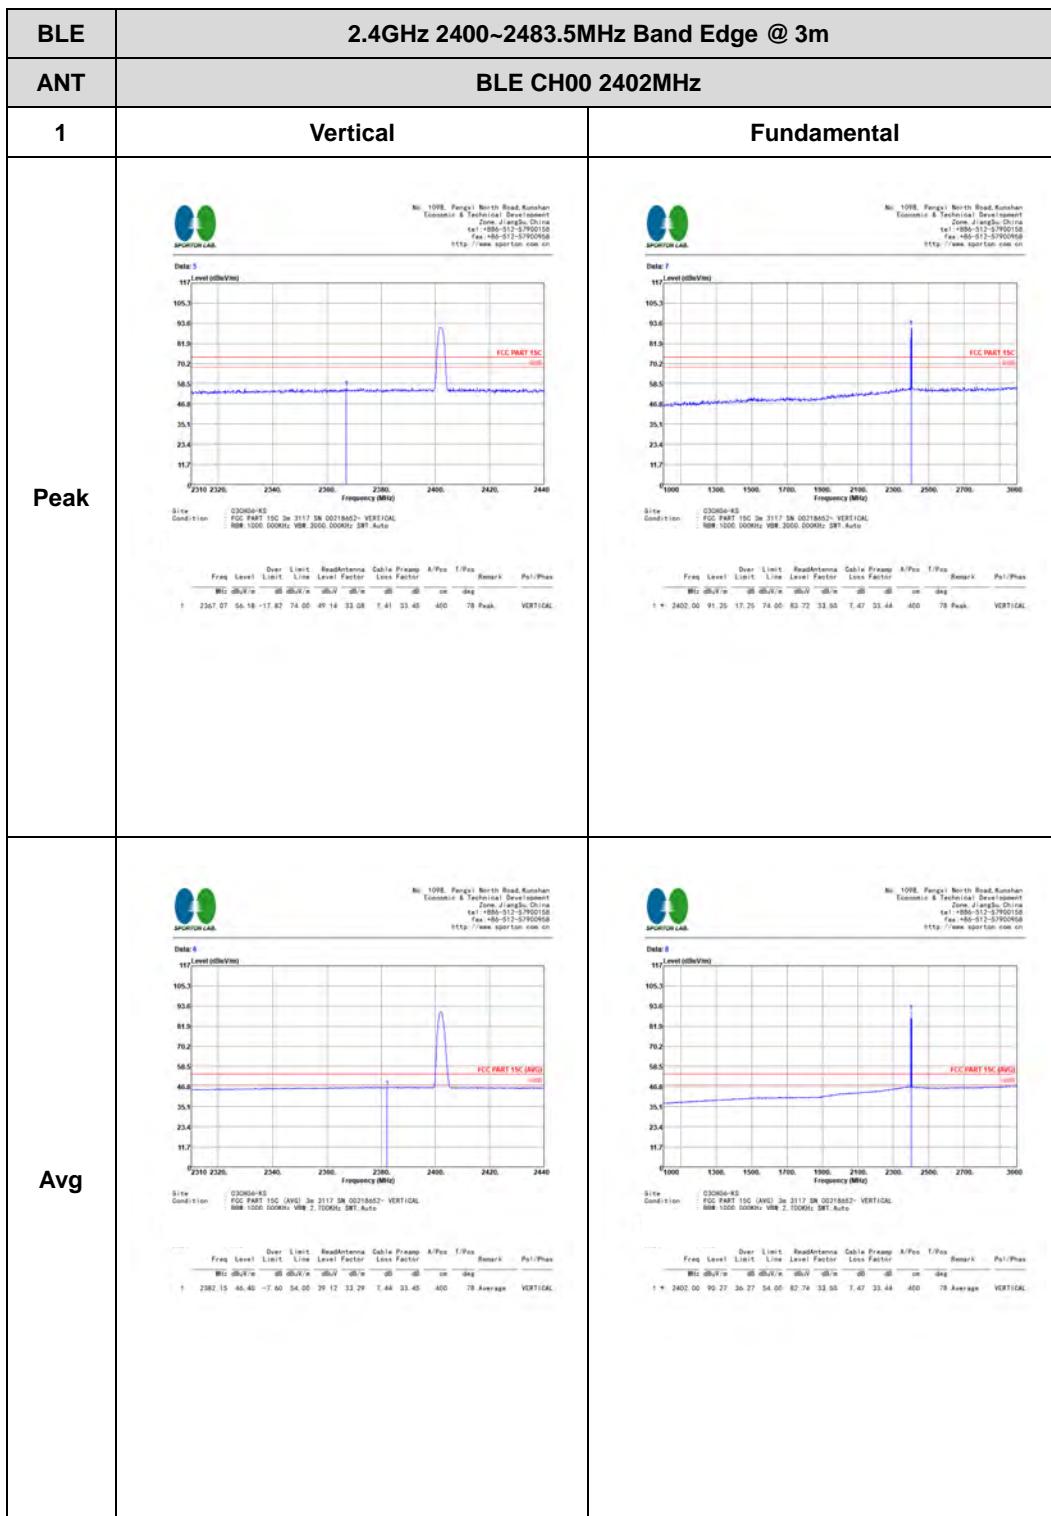


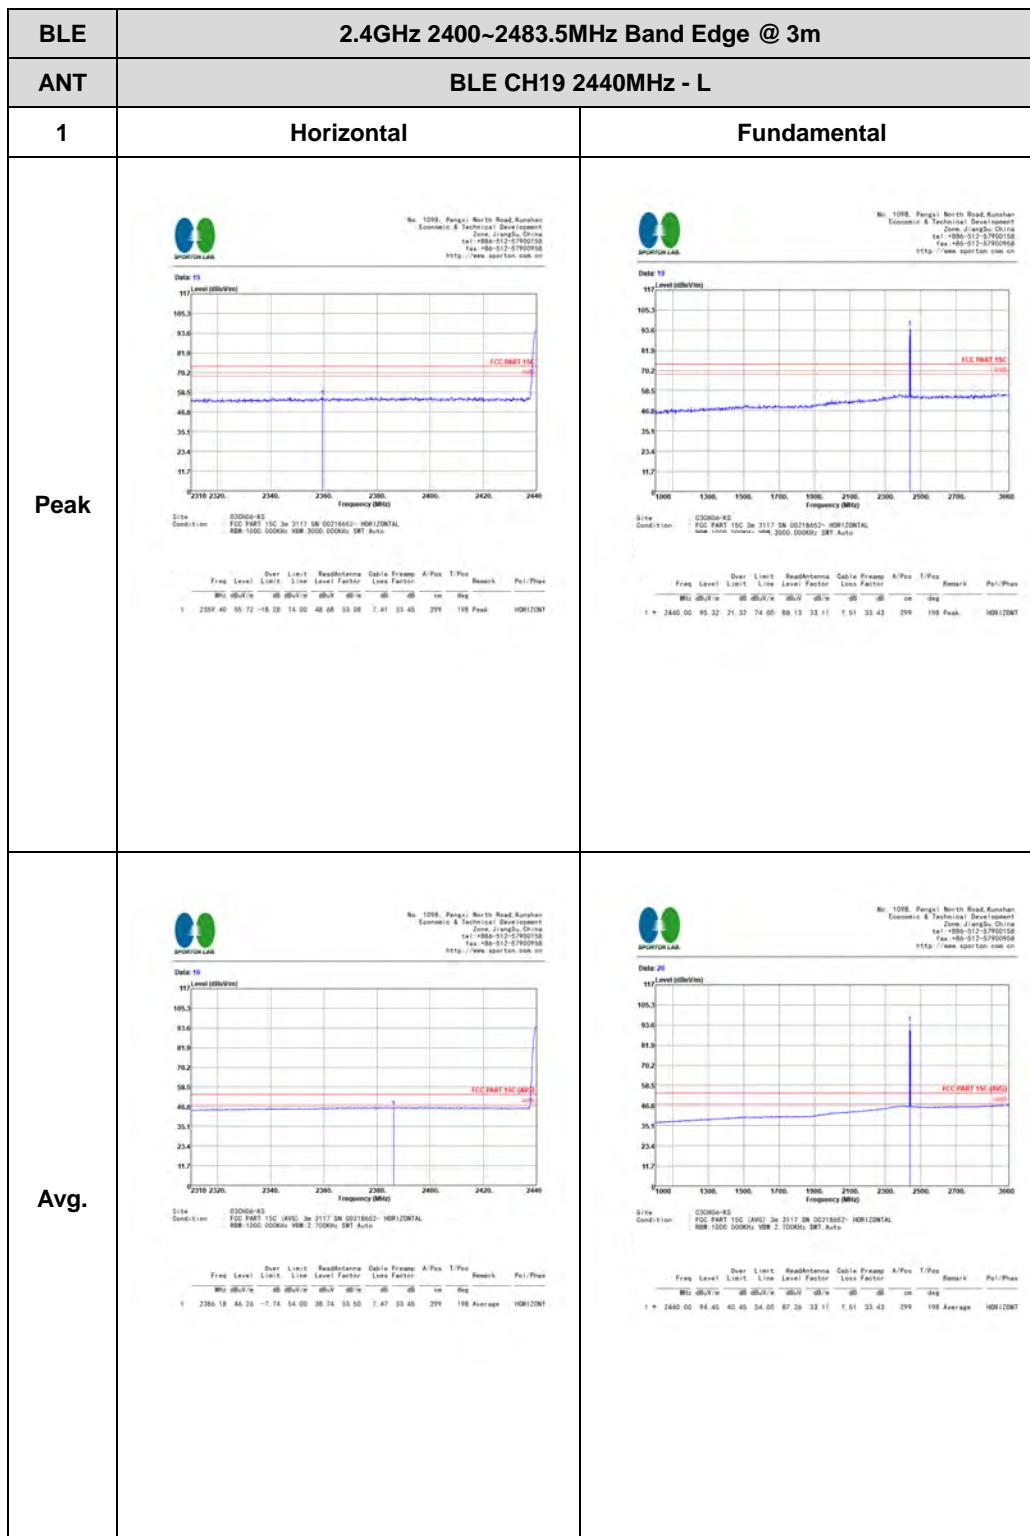



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	BLE CH19 2440MHz - R																															
1	Horizontal	-																														
Peak	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data: 17</p> <p>17.1 Level (dBm/Hz)</p> <p>169.3 167.6 165.9 164.2 162.5 160.8 159.1 157.4 155.7 154.0 152.3 150.6 148.9 147.2 145.5 143.8 142.1 140.4 138.7 137.0 135.3 133.6 131.9 130.2 128.5 126.8 125.1 123.4 121.7 120.0 118.3 116.6 114.9 113.2 111.5 109.8 108.1 106.4 104.7 103.0 101.3 100.0 98.7 97.4 96.1 94.8 93.5 92.2 90.9 89.6 88.3 87.0 85.7 84.4 83.1 81.8 80.5 79.2 77.9 76.6 75.3 74.0 72.7 71.4 70.1 68.8 67.5 66.2 64.9 63.6 62.3 61.0 59.7 58.4 57.1 55.8 54.5 53.2 51.9 50.6 49.3 48.0 46.7 45.4 44.1 42.8 41.5 40.2 38.9 37.6 36.3 35.0 33.7 32.4 31.1 29.8 28.5 27.2 25.9 24.6 23.3 22.0 20.7 19.4 18.1 16.8 15.5 14.2 12.9 11.6 10.3 9.0 7.7 6.4 5.1 3.8 2.5 1.2 0.9 0.6 0.3 0.0 -0.3 -0.6 -1.9 -3.2 -4.5 -5.8 -7.1 -8.4 -9.7 -11.0 -12.3 -13.6 -14.9 -16.2 -17.5 -18.8 -20.1 -21.4 -22.7 -24.0 -25.3 -26.6 -27.9 -29.2 -30.5 -31.8 -33.1 -34.4 -35.7 -37.0 -38.3 -39.6 -40.9 -42.2 -43.5 -44.8 -46.1 -47.4 -48.7 -49.0 -50.3 -51.6 -52.9 -54.2 -55.5 -56.8 -58.1 -59.4 -60.7 -62.0 -63.3 -64.6 -65.9 -67.2 -68.5 -69.8 -71.1 -72.4 -73.7 -75.0 -76.3 -77.6 -78.9 -79.2 -80.5 -81.8 -83.1 -84.4 -85.7 -87.0 -88.3 -89.6 -90.9 -92.2 -93.5 -94.8 -96.1 -97.4 -98.7 -99.0 -100.0 -101.3 -102.6 -103.9 -105.2 -106.5 -107.8 -109.1 -110.4 -111.7 -113.0 -114.3 -115.6 -116.9 -118.2 -119.5 -120.8 -122.1 -123.4 -124.7 -126.0 -127.3 -128.6 -129.9 -131.2 -132.5 -133.8 -135.1 -136.4 -137.7 -139.0 -140.3 -141.6 -142.9 -144.2 -145.5 -146.8 -148.1 -149.4 -150.7 -152.0 -153.3 -154.6 -155.9 -157.2 -158.5 -159.8 -161.1 -162.4 -163.7 -165.0 -166.3 -167.6 -168.9 -169.2</p> <p>Site: 00000043</p> <p>Condition: FCC PART 15C 3e 2117 SN 00176652- HORIZONTAL</p> <p>RBG: 10000 00000 00000 00000 SMT Auto</p> <table border="1"><tr><td>Freq</td><td>Level</td><td>Over Limit</td><td>Resistors</td><td>Cable</td><td>Frame</td><td>A/Poss</td><td>T/Poss</td><td>Remark</td><td>Pol/Phase</td></tr><tr><td>MHz</td><td>dBm/Hz</td><td>dB</td><td>dBm/Hz</td><td>dBm</td><td>dB</td><td>dB</td><td>dB</td><td>dBm</td><td></td></tr><tr><td>1</td><td>2487.88</td><td>55.74</td><td>-18.76</td><td>14.00</td><td>42.87</td><td>52.72</td><td>7.56</td><td>33.42</td><td>299 118 Peak HORIZONTAL</td></tr></table>	Freq	Level	Over Limit	Resistors	Cable	Frame	A/Poss	T/Poss	Remark	Pol/Phase	MHz	dBm/Hz	dB	dBm/Hz	dBm	dB	dB	dB	dBm		1	2487.88	55.74	-18.76	14.00	42.87	52.72	7.56	33.42	299 118 Peak HORIZONTAL	-
Freq	Level	Over Limit	Resistors	Cable	Frame	A/Poss	T/Poss	Remark	Pol/Phase																							
MHz	dBm/Hz	dB	dBm/Hz	dBm	dB	dB	dB	dBm																								
1	2487.88	55.74	-18.76	14.00	42.87	52.72	7.56	33.42	299 118 Peak HORIZONTAL																							
Avg.	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data: 18</p> <p>18.1 Level (dBm/Hz)</p> <p>169.3 167.6 165.9 164.2 162.5 160.8 159.1 157.4 155.7 154.0 152.3 150.6 148.9 147.2 145.5 143.8 142.1 140.4 138.7 137.0 135.3 133.6 131.9 130.2 128.5 126.8 125.1 123.4 121.7 120.0 118.3 116.6 114.9 113.2 111.5 110.0 108.3 106.6 105.0 103.3 101.6 100.0 98.3 96.6 95.0 93.3 91.6 90.0 88.3 86.6 85.0 83.3 81.6 80.0 78.3 76.6 75.0 73.3 71.6 70.0 68.3 66.6 65.0 63.3 61.6 60.0 58.3 56.6 55.0 53.3 51.6 50.0 48.3 46.6 45.0 43.3 41.6 40.0 38.3 36.6 35.0 33.3 31.6 30.0 28.3 26.6 25.0 23.3 21.6 20.0 18.3 16.6 15.0 13.3 11.6 10.0 8.3 6.6 5.0 3.3 1.6 0.0 -1.6 -3.3 -5.0 -6.6 -8.3 -10.0 -11.6 -13.3 -15.0 -16.6 -18.3 -20.0 -21.6 -23.3 -25.0 -26.6 -28.3 -29.6 -31.3 -33.0 -34.6 -36.3 -38.0 -39.6 -41.3 -43.0 -44.6 -46.3 -48.0 -49.6 -51.3 -53.0 -54.6 -56.3 -58.0 -59.6 -61.3 -63.0 -64.6 -66.3 -68.0 -69.6 -71.3 -73.0 -74.6 -76.3 -78.0 -79.6 -81.3 -83.0 -84.6 -86.3 -88.0 -89.6 -91.3 -93.0 -94.6 -96.3 -98.0 -99.6 -101.3 -103.0 -104.6 -106.3 -108.0 -109.6 -111.3 -113.0 -114.6 -116.3 -118.0 -119.6 -121.3 -123.0 -124.6 -126.3 -128.0 -129.6 -131.3 -133.0 -134.6 -136.3 -138.0 -139.6 -141.3 -143.0 -144.6 -146.3 -148.0 -149.6 -151.3 -153.0 -154.6 -156.3 -158.0 -159.6 -161.3 -163.0 -164.6 -166.3 -168.0 -169.6 -171.3 -173.0 -174.6 -176.3 -178.0 -179.6 -181.3 -183.0 -184.6 -186.3 -188.0 -189.6 -191.3 -193.0 -194.6 -196.3 -198.0 -199.6 -201.3 -203.0 -204.6 -206.3 -208.0 -209.6 -211.3 -213.0 -214.6 -216.3 -218.0 -219.6 -221.3 -223.0 -224.6 -226.3 -228.0 -229.6 -231.3 -233.0 -234.6 -236.3 -238.0 -239.6 -241.3 -243.0 -244.6 -246.3 -248.0 -249.6 -251.3 -253.0 -254.6 -256.3 -258.0 -259.6 -261.3 -263.0 -264.6 -266.3 -268.0 -269.6 -271.3 -273.0 -274.6 -276.3 -278.0 -279.6 -281.3 -283.0 -284.6 -286.3 -288.0 -289.6 -291.3 -293.0 -294.6 -296.3 -298.0 -299.6 -301.3 -303.0 -304.6 -306.3 -308.0 -309.6 -311.3 -313.0 -314.6 -316.3 -318.0 -319.6 -321.3 -323.0 -324.6 -326.3 -328.0 -329.6 -331.3 -333.0 -334.6 -336.3 -338.0 -339.6 -341.3 -343.0 -344.6 -346.3 -348.0 -349.6 -351.3 -353.0 -354.6 -356.3 -358.0 -359.6 -361.3 -363.0 -364.6 -366.3 -368.0 -369.6 -371.3 -373.0 -374.6 -376.3 -378.0 -379.6 -381.3 -383.0 -384.6 -386.3 -388.0 -389.6 -391.3 -393.0 -394.6 -396.3 -398.0 -399.6 -401.3 -403.0 -404.6 -406.3 -408.0 -409.6 -411.3 -413.0 -414.6 -416.3 -418.0 -419.6 -421.3 -423.0 -424.6 -426.3 -428.0 -429.6 -431.3 -433.0 -434.6 -436.3 -438.0 -439.6 -441.3 -443.0 -444.6 -446.3 -448.0 -449.6 -451.3 -453.0 -454.6 -456.3 -458.0 -459.6 -461.3 -463.0 -464.6 -466.3 -468.0 -469.6 -471.3 -473.0 -474.6 -476.3 -478.0 -479.6 -481.3 -483.0 -484.6 -486.3 -488.0 -489.6 -491.3 -493.0 -494.6 -496.3 -498.0 -499.6 -501.3 -503.0 -504.6 -506.3 -508.0 -509.6 -511.3 -513.0 -514.6 -516.3 -518.0 -519.6 -521.3 -523.0 -524.6 -526.3 -528.0 -529.6 -531.3 -533.0 -534.6 -536.3 -538.0 -539.6 -541.3 -543.0 -544.6 -546.3 -548.0 -549.6 -551.3 -553.0 -554.6 -556.3 -558.0 -559.6 -561.3 -563.0 -564.6 -566.3 -568.0 -569.6 -571.3 -573.0 -574.6 -576.3 -578.0 -579.6 -581.3 -583.0 -584.6 -586.3 -588.0 -589.6 -591.3 -593.0 -594.6 -596.3 -598.0 -599.6 -601.3 -603.0 -604.6 -606.3 -608.0 -609.6 -611.3 -613.0 -614.6 -616.3 -618.0 -619.6 -621.3 -623.0 -624.6 -626.3 -628.0 -629.6 -631.3 -633.0 -634.6 -636.3 -638.0 -639.6 -641.3 -643.0 -644.6 -646.3 -648.0 -649.6 -651.3 -653.0 -654.6 -656.3 -658.0 -659.6 -661.3 -663.0 -664.6 -666.3 -668.0 -669.6 -671.3 -673.0 -674.6 -676.3 -678.0 -679.6 -681.3 -683.0 -684.6 -686.3 -688.0 -689.6 -691.3 -693.0 -694.6 -696.3 -698.0 -699.6 -701.3 -703.0 -704.6 -706.3 -708.0 -709.6 -711.3 -713.0 -714.6 -716.3 -718.0 -719.6 -721.3 -723.0 -724.6 -726.3 -728.0 -729.6 -731.3 -733.0 -734.6 -736.3 -738.0 -739.6 -741.3 -743.0 -744.6 -746.3 -748.0 -749.6 -751.3 -753.0 -754.6 -756.3 -758.0 -759.6 -761.3 -763.0 -764.6 -766.3 -768.0 -769.6 -771.3 -773.0 -774.6 -776.3 -778.0 -779.6 -781.3 -783.0 -784.6 -786.3 -788.0 -789.6 -791.3 -793.0 -794.6 -796.3 -798.0 -799.6 -801.3 -803.0 -804.6 -806.3 -808.0 -809.6 -811.3 -813.0 -814.6 -816.3 -818.0 -819.6 -821.3 -823.0 -824.6 -826.3 -828.0 -829.6 -831.3 -833.0 -834.6 -836.3 -838.0 -839.6 -841.3 -843.0 -844.6 -846.3 -848.0 -849.6 -851.3 -853.0 -854.6 -856.3 -858.0 -859.6 -861.3 -863.0 -864.6 -866.3 -868.0 -869.6 -871.3 -873.0 -874.6 -876.3 -878.0 -879.6 -881.3 -883.0 -884.6 -886.3 -888.0 -889.6 -891.3 -893.0 -894.6 -896.3 -898.0 -899.6 -901.3 -903.0 -904.6 -906.3 -908.0 -909.6 -911.3 -913.0 -914.6 -916.3 -918.0 -919.6 -921.3 -923.0 -924.6 -926.3 -928.0 -929.6 -931.3 -933.0 -934.6 -936.3 -938.0 -939.6 -941.3 -943.0 -944.6 -946.3 -948.0 -949.6 -951.3 -953.0 -954.6 -956.3 -958.0 -959.6 -961.3 -963.0 -964.6 -966.3 -968.0 -969.6 -971.3 -973.0 -974.6 -976.3 -978.0 -979.6 -981.3 -983.0 -984.6 -986.3 -988.0 -989.6 -991.3 -993.0 -994.6 -996.3 -998.0 -999.6 -1001.3 -1003.0 -1004.6 -1006.3 -1008.0 -1009.6 -1011.3 -1013.0 -1014.6 -1016.3 -1018.0 -1019.6 -1021.3 -1023.0 -1024.6 -1026.3 -1028.0 -1029.6 -1031.3 -1033.0 -1034.6 -1036.3 -1038.0 -1039.6 -1041.3 -1043.0 -1044.6 -1046.3 -1048.0 -1049.6 -1051.3 -1053.0 -1054.6 -1056.3 -1058.0 -1059.6 -1061.3 -1063.0 -1064.6 -1066.3 -1068.0 -1069.6 -1071.3 -1073.0 -1074.6 -1076.3 -1078.0 -1079.6 -1081.3 -1083.0 -1084.6 -1086.3 -1088.0 -1089.6 -1091.3 -1093.0 -1094.6 -1096.3 -1098.0 -1099.6 -1101.3 -1103.0 -1104.6 -1106.3 -1108.0 -1109.6 -1111.3 -1113.0 -1114.6 -1116.3 -1118.0 -1119.6 -1121.3 -1123.0 -1124.6 -1126.3 -1128.0 -1129.6 -1131.3 -1133.0 -1134.6 -1136.3 -1138.0 -1139.6 -1141.3 -1143.0 -1144.6 -1146.3 -1148.0 -1149.6 -1151.3 -1153.0 -1154.6 -1156.3 -1158.0 -1159.6 -1161.3 -1163.0 -1164.6 -1166.3 -1168.0 -1169.6 -1171.3 -1173.0 -1174.6 -1176.3 -1178.0 -1179.6 -1181.3 -1183.0 -1184.6 -1186.3 -1188.0 -1189.6 -1191.3 -1193.0 -1194.6 -1196.3 -1198.0 -1199.6 -1201.3 -1203.0 -1204.6 -1206.3 -1208.0 -1209.6 -1211.3 -1213.0 -1214.6 -1216.3 -1218.0 -1219.6 -1221.3 -1223.0 -1224.6 -1226.3 -1228.0 -1229.6 -1231.3 -1233.0 -1234.6 -1236.3 -1238.0 -1239.6 -1241.3 -1243.0 -1244.6 -1246.3 -1248.0 -1249.6 -1251.3 -1253.0 -1254.6 -1256.3 -1258.0 -1259.6 -1261.3 -1263.0 -1264.6 -1266.3 -1268.0 -1269.6 -1271.3 -1273.0 -1274.6 -1276.3 -1278.0 -1279.6 -1281.3 -1283.0 -1284.6 -1286.3 -1288.0 -1289.6 -1291.3 -1293.0 -1294.6 -1296.3 -1298.0 -1299.6 -1301.3 -1303.0 -1304.6 -1306.3 -1308.0 -1309.6 -1311.3 -1313.0 -1314.6 -1316.3 -1318.0 -1319.6 -1321.3 -1323.0 -1324.6 -1326.3 -1328.0 -1329.6 -1331.3 -1333.0 -1334.6 -1336.3 -1338.0 -1339.6 -1341.3 -1343.0 -1344.6 -1346.3 -1348.0 -1349.6 -1351.3 -1353.0 -1354.6 -1356.3 -1358.0 -1359.6 -1361.3 -1363.0 -1364.6 -1366.3 -1368.0 -1369.6 -1371.3 -1373.0 -1374.6 -1376.3 -1378.0 -1379.6 -1381.3 -1383.0 -1384.6 -1386.3 -1388.0 -1389.6 -1391.3 -1393.0 -1394.6 -1396.3 -1398.0 -1399.6 -1401.3 -1403.0 -1404.6 -1406.3 -1408.0 -1409.6 -1411.3 -1413.0 -1414.6 -1416.3 -1418.0 -1419.6 -1421.3 -1423.0 -1424.6 -1426.3 -1428.0 -1429.6 -1431.3 -1433.0 -1434.6 -1436.3 -1438.0 -1439.6 -1441.3 -1443.0 -1444.6 -1446.3 -1448.0 -1449.6 -1451.3 -1453.0 -1454.6 -1456.3 -1458.0 -1459.6 -1461.3 -1463.0 -1464.6 -1466.3 -1468.0 -1469.6 -1471.3 -1473.0 -1474.6 -1476.3 -1478.0 -1479.6 -1481.3 -1483.0 -1484.6 -1486.3 -1488.0 -1489.6 -1491.3 -1493.0 -1494.6 -1496.3 -1498.0 -1499.6 -1501.3 -1503.0 -1504.6 -1506.3 -1508.0 -1509.6 -1511.3 -1513.0 -1514.6 -1516.3 -1518.0 -1519.6 -1521.3 -1523.0 -1524.6 -1526.3 -1528.0 -1529.6 -1531.3 -1533.0 -1534.6 -1536.3 -1538.0 -1539.6 -1541.3 -</p>																															








BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																							
ANT	BLE CH19 2440MHz - L																																							
1	Vertical	Fundamental																																						
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Peak. VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Peak. VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL																															
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL																															
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																							
ANT	BLE CH19 2440MHz - L																																							
1	Vertical	Fundamental																																						
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Peak. VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Peak. VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Peak. VERTICAL																															
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 25</p>  <p>Site: 030604-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862- VERTICAL RBW: 1000.0000Hz VSWR: 2.0000:1 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Fcs</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>2440.00</td> <td>91.73</td> <td>-17.72</td> <td>74.00</td> <td>84.94</td> <td>33.11</td> <td>T.01</td> <td>33.42</td> <td>130</td> <td>00 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas	2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Fcs	Remark	Pol/Phas																																
2440.00	91.73	-17.72	74.00	84.94	33.11	T.01	33.42	130	00 Average VERTICAL																															



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	-
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 23</p> <p>11. Level (dBmV/m)</p> <p>105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7</p> <p>2440 2450 2460 2470 2480 2490 2500</p> <p>Frequency (MHz)</p> <p>Site No: 030604-K5 Condition: FCC PART 15C 3m 2117 SN 00218652- VERTICAL RBR: 1000.000000 VSW: 2.000000 SMT: Auto</p> <p>Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas</p> <p>Bit dBmV/m dB dBmV/m dBV dBm dB cm deg</p> <p>2484.94 55.75 -18.29 74.00 48.77 32.96 T.55 31.42 130 68 Peak VERTICAL</p>	-
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Date 24</p> <p>11. Level (dBmV/m)</p> <p>105.3 93.6 81.9 70.2 58.5 46.8 35.1 23.4 11.7</p> <p>2440 2450 2460 2470 2480 2490 2500</p> <p>Frequency (MHz)</p> <p>Site No: 030604-K5 Condition: FCC PART 15C (AVER) 3m 2117 SN 00218652- VERTICAL RBR: 1000.000000 VSW: 2.000000 SMT: Auto</p> <p>Freq Level Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phas</p> <p>Bit dBmV/m dB dBmV/m dBV dBm dB cm deg</p> <p>2490.70 45.78 -8.27 54.00 28.91 32.73 T.56 31.42 130 68 Average VERTICAL</p>	-

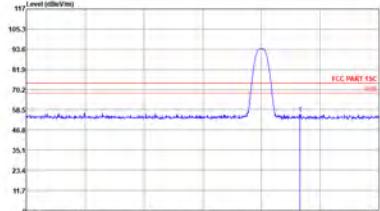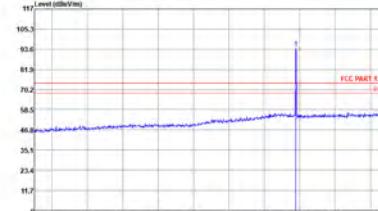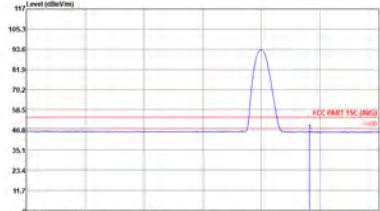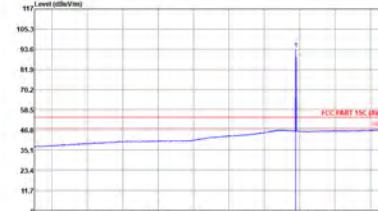


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																							
ANT	BLE CH39 2480MHz																																																																							
1	Horizontal					Fundamental																																																																		
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Postcode: 215300 tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Data 1</p>  <p>FCC PART 15C (40dB)</p> <p>Site Condition: G308A-K5 FCC PART 15C 3e 3117 SN 00218652- HORIZONTAL RRM 1000, DOCKHU VSW 2, T000H, SMT, Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBcV/m</td> <td>dB</td> <td>dBcV/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2480.56</td> <td>55.53</td> <td>-17.97</td> <td>74.00</td> <td>49.04</td> <td>32.86</td> <td>7.55</td> <td>33.42</td> <td>124</td> <td>328 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas	MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg	1	2480.56	55.53	-17.97	74.00	49.04	32.86	7.55	33.42	124	328 Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Postcode: 215300 tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Data 3</p>  <p>FCC PART 15C (40dB)</p> <p>Site Condition: G308A-K5 FCC PART 15C 3e 3117 SN 00218652- HORIZONTAL RRM 1000, DOCKHU VSW 2, T000H, SMT, Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBcV/m</td> <td>dB</td> <td>dBcV/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2480.00</td> <td>94.19</td> <td>20.19</td> <td>74.00</td> <td>87.21</td> <td>32.86</td> <td>7.55</td> <td>33.43</td> <td>124</td> <td>328 Peak</td> </tr> </tbody> </table>					Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas	MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg	1	2480.00	94.19	20.19	74.00	87.21	32.86	7.55	33.43	124	328 Peak
	Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas																																																														
MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg																																																															
1	2480.56	55.53	-17.97	74.00	49.04	32.86	7.55	33.42	124	328 Peak																																																														
Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas																																																															
MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg																																																															
1	2480.00	94.19	20.19	74.00	87.21	32.86	7.55	33.43	124	328 Peak																																																														
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Postcode: 215300 tel: +86-512-57900568 fax: +86-512-57900568 http://www.sparton.com.cn</p> <p>Data 2</p>  <p>FCC PART 15C (40dB)</p> <p>Site Condition: G308A-K5 FCC PART 15G (AHS) 3e 3117 SN 00218652- HORIZONTAL RRM 1000, DOCKHU VSW 2, T000H, SMT, Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBcV/m</td> <td>dB</td> <td>dBcV/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2488.18</td> <td>54.00</td> <td>-6.12</td> <td>54.00</td> <td>39.01</td> <td>32.73</td> <td>7.54</td> <td>33.42</td> <td>124</td> <td>328 Average</td> </tr> </tbody> </table>					Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas	MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg	1	2488.18	54.00	-6.12	54.00	39.01	32.73	7.54	33.42	124	328 Average	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China Postcode: 215300 tel: +86-512-57900568 fax: +86-512-57900568 http://www.sparton.com.cn</p> <p>Data 4</p>  <p>FCC PART 15C (40dB)</p> <p>Site Condition: G308A-K5 FCC PART 15G (AHS) 3e 3117 SN 00218652- HORIZONTAL RRM 1000, DOCKHU VSW 2, T000H, SMT, Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBcV/m</td> <td>dB</td> <td>dBcV/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> </tr> <tr> <td>1</td> <td>2480.93</td> <td>93.46</td> <td>39.46</td> <td>54.00</td> <td>86.48</td> <td>32.86</td> <td>7.55</td> <td>33.43</td> <td>124</td> <td>328 Average</td> </tr> </tbody> </table>					Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas	MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg	1	2480.93	93.46	39.46	54.00	86.48	32.86	7.55	33.43	124	328 Average
Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas																																																															
MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg																																																															
1	2488.18	54.00	-6.12	54.00	39.01	32.73	7.54	33.42	124	328 Average																																																														
Freq	Level	Over Limit	ReadAntenna	Cable	Preamp	A/Pes	T/Pes	Remark	Pol/Phas																																																															
MHz	dBcV/m	dB	dBcV/m	dB	dB	dB	dB	cm	deg																																																															
1	2480.93	93.46	39.46	54.00	86.48	32.86	7.55	33.43	124	328 Average																																																														

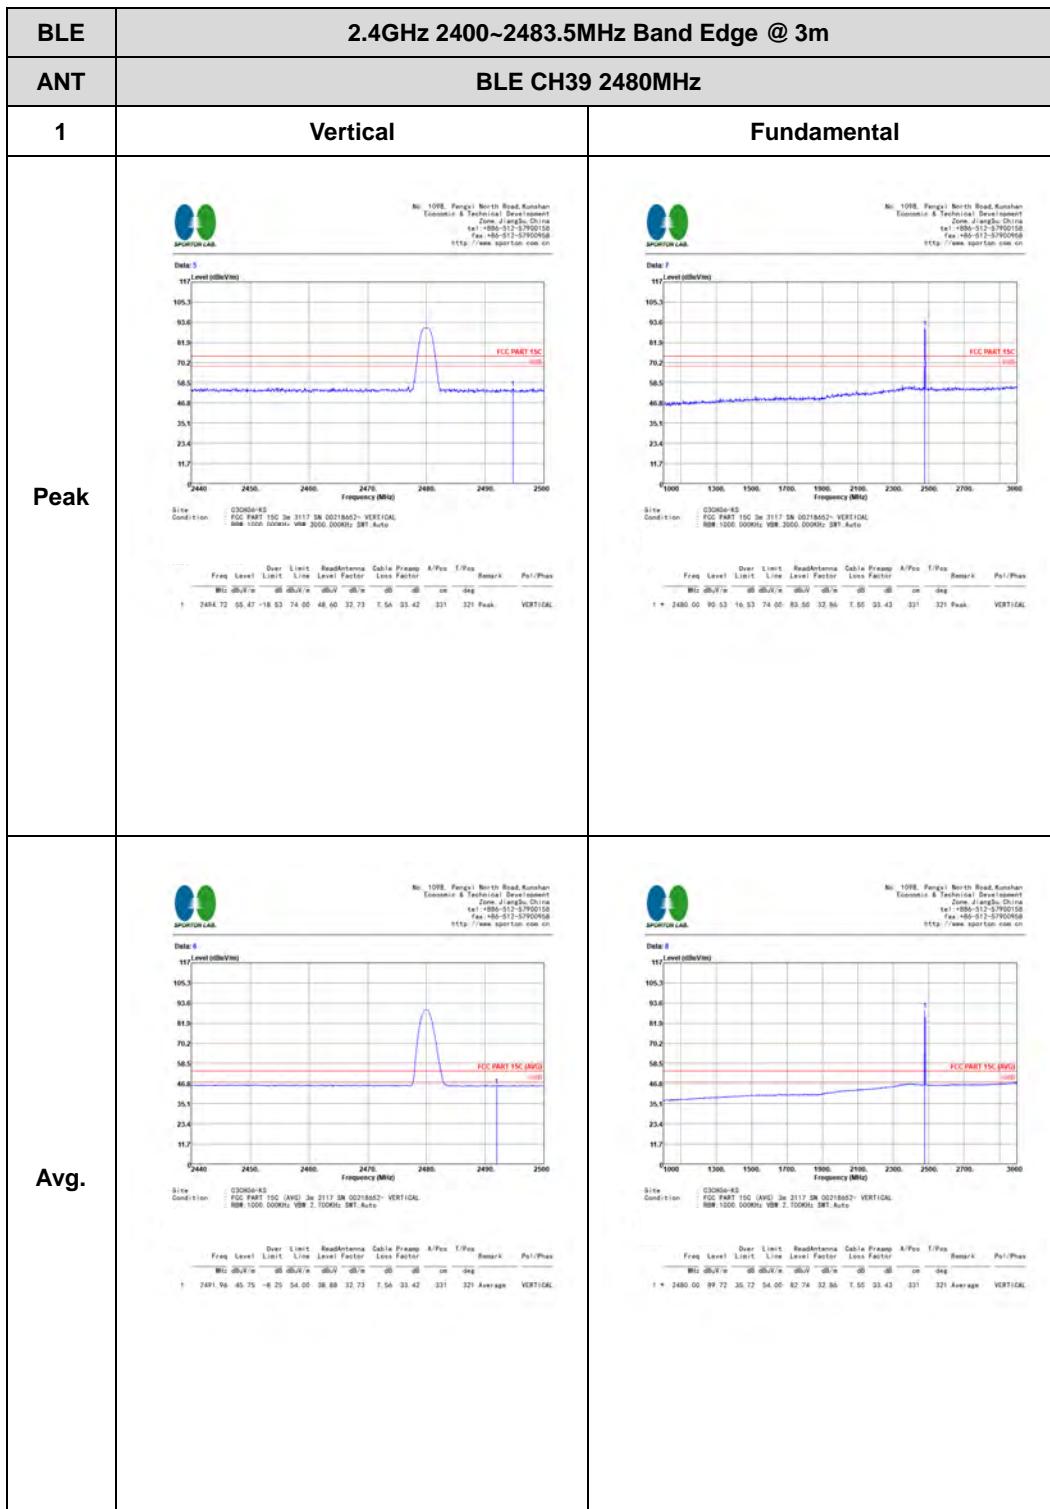





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

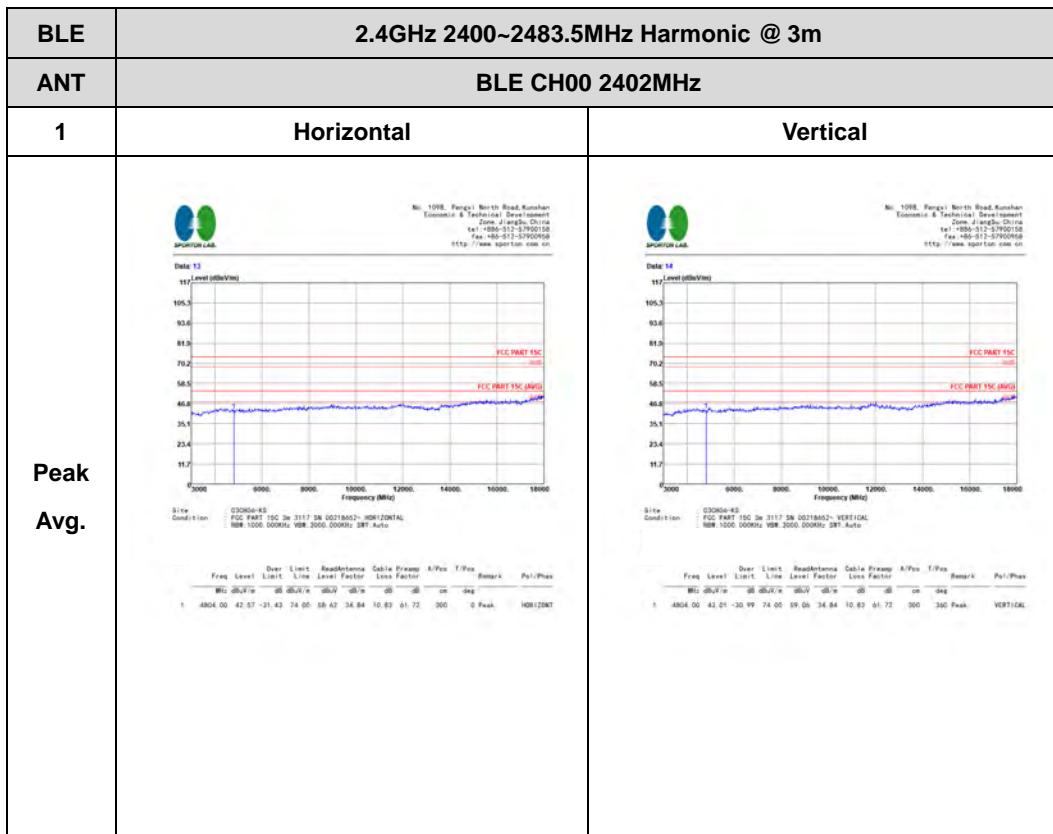

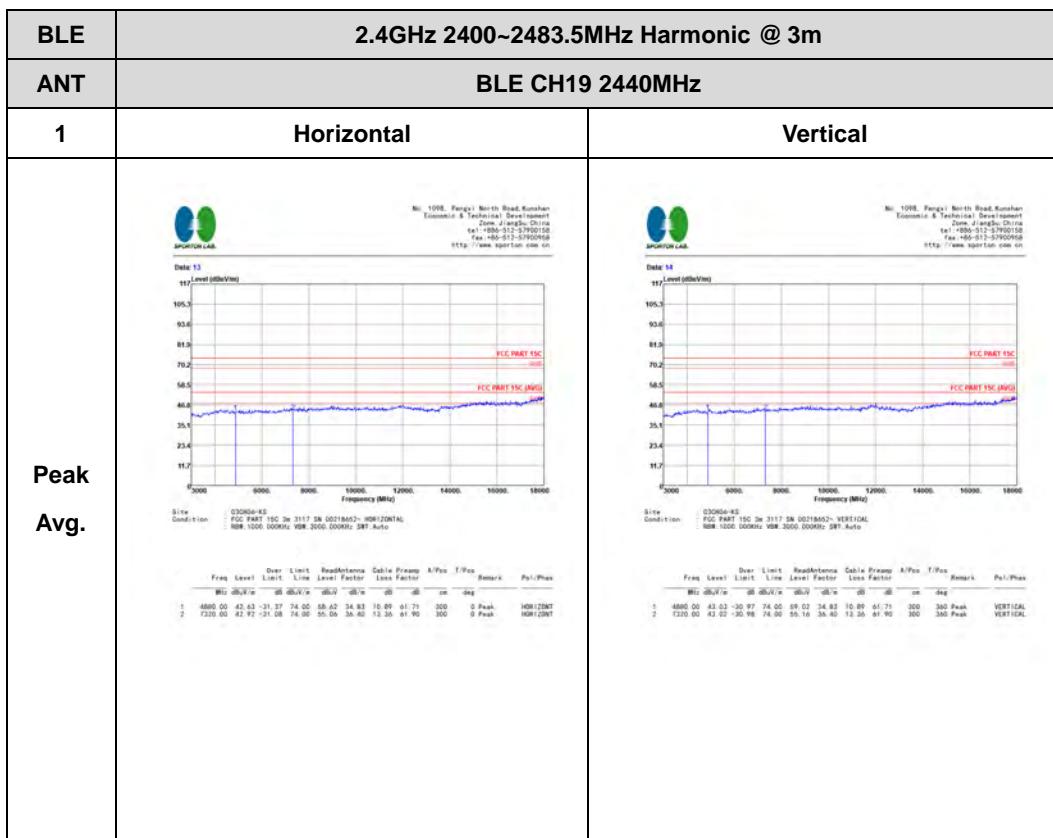


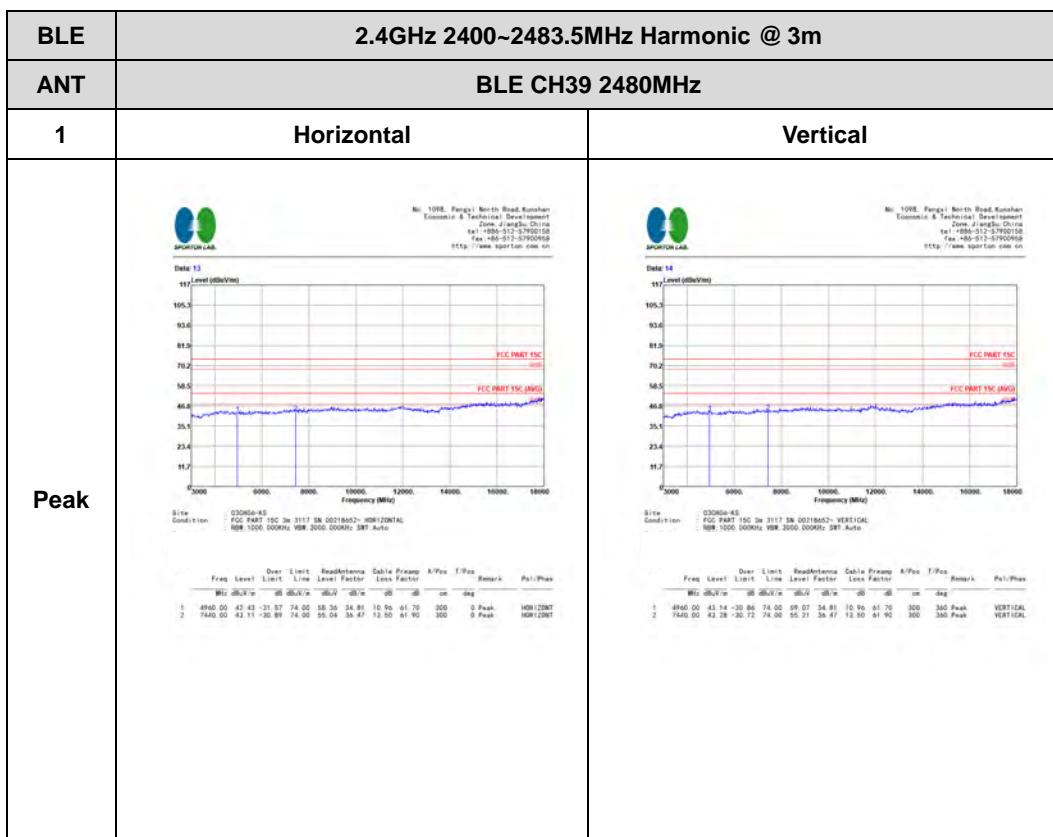



Emission below 1GHz


2.4GHz BLE (LF)

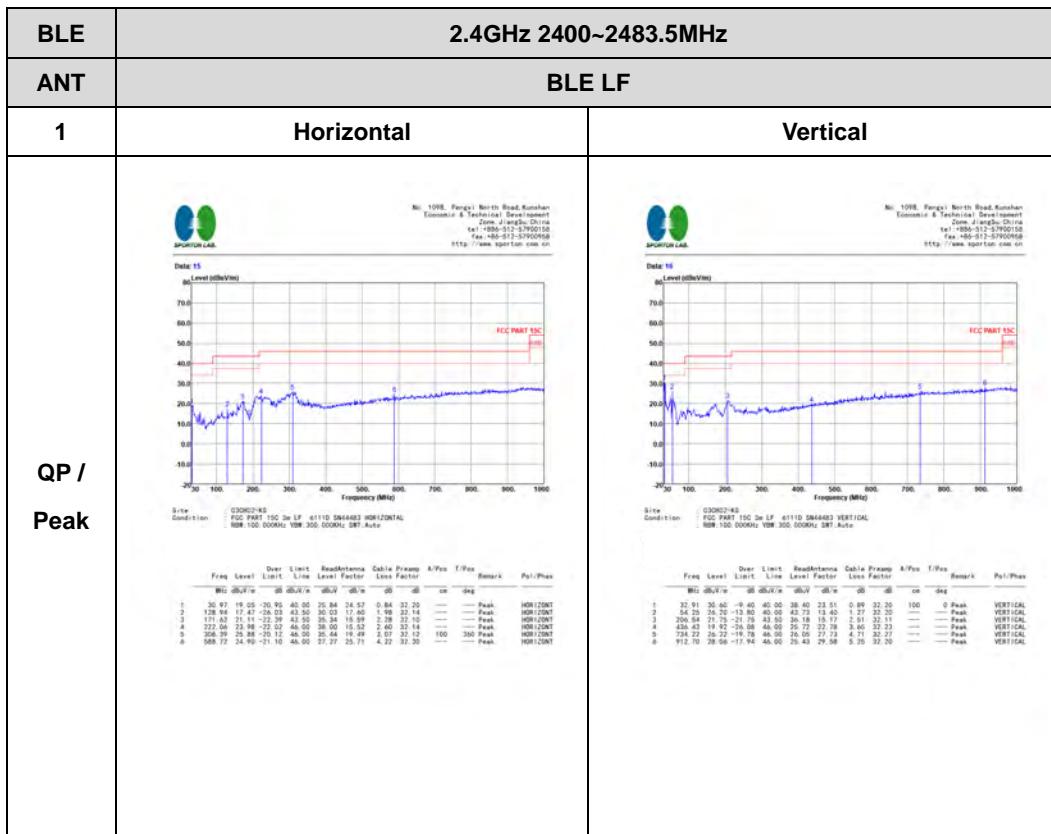






Emission above 18-25GHz

2.4GHz BT (HF)

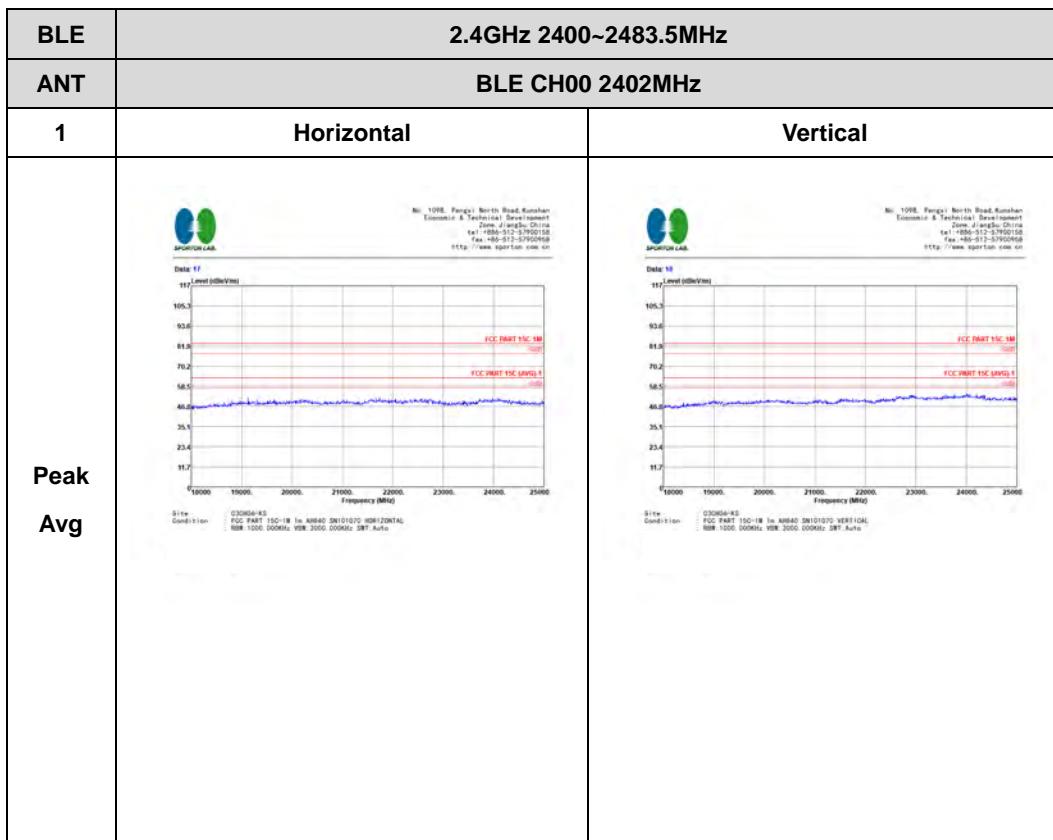

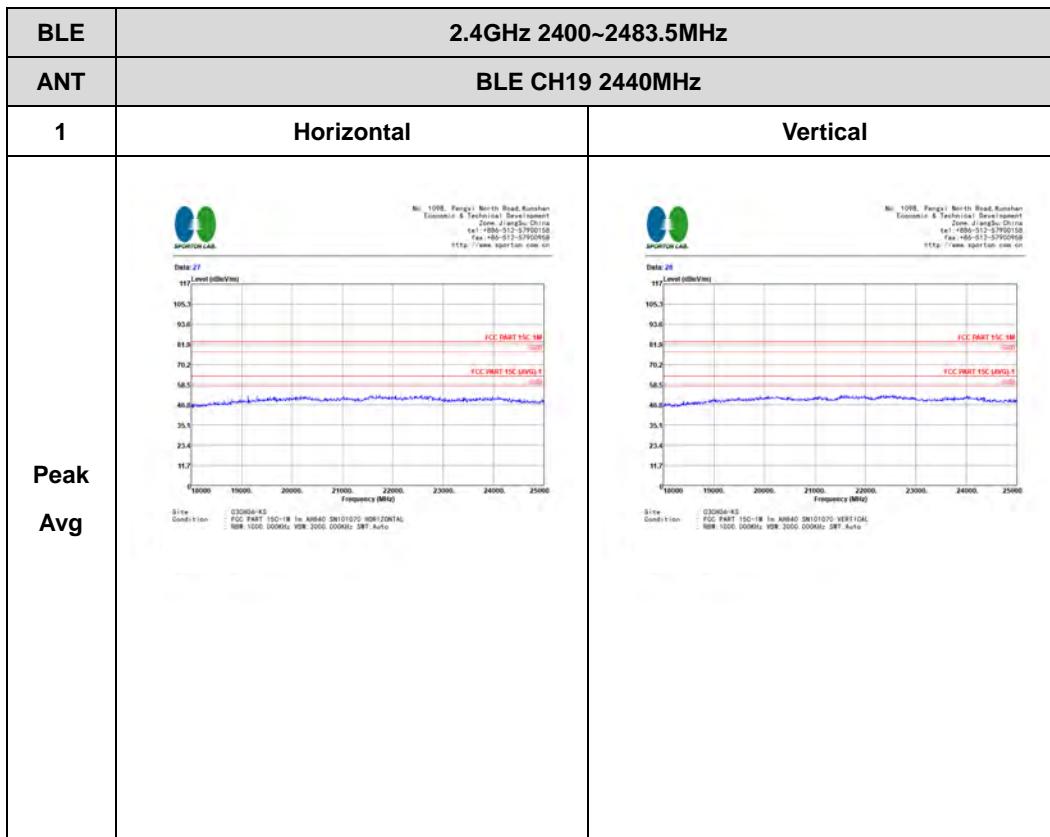

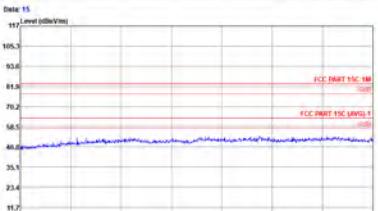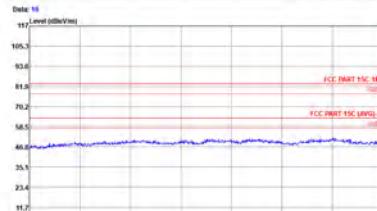


BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 <p>No: 1098, Fengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Date: 15</p> <p>117. Level (dBmV/m)</p>  <p>105.3</p> <p>80.0</p> <p>70.2</p> <p>68.5</p> <p>40.0</p> <p>35.1</p> <p>23.4</p> <p>11.7</p> <p>18000 19000 20000 21000 22000 23000 24000 25000 Frequency (MHz)</p> <p>Site Condition: C33054-K5 FCC PART 15C-1B In AIR/AD SW1010/10 VSW 2000:2000Hz DFT:Auto</p>	 <p>No: 1098, Fengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Date: 16</p> <p>117. Level (dBmV/m)</p>  <p>105.3</p> <p>80.0</p> <p>70.2</p> <p>68.5</p> <p>40.0</p> <p>35.1</p> <p>23.4</p> <p>11.7</p> <p>18000 19000 20000 21000 22000 23000 24000 25000 Frequency (MHz)</p> <p>Site Condition: C33054-K5 FCC PART 15C-1B In AIR/AD SW1010/10 VERT/1AL SWR 1000:2000Hz VSW 2000:2000Hz DFT:Auto</p>
Avg		







Bluetooth v5.0 LE


2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

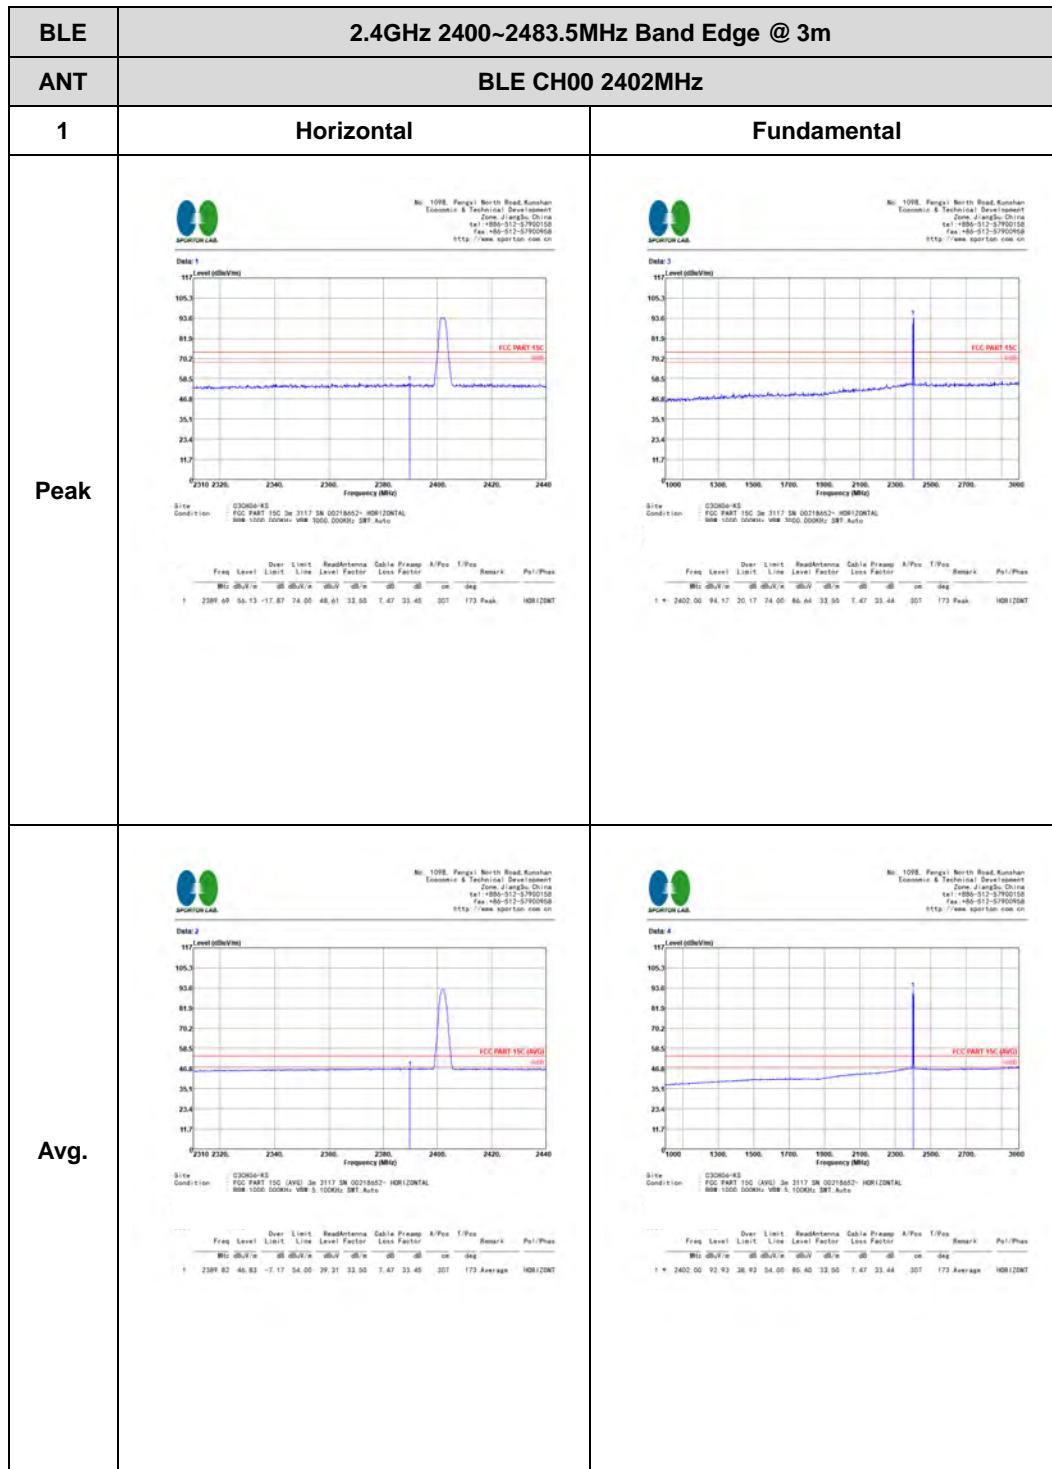


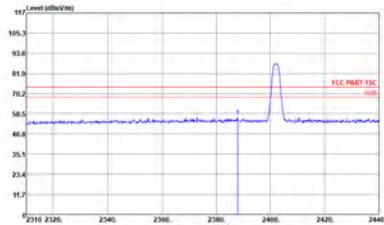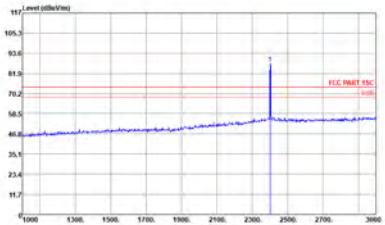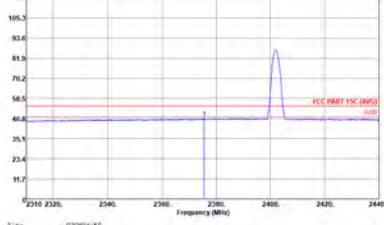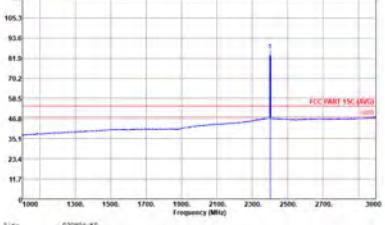

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																							
ANT	BLE CH00 2402MHz																																							
1	Vertical	Fundamental																																						
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data 5</p>  <p>Site: 030004-K5 Condition: FCC PART 15C 3e 2117 SN 0021862 VERTICAL RBW: 1000.0000Hz VSWR: 5.10000 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2387.87</td> <td>56.64</td> <td>-17.34</td> <td>74.00</td> <td>49.12</td> <td>33.98</td> <td>T.47</td> <td>33.45</td> <td>396</td> <td>310 Peak: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase	2387.87	56.64	-17.34	74.00	49.12	33.98	T.47	33.45	396	310 Peak: VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data 7</p>  <p>Site: 030004-K5 Condition: FCC PART 15C 3e 2117 SN 0021862 VERTICAL RBW: 1000.0000Hz VSWR: 5.00000 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>87.64</td> <td>-13.64</td> <td>74.00</td> <td>80.11</td> <td>33.98</td> <td>T.47</td> <td>33.44</td> <td>396</td> <td>310 Peak: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase	2402.00	87.64	-13.64	74.00	80.11	33.98	T.47	33.44	396	310 Peak: VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase																																
2387.87	56.64	-17.34	74.00	49.12	33.98	T.47	33.45	396	310 Peak: VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase																																
2402.00	87.64	-13.64	74.00	80.11	33.98	T.47	33.44	396	310 Peak: VERTICAL																															
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data 8</p>  <p>Site: 030004-K5 Condition: FCC PART 15C (AVG) 3e 2117 SN 0021862 VERTICAL RBW: 1000.0000Hz VSWR: 5.10000 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2375.52</td> <td>46.88</td> <td>-7.17</td> <td>54.00</td> <td>29.60</td> <td>33.29</td> <td>T.44</td> <td>33.45</td> <td>396</td> <td>310 Average: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase	2375.52	46.88	-7.17	54.00	29.60	33.29	T.44	33.45	396	310 Average: VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn</p> <p>Data 8</p>  <p>Site: 030004-K5 Condition: FCC PART 15C (AVG) 3e 2117 SN 0021862 VERTICAL RBW: 1000.0000Hz VSWR: 5.00000 SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pre</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2402.00</td> <td>86.37</td> <td>-22.37</td> <td>54.00</td> <td>78.84</td> <td>33.98</td> <td>T.47</td> <td>33.44</td> <td>396</td> <td>310 Average: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase	2402.00	86.37	-22.37	54.00	78.84	33.98	T.47	33.44	396	310 Average: VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase																																
2375.52	46.88	-7.17	54.00	29.60	33.29	T.44	33.45	396	310 Average: VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pre	T/Pos	Remark	Pol/Phase																																
2402.00	86.37	-22.37	54.00	78.84	33.98	T.47	33.44	396	310 Average: VERTICAL																															

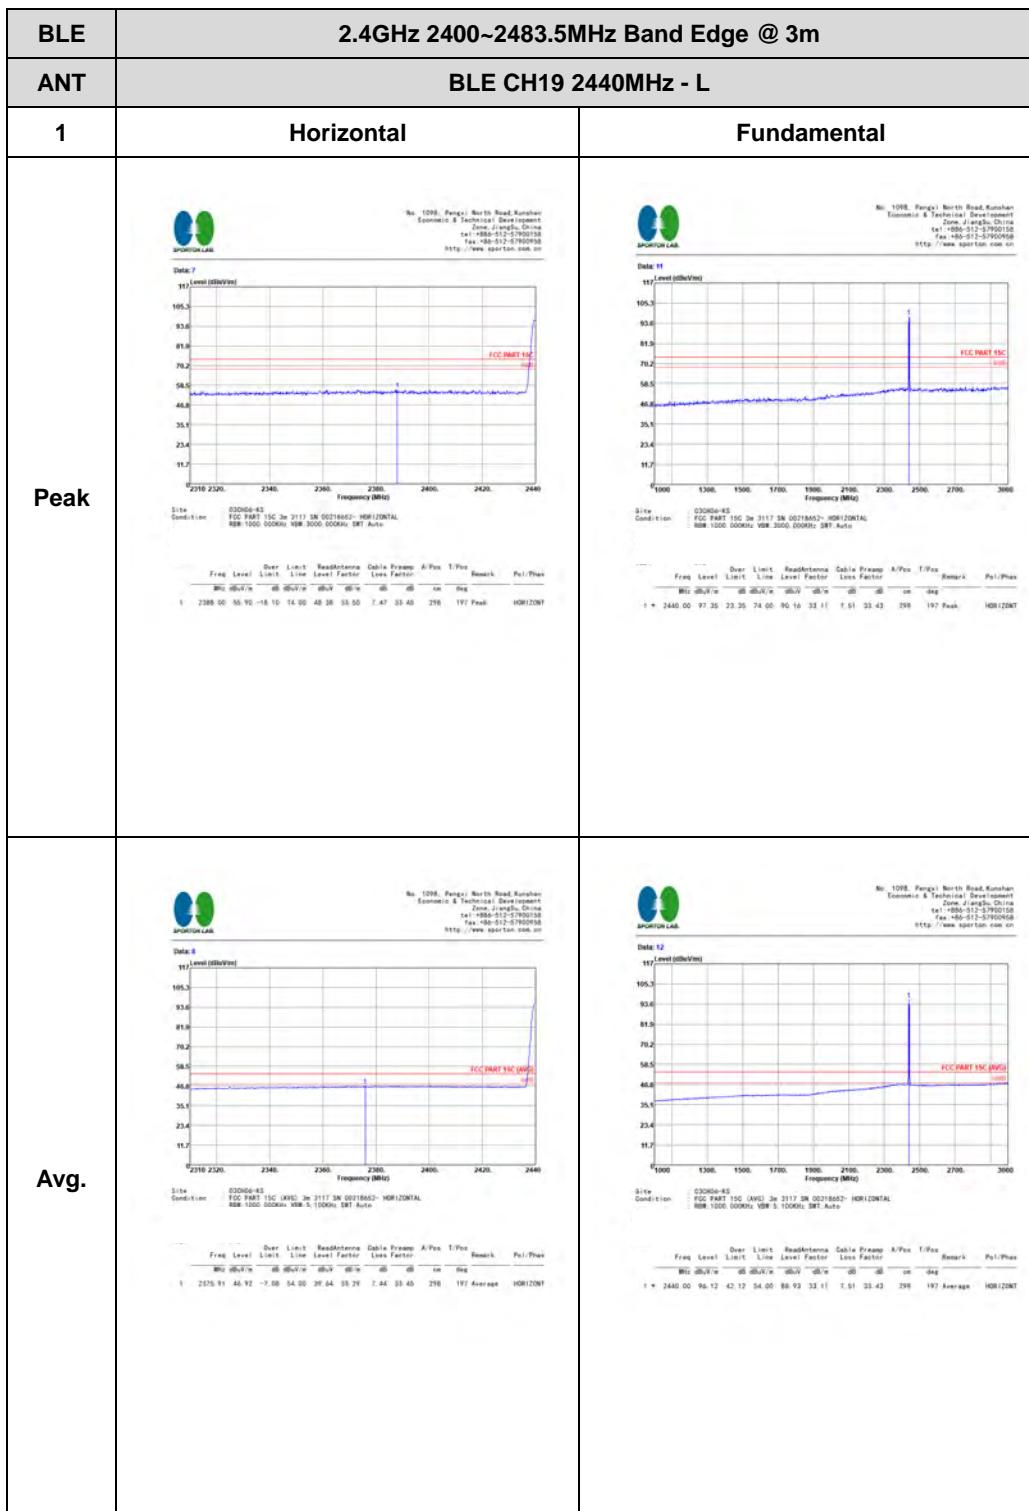





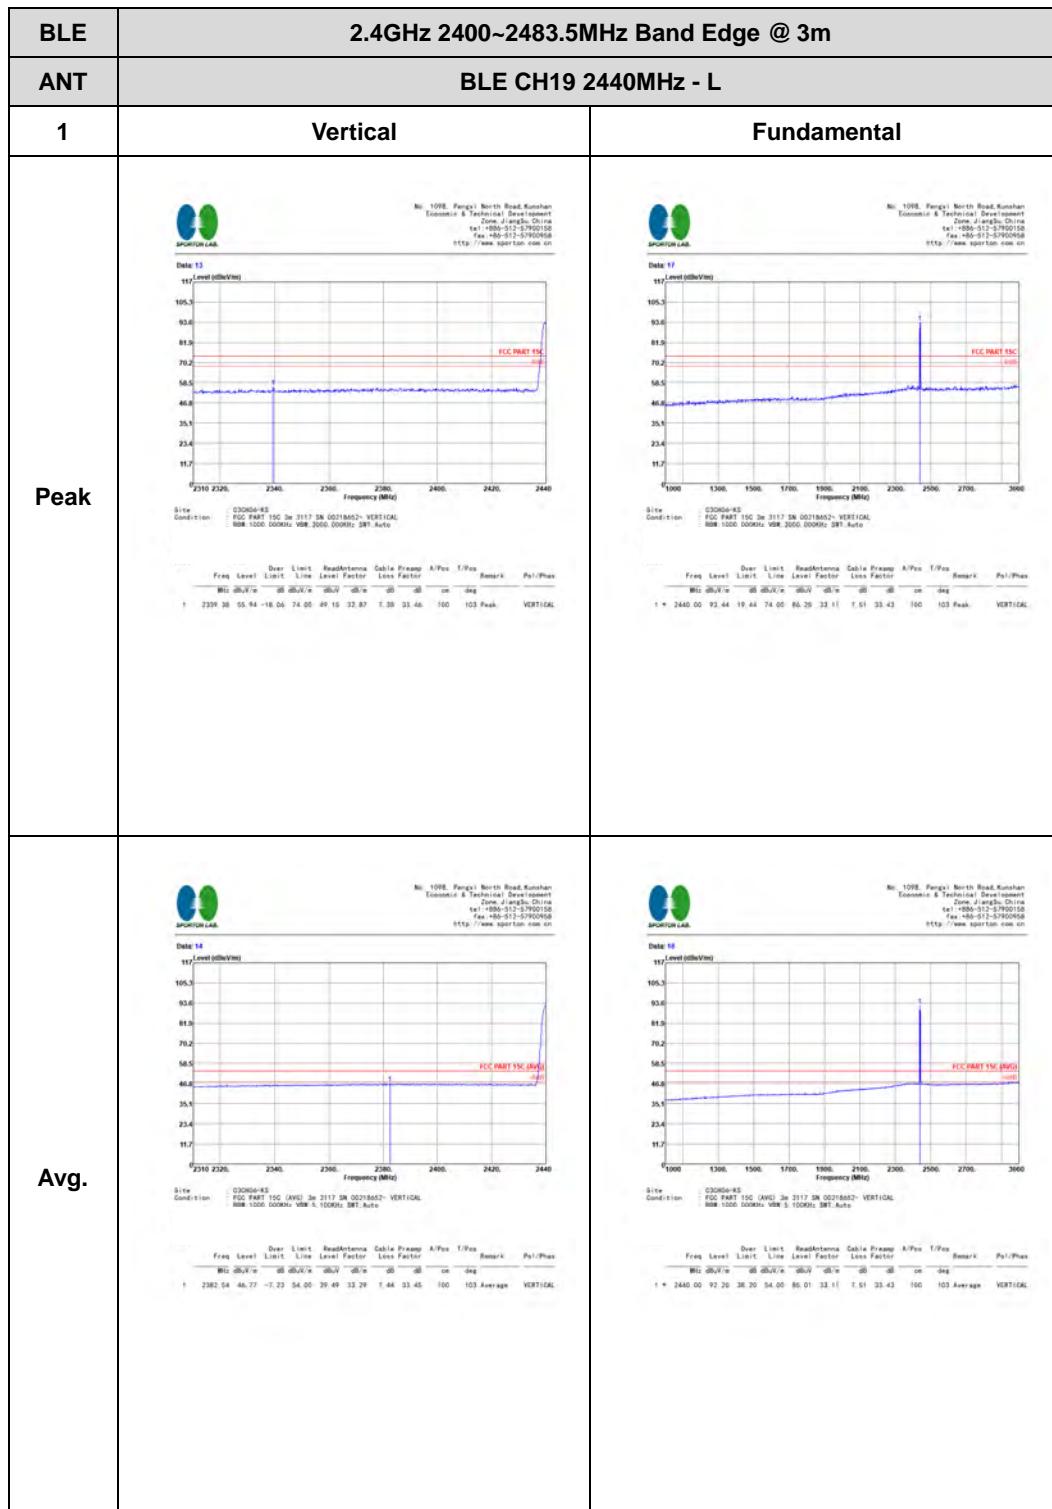



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	-
Peak	 No. 1098, Fangxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn Date: 15 11. Level (dBmV/m) 105.5 93.6 81.8 70.2 58.5 35.1 23.4 11.7 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz) Site: 030084-K5 Condition: FCC PART 15C 3m 2117 SN 00218452- VERTICAL RBM: 1000.00000 VSW: 2.000000000 SMT: Auto Freq Level Over Limit Line ReadAntenna Cable Preamp A/Pow T/Freq Remark Pst/Phas MHz dBmV/m dBmV/m dBmV dB/m dB cm deg 2485.90 55.42 -18.58 74.00 46.43 32.96 7.55 33.42 100 103 Peak VERTICAL	-
Avg.	 No. 1098, Fangxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sportun.com.cn Date: 16 11. Level (dBmV/m) 105.5 93.6 81.8 70.2 58.5 46.8 35.1 23.4 11.7 2440 2450 2460 2470 2480 2490 2500 Frequency (MHz) Site: 030084-K5 Condition: FCC PART 15C (AVG) 3m 2117 SN 00218452- VERTICAL RBM: 1000.00000 VSW: 2.000000000 SMT: Auto Freq Level Over Limit Line ReadAntenna Cable Preamp A/Pow T/Freq Remark Pst/Phas MHz dBmV/m dBmV/m dBmV dB/m dB cm deg 2490.70 46.11 -7.89 54.00 29.24 32.73 7.56 33.42 100 103 Average VERTICAL	-

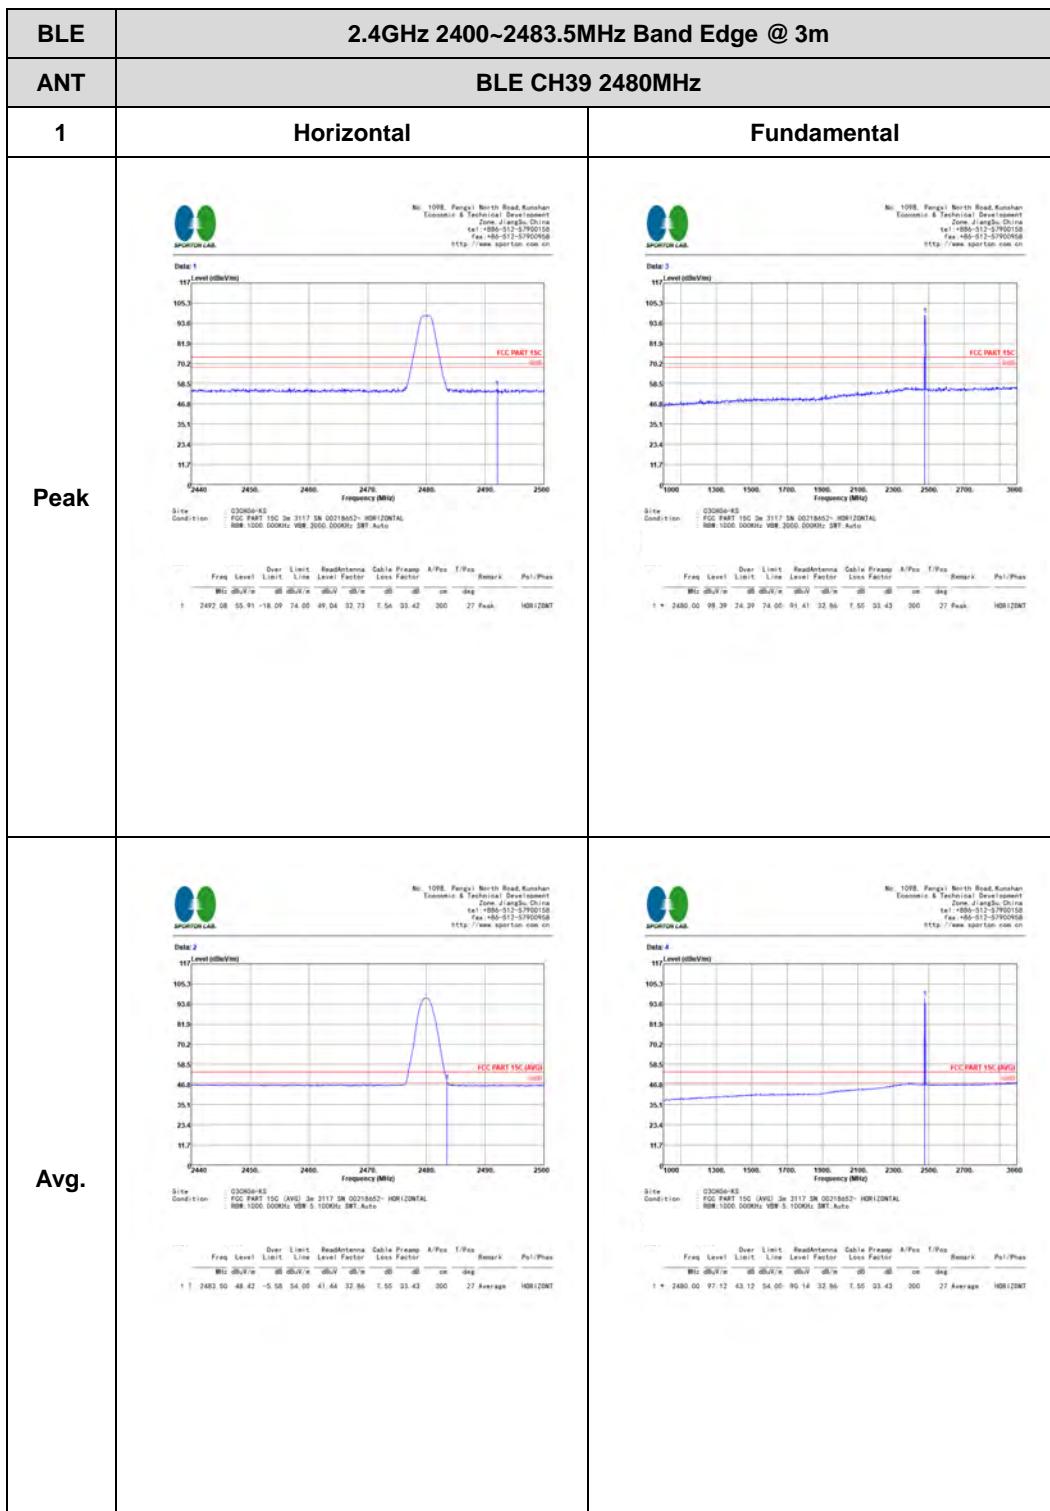

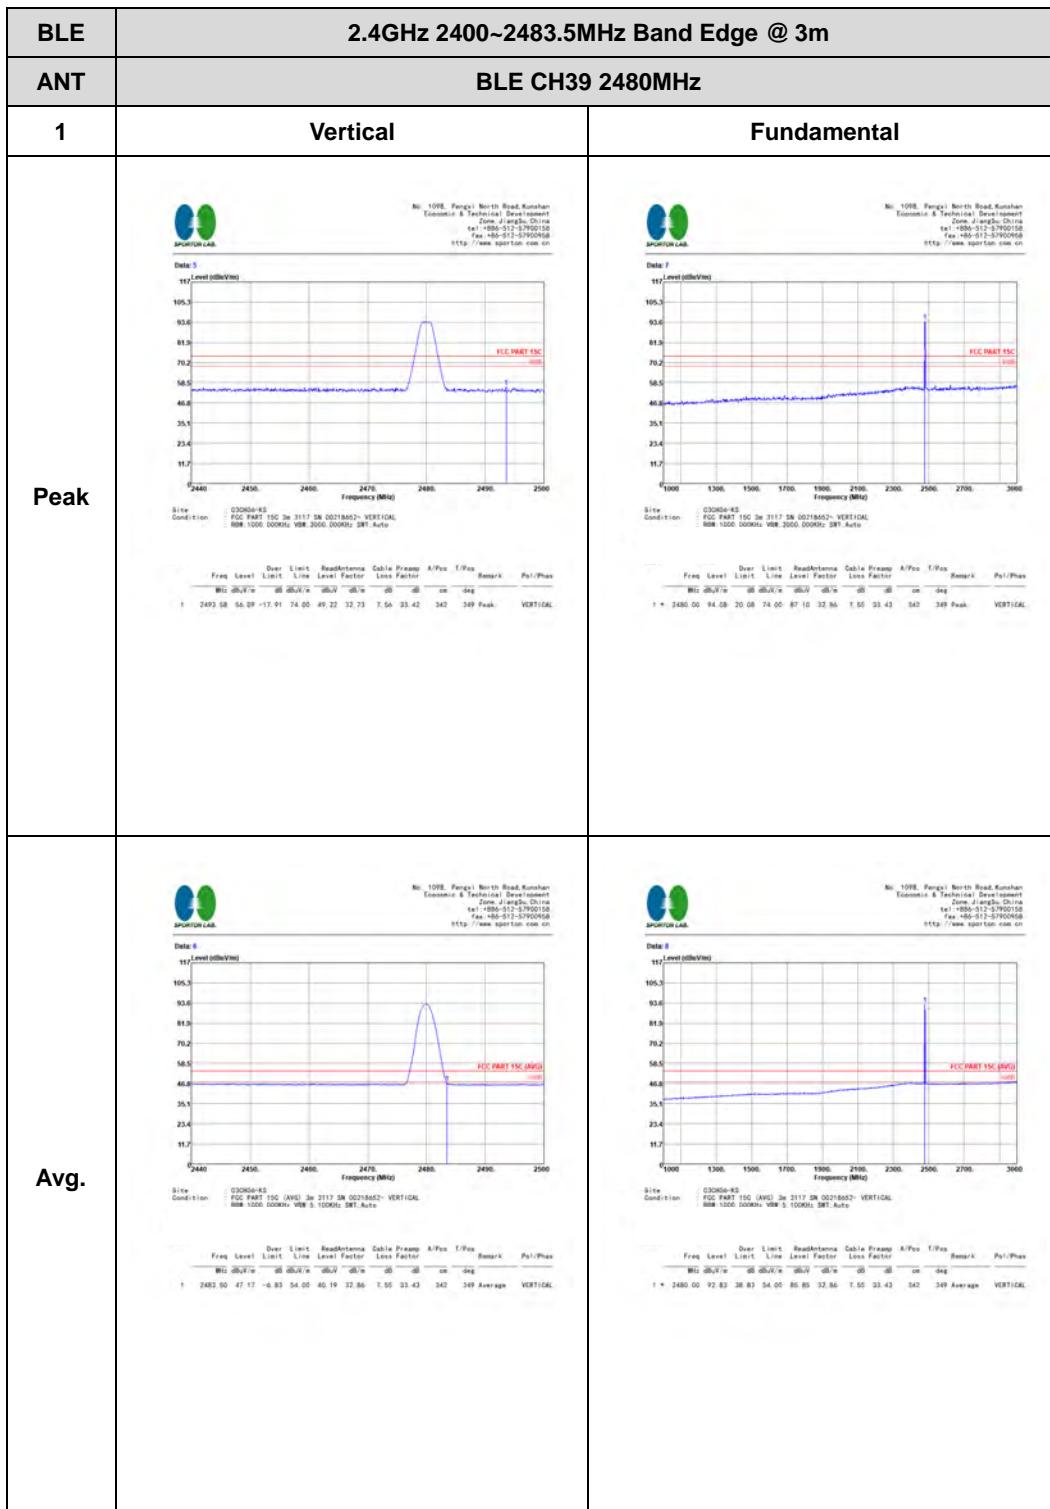





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																			
ANT	BLE CH00 2402MHz																																																																			
1	Horizontal	Vertical																																																																		
Peak	<p>No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 Fax: +86-512-57900658 http://www.sparton.com.cn</p> <p>Date: 13</p> <p>Site: 030564-K5 Condition: FCC PART 15C 3m 3117 SN 00218452> HDM/20NTG RBR: 1500 000MHz VBR: 2000 2000Hz SBT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pow</th> <th>T/Pow</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBc/m</td> <td>dBc/m</td> <td>dBc/m</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>4804.00</td> <td>42.83</td> <td>-31.17</td> <td>74.00</td> <td>58.88</td> <td>34.84</td> <td>10.82</td> <td>61.72</td> <td>300</td> <td>0 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Line	Level Factor	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phase	MHz	dBc/m	dBc/m	dBc/m	dB/m	dB	dB	cm	deg			5	4804.00	42.83	-31.17	74.00	58.88	34.84	10.82	61.72	300	0 Peak	<p>No. 1098, Pengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 Fax: +86-512-57900658 http://www.sparton.com.cn</p> <p>Date: 14</p> <p>Site: 030564-K5 Condition: FCC PART 15C 3m 3117 SN 00218452> VERTICAL RBR: 1500 000MHz VBR: 2000 2000Hz SBT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pow</th> <th>T/Pow</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBc/m</td> <td>dBc/m</td> <td>dBc/m</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>4804.00</td> <td>43.53</td> <td>-30.47</td> <td>74.00</td> <td>59.58</td> <td>34.84</td> <td>10.82</td> <td>61.72</td> <td>300</td> <td>300 Peak</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Line	Level Factor	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phase	MHz	dBc/m	dBc/m	dBc/m	dB/m	dB	dB	cm	deg			5	4804.00	43.53	-30.47	74.00	59.58	34.84	10.82	61.72	300	300 Peak
Freq	Level	Over Limit	Line	Level Factor	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phase																																																										
MHz	dBc/m	dBc/m	dBc/m	dB/m	dB	dB	cm	deg																																																												
5	4804.00	42.83	-31.17	74.00	58.88	34.84	10.82	61.72	300	0 Peak																																																										
Freq	Level	Over Limit	Line	Level Factor	Cable	Preamp	A/Pow	T/Pow	Remark	Pol/Phase																																																										
MHz	dBc/m	dBc/m	dBc/m	dB/m	dB	dB	cm	deg																																																												
5	4804.00	43.53	-30.47	74.00	59.58	34.84	10.82	61.72	300	300 Peak																																																										
Avg.																																																																				

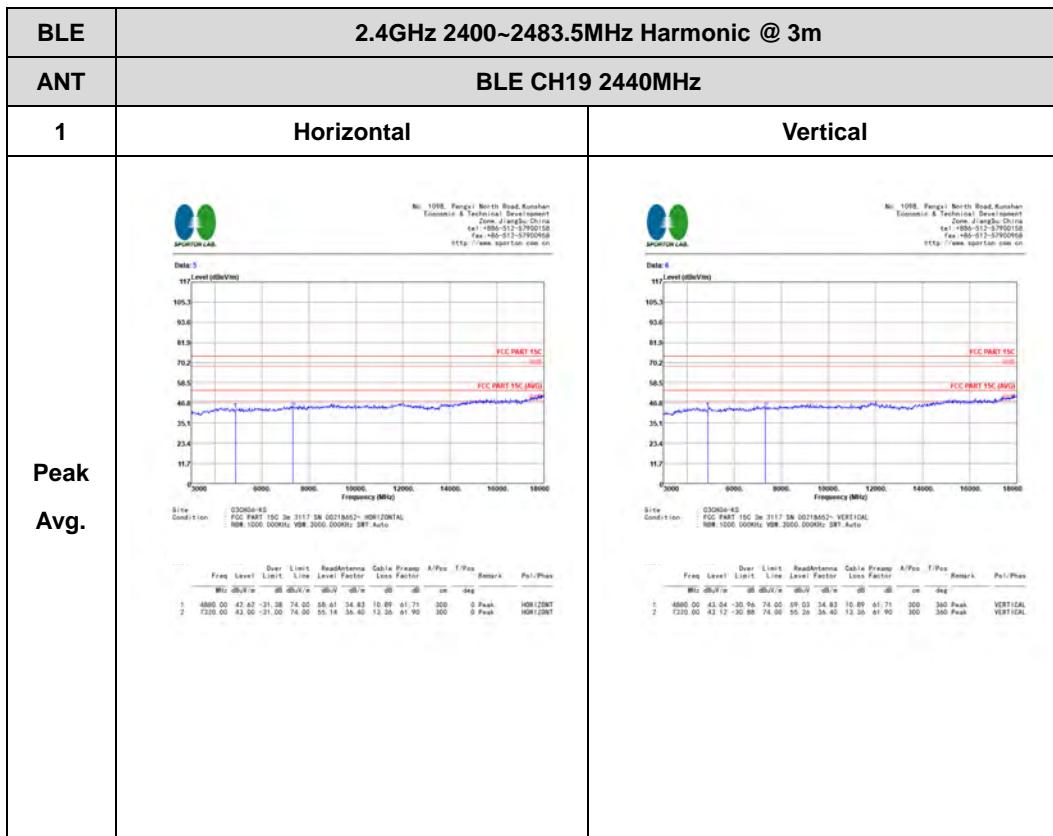


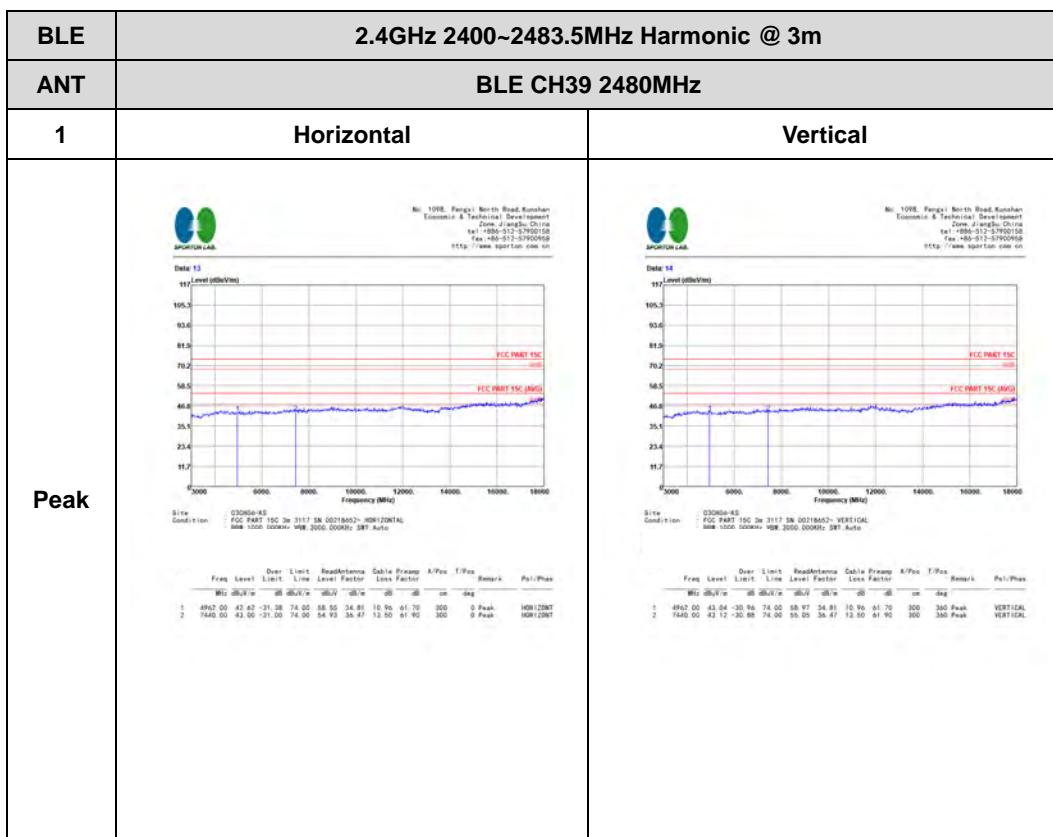



Emission below 1GHz


2.4GHz BLE (LF)

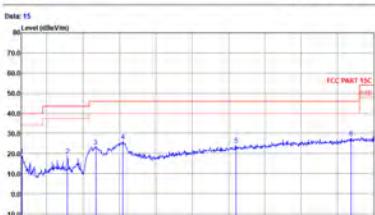
BLE	2.4GHz 2400~2483.5MHz																																																																																																																																																																																																	
ANT	BLE LF																																																																																																																																																																																																	
1	Horizontal	Vertical																																																																																																																																																																																																
QP / Peak	 <p>No. 1098, Pengya North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-5790150 fax: +86-512-5790150 http://www.sparton.com.cn</p> <p>Date: 15</p>  <p>Site: Q30R02-KS Condition: FCC PART 15G 3m LF 4311D SMI4483 HORIZONTAL BBW: 150 200MHz VSW: 300 500MHz SRI: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Dur</th> <th>Line</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Ph</th> <th>T/Ph</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm/m</td> <td>dB</td> <td>dBm/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>30.97</td> <td>18.91</td> <td>-21.09</td> <td>40.05</td> <td>25.70</td> <td>-24.57</td> <td>0.84</td> <td>32.20</td> <td>—</td> <td>Peak</td> <td>HOR1/INT</td> </tr> <tr> <td>2</td> <td>153.67</td> <td>23.44</td> <td>-22.56</td> <td>46.00</td> <td>35.99</td> <td>-16.93</td> <td>2.67</td> <td>32.17</td> <td>—</td> <td>Peak</td> <td>HOR1/INT</td> </tr> <tr> <td>3</td> <td>234.67</td> <td>23.44</td> <td>-22.56</td> <td>46.00</td> <td>35.99</td> <td>-16.93</td> <td>2.67</td> <td>32.17</td> <td>—</td> <td>Peak</td> <td>HOR1/INT</td> </tr> <tr> <td>4</td> <td>234.67</td> <td>23.44</td> <td>-22.56</td> <td>46.00</td> <td>35.99</td> <td>-16.93</td> <td>2.67</td> <td>32.17</td> <td>—</td> <td>Peak</td> <td>HOR1/INT</td> </tr> <tr> <td>5</td> <td>620.73</td> <td>24.38</td> <td>-21.62</td> <td>46.00</td> <td>26.27</td> <td>-26.09</td> <td>4.33</td> <td>32.26</td> <td>—</td> <td>Peak</td> <td>HOR1/INT</td> </tr> <tr> <td>6</td> <td>938.95</td> <td>27.74</td> <td>-18.68</td> <td>46.00</td> <td>24.10</td> <td>-30.52</td> <td>5.32</td> <td>32.20</td> <td>100</td> <td>Peak</td> <td>HOR1/INT</td> </tr> </tbody> </table>	Freq	Level	Dur	Line	Read	Antenna	Cable	Preamp	A/Ph	T/Ph	Remark	Pol/Phase	MHz	dBm/m	dB	dBm/m	dB	dB	dB	dB	dB	deg			1	30.97	18.91	-21.09	40.05	25.70	-24.57	0.84	32.20	—	Peak	HOR1/INT	2	153.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT	3	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT	4	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT	5	620.73	24.38	-21.62	46.00	26.27	-26.09	4.33	32.26	—	Peak	HOR1/INT	6	938.95	27.74	-18.68	46.00	24.10	-30.52	5.32	32.20	100	Peak	HOR1/INT	 <p>Site: Q30R02-KS Condition: FCC PART 15G 3m LF 4311D SMI4483 VERTICAL BBW: 150 200MHz VSW: 300 500MHz SRI: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Dur</th> <th>Line</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Ph</th> <th>T/Ph</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBm/m</td> <td>dB</td> <td>dBm/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>deg</td> <td></td> <td></td> </tr> <tr> <td>1</td> <td>31.94</td> <td>29.72</td> <td>-10.28</td> <td>40.00</td> <td>37.02</td> <td>-24.04</td> <td>0.86</td> <td>32.20</td> <td>100</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>154.01</td> <td>23.10</td> <td>-20.40</td> <td>43.93</td> <td>30.44</td> <td>-16.56</td> <td>2.20</td> <td>32.10</td> <td>—</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>199.01</td> <td>17.10</td> <td>-20.40</td> <td>43.93</td> <td>30.44</td> <td>-16.56</td> <td>2.20</td> <td>32.10</td> <td>—</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>4</td> <td>234.67</td> <td>23.44</td> <td>-22.56</td> <td>46.00</td> <td>35.99</td> <td>-16.93</td> <td>2.67</td> <td>32.17</td> <td>—</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>5</td> <td>464.56</td> <td>23.84</td> <td>-20.16</td> <td>46.00</td> <td>35.97</td> <td>-23.36</td> <td>2.77</td> <td>32.26</td> <td>—</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>6</td> <td>806.00</td> <td>29.54</td> <td>-20.46</td> <td>46.00</td> <td>24.58</td> <td>-28.33</td> <td>4.94</td> <td>32.31</td> <td>—</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Dur	Line	Read	Antenna	Cable	Preamp	A/Ph	T/Ph	Remark	Pol/Phase	MHz	dBm/m	dB	dBm/m	dB	dB	dB	dB	dB	deg			1	31.94	29.72	-10.28	40.00	37.02	-24.04	0.86	32.20	100	Peak	VERTICAL	2	154.01	23.10	-20.40	43.93	30.44	-16.56	2.20	32.10	—	Peak	VERTICAL	3	199.01	17.10	-20.40	43.93	30.44	-16.56	2.20	32.10	—	Peak	VERTICAL	4	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	VERTICAL	5	464.56	23.84	-20.16	46.00	35.97	-23.36	2.77	32.26	—	Peak	VERTICAL	6	806.00	29.54	-20.46	46.00	24.58	-28.33	4.94	32.31	—	Peak	VERTICAL
Freq	Level	Dur	Line	Read	Antenna	Cable	Preamp	A/Ph	T/Ph	Remark	Pol/Phase																																																																																																																																																																																							
MHz	dBm/m	dB	dBm/m	dB	dB	dB	dB	dB	deg																																																																																																																																																																																									
1	30.97	18.91	-21.09	40.05	25.70	-24.57	0.84	32.20	—	Peak	HOR1/INT																																																																																																																																																																																							
2	153.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT																																																																																																																																																																																							
3	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT																																																																																																																																																																																							
4	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	HOR1/INT																																																																																																																																																																																							
5	620.73	24.38	-21.62	46.00	26.27	-26.09	4.33	32.26	—	Peak	HOR1/INT																																																																																																																																																																																							
6	938.95	27.74	-18.68	46.00	24.10	-30.52	5.32	32.20	100	Peak	HOR1/INT																																																																																																																																																																																							
Freq	Level	Dur	Line	Read	Antenna	Cable	Preamp	A/Ph	T/Ph	Remark	Pol/Phase																																																																																																																																																																																							
MHz	dBm/m	dB	dBm/m	dB	dB	dB	dB	dB	deg																																																																																																																																																																																									
1	31.94	29.72	-10.28	40.00	37.02	-24.04	0.86	32.20	100	Peak	VERTICAL																																																																																																																																																																																							
2	154.01	23.10	-20.40	43.93	30.44	-16.56	2.20	32.10	—	Peak	VERTICAL																																																																																																																																																																																							
3	199.01	17.10	-20.40	43.93	30.44	-16.56	2.20	32.10	—	Peak	VERTICAL																																																																																																																																																																																							
4	234.67	23.44	-22.56	46.00	35.99	-16.93	2.67	32.17	—	Peak	VERTICAL																																																																																																																																																																																							
5	464.56	23.84	-20.16	46.00	35.97	-23.36	2.77	32.26	—	Peak	VERTICAL																																																																																																																																																																																							
6	806.00	29.54	-20.46	46.00	24.58	-28.33	4.94	32.31	—	Peak	VERTICAL																																																																																																																																																																																							




Emission above 18-25GHz

2.4GHz BLE (HF)

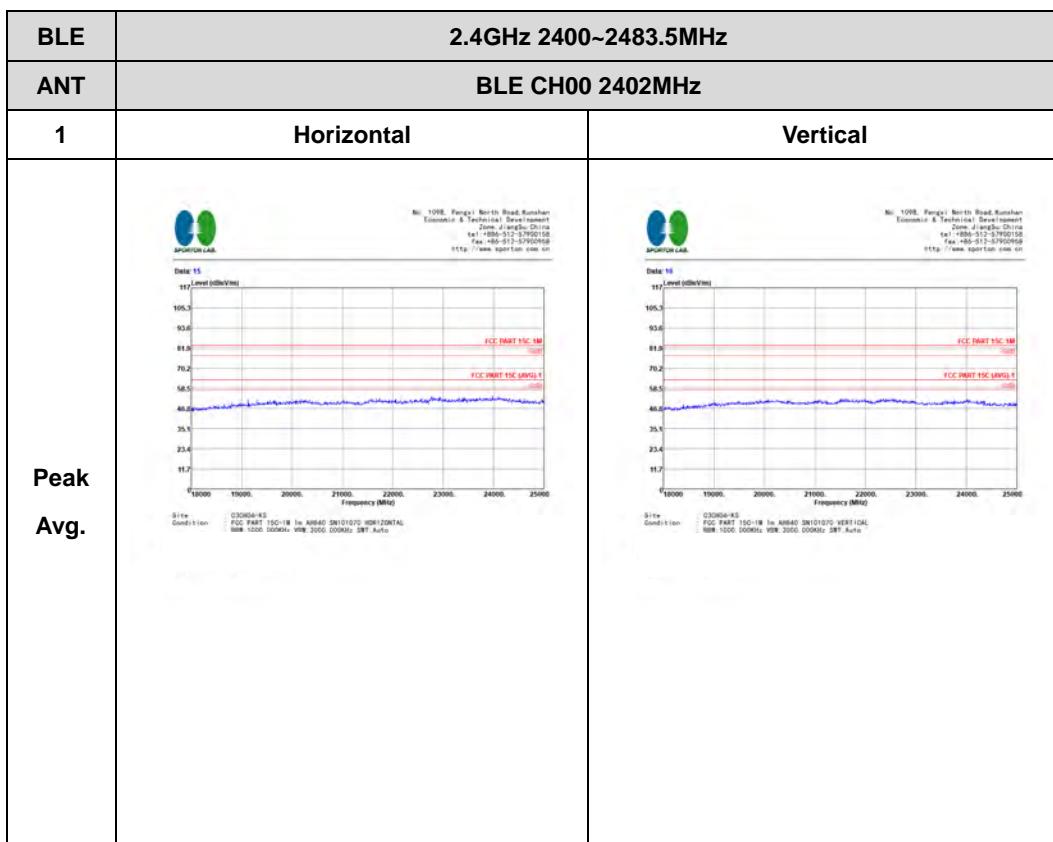

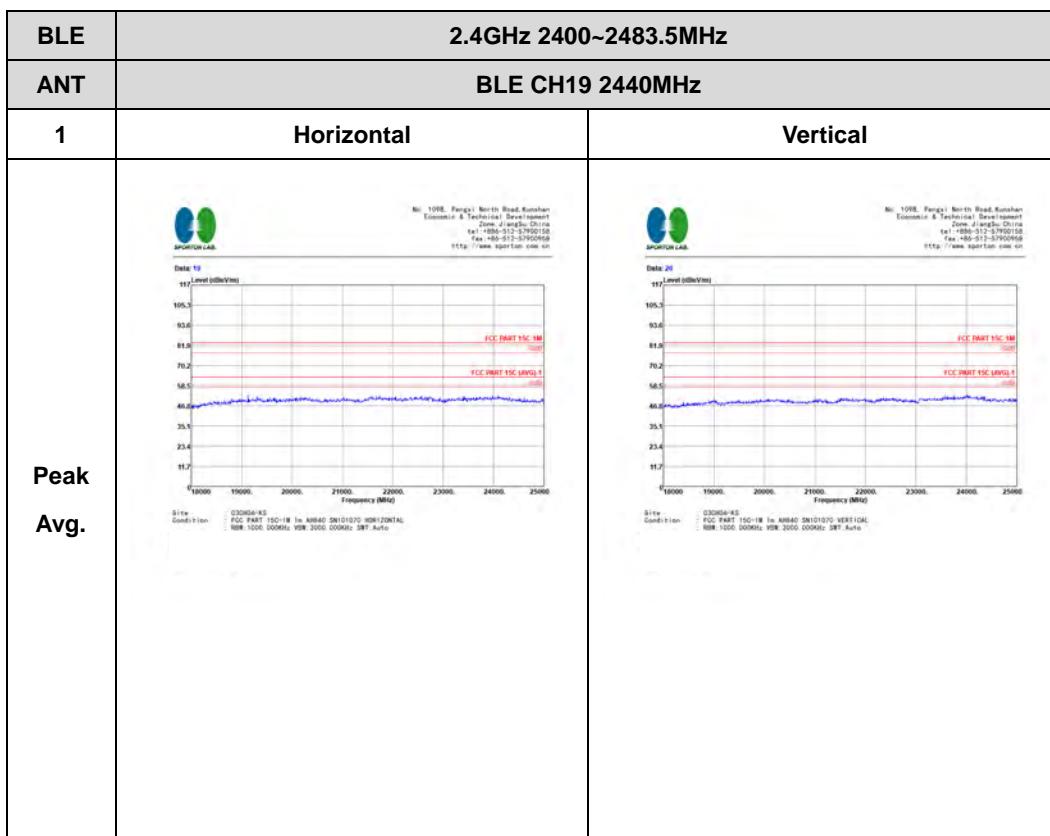

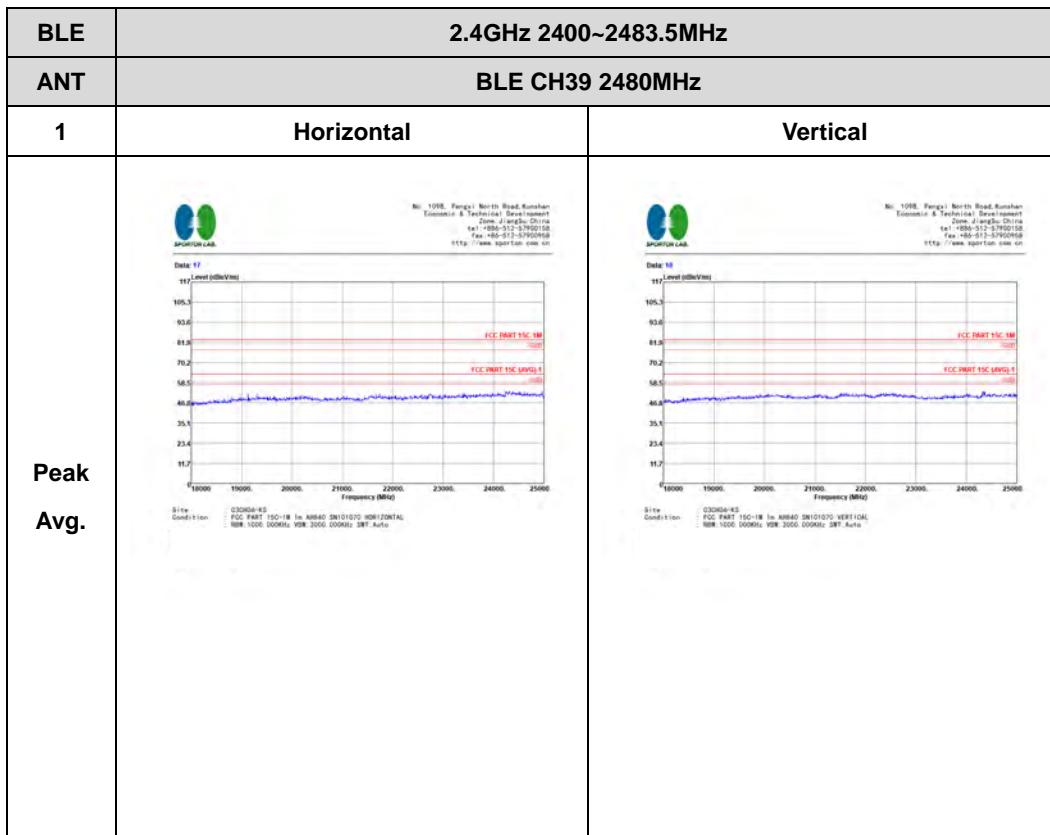







Bluetooth v5.0 LE for Sample 2

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																													
ANT	BLE CH39 2480MHz																																													
1	Horizontal	Fundamental																																												
Peak	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900568 http://www.sportun.com.cn</p> <p>Date 9</p> <p>Site Condition : FCC PART 15C 3e 2117 SN 00218452- HORIZONTAL BBW 10000.0000uVW 5.1000uV SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Redistortion</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Ps1/Phas</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>56.16</td> <td>-17.84</td> <td>74.00</td> <td>46.29</td> <td>32.73</td> <td>T.56</td> <td>33.42</td> <td>180</td> <td>347 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas	2480.00	56.16	-17.84	74.00	46.29	32.73	T.56	33.42	180	347 Peak	HORIZONTAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900568 http://www.sportun.com.cn</p> <p>Date 11</p> <p>Site Condition : FCC PART 15C 3e 2117 SN 00218452- HORIZONTAL BBW 10000.0000uVW 5.1000uV SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Redistortion</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Ps1/Phas</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>97.56</td> <td>23.56</td> <td>74.00</td> <td>90.58</td> <td>32.86</td> <td>T.56</td> <td>33.42</td> <td>180</td> <td>347 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas	2480.00	97.56	23.56	74.00	90.58	32.86	T.56	33.42	180	347 Peak	HORIZONTAL
Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas																																				
2480.00	56.16	-17.84	74.00	46.29	32.73	T.56	33.42	180	347 Peak	HORIZONTAL																																				
Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas																																				
2480.00	97.56	23.56	74.00	90.58	32.86	T.56	33.42	180	347 Peak	HORIZONTAL																																				
Avg.	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900568 http://www.sportun.com.cn</p> <p>Date 10</p> <p>Site Condition : FCC PART 15C (AVG) 3e 2117 SN 00218452- HORIZONTAL BBW 10000.0000uVW 5.1000uV SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Redistortion</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Ps1/Phas</th> </tr> </thead> <tbody> <tr> <td>2482.50</td> <td>56.02</td> <td>-15.99</td> <td>54.00</td> <td>41.04</td> <td>32.86</td> <td>T.56</td> <td>33.42</td> <td>180</td> <td>347 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas	2482.50	56.02	-15.99	54.00	41.04	32.86	T.56	33.42	180	347 Average	HORIZONTAL	 <p>No. 1098, Pengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900568 http://www.sportun.com.cn</p> <p>Date 12</p> <p>Site Condition : FCC PART 15C (AVG) 3e 2117 SN 00218452- HORIZONTAL BBW 10000.0000uVW 5.1000uV SMT:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Redistortion</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Ps1/Phas</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>96.28</td> <td>42.28</td> <td>54.00</td> <td>89.30</td> <td>32.86</td> <td>T.56</td> <td>33.42</td> <td>180</td> <td>347 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas	2480.00	96.28	42.28	54.00	89.30	32.86	T.56	33.42	180	347 Average	HORIZONTAL
Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas																																				
2482.50	56.02	-15.99	54.00	41.04	32.86	T.56	33.42	180	347 Average	HORIZONTAL																																				
Freq	Level	Over	Limit	Redistortion	Cable	Preamp	A/Pos	T/Pos	Remark	Ps1/Phas																																				
2480.00	96.28	42.28	54.00	89.30	32.86	T.56	33.42	180	347 Average	HORIZONTAL																																				

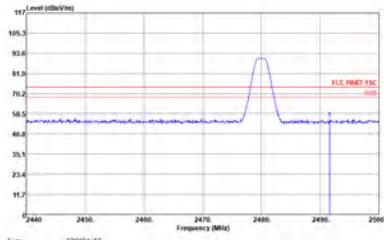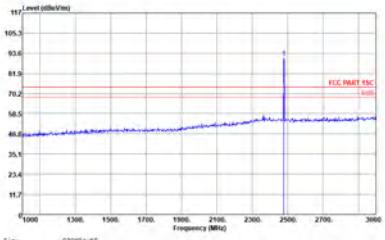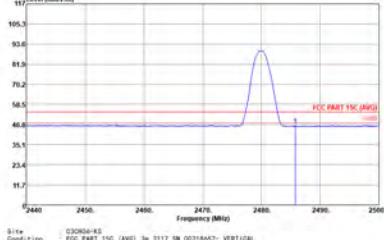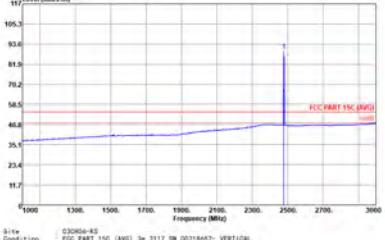


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																							
ANT	BLE CH39 2480MHz																																							
1	Vertical	Fundamental																																						
Peak	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sparton.com.cn</p> <p>Date 13</p>  <p>Site: 030064-K5 Condition: FCC PART 15C 3e 3117 SN 0021862, VERTICAL RBW: 1000.0000Hz VSW: 2000.0000Hz SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2481.60</td> <td>55.42</td> <td>-18.58</td> <td>74.00</td> <td>48.55</td> <td>32.73</td> <td>7.56</td> <td>33.42</td> <td>250</td> <td>272 Peak: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase	2481.60	55.42	-18.58	74.00	48.55	32.73	7.56	33.42	250	272 Peak: VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sparton.com.cn</p> <p>Date 15</p>  <p>Site: 030064-K5 Condition: FCC PART 15C 3e 3117 SN 0021862, VERTICAL RBW: 1000.0000Hz VSW: 2000.0000Hz SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>91.08</td> <td>-17.74</td> <td>74.00</td> <td>84.10</td> <td>32.96</td> <td>7.56</td> <td>33.42</td> <td>250</td> <td>272 Peak: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase	2480.00	91.08	-17.74	74.00	84.10	32.96	7.56	33.42	250	272 Peak: VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase																																
2481.60	55.42	-18.58	74.00	48.55	32.73	7.56	33.42	250	272 Peak: VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase																																
2480.00	91.08	-17.74	74.00	84.10	32.96	7.56	33.42	250	272 Peak: VERTICAL																															
Avg.	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sparton.com.cn</p> <p>Date 14</p>  <p>Site: 030064-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862, VERTICAL RBW: 1000.0000Hz VSW: 5.10000, SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2485.78</td> <td>46.18</td> <td>-7.87</td> <td>54.00</td> <td>29.19</td> <td>32.86</td> <td>7.55</td> <td>33.42</td> <td>250</td> <td>272 Average: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase	2485.78	46.18	-7.87	54.00	29.19	32.86	7.55	33.42	250	272 Average: VERTICAL	 <p>No. 1098, Fengxi North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sparton.com.cn</p> <p>Date 16</p>  <p>Site: 030064-K5 Condition: FCC PART 15C (AVG) 3e 3117 SN 0021862, VERTICAL RBW: 1000.0000Hz VSW: 5.10000, SMT: Auto</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pes</th> <th>T/Pes</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>99.77</td> <td>-35.77</td> <td>54.00</td> <td>87.79</td> <td>32.86</td> <td>7.55</td> <td>33.43</td> <td>250</td> <td>272 Average: VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase	2480.00	99.77	-35.77	54.00	87.79	32.86	7.55	33.43	250	272 Average: VERTICAL
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase																																
2485.78	46.18	-7.87	54.00	29.19	32.86	7.55	33.42	250	272 Average: VERTICAL																															
Freq	Level	Over Limit	ReadAntenna	Cable Preamp	A/Pes	T/Pes	Remark	Pol/Phase																																
2480.00	99.77	-35.77	54.00	87.79	32.86	7.55	33.43	250	272 Average: VERTICAL																															



2.4GHz 2400~2483.5MHz


BLE (Harmonic @ 3m)

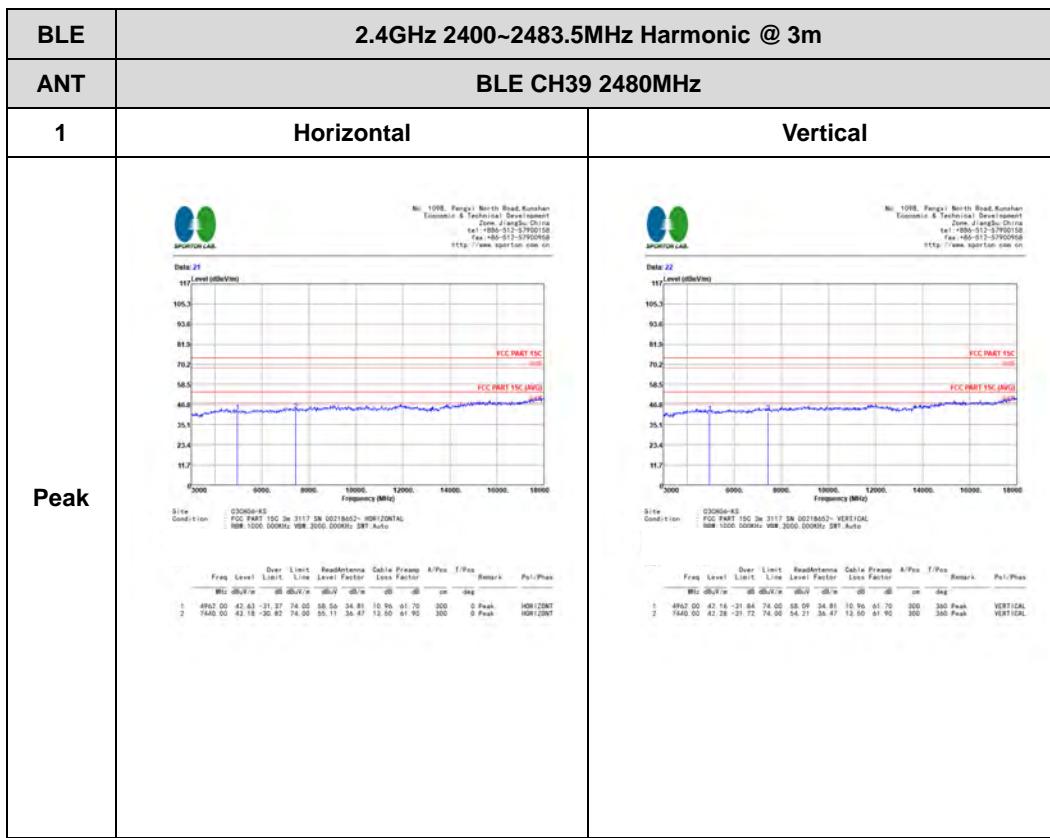






Emission above 18-25GHz

2.4GHz BT (HF)

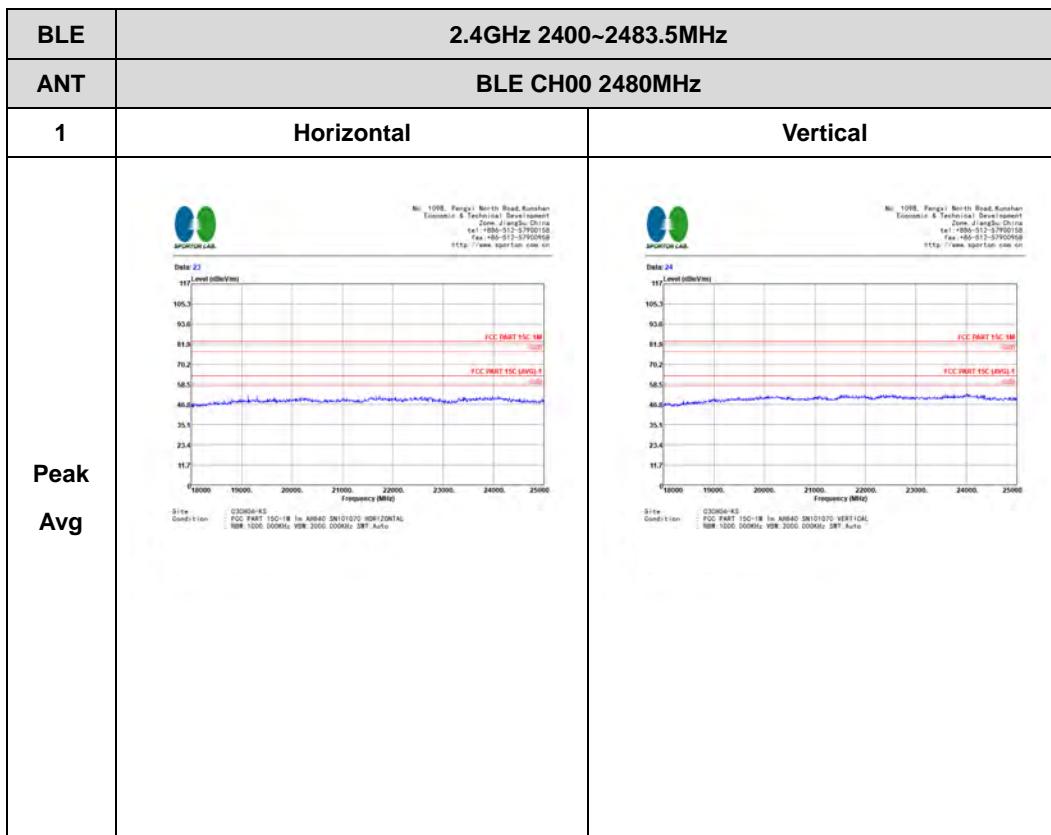

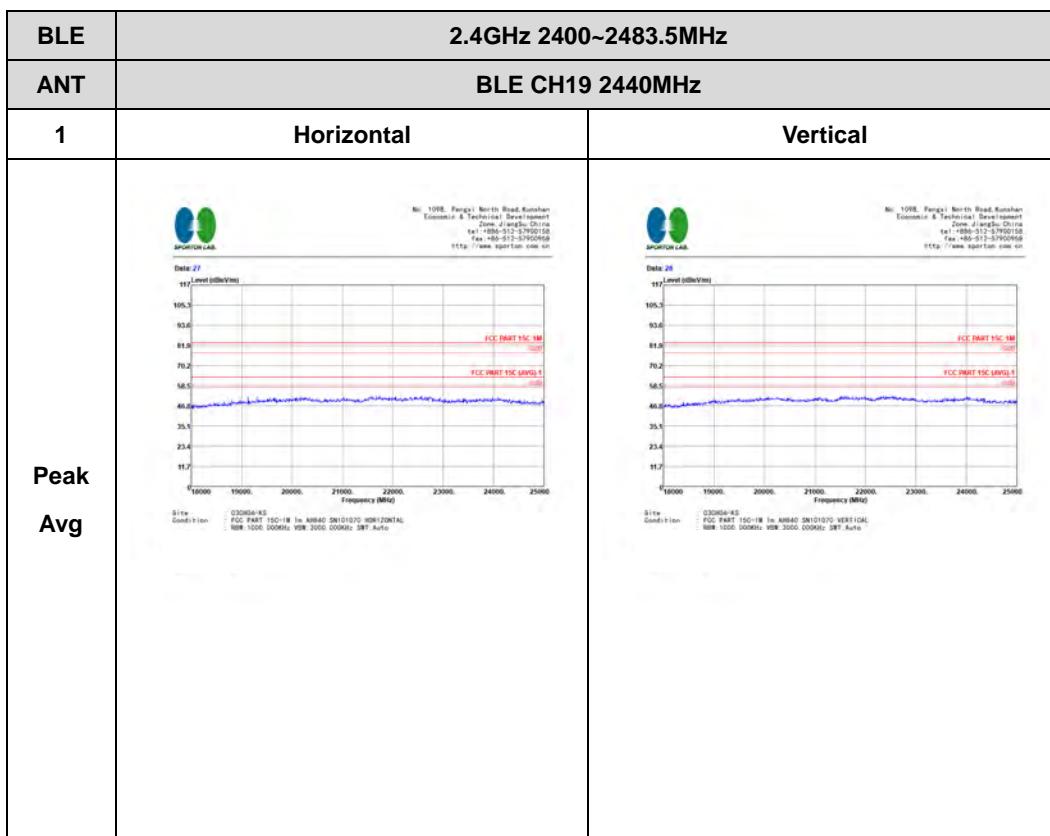

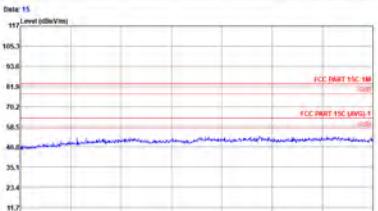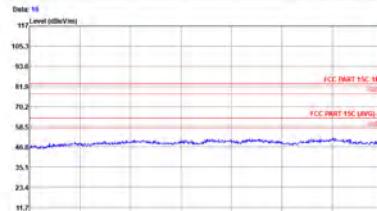


BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 <p>No: 1098, Fengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Date: 15 117. Level (dBmV/m)</p>  <p>Site Condition: C33054-K5 FCC PART 15C 1B-1B In ARIAD 2N101070 VERTICAL SER BLOCK 200MHz, VSW 2000, 2000Hz, DFT-Auto</p>	 <p>No: 1098, Fengji North Road, Kunshan Economic & Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900159 http://www.sparton.com.cn</p> <p>Date: 16 117. Level (dBmV/m)</p>  <p>Site Condition: C33054-K5 FCC PART 15C 1B-1B In ARIAD 2N101070 VERTICAL SER BLOCK 200MHz, VSW 2000, 2000Hz, DFT-Auto</p>
Avg		



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth v4.0 LE	62.04	0.388	2.575	2.7KHz
Bluetooth v5.0 LE	32.41	0.203	4.929	5.1KHz

Bluetooth v4.0 LE

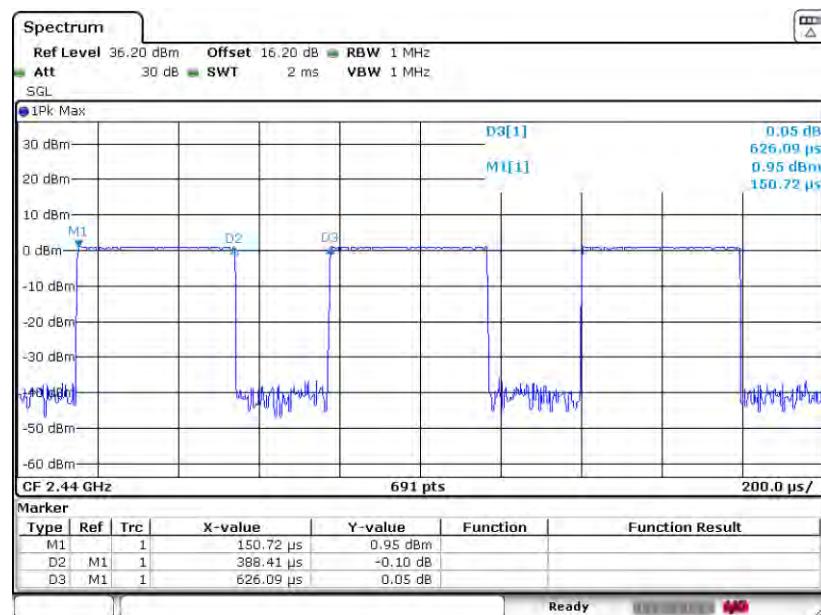



Bluetooth v5.0 LE

