



Test channel:	CH3
---------------	-----

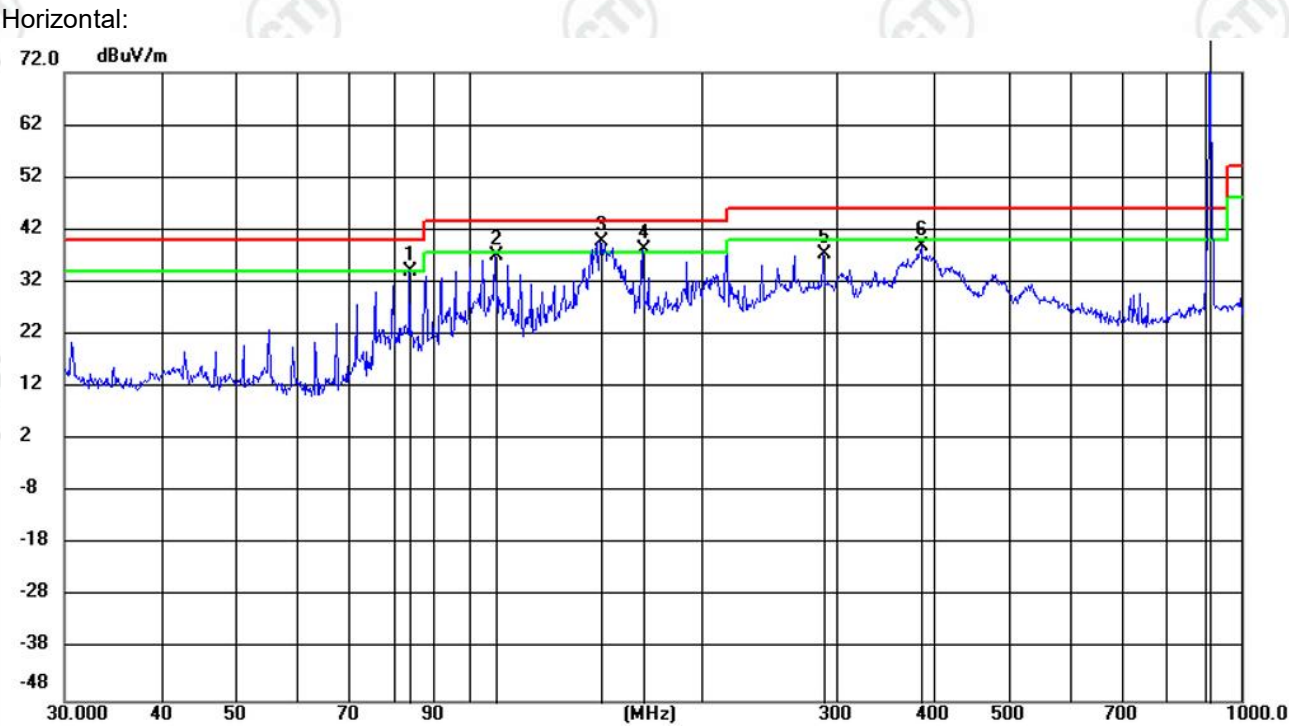


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		83.9773	23.49	10.45	33.94	40.00	-6.06	QP	200	353
2		108.5327	22.98	14.02	37.00	43.50	-6.50	QP	200	28
3	!	147.9992	29.36	10.28	39.64	43.50	-3.86	QP	200	10
4	!	168.0598	27.27	10.96	38.23	43.50	-5.27	QP	100	219
5		288.1923	21.56	15.84	37.40	46.00	-8.60	QP	100	327
6		386.3627	19.92	19.07	38.99	46.00	-7.01	QP	100	318
7	*	912.0621	77.01	27.07	104.08	46.00	58.08	peak	100	174

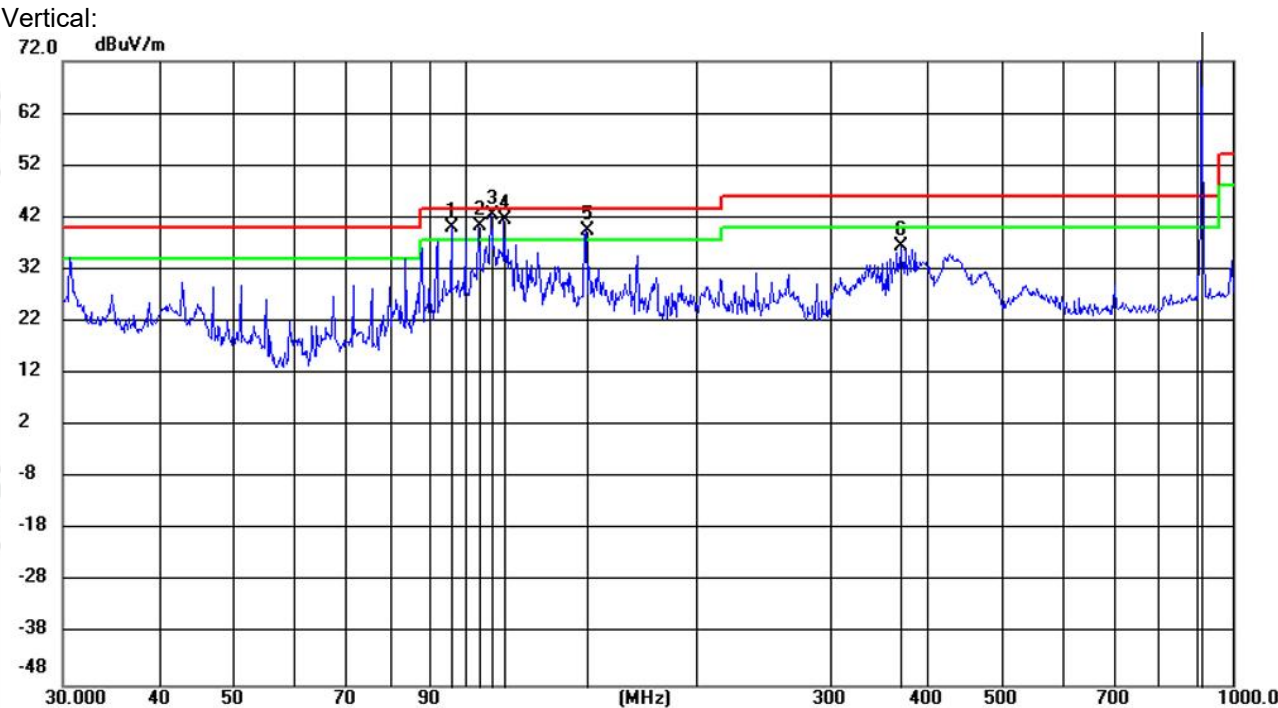

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	96.2672	27.40	12.78	40.18	43.50	-3.32	QP	100	54
2	!	104.4261	26.61	13.73	40.34	43.50	-3.16	QP	100	44
3	!	108.5518	28.39	14.02	42.41	43.50	-1.09	QP	100	44
4	!	112.6428	28.00	13.43	41.43	43.50	-2.07	QP	100	63
5	!	143.9556	29.03	10.33	39.36	43.50	-4.14	QP	100	162
6		370.7023	17.88	18.58	36.46	46.00	-9.54	QP	100	353
7	*	912.2221	69.35	27.07	96.42	46.00	50.42	peak	200	69


Test channel:	CH4
---------------	-----

Horizontal:

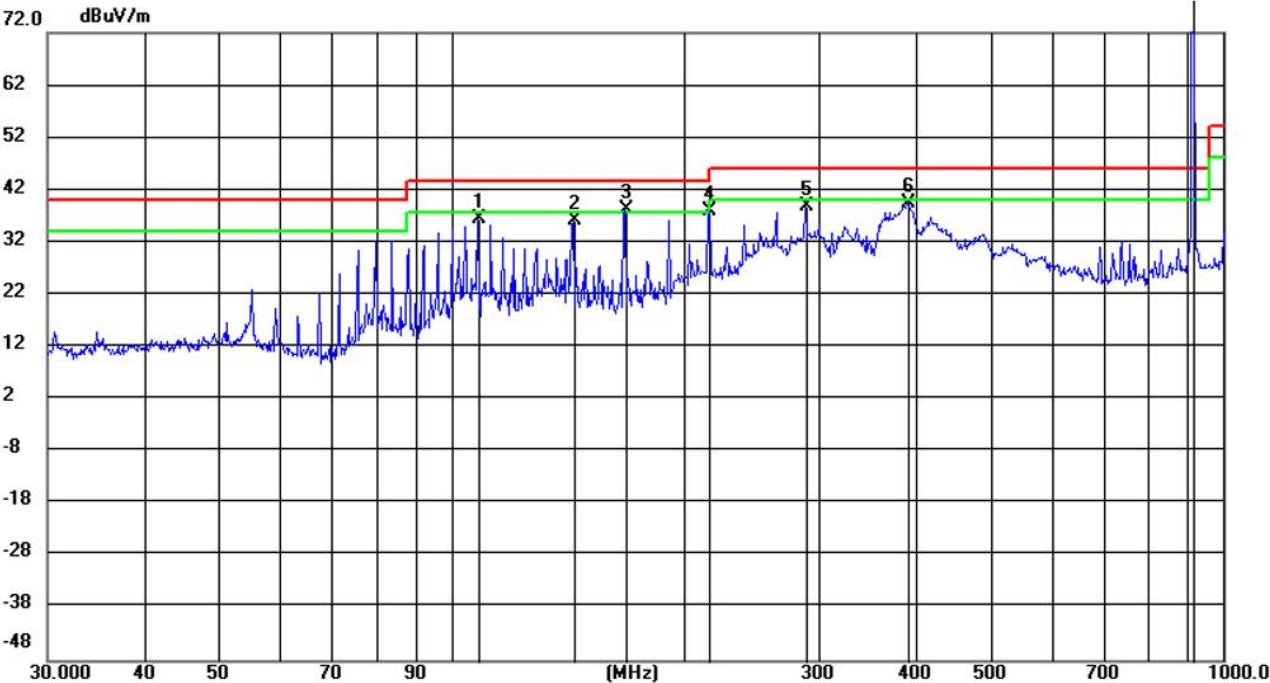


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		108.5327	22.36	14.02	36.38	43.50	-7.12	QP 199	41	
2		143.8800	25.93	10.33	36.26	43.50	-7.24	QP 199	113	
3	!	167.9714	27.38	10.96	38.34	43.50	-5.16	QP 100	212	
4		216.0239	24.73	13.09	37.82	46.00	-8.18	QP 100	221	
5		288.0914	22.99	15.83	38.82	46.00	-7.18	QP 100	230	
6		391.2023	20.27	19.21	39.48	46.00	-6.52	QP 100	301	
7	*	916.0686	79.23	27.11	106.34	46.00	60.34	peak 100	167	

Vertical:

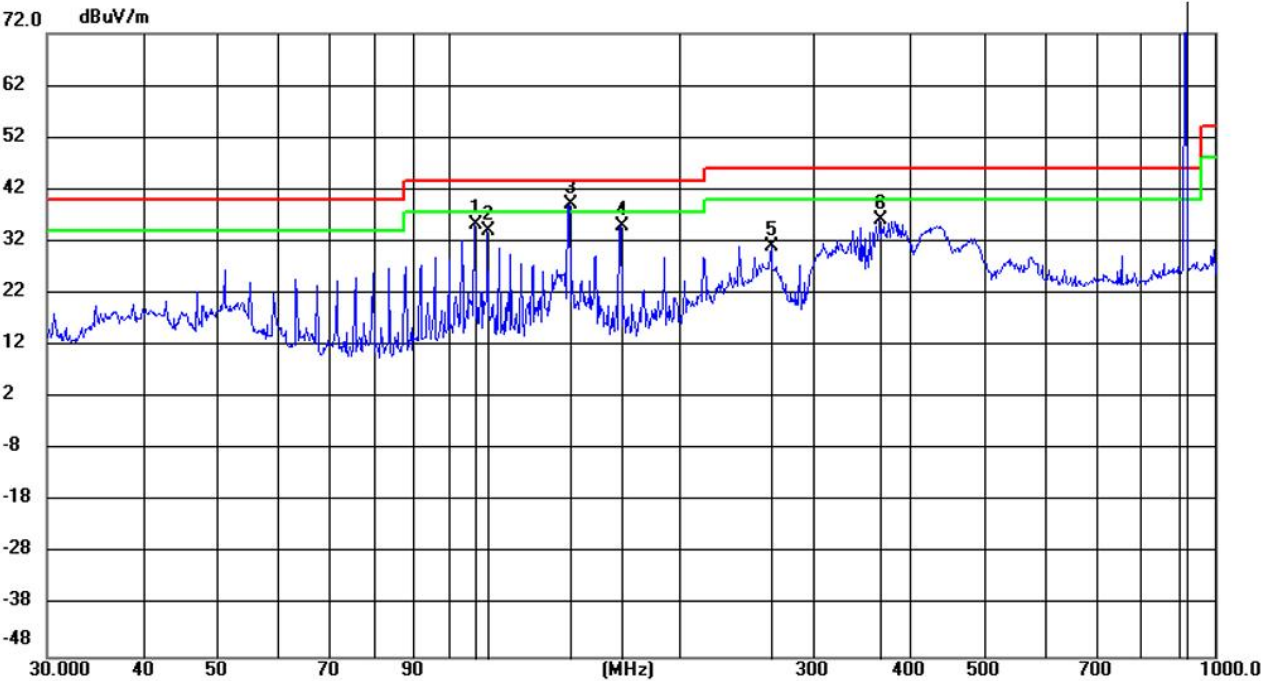


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		108.5518	21.25	14.02	35.27	43.50	-8.23	QP	100	59
2		112.6428	20.73	13.43	34.16	43.50	-9.34	QP	100	59
3	!	143.9808	28.90	10.33	39.23	43.50	-4.27	QP	100	203
4		167.9420	23.90	10.96	34.86	43.50	-8.64	QP	200	292
5		264.0041	15.99	15.12	31.11	46.00	-14.89	QP	200	14
6		366.6302	17.77	18.45	36.22	46.00	-9.78	QP	100	5
7	*	916.0687	73.52	27.11	100.63	46.00	54.63	peak	100	203

Test channel:	CH5
---------------	-----

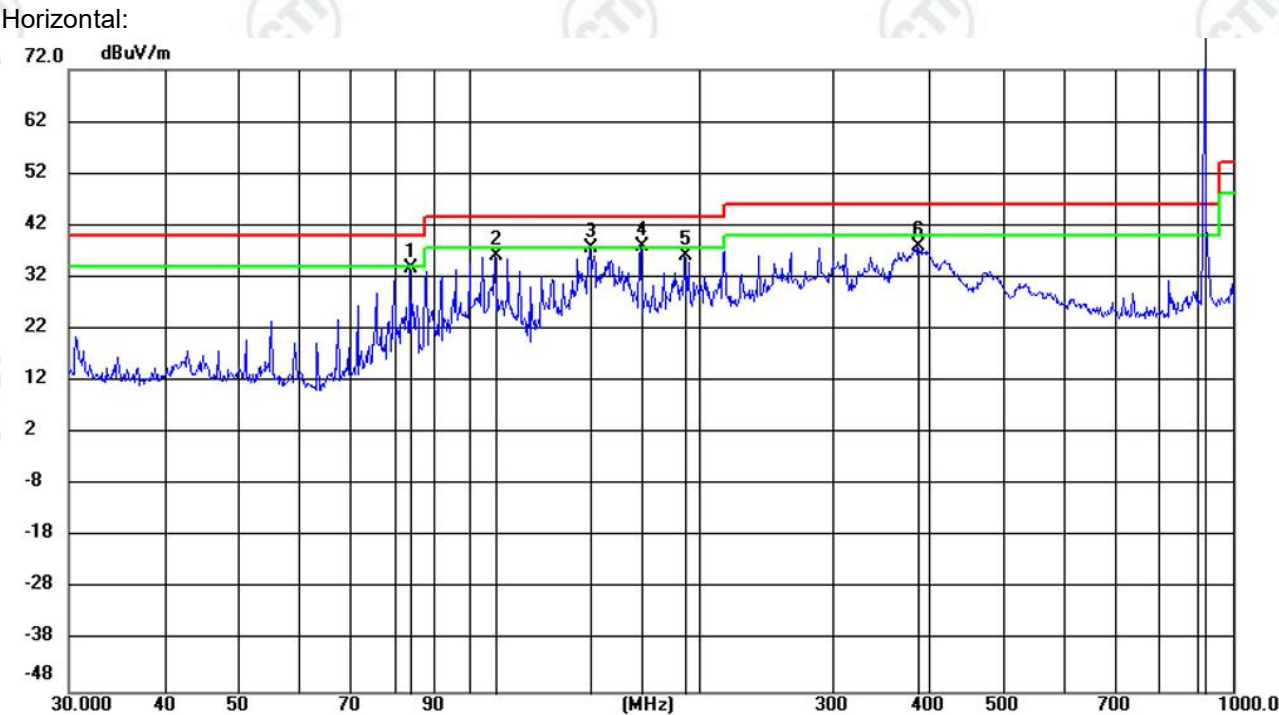

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		83.9626	23.23	10.44	33.67	40.00	-6.33	QP	199	354
2		108.5327	22.23	14.02	36.25	43.50	-7.25	QP	199	19
3	!	144.0314	27.29	10.33	37.62	43.50	-5.88	QP	199	354
4	!	168.0008	27.13	10.96	38.09	43.50	-5.41	QP	199	19
5		191.8122	23.49	12.57	36.06	43.50	-7.44	QP	199	209
6		387.1086	18.87	19.09	37.96	46.00	-8.04	QP	100	166
7	*	920.0927	73.11	27.14	100.25	46.00	54.25	peak	100	32

Vertical:

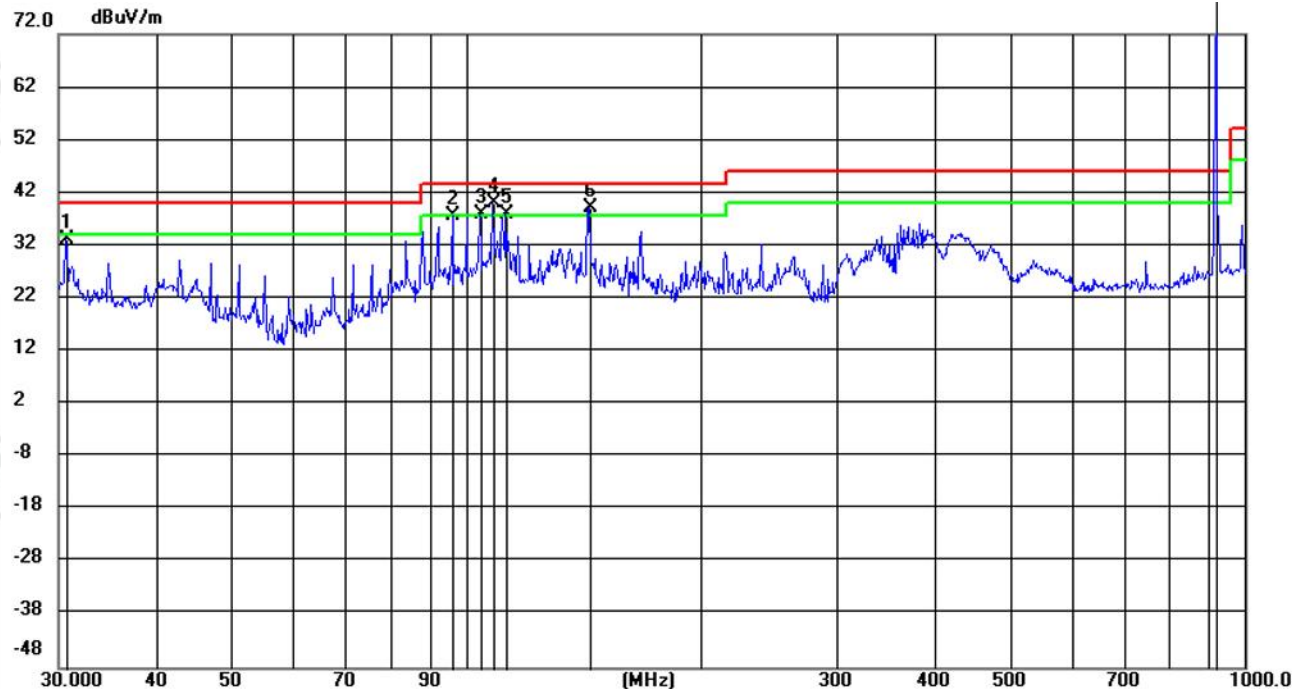

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		30.7347	20.78	12.51	33.29	40.00	-6.71	QP	100	244
2	!	96.2503	24.88	12.78	37.66	43.50	-5.84	QP	100	26
3	!	104.4444	24.23	13.74	37.97	43.50	-5.53	QP	100	36
4	!	108.5518	25.99	14.02	40.01	43.50	-3.49	QP	100	45
5	!	112.6427	24.66	13.43	38.09	43.50	-5.41	QP	100	63
6	!	143.9808	28.91	10.33	39.24	43.50	-4.26	QP	100	308
7	*	919.9314	70.59	27.14	97.73	46.00	51.73	peak	100	190

Above 1GHz:									
Test mode:					Transmitting (CH1)				
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1200.94	-22.29	63.39	41.10	74.00	32.90	PASS	Horizontal	PK
2	2725.07	-16.45	63.17	46.72	74.00	27.28	PASS	Horizontal	PK
3	4541.80	-9.74	56.98	47.24	74.00	26.76	PASS	Horizontal	PK
4	6358.53	-4.68	66.53	61.85	74.00	12.15	PASS	Horizontal	PK
5	8175.26	-1.62	54.29	52.67	74.00	21.33	PASS	Horizontal	PK
6	9991.99	1.18	48.62	49.80	74.00	24.20	PASS	Horizontal	PK
7	1394.83	-21.73	66.39	44.66	74.00	29.34	PASS	Vertical	PK
8	2725.07	-16.45	67.48	51.03	74.00	22.97	PASS	Vertical	PK
9	4541.80	-9.74	62.27	52.53	74.00	21.47	PASS	Vertical	PK
10	5450.17	-6.11	59.35	53.24	74.00	20.76	PASS	Vertical	PK
11	6358.53	-4.68	68.34	63.66	74.00	10.34	PASS	Vertical	PK
12	8176.44	-1.61	55.50	53.89	74.00	20.11	PASS	Vertical	PK

Above 1GHz:									
Test mode:					Transmitting (CH2)				
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1196.24	-22.33	64.59	42.26	74.00	31.74	PASS	Horizontal	PK
2	1398.36	-21.70	64.13	42.43	74.00	31.57	PASS	Horizontal	PK
3	2725.07	-16.45	64.84	48.39	74.00	25.61	PASS	Horizontal	PK
4	5450.17	-6.11	57.79	51.68	74.00	22.32	PASS	Horizontal	PK
5	6358.53	-4.68	69.84	65.16	74.00	8.84	PASS	Horizontal	PK
6	9237.57	0.57	45.42	45.99	74.00	28.01	PASS	Horizontal	PK
7	1397.18	-21.71	64.05	42.34	74.00	31.66	PASS	Vertical	PK
8	2431.29	-17.74	63.09	45.35	74.00	28.65	PASS	Vertical	PK
9	5450.17	-6.11	58.87	52.76	74.00	21.24	PASS	Vertical	PK
10	6358.53	-4.68	67.93	63.25	74.00	10.75	PASS	Vertical	PK
11	8175.26	-1.62	53.23	51.61	74.00	22.39	PASS	Vertical	PK
12	11809.9	2.14	49.71	51.85	74.00	22.15	PASS	Vertical	PK

Above 1GHz:									
Test mode:					Transmitting (CH3)				
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1393.66	-21.73	62.79	41.06	74.00	32.94	PASS	Horizontal	PK
2	1950.67	-19.54	55.79	36.25	74.00	37.75	PASS	Horizontal	PK
3	2735.64	-16.40	63.28	46.88	74.00	27.12	PASS	Horizontal	PK
4	5476.02	-6.33	52.84	46.51	74.00	27.49	PASS	Horizontal	PK
5	7934.36	-1.52	45.67	44.15	74.00	29.85	PASS	Horizontal	PK
6	11853.3	2.29	45.80	48.09	74.00	25.91	PASS	Horizontal	PK
7	1399.54	-21.69	61.75	40.06	74.00	33.94	PASS	Vertical	PK
8	1795.55	-20.15	64.10	43.95	74.00	30.05	PASS	Vertical	PK
9	2735.64	-16.40	66.83	50.43	74.00	23.57	PASS	Vertical	PK
10	3910.76	-12.18	55.19	43.01	74.00	30.99	PASS	Vertical	PK
11	6382.03	-4.66	64.32	59.66	74.00	14.34	PASS	Vertical	PK
12	10249.3	1.79	43.89	45.68	74.00	28.32	PASS	Vertical	PK

Above 1GHz:									
Test mode:					Transmitting (CH4)				
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1396.01	-21.71	59.04	37.33	74.00	36.67	PASS	Horizontal	PK
2	2199.79	-18.60	58.35	39.75	74.00	34.25	PASS	Horizontal	PK
3	2788.52	-16.22	54.07	37.85	74.00	36.15	PASS	Horizontal	PK
4	4580.58	-9.60	56.71	47.11	74.00	26.89	PASS	Horizontal	PK
5	6412.59	-4.59	53.31	48.72	74.00	25.28	PASS	Horizontal	PK
6	10218.7	1.56	44.42	45.98	74.00	28.02	PASS	Horizontal	PK
7	1394.83	-21.73	66.02	44.29	74.00	29.71	PASS	Vertical	PK
8	2393.68	-17.90	62.01	44.11	74.00	29.89	PASS	Vertical	PK
9	4580.58	-9.60	61.07	51.47	74.00	22.53	PASS	Vertical	PK
10	5495.99	-6.50	54.96	48.46	74.00	25.54	PASS	Vertical	PK
11	8244.59	-1.25	46.77	45.52	74.00	28.48	PASS	Vertical	PK
12	11281.1	2.49	44.97	47.46	74.00	26.54	PASS	Vertical	PK

Above 1GHz:									
Test mode:					Transmitting (CH5)				
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1399.54	-21.69	66.08	44.39	74.00	29.61	PASS	Horizontal	PK
2	2393.68	-17.90	59.14	41.24	74.00	32.76	PASS	Horizontal	PK
3	3779.15	-12.93	53.64	40.71	74.00	33.29	PASS	Horizontal	PK
4	5520.67	-6.42	56.35	49.93	74.00	24.07	PASS	Horizontal	PK
5	6441.96	-4.47	63.68	59.21	74.00	14.79	PASS	Horizontal	PK
6	10201.1	1.42	43.77	45.19	74.00	28.81	PASS	Horizontal	PK
7	1396.01	-21.71	67.10	45.39	74.00	28.61	PASS	Vertical	PK
8	2238.57	-18.53	61.94	43.41	74.00	30.59	PASS	Vertical	PK
9	3193.94	-14.81	56.44	41.63	74.00	32.37	PASS	Vertical	PK
10	4600.56	-9.51	60.90	51.39	74.00	22.61	PASS	Vertical	PK
11	5518.32	-6.44	62.22	55.78	74.00	18.22	PASS	Vertical	PK
12	8282.20	-1.26	47.38	46.12	74.00	27.88	PASS	Vertical	PK

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 Final Test Level = Receiver Reading + Correct Factor
 Correct Factor = Antenna Factor + Cable Factor - Preamplifier Factor
- 2) Scan from 9kHz to 18GHz, below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

Report No. : EED32R81174001


Page 33 of 43

5.2.4 20dB Bandwidth

Test Requirement: 47 CFR Part 15C Section 15.215

Test Method: ANSI C63.10: 2013

Test Setup:

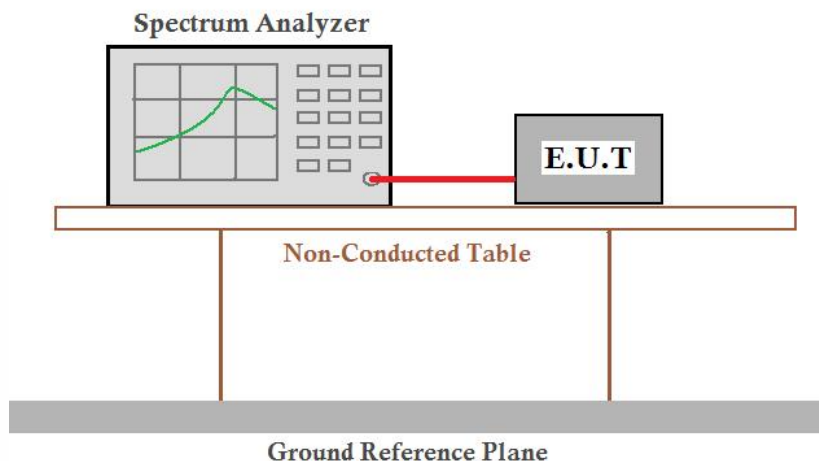

Remark: Offset=Cable loss+ attenuation factor.

1) The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

2) Set to the maximum power setting and enable the EUT transmit continuously.

Test Procedure: 3) Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a test channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$;

Sweep = auto; Detector function = peak; Trace = max hold.

4) Measure and record the results in the test report.

Limit: N/A

Test Mode: Transmitter mode

Test Results: Pass

Note: The test data please refer to Appendix of EED32R81174001

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***