


ZSE41 Door Window Sensor 700

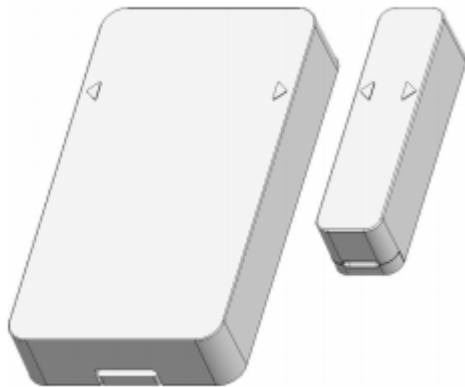

SPECIFICATIONS

Model: ZSE41

Battery: CR2302 *1pc

Signal (Frequency): 908.42 MHz

Range: Up to 100 feet line of sight

Temperature Range: 32-104° F (0-40° C) For indoor use.

Approval: FCC/Z-Wave Plus Certified

FCC ID: 2AZ2VZSE41

- * Zwave Door Sensor Window Sensor. A security or an intelligence sensor. Anytime and anywhere, giving you a full sense of security
- * 700 series chip. You will get 50% faster wireless communication, enhanced encryption, 2 years of battery life.
- * SmartStart QR for simplest possible device installation. Make your home really intelligent and safe.
- * Mini Size Z-Wave Door Sensor.
- * Home Automation: Work with Z-wave hub: SmartThings, Vera, Hubitat, Fibaro Home Centre, HomeSeer, Open Z-Wave, etc..
- * With a waterproof case can work in Outdoor.

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

[illegible]