


Test report No:
2560874R.701A

FCC TEST REPORT

Product Name	Prysm iO
Trademark	Nu Skin
Model and /or type reference	PD1R
FCC ID	2AZ3A-PD1R
Applicant's name / address	NSE Products, Inc 75 West Center St, Provo, Utah, 84601, United States of America
Test method requested, standard	47 CFR FCC Part 15 (Section 15.247) ANSI C63.10: 2013
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He / Technical Manager 
Date of issue	2025-09-03
Report Version	V1.0
Report template No	Template_FCC Part 15C-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	9
1 General Information.....	10
2 Description of Test Setup	11
2.1 Auxiliary equipment /Accessories/Test software for the EUT	11
2.2 Test Configuration / Block diagram used for tests	12
3 Verdict summary section	14
3.1 Standards.....	14
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	14
3.3 Overview of results.....	15
3.4 Test Facility.....	16
4 Test Items of limit/setup/procedure	17
4.1 DTS Bandwidth	17
4.1.1 Limit	17
4.1.2 Test Setup.....	17
4.1.3 Test Procedure	17
4.2 Occupied Channel Bandwidth.....	18
4.2.1 Limit	18
4.2.2 Test Setup.....	18
4.2.3 Test Procedure	18
4.3 Maximum Conducted Output Power	19
4.3.1 Limit	19
4.3.2 Test Setup.....	19
4.3.3 Test Procedure	19
4.4 Maximum Power Spectral Density	20
4.4.1 Limit	20
4.4.2 Test Setup.....	20
4.4.3 Test Procedure	20

4.5	Band Edge Measurements	21
4.5.1	Limit	21
4.5.2	Test Setup	21
4.5.3	Test Procedure	21
4.6	Conducted Spurious Emission	22
4.6.1	Limit	22
4.6.2	Test Setup	22
4.6.3	Test Procedure	22
4.7	Duty cycle	23
4.7.1	Limit	23
4.7.2	Test Setup	23
4.7.3	Test Procedure	23
4.8	Emissions in Restricted Bands	24
4.8.1	Limit	24
4.8.2	Test Setup	26
4.8.3	Test Procedure	27
4.9	AC Power Line Conducted Emission	28
4.9.1	Limit	28
4.9.2	Test Setup	28
4.9.3	Test Procedure	28
4.10	Antenna Requirement	29
4.10.1	Limit	29
4.11.2	Antenna Connector Construction:	29
5	Test setup photo and EUT Photo	30
6	Test Result	31
	Appendix A: DTS Bandwidth	31
	Appendix B: Maximum conducted output power	35
	Appendix C: Maximum power spectral density	36
	Appendix D: Band Edge Measurements	40
	Appendix E: Conducted Spurious Emission	56
	Appendix F: Duty Cycle	67
	Appendix G: Emissions in Restricted Bands	71
	Appendix H: AC Power Line Conducted Emission	85

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Jun. 30, 2025
Date (start test)	Jul. 05, 2025
Date (finish test)	Aug. 31, 2025

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
T_x	: Transmitter
R_x	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2560874R.701A	V1.0	Initial issue of report.	2025-09-03

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.247).
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:

- Chapter 1 General Information

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100726	2025.05.18	2026.05.17
Two-Line V-Network	R&S	ENV 216	101044	2024.10.26	2025.10.25
Two-Line V-Network	R&S	ENV 216	101189	2025.05.10	2026.05.09
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2025.03.16	2026.03.15
Coaxial Cable	Huber+Suhner	RG 223	TR1-C1	2025.03.16	2026.03.15
Impedance Stabilization Network	Teseq GmbH	ISN T800	57318	2025.02.25	2026.02.24
Temperature/Humidity Meter	RTS	RTS-8S	EMC01	2025.06.17	2026.06.16
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Conducted Test / TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2025.05.10	2026.05.09
Coaxial Cable	N/A	N/A	2477	2025.06.10	2026.06.09
Coaxial Cable	N/A	N/A	2478	2025.06.10	2026.06.09
Temperature/Humidity Meter	RTS	RTS-1909	THM-032	2025.04.30	2026.04.29
EXA Signal Analyzer	Keysight	N9010A	MY55370495	2024.10.19	2025.10.18
MAX Signal Analyzer	Keysight	N9020B	MY59050482	2025.05.10	2026.05.09
RF Control Unit	Tonscend	JS0806-2	22G8060594	2025.01.26	2026.01.25
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	2025.03.23	2026.03.22
Frequency extender for EXG or MXG	Keysight	N5182BX07	MY59362500	2025.03.23	2026.03.22
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2025.03.23	2026.03.22
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A

Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2025.01.11	2026.01.10
Loop Antenna	R&S	HFH2-Z2E	101149	2025.04.16	2026.04.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2025.03.24	2026.03.23
Temperature/Humidity Meter	RTS	RTS-1909	THM-021	2025.04.30	2026.04.29
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2025.03.16	2026.03.15
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Conducted Test / TR8

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
Wireless Connectivity Tester	R&S	CMW 270	102593	V 4.0.60	N/A
MAX Signal Analyzer	Keysight	N9020B	MY59050482	A.14.03	N/A
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY61252529	B.01.96	N/A
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	B.01.95	N/A
Test Software	Tonscend	TS1120	JS1120-3	N/A	V3.0.22

Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
EMI Test Receiver	R&S	ESCI	100573	4.42 SP2	N/A
Dekra test software	Dekra	N/A	N/A	N/A	3

Radiated Emission Band Edge / AC6

Instrument	Manufacturer	Model No.	Serial No.	Firmware Version	Software version
Signal analyzer	Agilent	N9020A	MY49100159	A 08.54	N/A
Wideband Radio Communication Tester	R&S	CMW 500	170870	X 4.0.62.11	N/A
Test Software	Tonscend	JS36	JS36-RSE	N/A	V5.0.0

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties is comply with standard required as below.

Test item Test Location	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.8 dB 150kHz~30MHz: 2.4 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~300MHz: 3.5 dB, 300MHz~1GHz: 3.6 dB Vertical: 30MHz~300MHz: 3.6 dB, 300MHz~1GHz: 3.5 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.0 dB Vertical: 1GHz~18GHz: 4.8 dB
Bandwidth	± 1.0 kHz
Carrier Frequency Separation	± 1.0 kHz
Number of Hopping Frequencies	± 1.0 kHz
Time of Occupancy (Dwell Time)	± 0.1 us
Peak OutputPower	± 1.3 dB
Emissions in non-restricted frequency bands	± 1.0 dB
Radiated Emission Band Edge	± 3.9 dB

1 GENERAL INFORMATION

Product Name..... :	Prysm iO	
Trademark..... :	Nu Skin	
Model No. :	PD1R	
FCC ID..... :	2AZ3A-PD1R	
Operating Temperature..... :	5°C ~ 40°C	
Power Supply..... :	DC: 5 Vdc	
Manufacturer..... :	NSE Products, Inc	
Manufacturer address..... :	75 West Center St, Provo, Utah, 84601, United States of America	
Factory..... :	Rosti Integrated Manufacturing Solutions(Suzhou) Co., LTD	
Factory address..... :	No. 1 Huazheng Street, SIP, Suzhou	
Wireless specification..... :	Bluetooth	
Operating frequency range(s) :	2402~2480MHz	
Type of Modulation..... :	GFSK	
Data Rate..... :	BLE 1Mbit/s	BLE 2Mbit/s
Number of channels..... :	40	
Antenna Type..... :	PCB	
Antenna Gain..... :	2.70 dBi	

Remark:

As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information.


2 DESCRIPTION OF TEST SETUP

2.1 Auxiliary equipment /Accessories/Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	N/A	N/A	N/A
(2) USB Control Cable	N/A	N/A	N/A
(3) USB Control Cable	N/A	N/A	N/A
software	Type / Version	Manufacturer	Supplied by
Direct Test Mode	V2.5.0	N/A	N/A

2.2 Test Configuration / Block diagram used for tests


Test setup Diagram- Conducted test

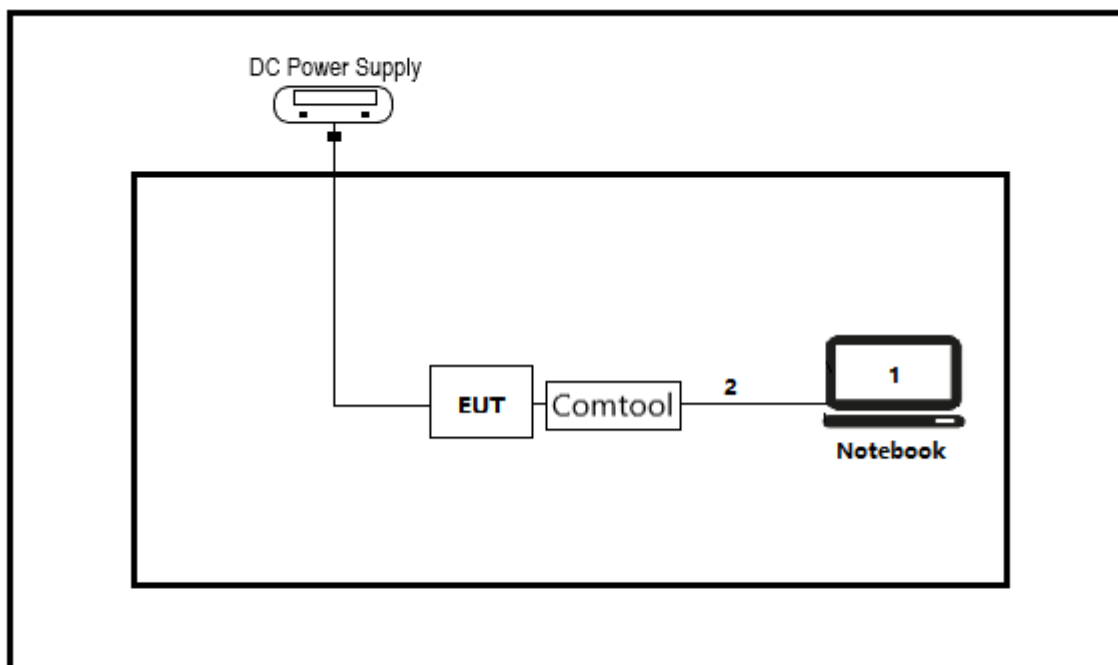

Test setup Diagram- Radiated test

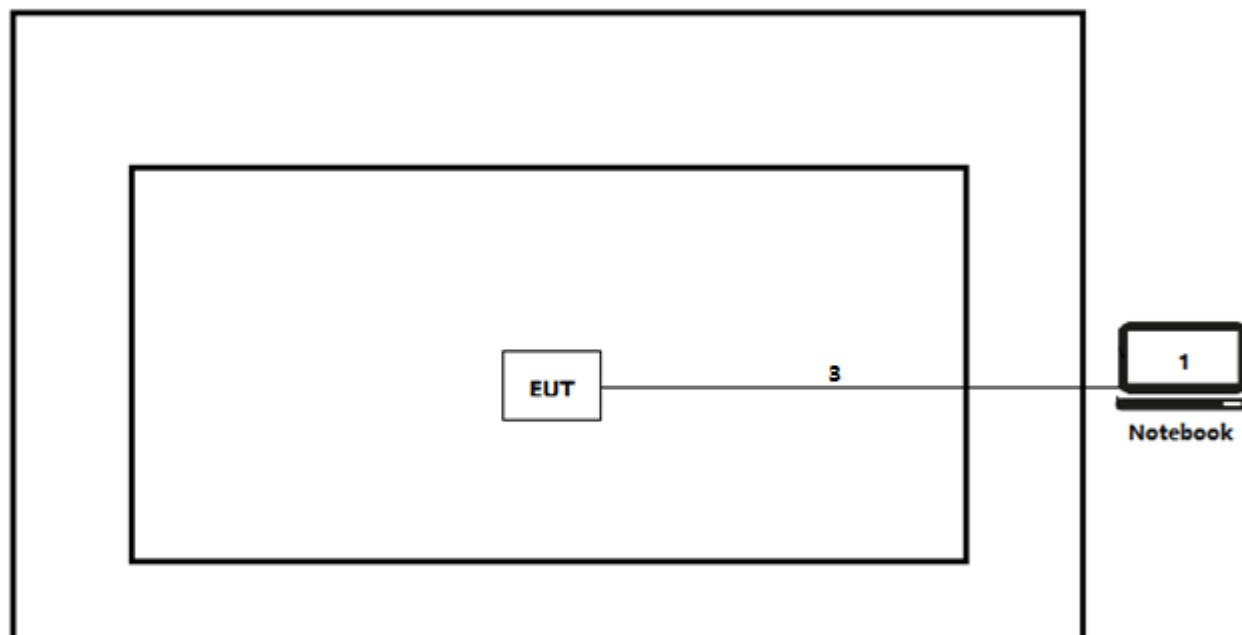

Test setup Diagram- AC Line Conducted Emission Test

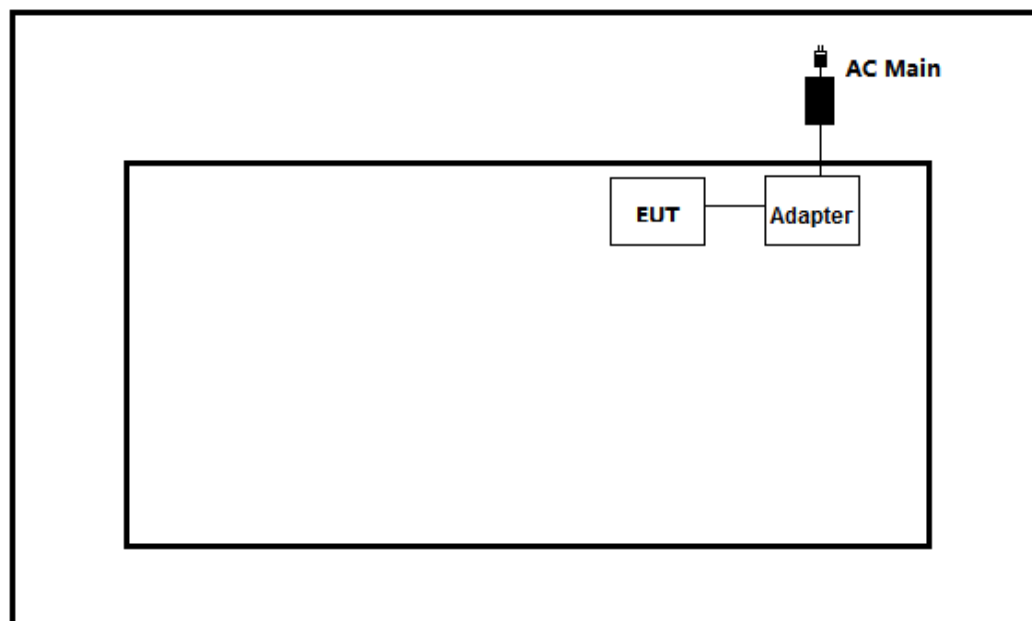

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
CFR 47, FCC Part 15 C	2024	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

Requirement – Test Item	Standard(s)	Verdict	Remark
DTS Bandwidth	FCC 15.247(a)(2)	PASS	Test data please refer to Appendix A
Maximum conducted output power	15.247 (b)(3)	PASS	Test data please refer to Appendix B
Maximum power spectral density	FCC 15.247(e)	PASS	Test data please refer to Appendix C
Band edge measurements	FCC 15.247(d) FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix D
Conducted Spurious Emission	FCC 15.247(d), FCC 15.209	PASS	Test data please refer to Appendix E
Duty cycle	ANSI C63.10:2013	PASS	Test data please refer to Appendix F
Emissions in Restricted Bands	FCC 15.205 FCC 15.209	PASS	Test data please refer to Appendix G
AC Power Line Conducted Emission	FCC 15.207	PASS	Test data please refer to Appendix H
Antenna Requirement	FCC 15.203	PASS	---

Mode	Power Setting
BLE 1M	Default
BLE 2M	Default

3.4 Test Facility

Tset Location : FCC Designation Number: CN1199

4 TEST ITEMS OF LIMIT/SETUP/PROCEDURE

4.1 DTS Bandwidth


VERDICT: PASS

4.1.1 Limit

Standard FCC Part 15 Subpart C Paragraph 15.247 (a)(2);

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

4.1.2 Test Setup

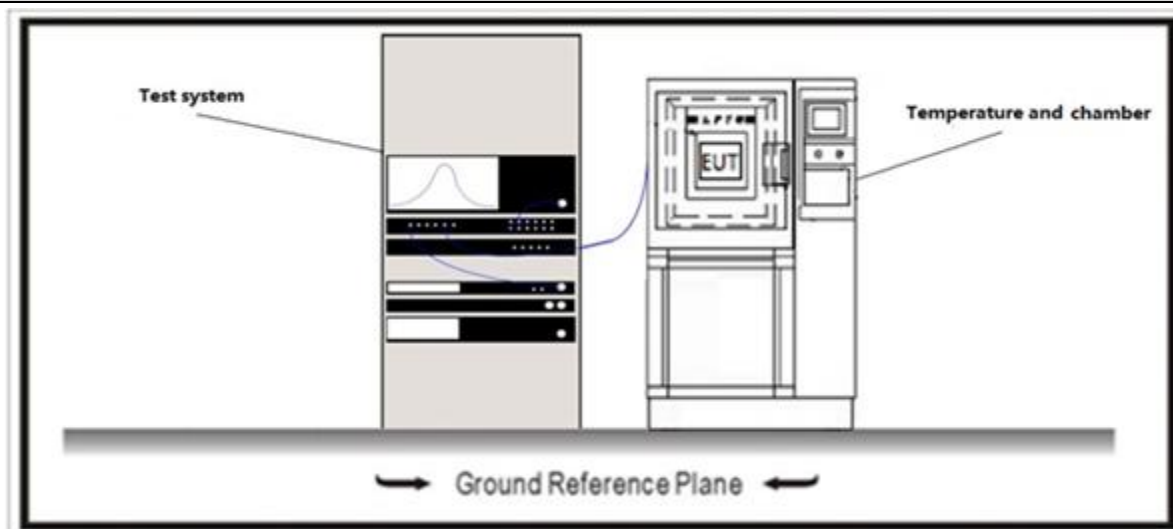

4.1.3 Test Procedure

References Rule		Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	☒ ANSI C63.10	11.8.1	Option 1

4.2 Occupied Channel Bandwidth


VERDICT: PASS

4.2.1 Limit

Standard RSS-Gen Issue 5 Paragraph 6.7

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs

4.2.2 Test Setup

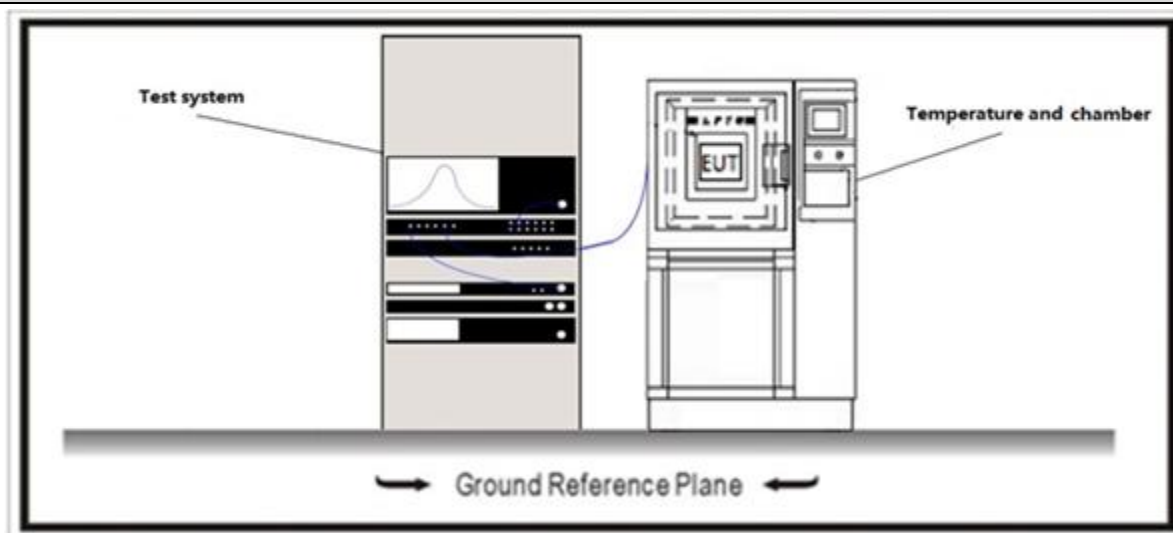

4.2.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	6.9	Occupied bandwidth tests
☒	ANSI C63.10	6.9.3	Option 1

4.3 Maximum Conducted Output Power

VERDICT: PASS

4.3.1 Limit


Standard FCC Part 15 Subpart C Paragraph 15.247 (b)(3);

GTX <6dBi, Pout≤30dBm

Note 1 : GTX directional gain of transmitting antennas.

Note 2 : Pout is maximum peak conducted output power .

4.3.2 Test Setup

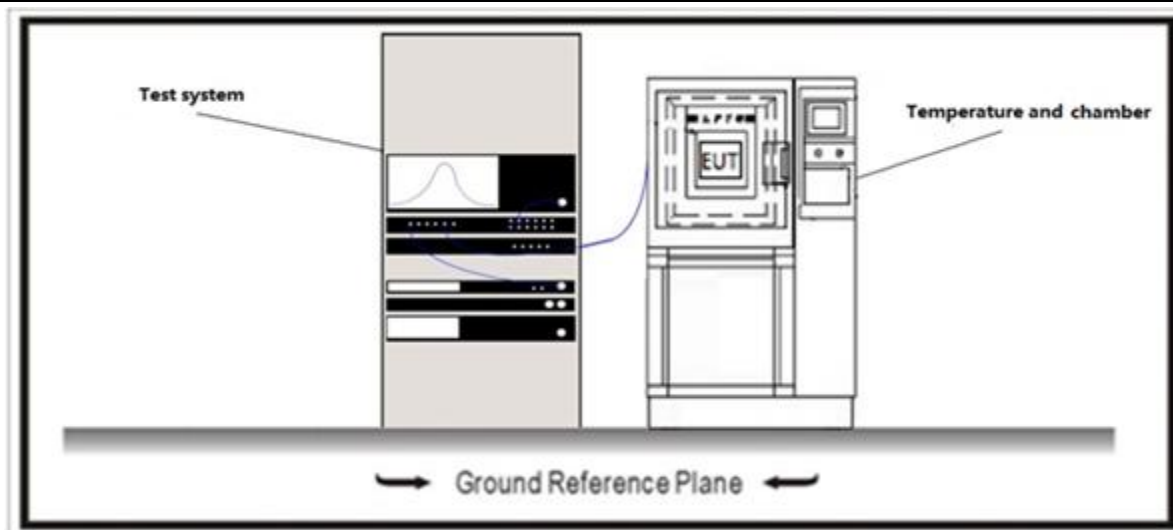


4.3.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
	☒	ANSI C63.10		Maximum conducted (average) output power
		☒	ANSI C63.10	Measurement using a power meter (PM)
		☒	ANSI C63.10	Method AVGPM
		☐	ANSI C63.10	Method AVGPM-G

4.4 Maximum Power Spectral Density**VERDICT: PASS****4.4.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (b)(3);

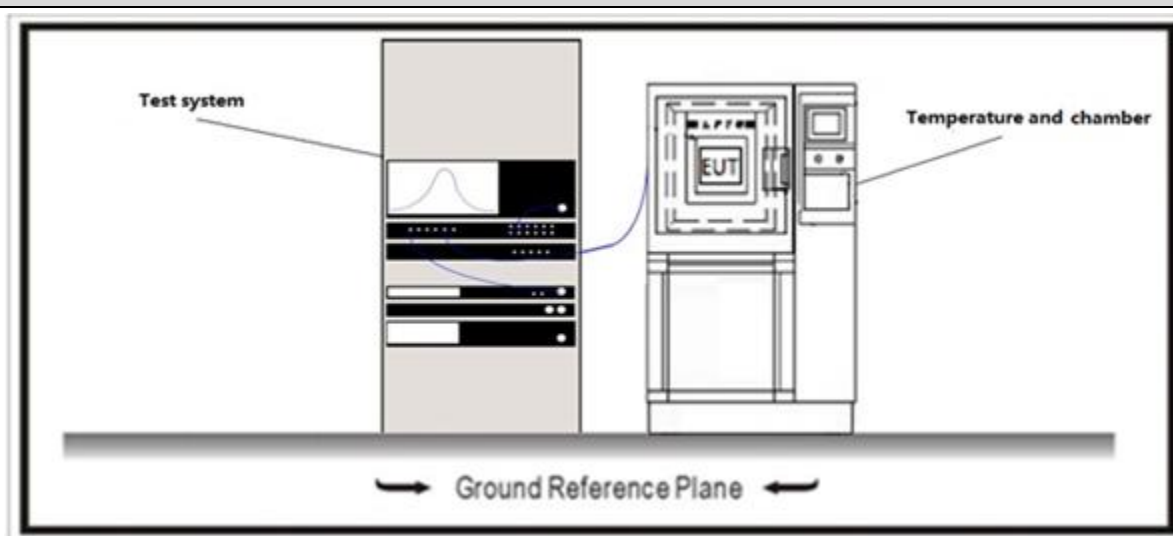Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.4.2 Test Setup****4.4.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq 98\%$)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $< 98\%$)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

4.5 Band Edge Measurements

VERDICT: PASS


4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.209;		
Frequency bands (MHz)	Detector	Limit (dBμV/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

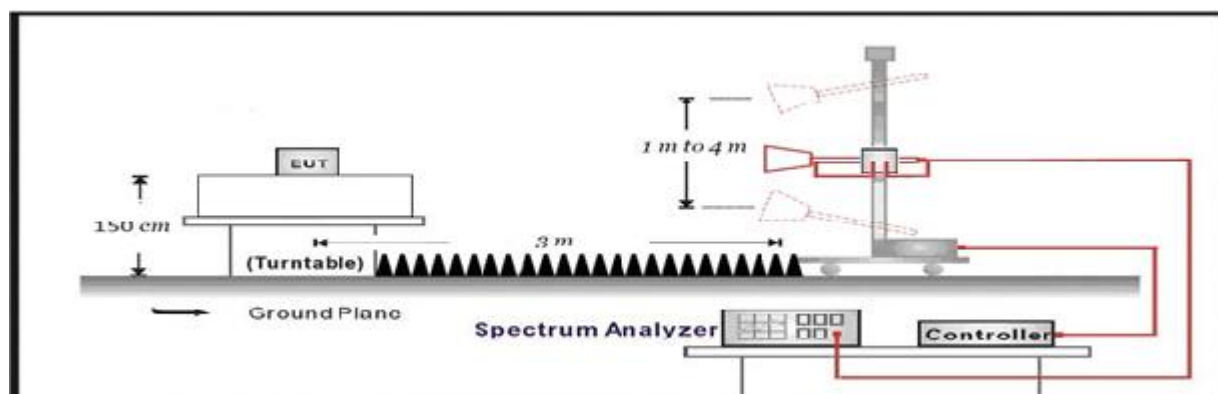

4.5.3 Test Procedure


	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☐	ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	ANSI C63.10	11.12.1	Radiated emission measurements
☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.6 Conducted Spurious Emission**VERDICT: PASS****4.6.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d);
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

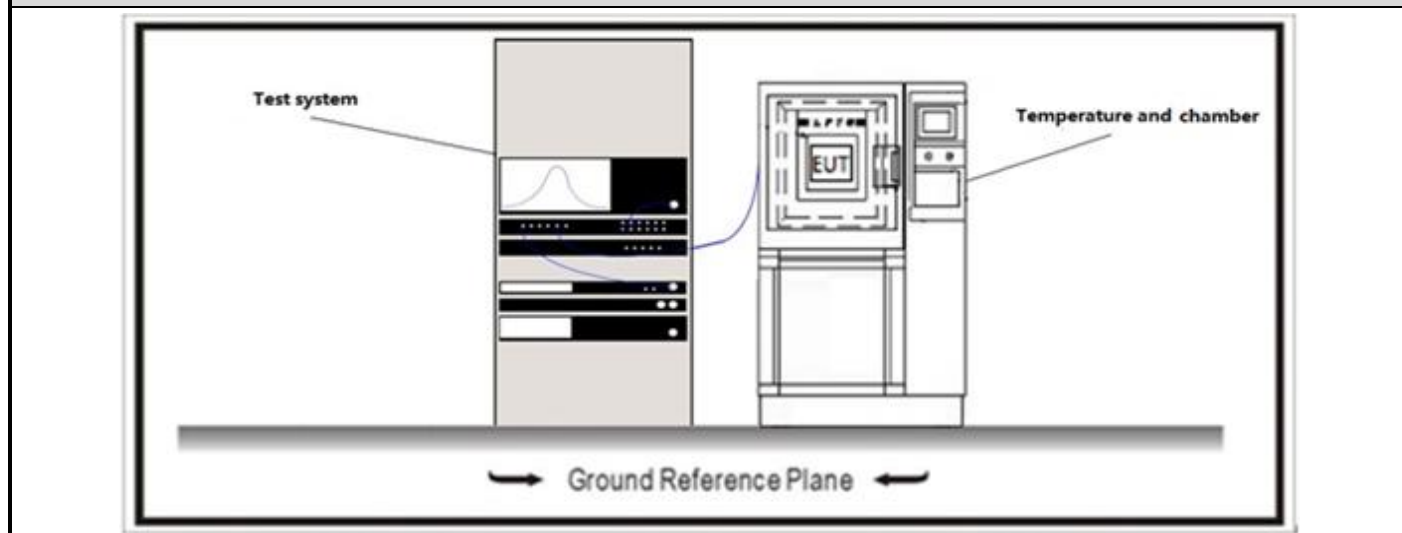4.6.2 Test Setup**4.6.3 Test Procedure**


References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.7 Duty cycle	VERDICT: PASS
-----------------------	----------------------

4.7.1 Limit

N/A

4.7.2 Test Setup

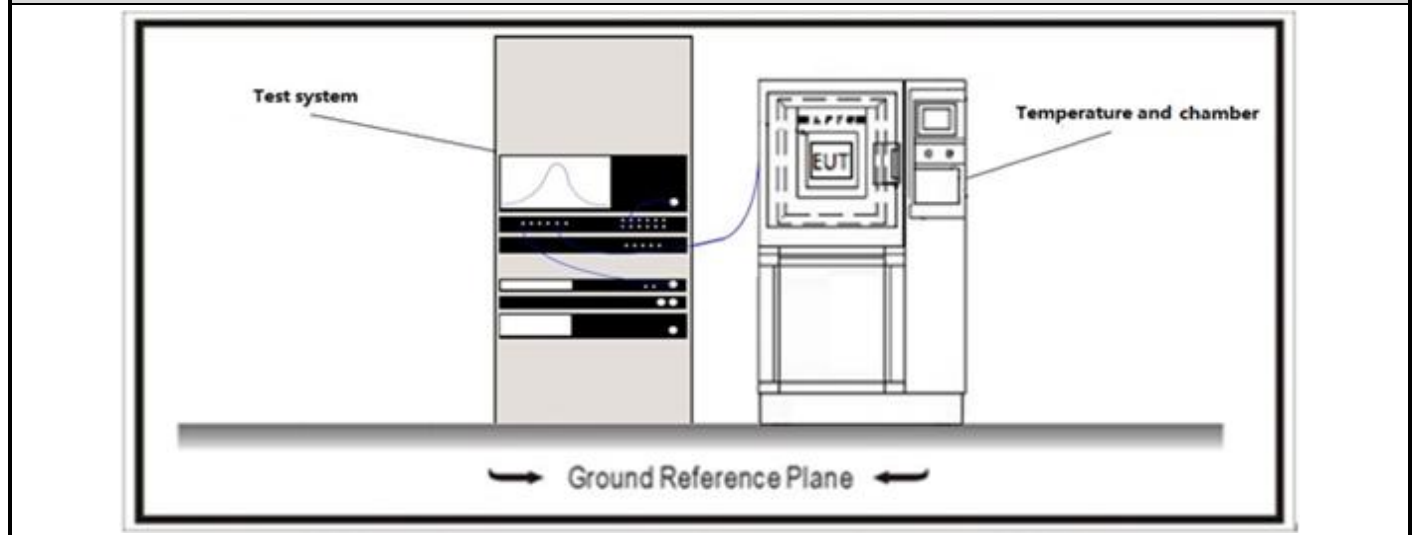

4.7.3 Test Procedure

References Rule	Chapter	Description
☒ ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level

4.8 Emissions in Restricted Bands**VERDICT: PASS****4.8.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit

FCC Part 15 Subpart C Paragraph 15.209

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30(Note 1)
1.705 - 30	30	29.5	30(Note 1)
30 - 88	100	40	3(Note 2)
88 - 216	150	43.5	3(Note 2)
216 - 960	200	46	3(Note 2)
Above 960	500	54	3(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.8.2 Test Setup


Below 30MHz Test Setup:

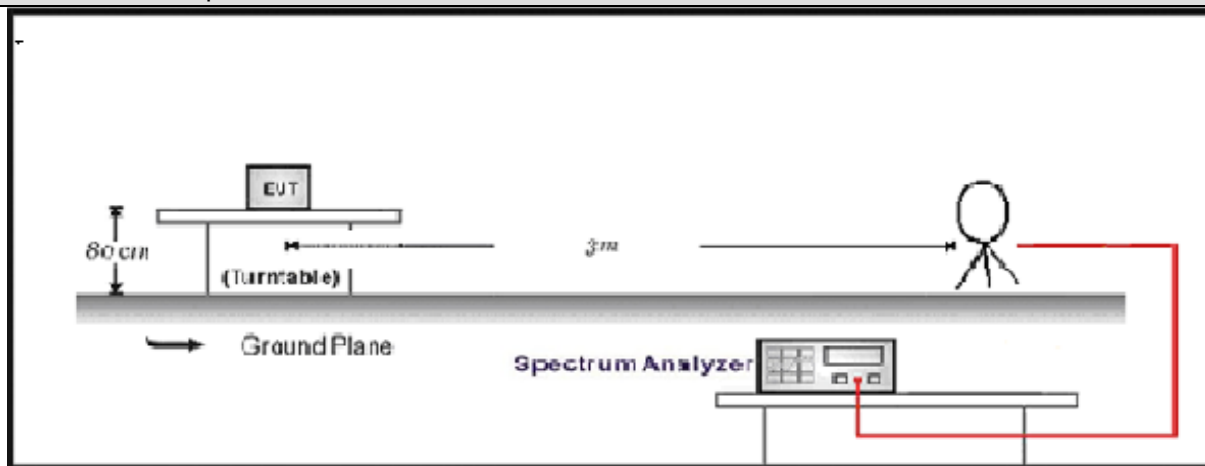

30MHz-1GHz Test Setup:

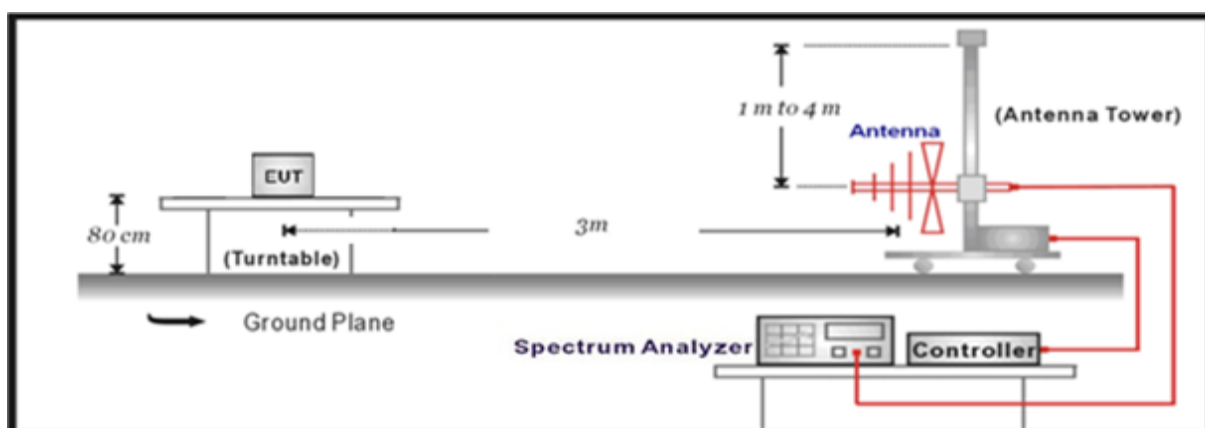

Above 1GHz Test Setup:

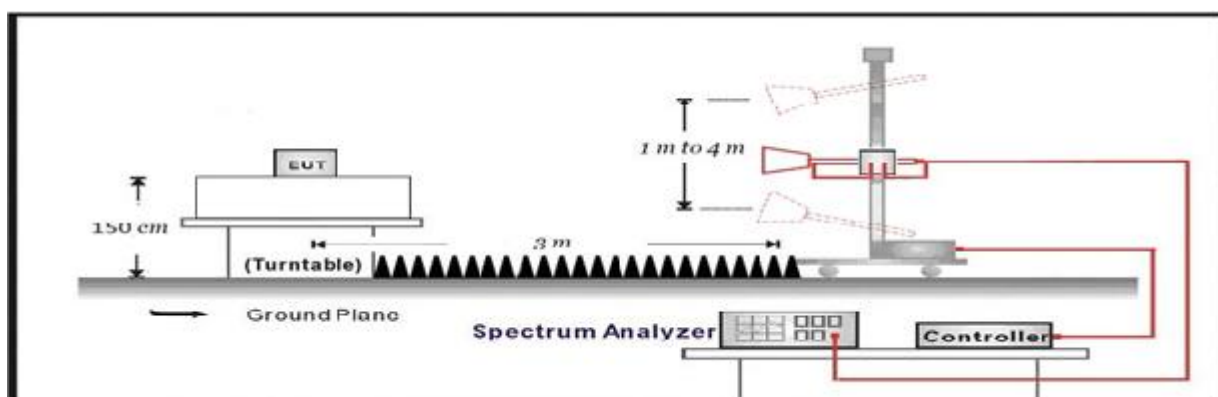

4.8.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.9 AC Power Line Conducted Emission**VERDICT: PASS****4.9.1 Limit**


Standard	FCC Part 15 Subpart C Paragraph 15.207; RSS-Gen Issue 5 Paragraph 8.8.	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

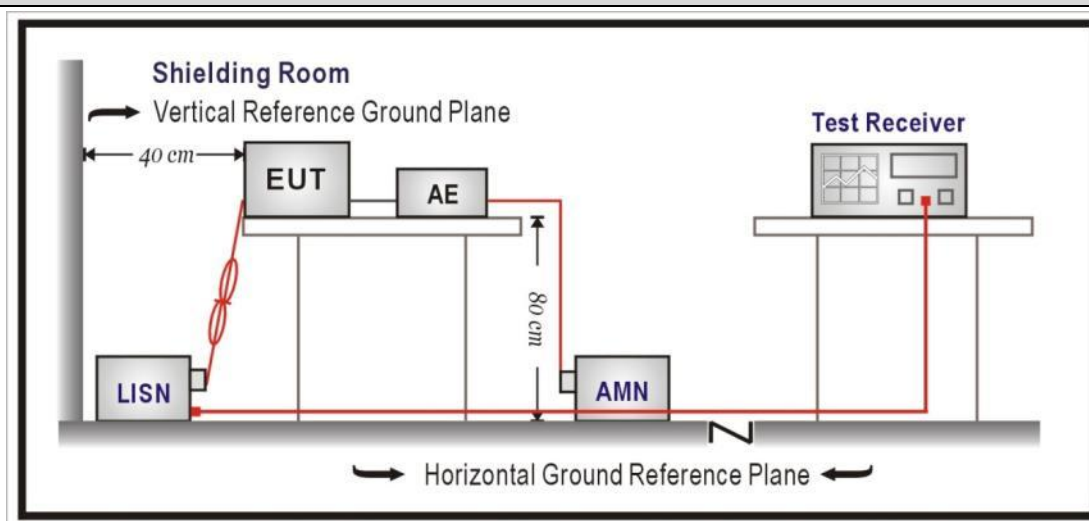4.9.2 Test Setup**4.9.3 Test Procedure**

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.10 Antenna Requirement**VERDICT: PASS****4.10.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247(d) ,15.209

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.11.2 Antenna Connector Construction:

☒	The use of a permanently attached antenna
☐	The antenna use of a unique coupling to the intentional radiator
☐	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT

Appendix A: DTS Bandwidth Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.696	2401.652	2402.348	0.5	PASS
BLE_1M	2440	0.724	2439.644	2440.368	0.5	PASS
BLE_1M	2480	0.716	2479.644	2480.360	0.5	PASS
BLE_2M	2402	1.140	2401.448	2402.588	0.5	PASS
BLE_2M	2440	1.096	2439.456	2440.552	0.5	PASS
BLE_2M	2480	1.204	2479.388	2480.592	0.5	PASS

Test Graphs



BLE_1M-Ant1-2402-PASS



BLE_1M-Ant1-2440-PASS



BLE_1M-Ant1-2480-PASS



BLE_2M-Ant1-2402-PASS



BLE_2M-Ant1-2440-PASS





BLE_2M-Ant1-2480-PASS


Appendix B: Maximum conducted output power

Test Mode	Frequency [MHz]	Conducted Power [dBm]	Limit [dBm]	Verdict
BLE_1M	2402	-1.11	≤ 30	PASS
	2440	-0.93	≤ 30	PASS
	2480	-1.20	≤ 30	PASS
BLE_2M	2402	-2.40	≤ 30	PASS
	2440	-2.29	≤ 30	PASS
	2480	-2.53	≤ 30	PASS


Appendix C: Maximum power spectral density Test Result

TestMode	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	-18.21	≤8.00	PASS
BLE_1M	2440	-18.31	≤8.00	PASS
BLE_1M	2480	-18.42	≤8.00	PASS
BLE_2M	2402	-20.03	≤8.00	PASS
BLE_2M	2440	-20.33	≤8.00	PASS
BLE_2M	2480	-20.30	≤8.00	PASS

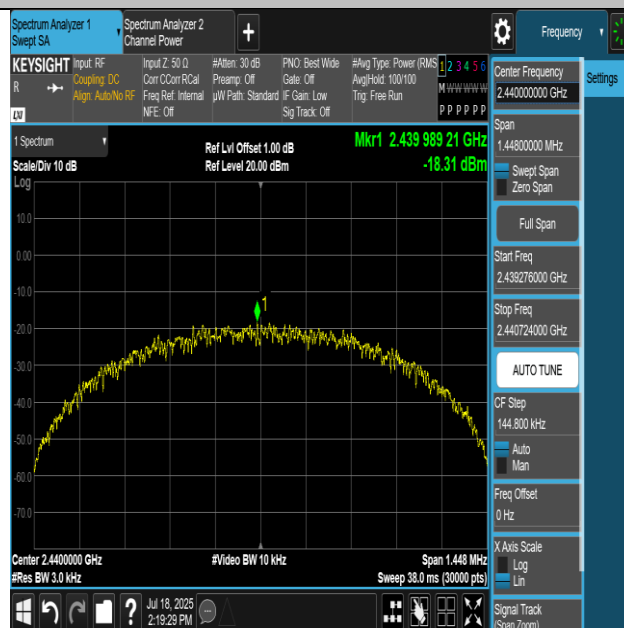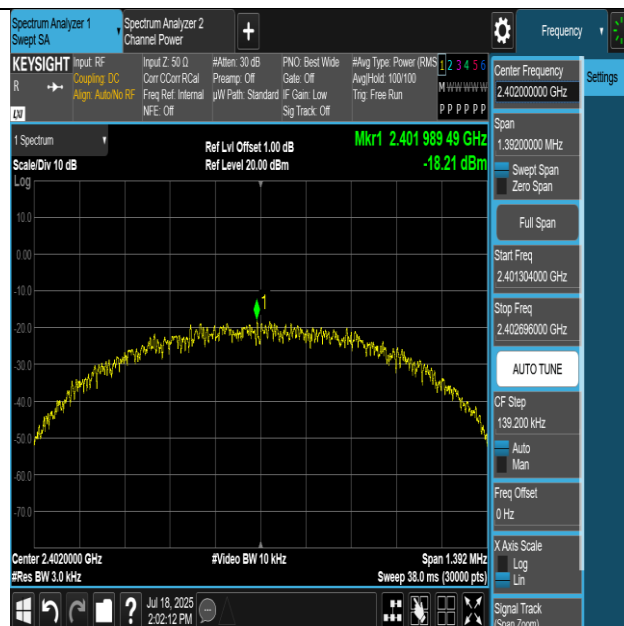


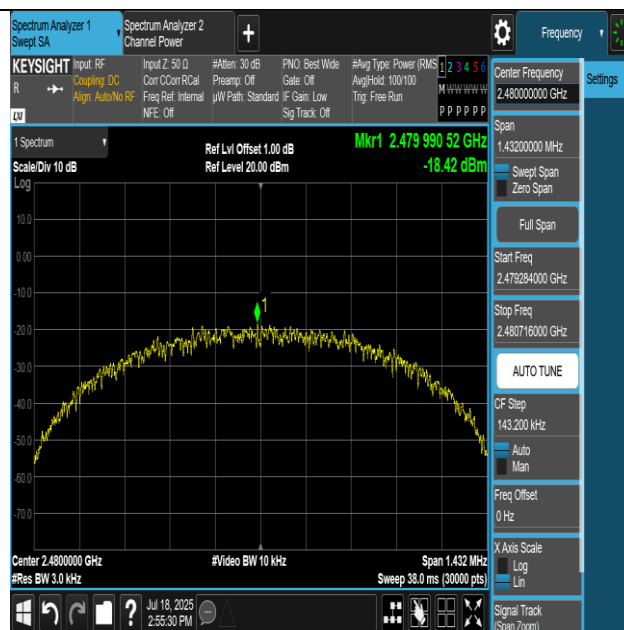


BLE_1M-Ant1-2480-PASS

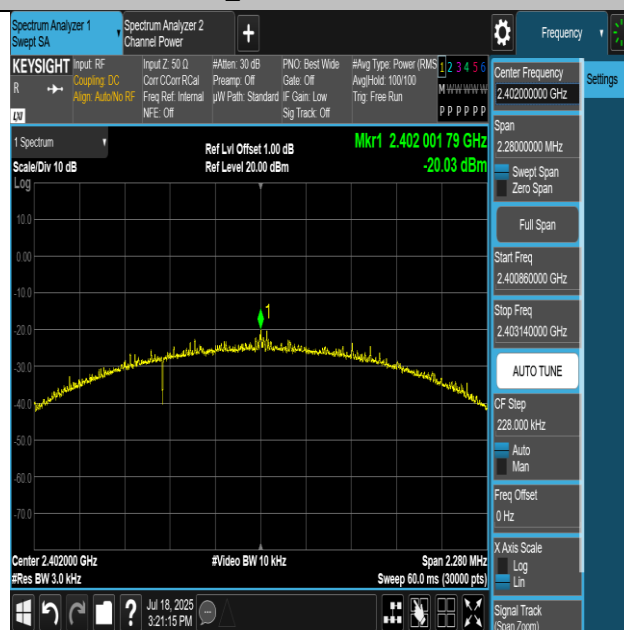

BLE_2M-Ant1-2402-PASS

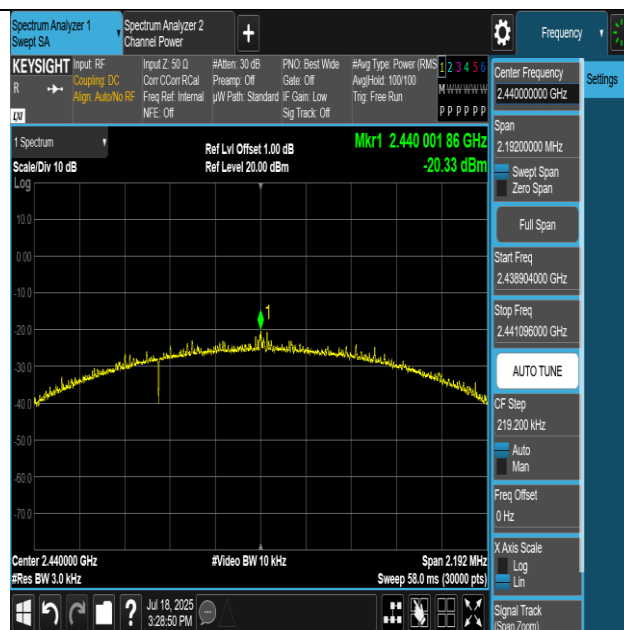

BLE_2M-Ant1-2440-PASS

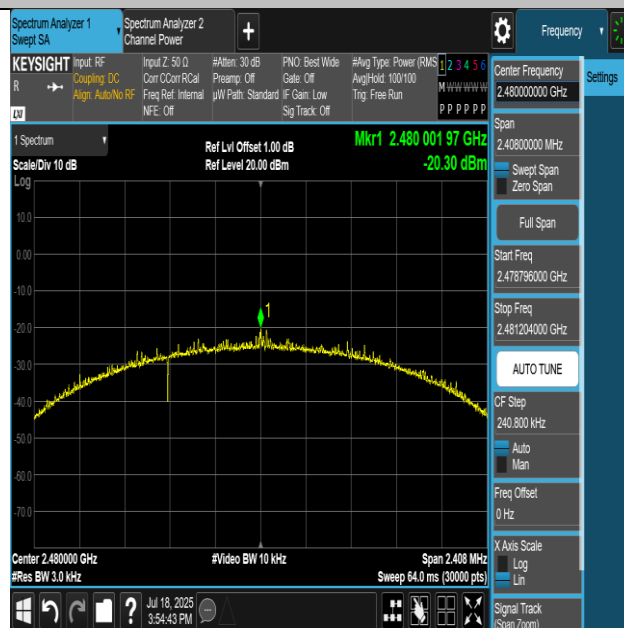


BLE_2M-Ant1-2480-PASS

Appendix D: Band Edge Measurements

Transmit at 2402MHz by LE_1Mbps

Test Graph

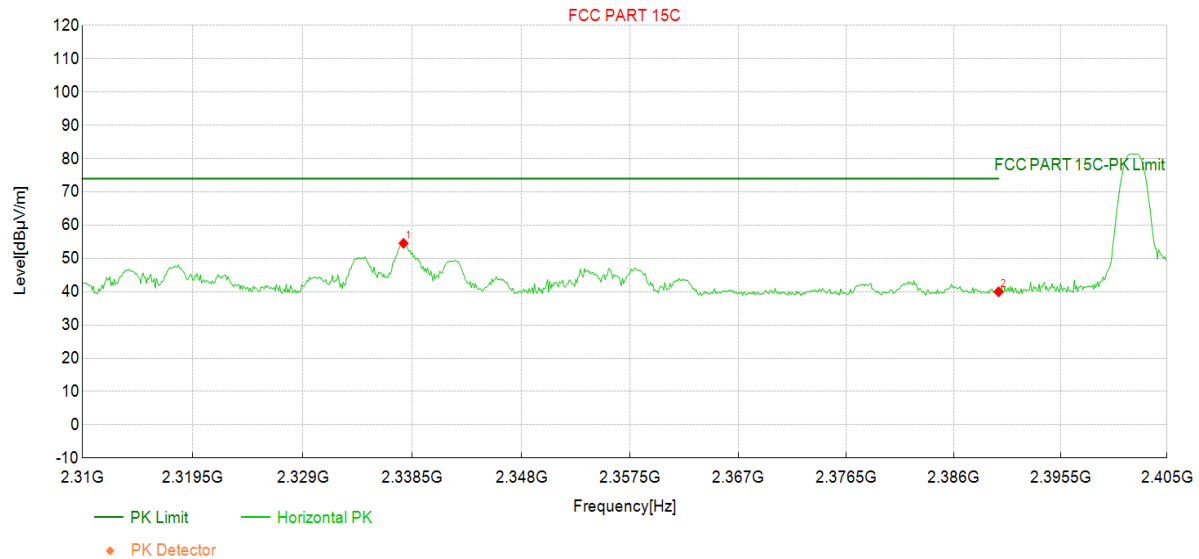


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2337.74	54.7	54.54	-0.180	74.00	19.46	PK	Horizo	PASS
2	2390.00	40.0	39.97	-0.050	74.00	34.03	PK	Horizo	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

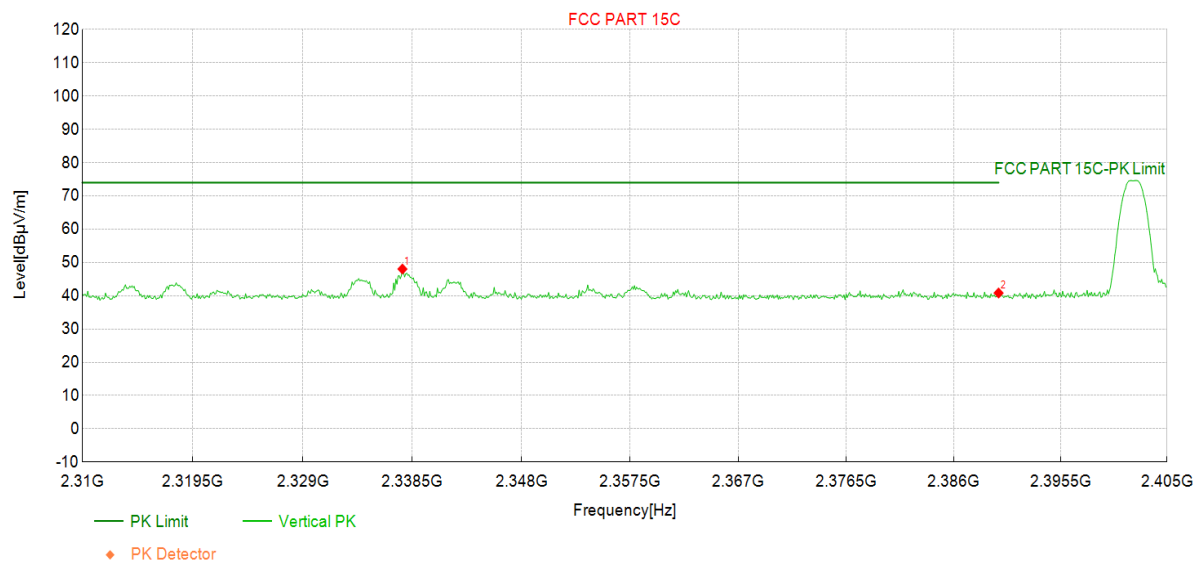


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2337.65	48.2	48.02	-0.180	74.00	25.98	PK	Vertic	PASS
2	2390.00	40.9	40.81	-0.050	74.00	33.19	PK	Vertic	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

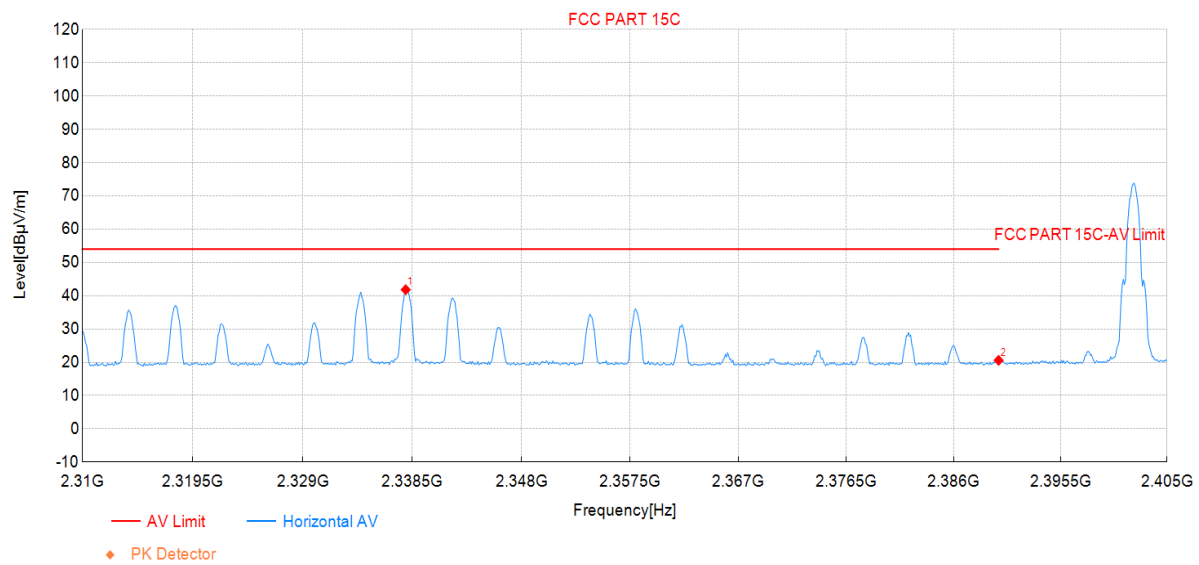


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2337.93	42.0	41.82	-0.180	54.00	12.18	AV	Horizo	PASS
2	2390.00	20.6	20.57	-0.050	54.00	33.43	AV	Horizo	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

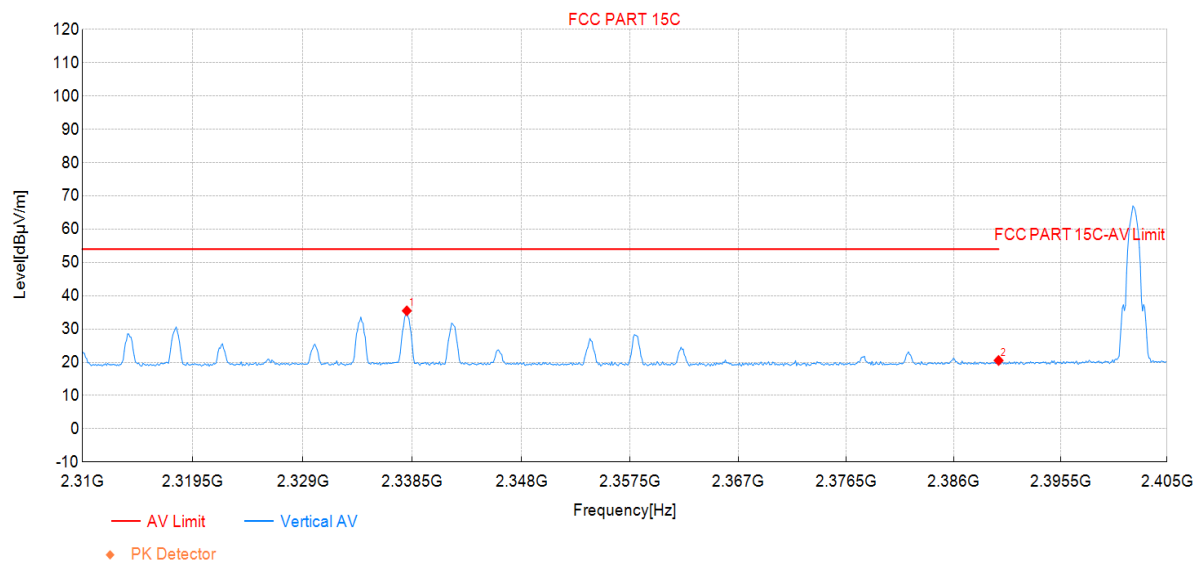


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2338.03	35.7	35.47	-0.180	54.00	18.53	AV	Vertic	PASS
2	2390.00	20.6	20.53	-0.050	54.00	33.47	AV	Vertic	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

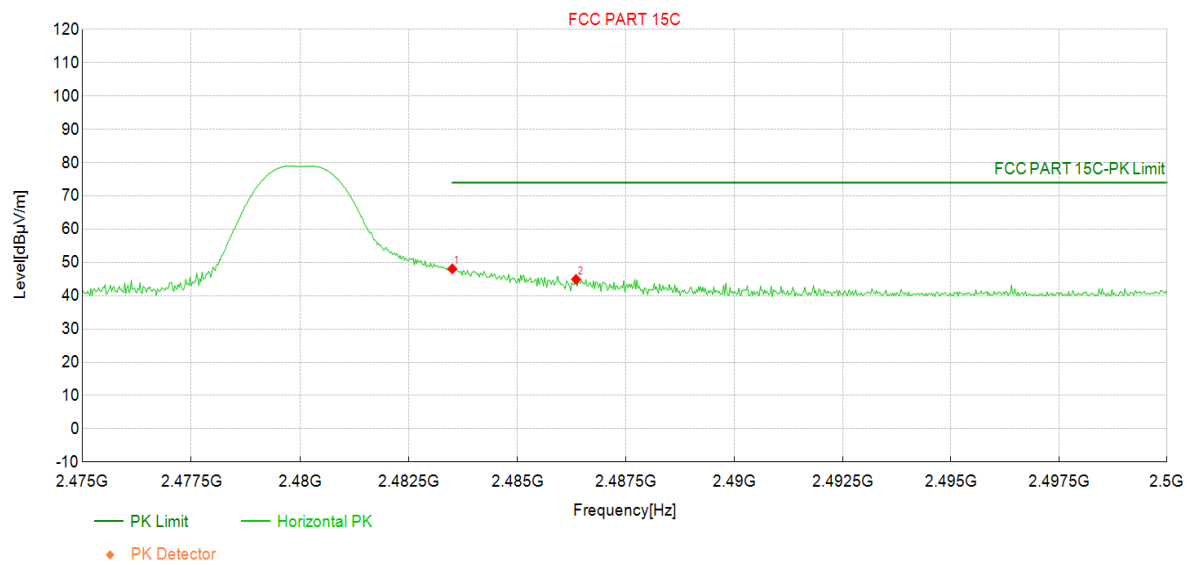


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	47.8	48.08	0.270	74.00	25.92	PK	Horizo	PASS
2	2486.35	44.6	44.92	0.290	74.00	29.08	PK	Horizo	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

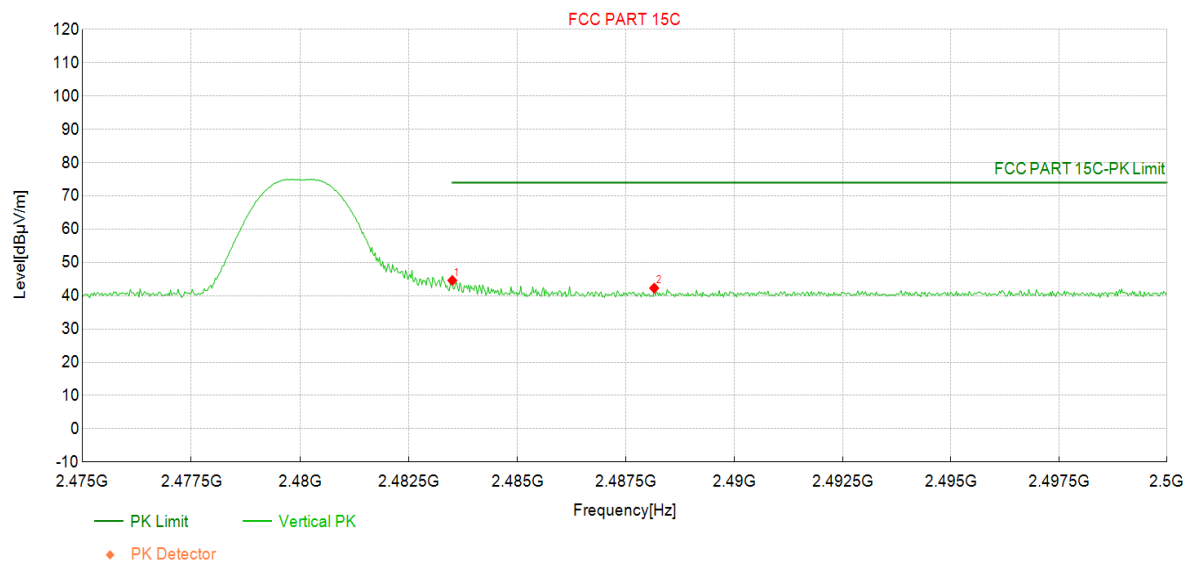


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	44.3	44.59	0.270	74.00	29.41	PK	Vertic	PASS
2	2488.15	42.0	42.29	0.290	74.00	31.71	PK	Vertic	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

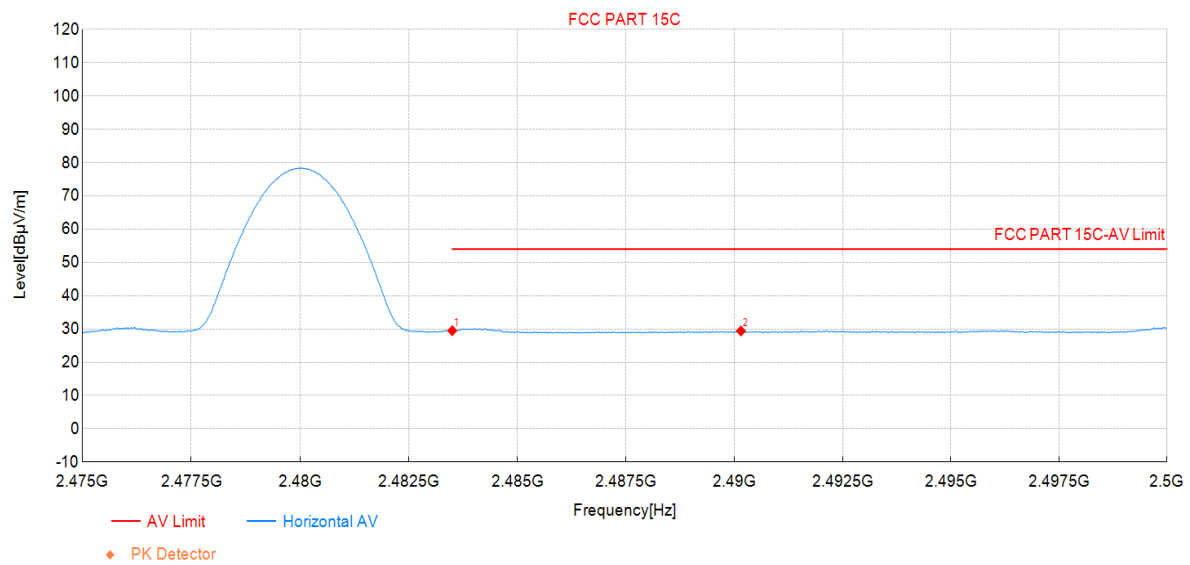


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.2	29.49	0.270	54.00	24.51	AV	Horizo	PASS
2	2490.15	29.1	29.40	0.300	54.00	24.60	AV	Horizo	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

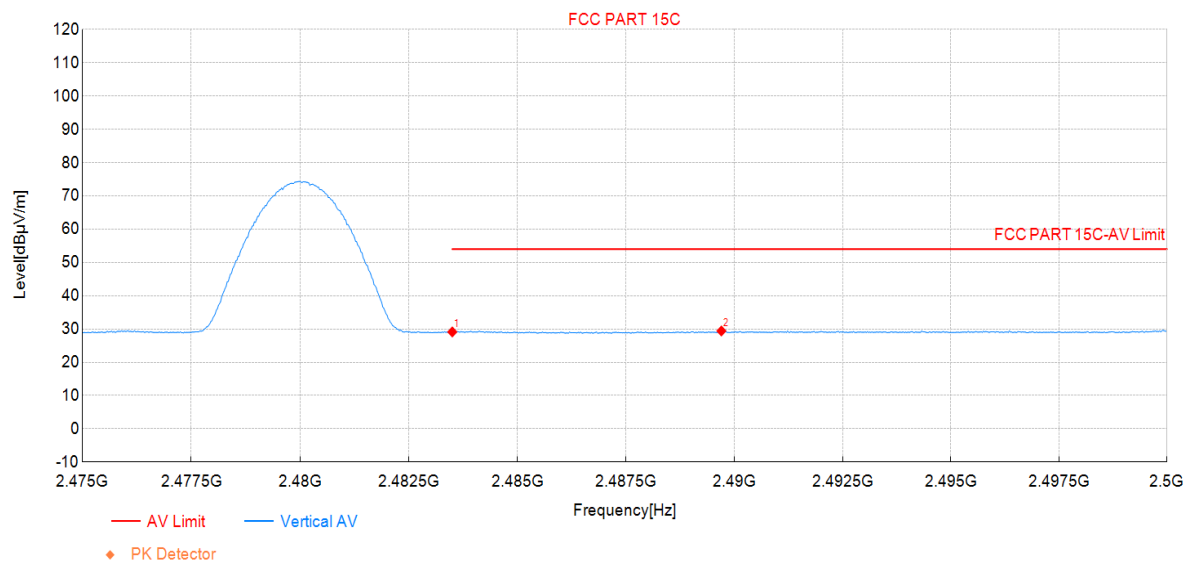


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	28.8	29.11	0.270	54.00	24.89	AV	Vertic	PASS
2	2489.70	29.1	29.41	0.300	54.00	24.59	AV	Vertic	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

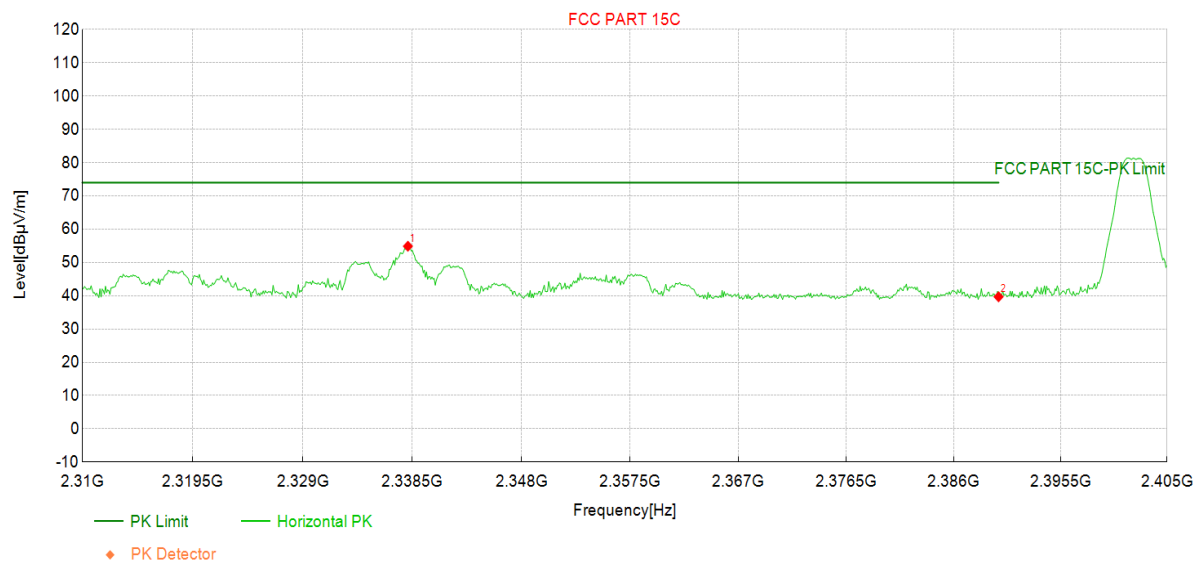


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2338.12	55.1	54.88	-0.180	74.00	19.12	PK	Horizo	PASS
2	2390.00	39.7	39.68	-0.050	74.00	34.32	PK	Horizo	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

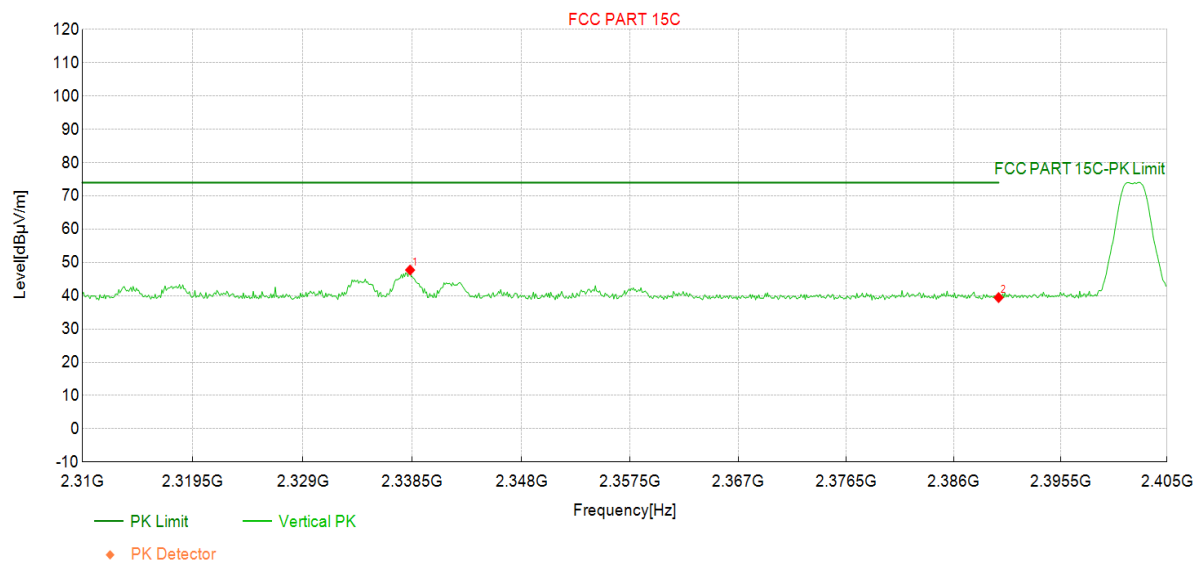


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2338.31	47.9	47.73	-0.180	74.00	26.27	PK	Vertic	PASS
2	2390.00	39.5	39.44	-0.050	74.00	34.56	PK	Vertic	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

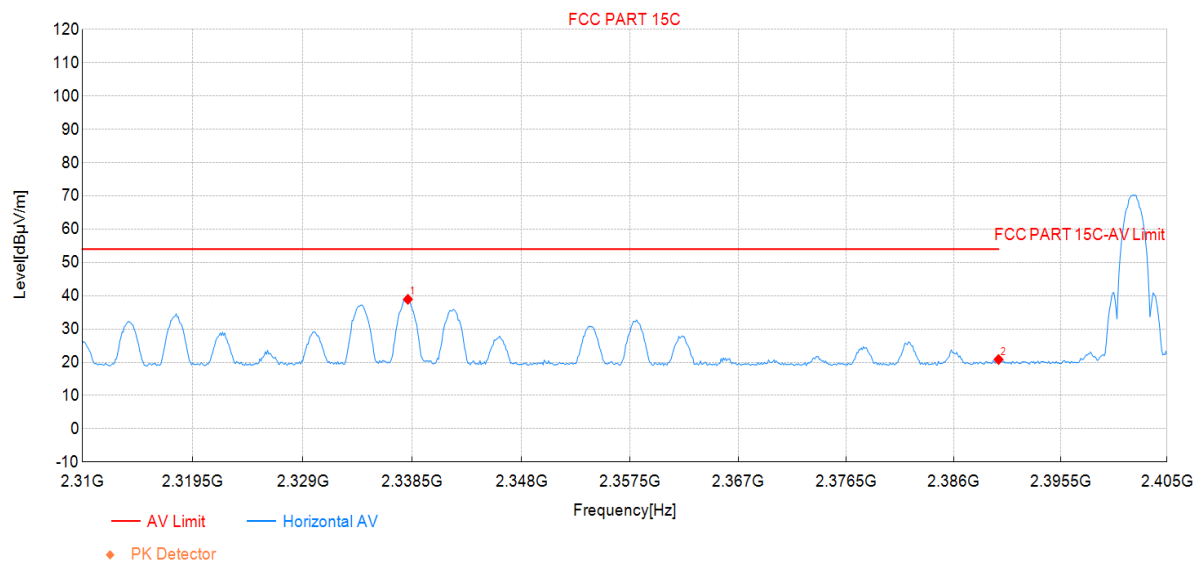


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2338.12	39.1	38.92	-0.180	54.00	15.08	AV	Horizo	PASS
2	2390.00	20.9	20.82	-0.050	54.00	33.18	AV	Horizo	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

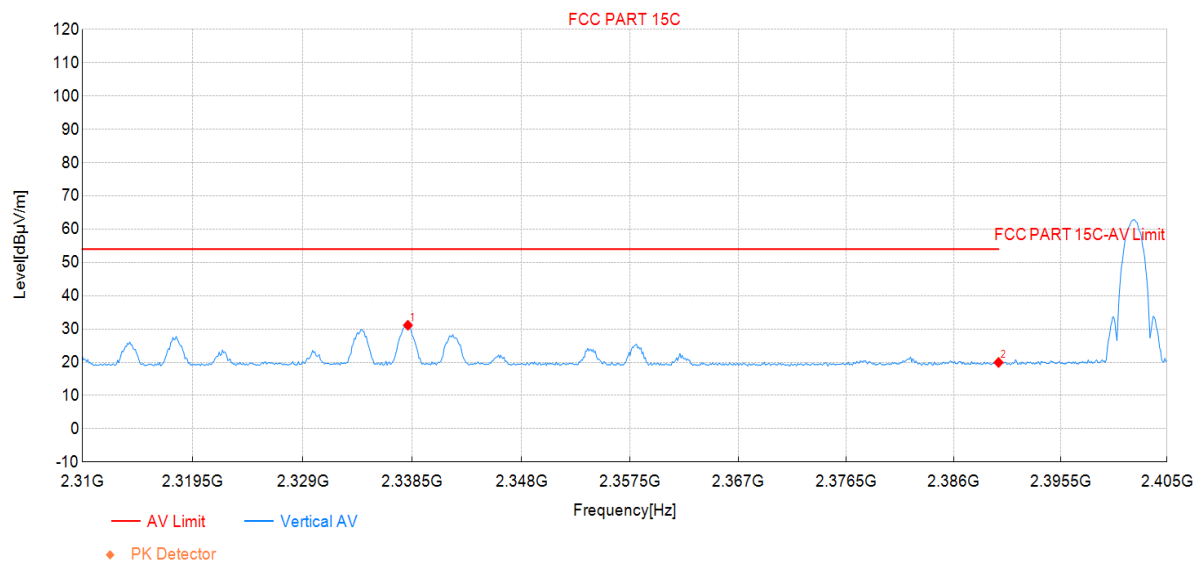


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2338.12	31.3	31.12	-0.180	54.00	22.88	AV	Vertic	PASS
2	2390.00	20.0	19.93	-0.050	54.00	34.07	AV	Vertic	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

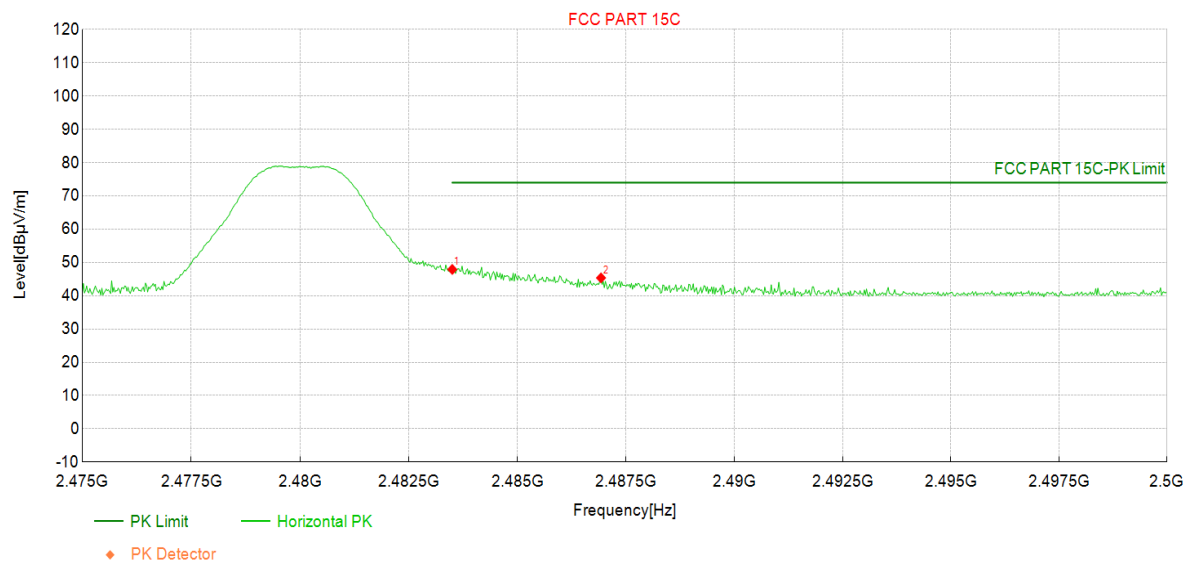


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	47.6	47.90	0.270	74.00	26.10	PK	Horizo	PASS
2	2486.93	45.1	45.35	0.290	74.00	28.65	PK	Horizo	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

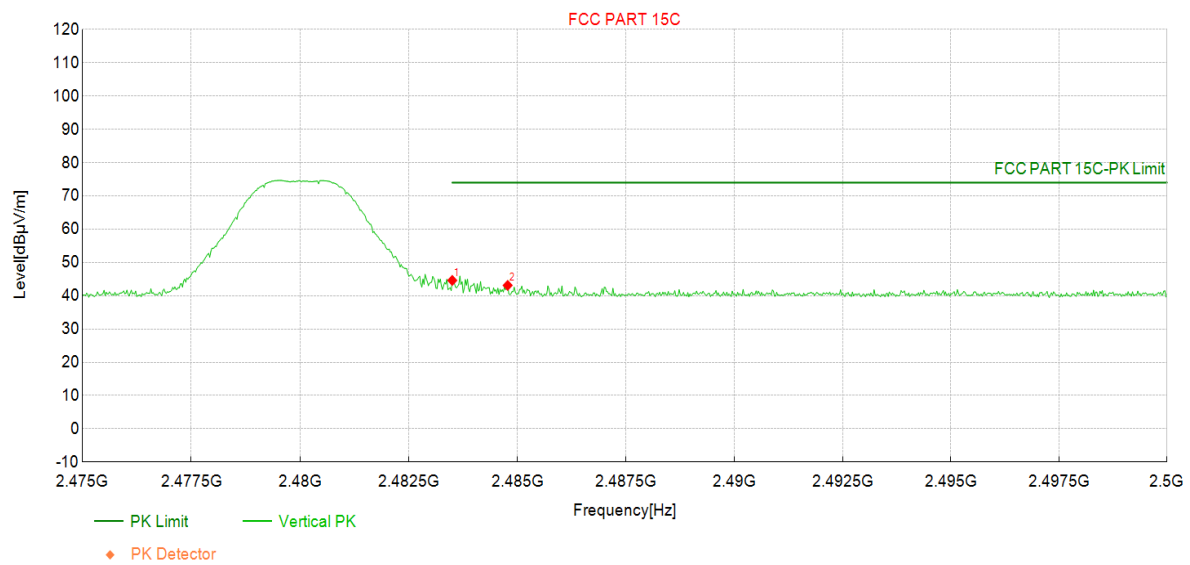


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	44.3	44.60	0.270	74.00	29.40	PK	Vertic	PASS
2	2484.78	42.8	43.11	0.270	74.00	30.89	PK	Vertic	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

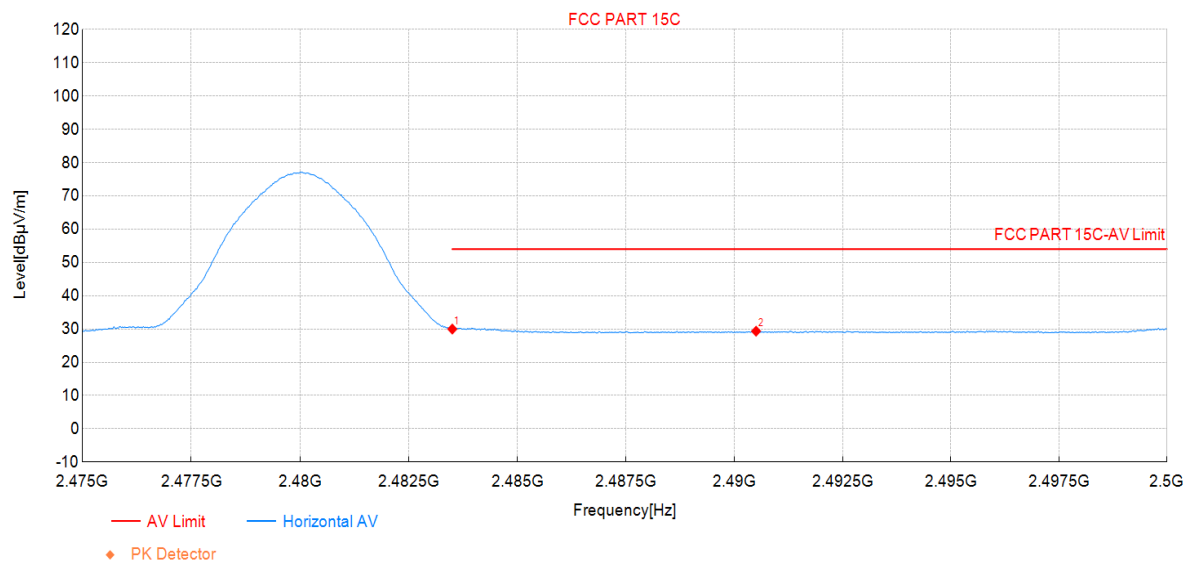


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.7	29.97	0.270	54.00	24.03	AV	Horizo	PASS
2	2490.50	29.0	29.34	0.300	54.00	24.66	AV	Horizo	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

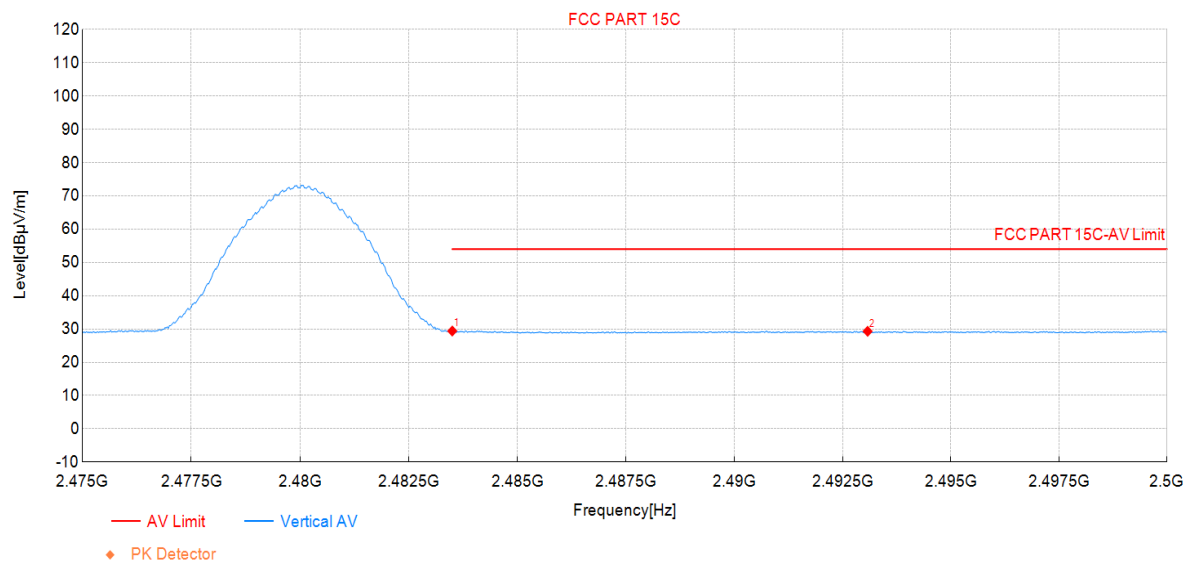

Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2483.50	29.1	29.39	0.270	54.00	24.61	AV	Vertic	PASS
2	2493.08	29.0	29.31	0.310	54.00	24.69	AV	Vertic	PASS

Note:

1. Level = Reading + Factor

Appendix E: Conducted Spurious Emission

Reference level measurement

Test Graphs




BLE_1M-Ant1-2402-PASS



BLE_1M-Ant1-2440-PASS



BLE_1M-Ant1-2480-PASS

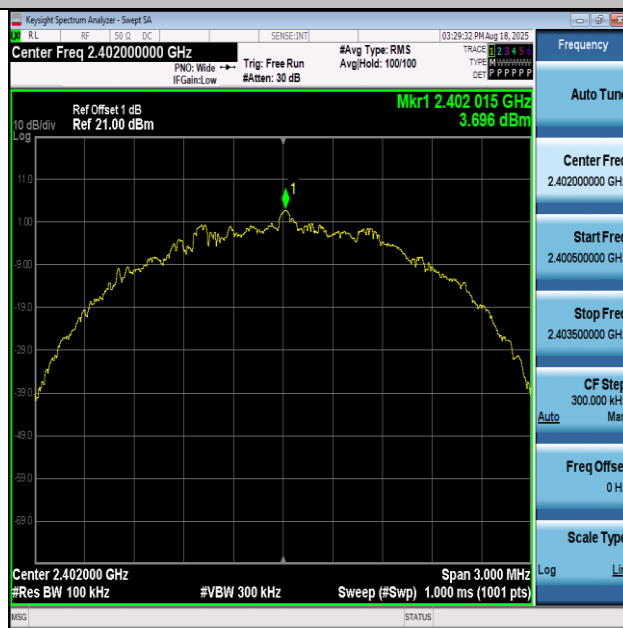

BLE_2M-Ant1-2402-PASS




BLE_2M-Ant1-2440-PASS




BLE_2M-Ant1-2480-PASS

Band edge measurements


Test Graphs

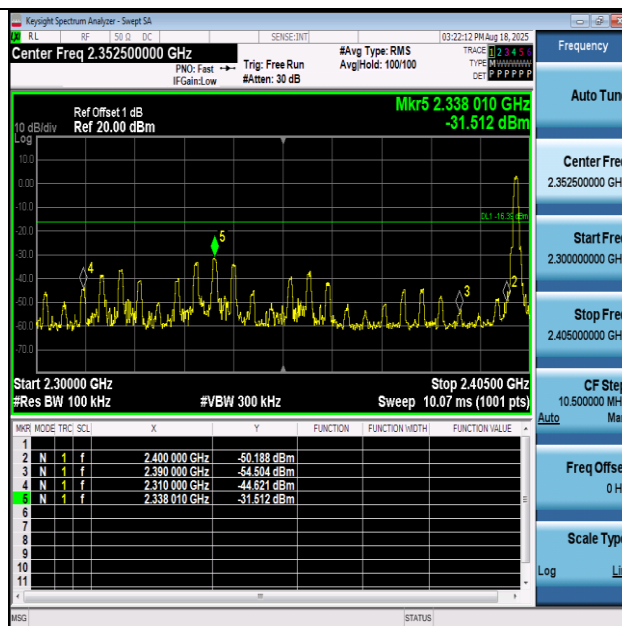


BLE_1M-Ant1-2402-PASS

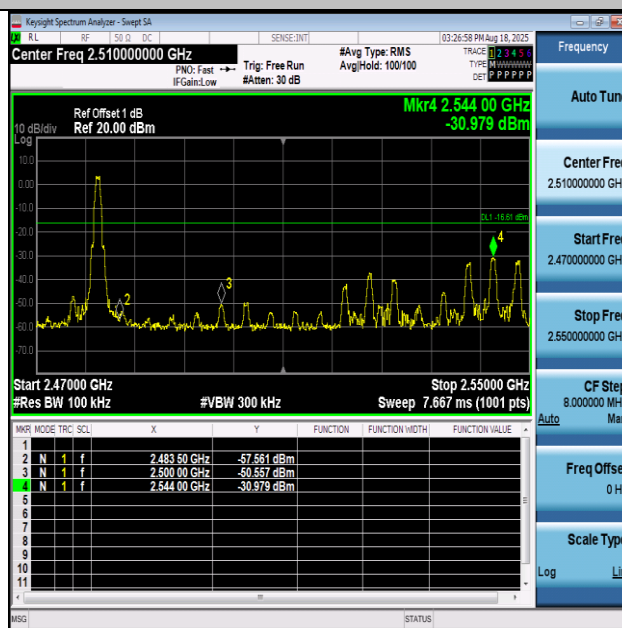

BLE_1M-Ant1-2480-PASS

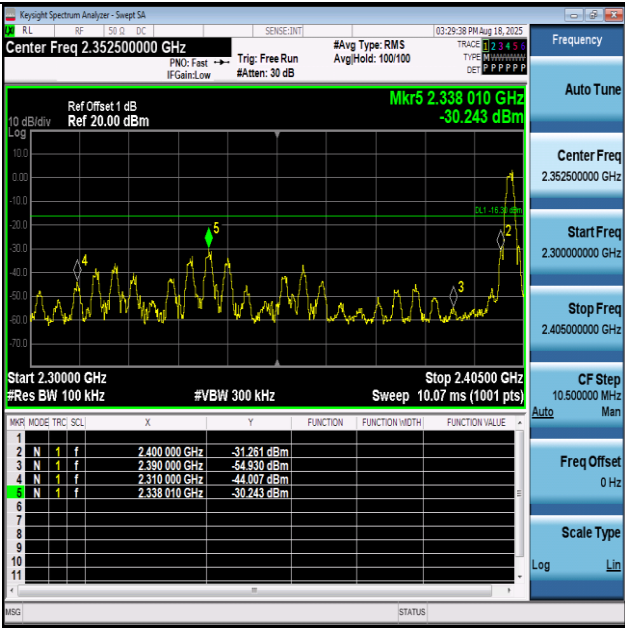


BLE_2M-Ant1-2402-PASS

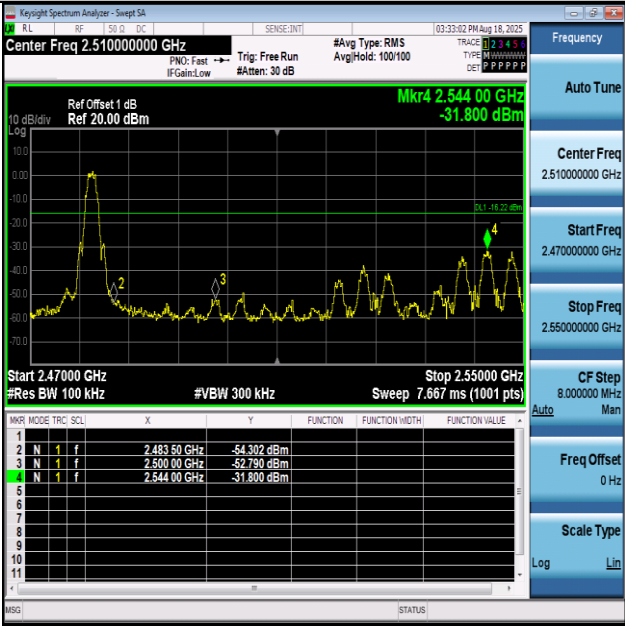


BLE_2M-Ant1-2480-PASS


Conducted Spurious Emission Test Graphs

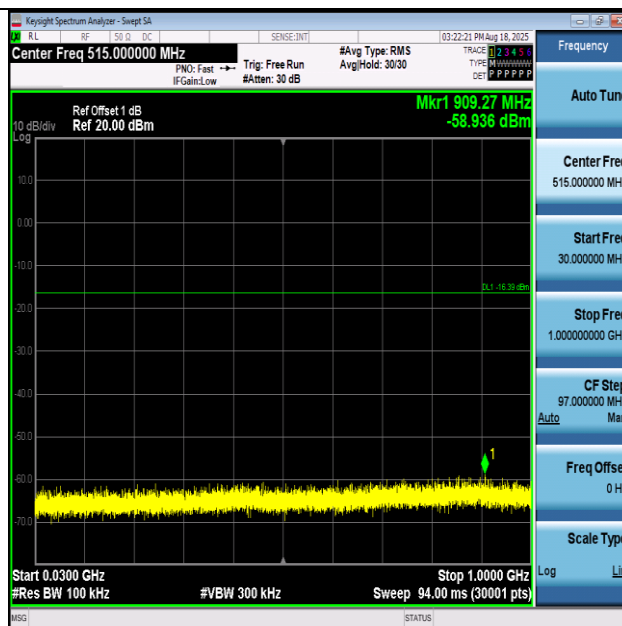


BLE_1M-Ant1-2402-30~1000-PASS

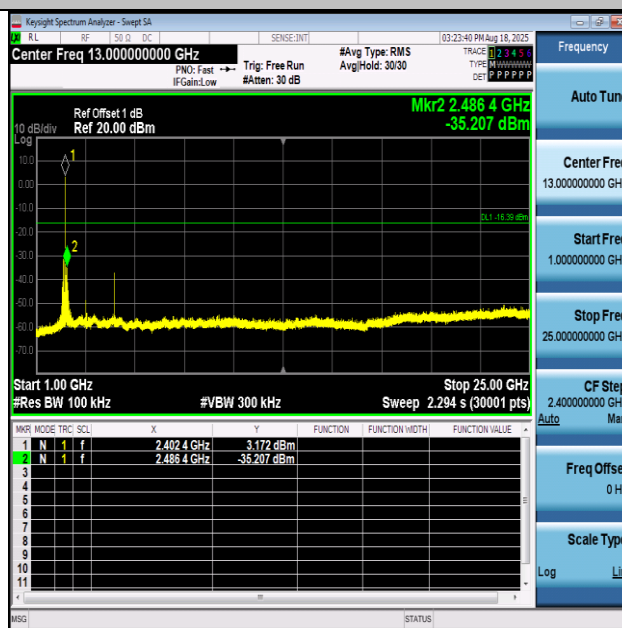


BLE_1M-Ant1-2402-1000~25000-PASS

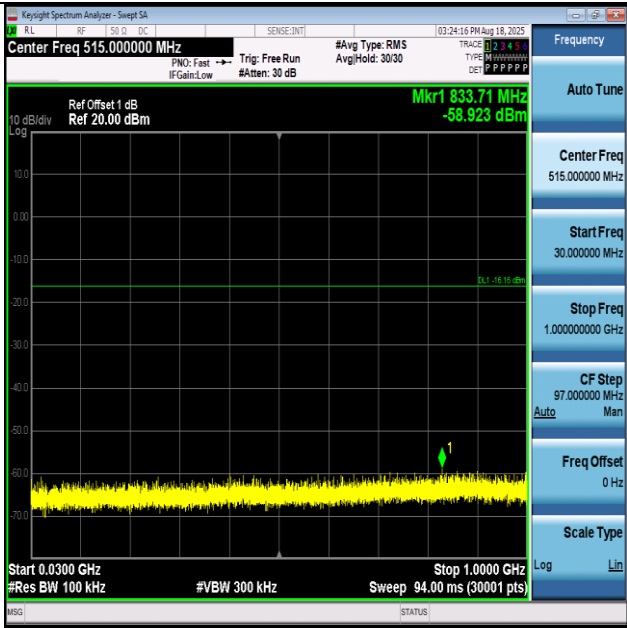


BLE_1M-Ant1-2440-30~1000-PASS

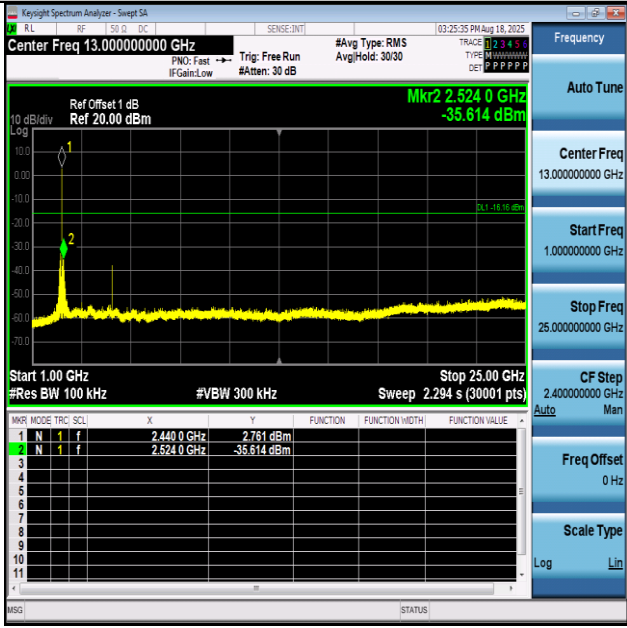


BLE_1M-Ant1-2440-1000~25000-PASS

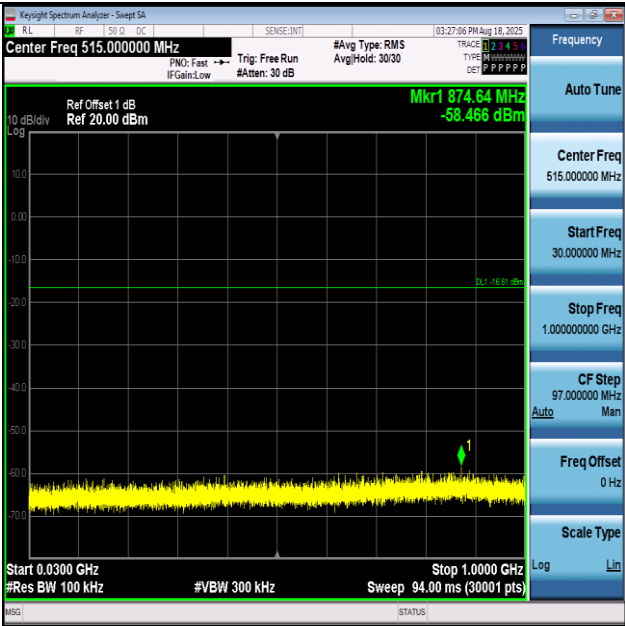


BLE_1M-Ant1-2480-30~1000-PASS

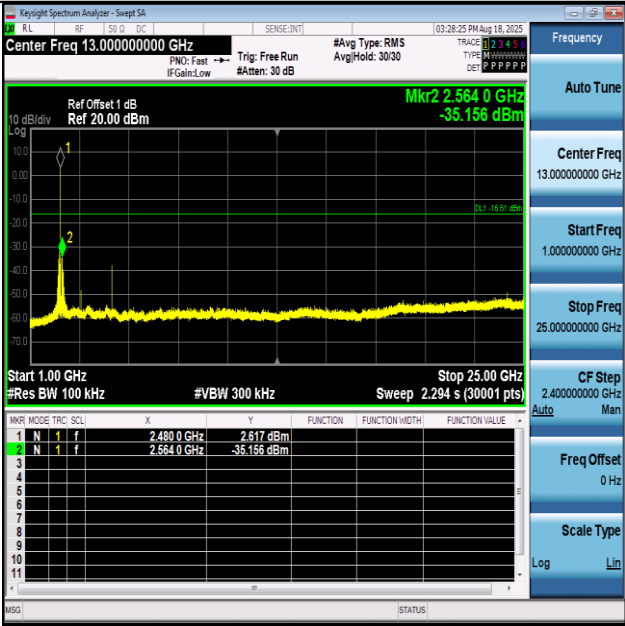


BLE_1M-Ant1-2480-1000~25000-PASS

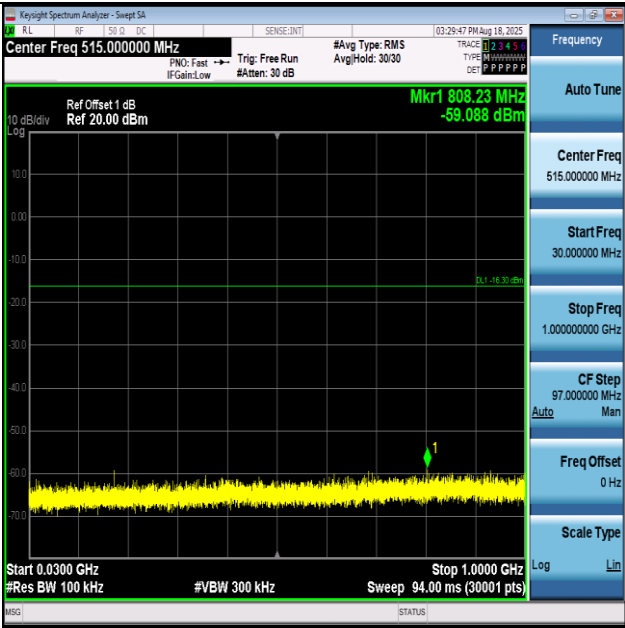


BLE_2M-Ant1-2402-30~1000-PASS

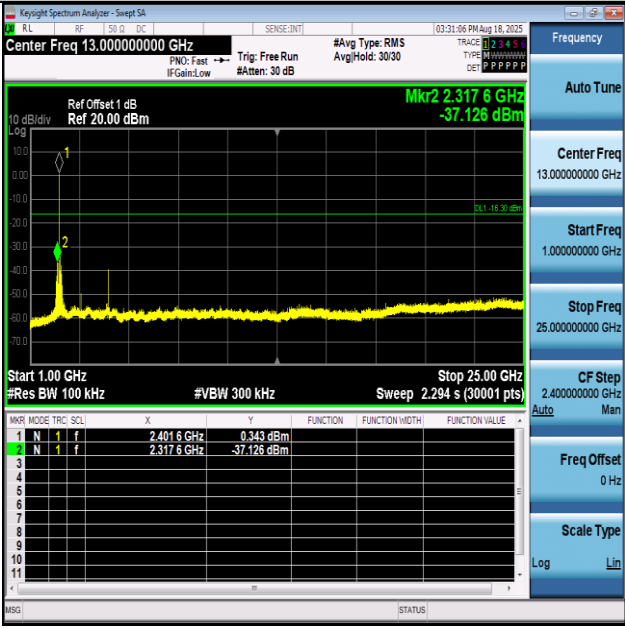


BLE_2M-Ant1-2402-1000~25000-PASS

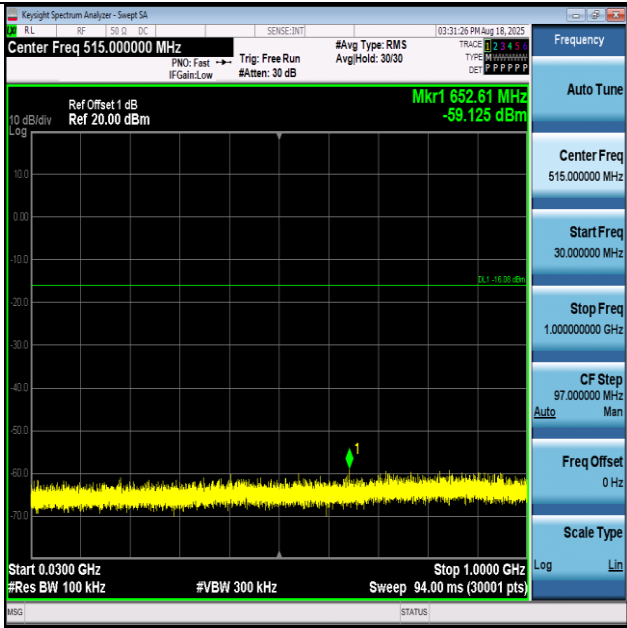


BLE_2M-Ant1-2440-30~1000-PASS

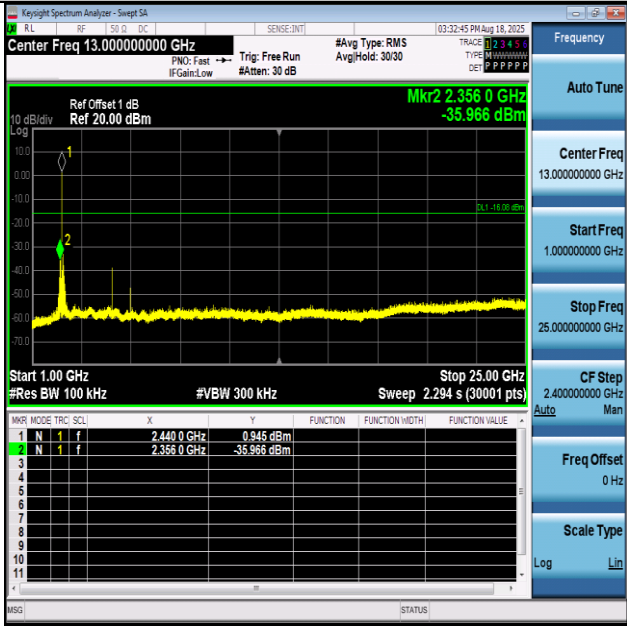

BLE_2M-Ant1-2440-1000~25000-PASS

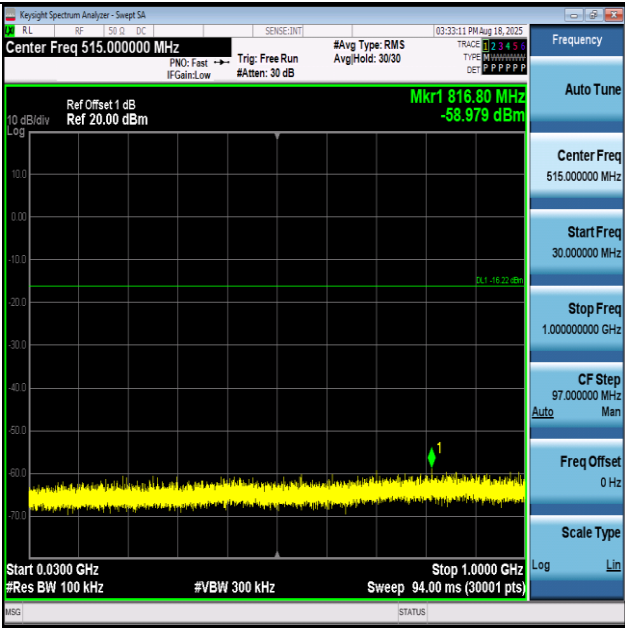

BLE_2M-Ant1-2480-30~1000-PASS

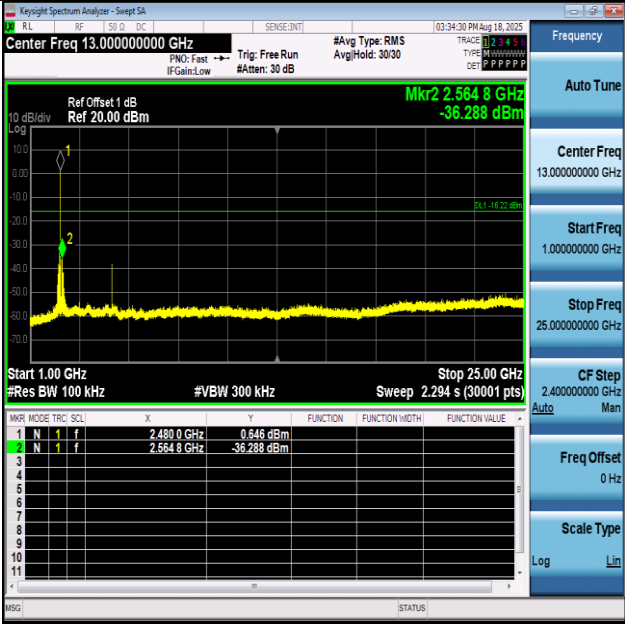


BLE_2M-Ant1-2480-1000~25000-PASS


Appendix F: Duty Cycle Test Result

TestMode	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
BLE_1M	2402	2.14	2.50	85.60	0.68
BLE_1M	2440	2.14	2.50	85.60	0.68
BLE_1M	2480	2.14	2.50	85.60	0.68
BLE_2M	2402	1.08	1.88	57.45	2.41
BLE_2M	2440	1.08	1.88	57.45	2.41
BLE_2M	2480	1.08	1.88	57.45	2.41


Test Graphs

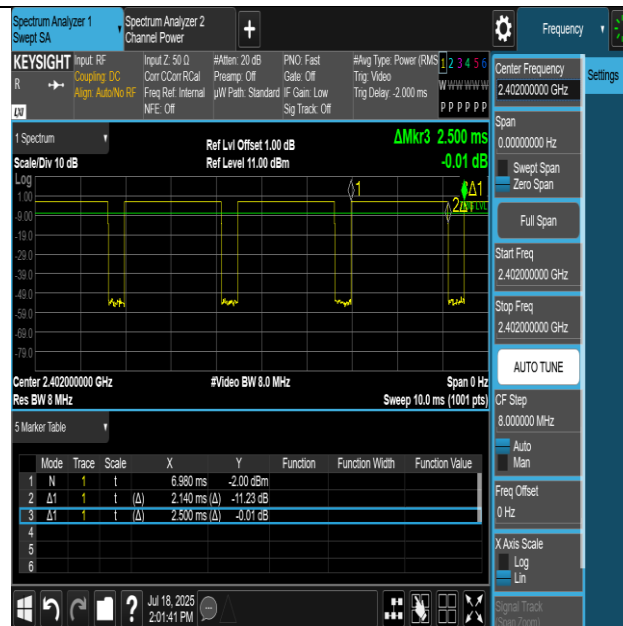


NTNV-BLE_1M-Ant1-2402

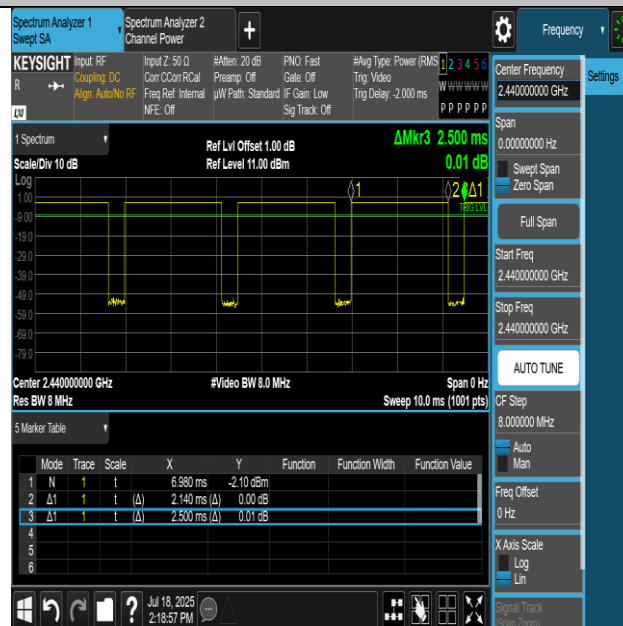


NTNV-BLE_1M-Ant1-2440

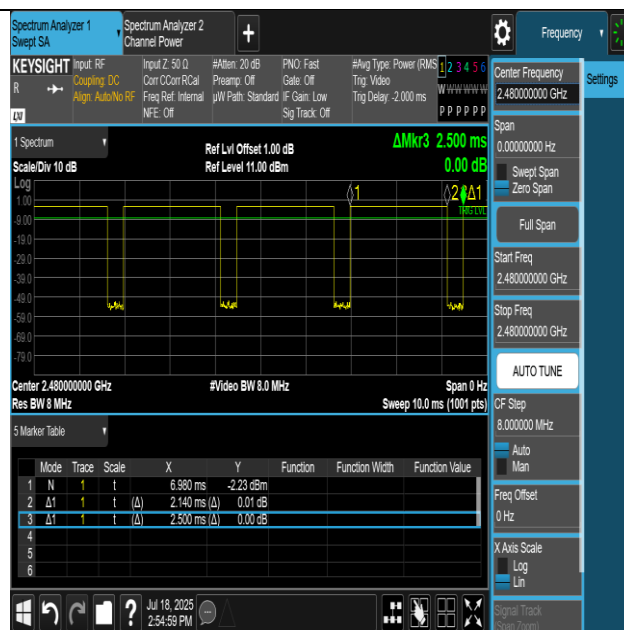


NTNV-BLE_1M-Ant1-2480

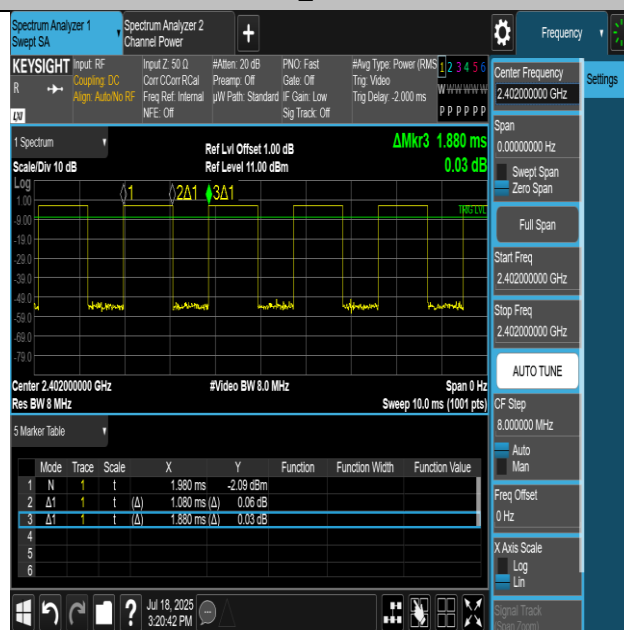

NTNV-BLE_2M-Ant1-2402

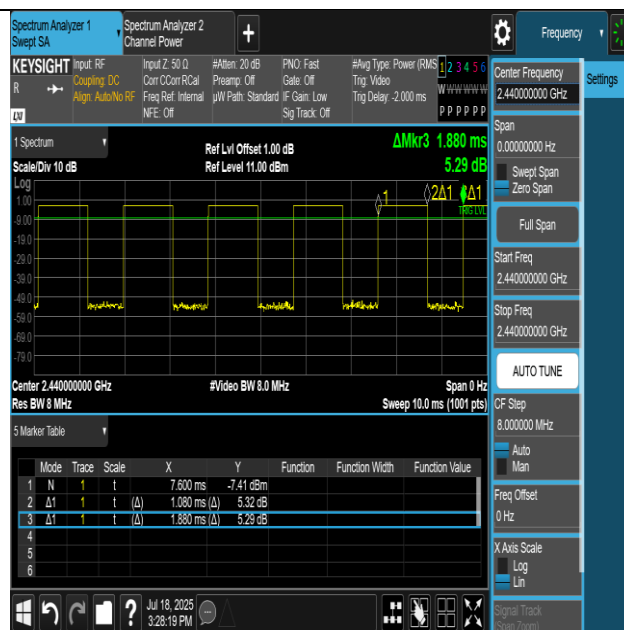

NTNV-BLE_2M-Ant1-2440

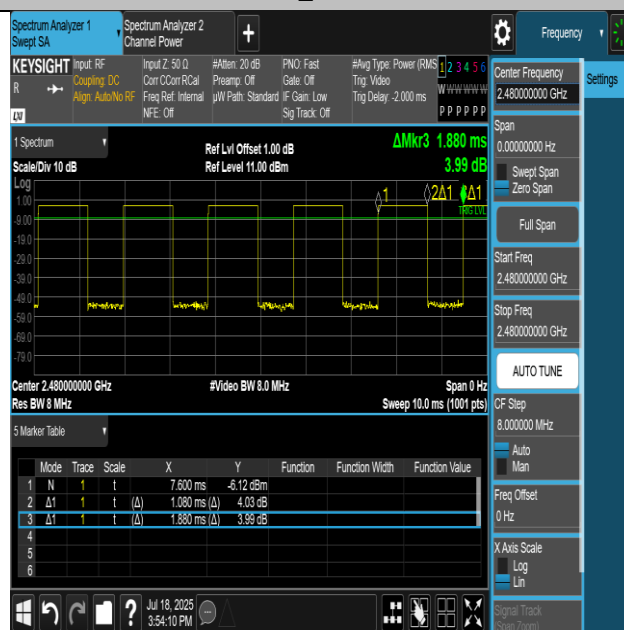


NTNV-BLE_2M-Ant1-2480

Appendix G: Emissions in Restricted Bands

Transmit at 2402MHz by LE_1Mbps

Test Graph

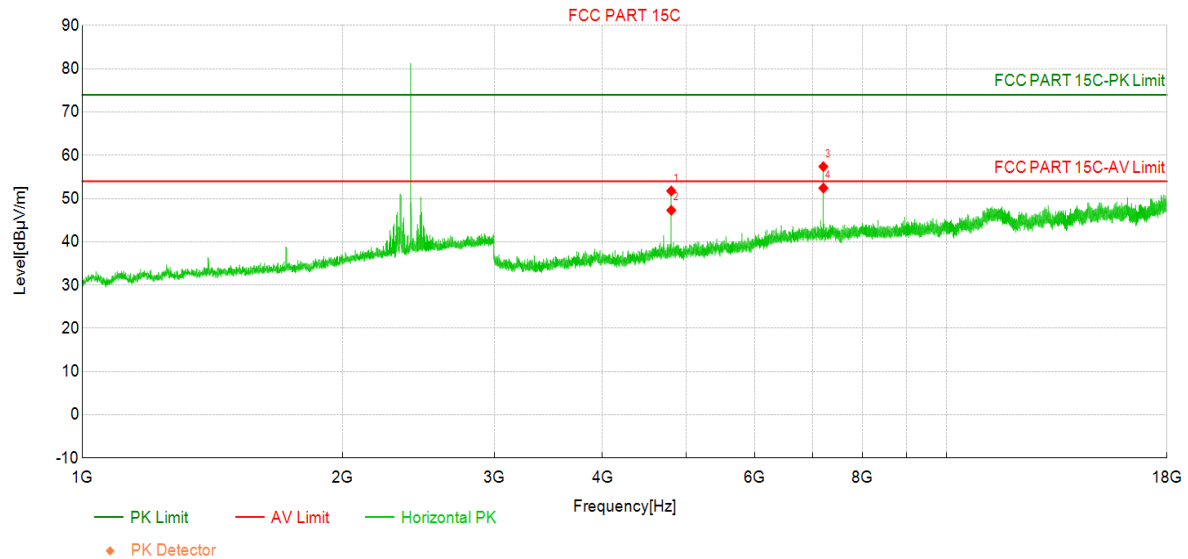


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.75	60.2	51.76	-8.480	74.00	22.24	PK	Horizo	PASS
2	4804.50	55.8	47.30	-8.480	54.00	6.70	AV	Horizo	PASS
3	7205.25	59.0	57.39	-1.620	74.00	16.61	PK	Horizo	PASS
4	7206.00	54.0	52.42	-1.620	54.00	1.58	AV	Horizo	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

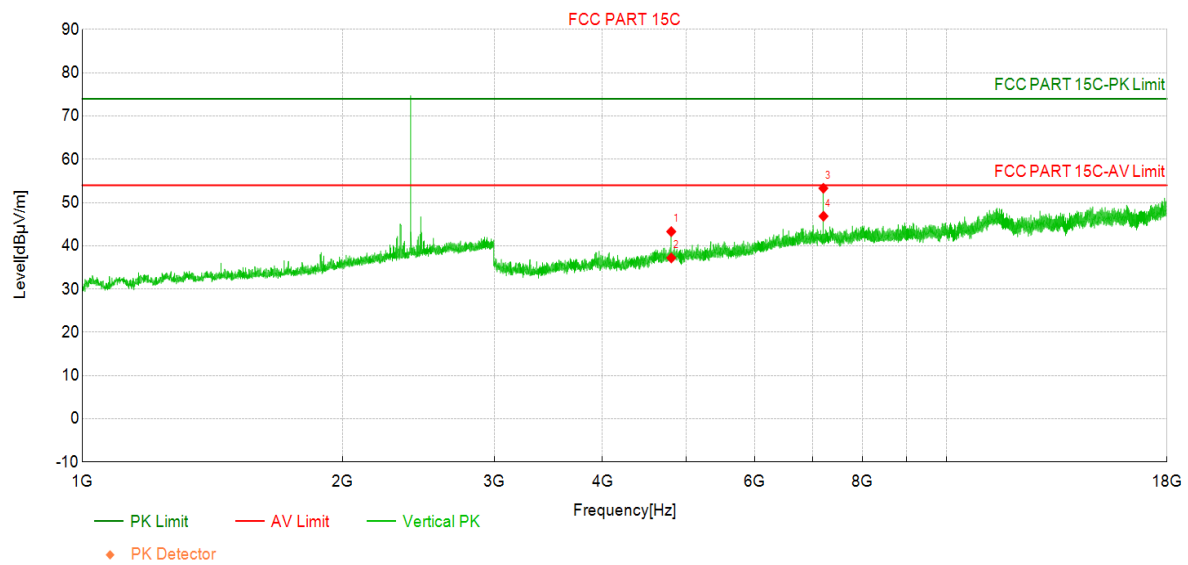


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.75	51.8	43.29	-8.480	74.00	30.71	PK	Vertic	PASS
2	4804.50	45.7	37.20	-8.480	54.00	16.80	AV	Vertic	PASS
3	7205.25	54.9	53.31	-1.620	74.00	20.69	PK	Vertic	PASS
4	7207.50	48.5	46.85	-1.620	54.00	7.15	AV	Vertic	PASS

Transmit at 2440MHz by LE_1Mbps

Test Graph

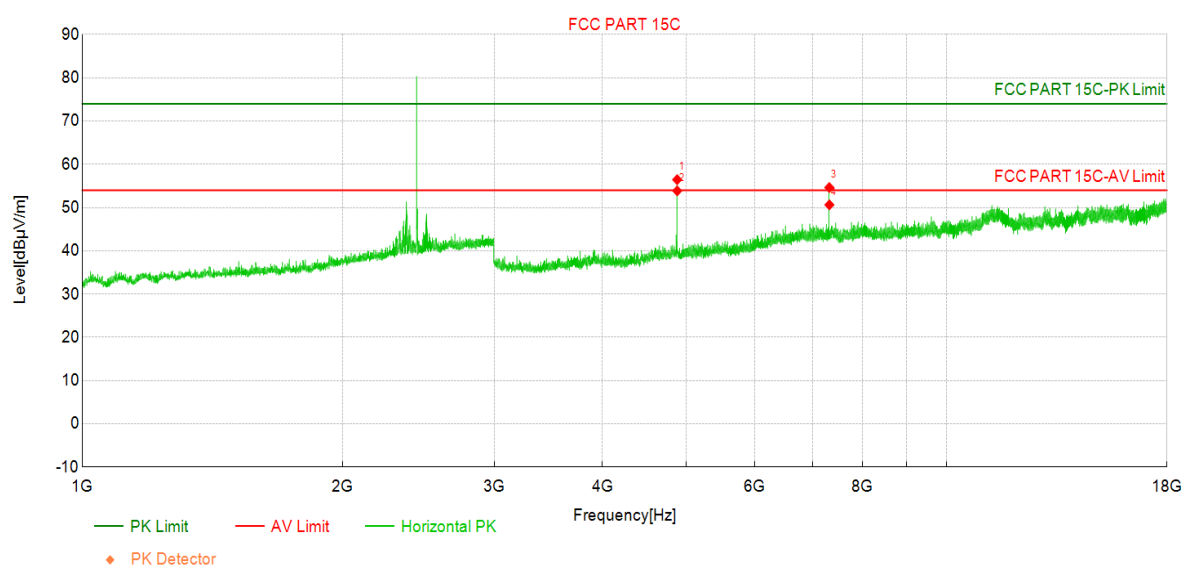


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.25	64.6	56.46	-8.160	74.00	17.54	PK	Horizo	PASS
2	4881.00	62.0	53.87	-8.150	54.00	0.13	AV	Horizo	PASS
3	7319.25	56.1	54.64	-1.450	74.00	19.36	PK	Horizo	PASS
4	7321.50	52.1	50.63	-1.440	54.00	3.37	AV	Horizo	PASS

Transmit at 2440MHz by LE_1Mbps

Test Graph

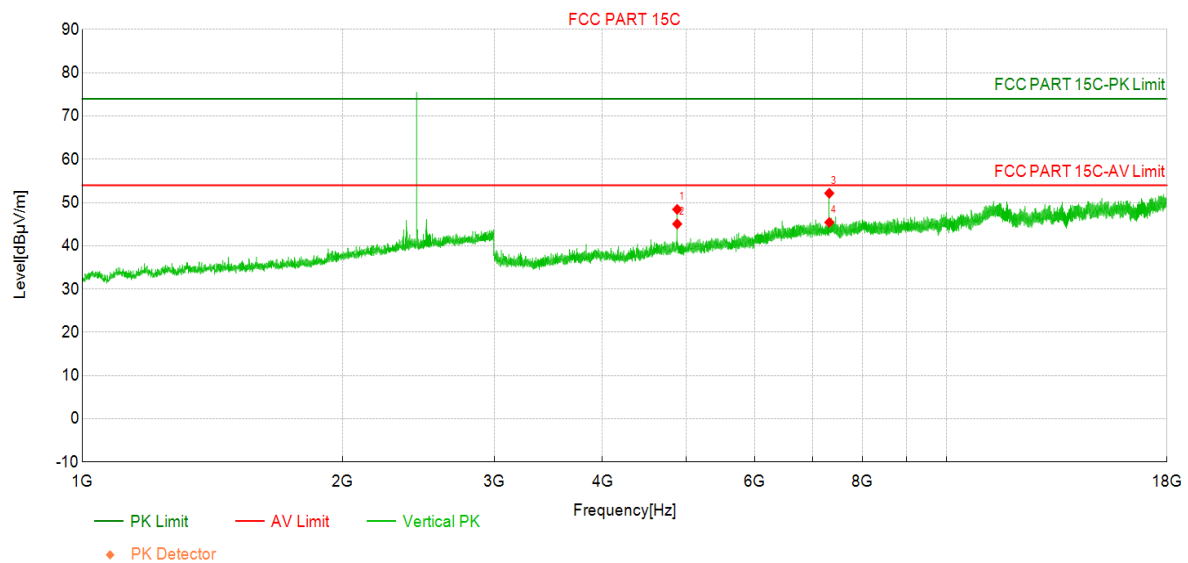


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4880.25	56.6	48.42	-8.160	74.00	25.58	PK	Vertic	PASS
2	4881.00	53.2	45.05	-8.150	54.00	8.95	AV	Vertic	PASS
3	7319.25	53.6	52.15	-1.450	74.00	21.85	PK	Vertic	PASS
4	7320.00	46.9	45.41	-1.450	54.00	8.59	AV	Vertic	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

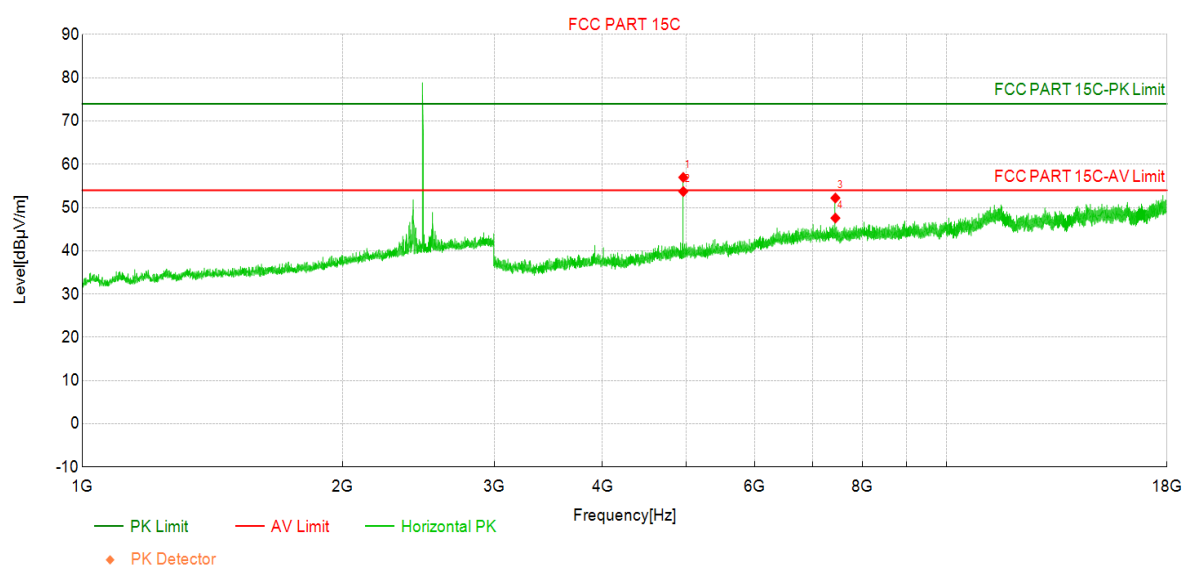


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4959.75	64.8	56.99	-7.830	74.00	17.01	PK	Horizo	PASS
2	4960.50	61.6	53.72	-7.830	54.00	0.28	AV	Horizo	PASS
3	7439.25	53.5	52.21	-1.300	74.00	21.79	PK	Horizo	PASS
4	7440.00	48.9	47.57	-1.300	54.00	6.43	AV	Horizo	PASS

Transmit at 2480MHz by LE_1Mbps

Test Graph

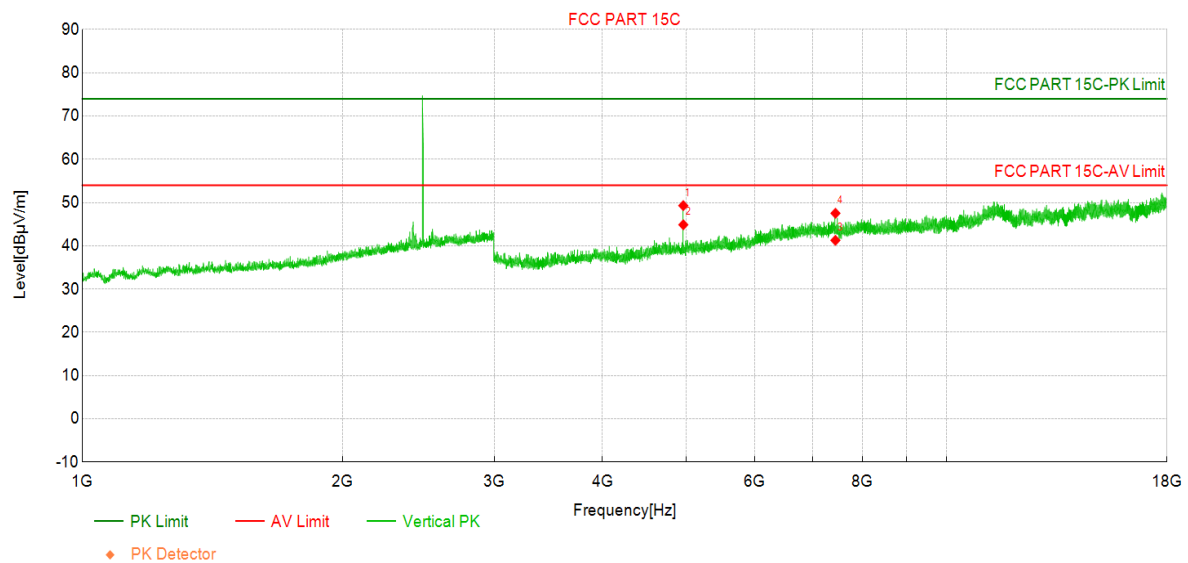


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960.50	57.1	49.30	-7.830	74.00	24.70	PK	Vertic	PASS
2	4961.25	52.7	44.87	-7.830	54.00	9.13	AV	Vertic	PASS
3	7440.00	42.6	41.27	-1.300	54.00	12.73	AV	Vertic	PASS
4	7440.75	48.9	47.53	-1.320	74.00	26.47	PK	Vertic	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

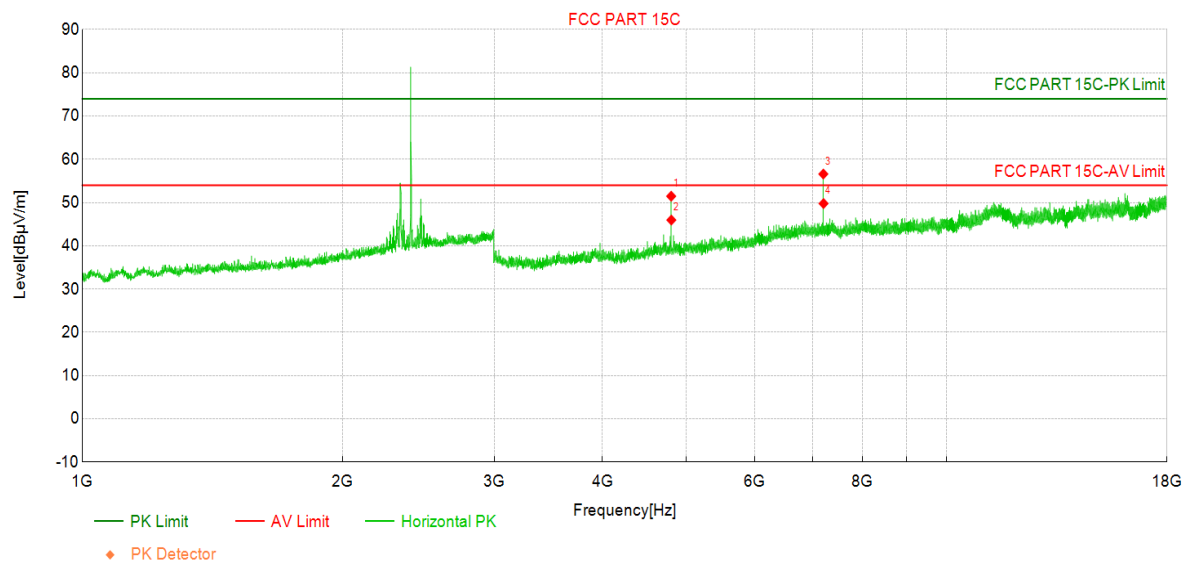


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4803.00	60.0	51.47	-8.490	74.00	22.53	PK	Horizo	PASS
2	4805.25	54.4	45.96	-8.480	54.00	8.04	AV	Horizo	PASS
3	7204.50	58.2	56.60	-1.620	74.00	17.40	PK	Horizo	PASS
4	7208.25	51.4	49.78	-1.610	54.00	4.22	AV	Horizo	PASS

Transmit at 2402MHz by LE_2Mbps

Test Graph

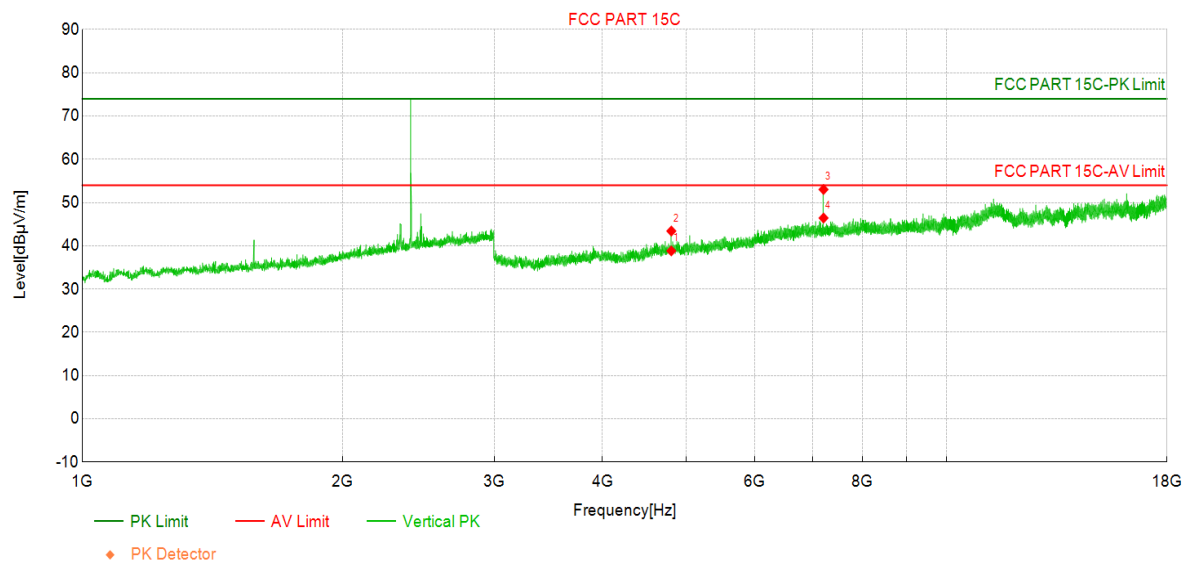


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4804.50	47.3	38.82	-8.480	54.00	15.18	AV	Vertic	PASS
2	4805.25	51.9	43.42	-8.480	74.00	30.58	PK	Vertic	PASS
3	7207.50	54.7	53.03	-1.620	74.00	20.97	PK	Vertic	PASS
4	7208.25	48.0	46.43	-1.610	54.00	7.57	AV	Vertic	PASS

Transmit at 2440MHz by LE_2Mbps

Test Graph

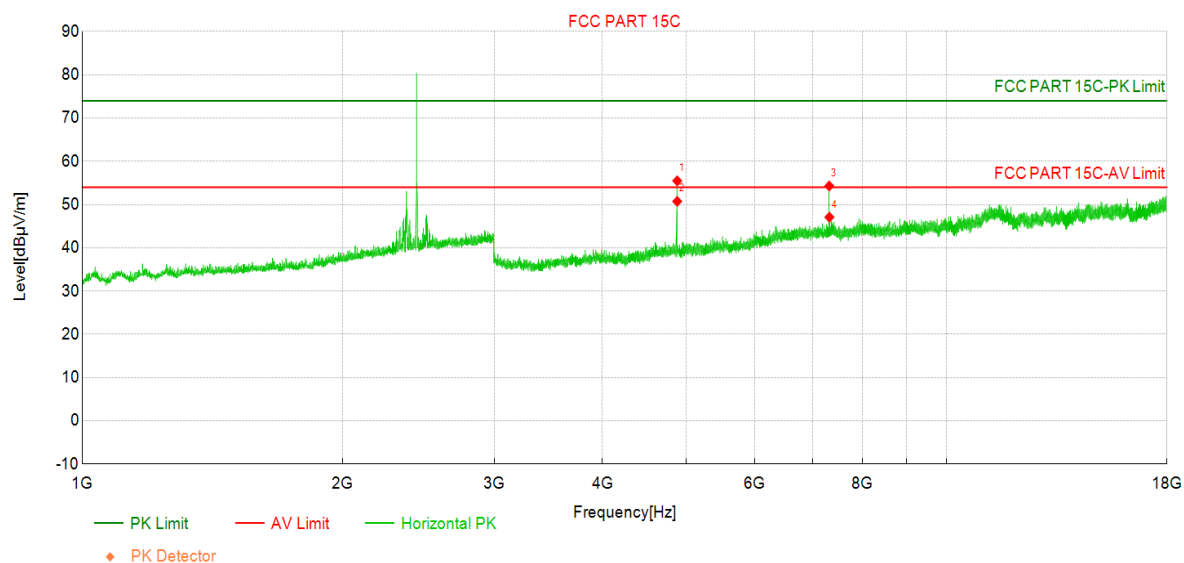


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4881.00	63.6	55.49	-8.150	74.00	18.51	PK	Horizo	PASS
2	4881.00	58.9	50.75	-8.150	54.00	3.25	AV	Horizo	PASS
3	7318.50	55.8	54.30	-1.450	74.00	19.70	PK	Horizo	PASS
4	7322.25	48.5	47.08	-1.420	54.00	6.92	AV	Horizo	PASS

Transmit at 2440MHz by LE_2Mbps

Test Graph

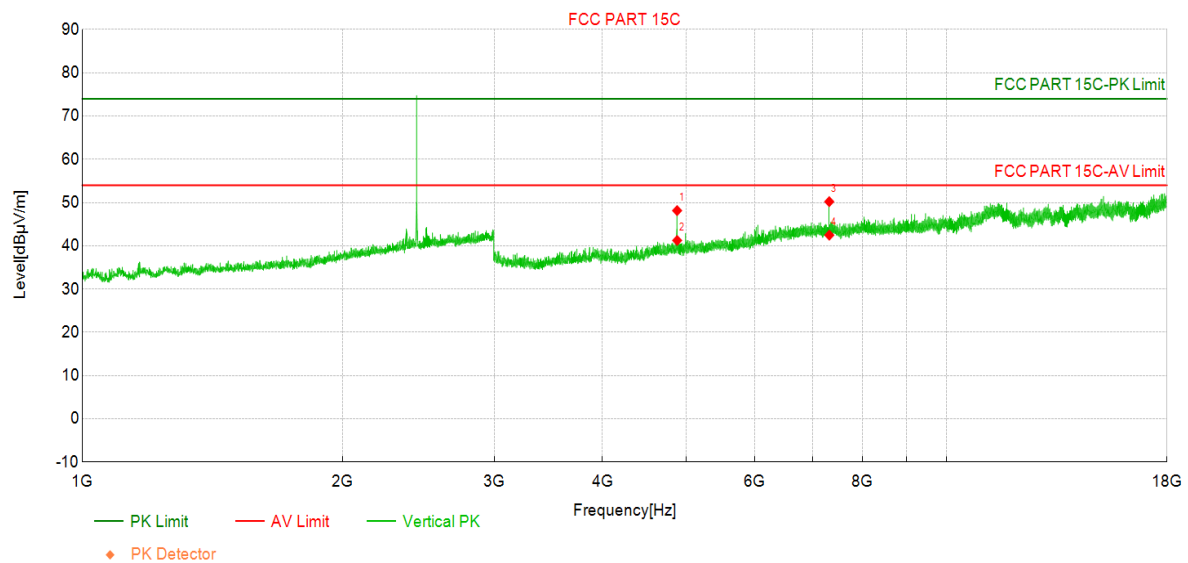


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4879.50	56.3	48.15	-8.160	74.00	25.85	PK	Vertic	PASS
2	4880.25	49.4	41.24	-8.160	54.00	12.76	AV	Vertic	PASS
3	7318.50	51.7	50.22	-1.450	74.00	23.78	PK	Vertic	PASS
4	7319.25	43.9	42.46	-1.450	54.00	11.54	AV	Vertic	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

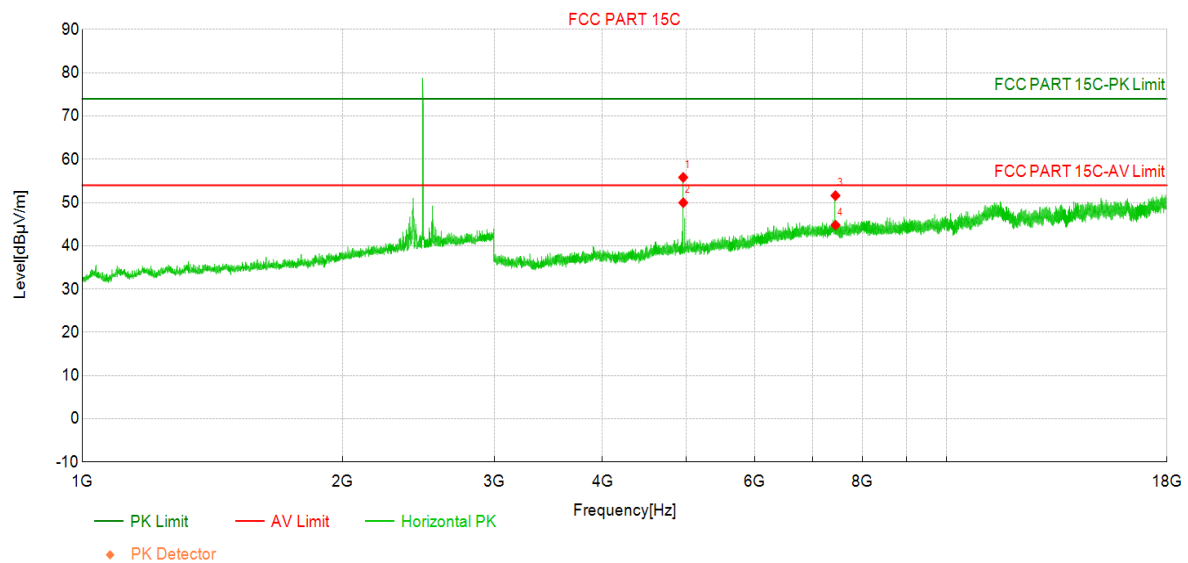


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4959.00	63.7	55.82	-7.830	74.00	18.18	PK	Horizo	PASS
2	4960.50	57.8	49.97	-7.830	54.00	4.03	AV	Horizo	PASS
3	7441.50	52.9	51.61	-1.320	74.00	22.39	PK	Horizo	PASS
4	7442.25	46.1	44.77	-1.330	54.00	9.23	AV	Horizo	PASS

Transmit at 2480MHz by LE_2Mbps

Test Graph

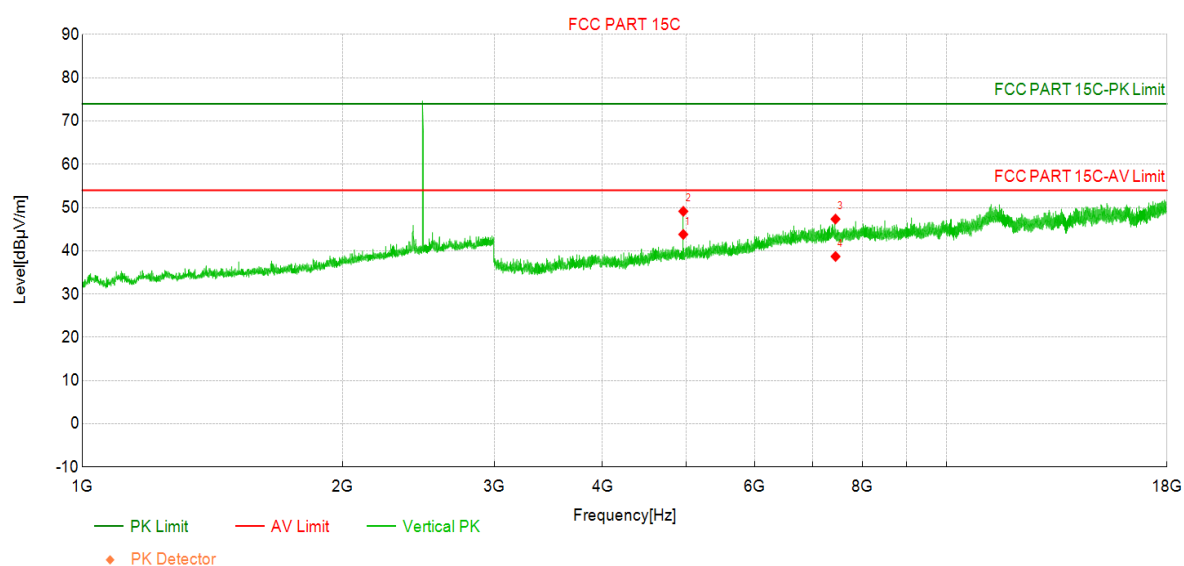


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	4960.50	51.6	43.80	-7.830	54.00	10.20	AV	Vertic	PASS
2	4961.25	57.0	49.13	-7.830	74.00	24.87	PK	Vertic	PASS
3	7441.50	48.7	47.34	-1.320	74.00	26.66	PK	Vertic	PASS
4	7442.25	40.0	38.69	-1.330	54.00	15.31	AV	Vertic	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

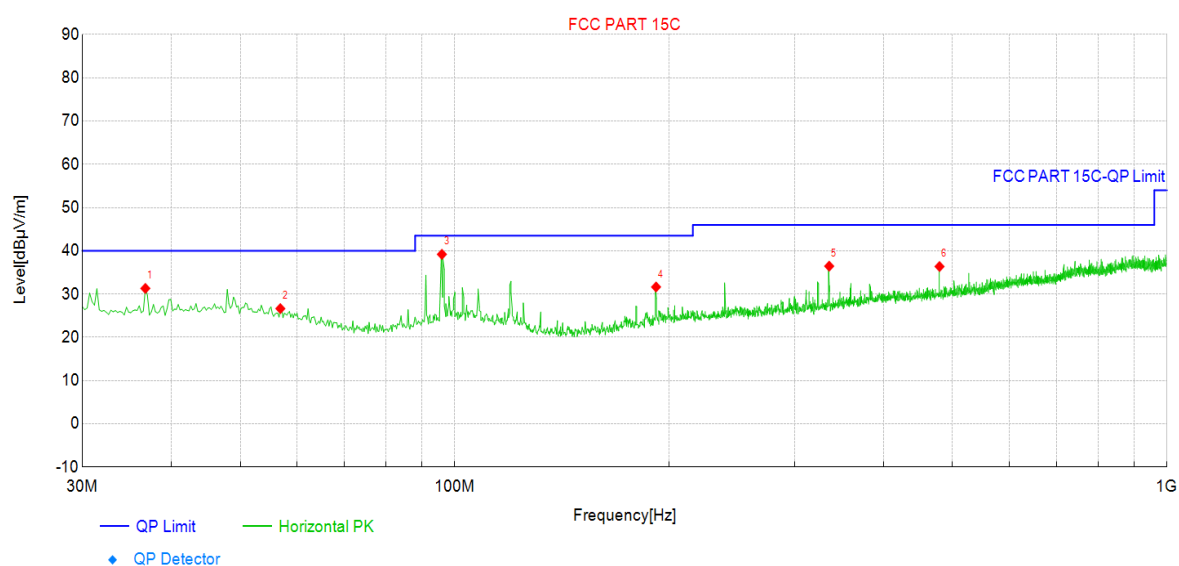


Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	36.79	17.9	31.31	13.430	40.00	8.69	PK	Horizo	PASS
2	56.92	13.2	26.64	13.420	40.00	13.36	PK	Horizo	PASS
3	95.96	27.2	39.19	12.040	43.50	4.31	PK	Horizo	PASS
4	191.75	20.3	31.64	11.350	43.50	11.86	PK	Horizo	PASS
5	335.55	21.4	36.45	15.070	46.00	9.55	PK	Horizo	PASS
6	479.35	19.1	36.37	17.310	46.00	9.63	PK	Horizo	PASS

Transmit at 2402MHz by LE_1Mbps

Test Graph

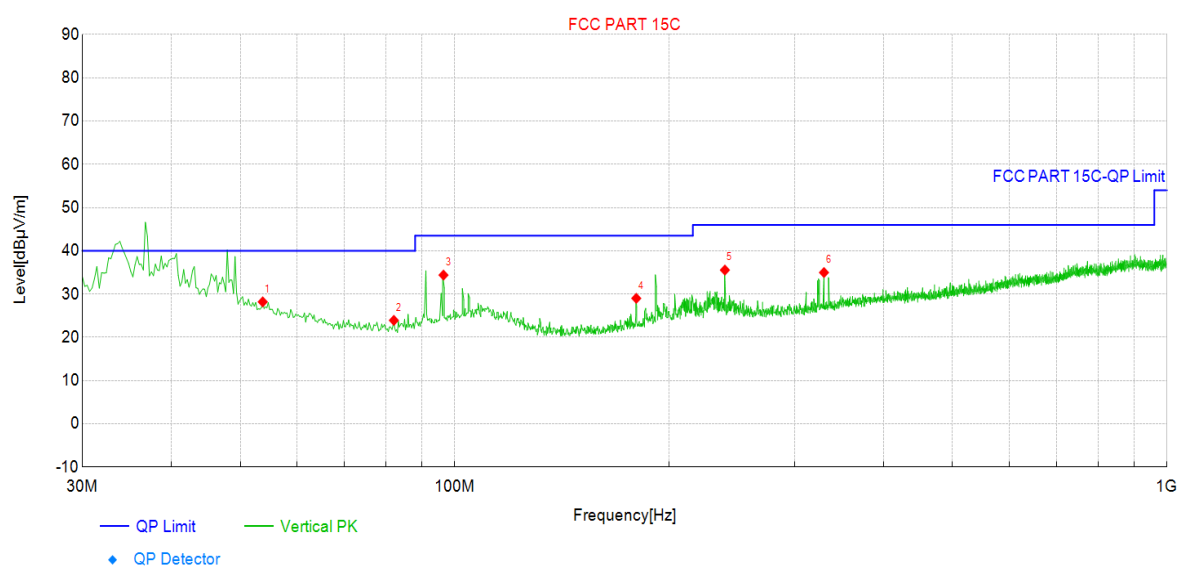

Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	53.77	14.2	28.20	14.050	40.00	11.80	PK	Vertic	PASS
2	82.14	13.8	23.92	10.090	40.00	16.08	PK	Vertic	PASS
3	96.45	22.3	34.39	12.110	43.50	9.11	PK	Vertic	PASS
4	179.87	18.5	29.01	10.500	43.50	14.49	PK	Vertic	PASS
5	239.52	22.5	35.55	13.070	46.00	10.45	PK	Vertic	PASS
6	329.97	20.1	34.98	14.930	46.00	11.02	PK	Vertic	PASS

Note:


1. Level = Reading + Factor

2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.

3. The test frequency range, 18GHz~26GHz test result on peak is lower than average limit, all is the noise base, therefore no data appear in the report.


Appendix H: AC Power Line Conducted Emission

Profile: 2560874R	Page No.: 1
Engineer: Yu Liu	
Site: TR1	Time: 2025/08/10
Limit: FCC_Part 15.107_CE_AC Power_Class B	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: #1	Power: AC 120V/60Hz
Note: Transmit at 2402MHz by LE_1Mbps	

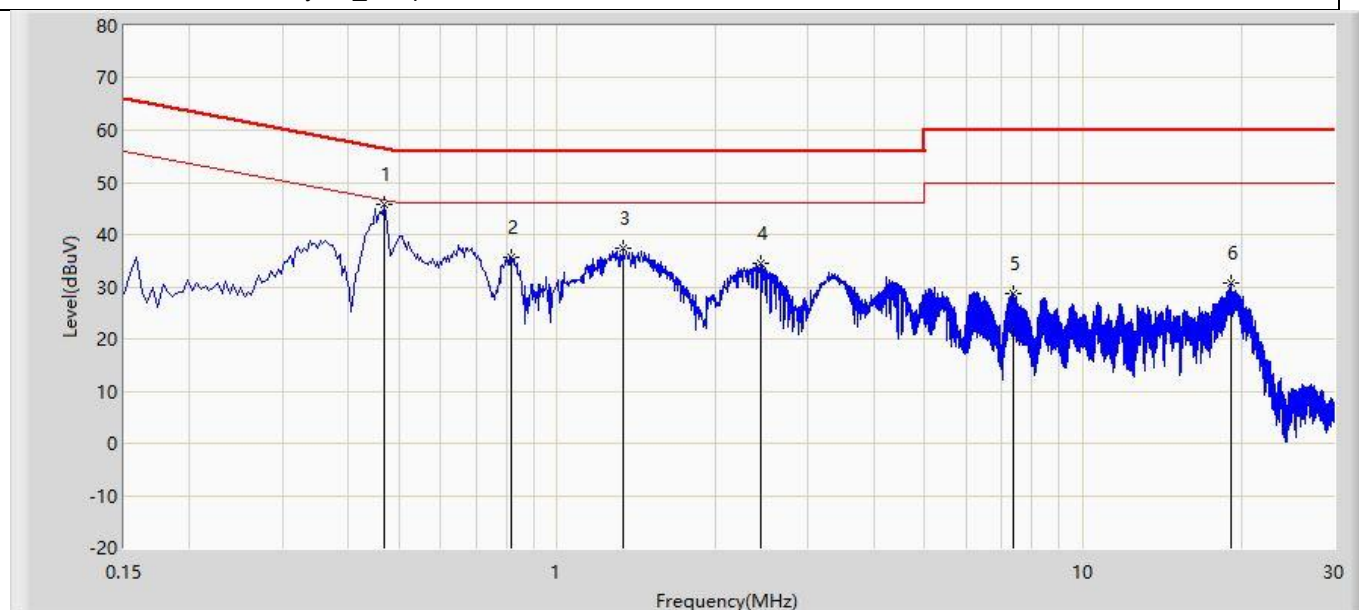


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.470	45.889	36.190	-10.625	56.514	9.698	QP
2		0.818	35.576	25.900	-20.424	56.000	9.676	QP
3		1.334	37.437	27.715	-18.563	56.000	9.722	QP
4		2.434	34.627	24.848	-21.373	56.000	9.779	QP
5		7.382	28.628	18.747	-31.372	60.000	9.881	QP
6		19.158	30.682	20.244	-29.318	60.000	10.438	QP

Profile: 2560874R	Page No.: 2
Engineer: Yu Liu	
Site: TR1	Time: 2025/08/10
Limit: FCC_Part 15.107_CE_AC Power_Class B	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: Prysm iO	Power: AC 120V/60Hz
Note: Transmit at 2402MHz by LE_1Mbps	

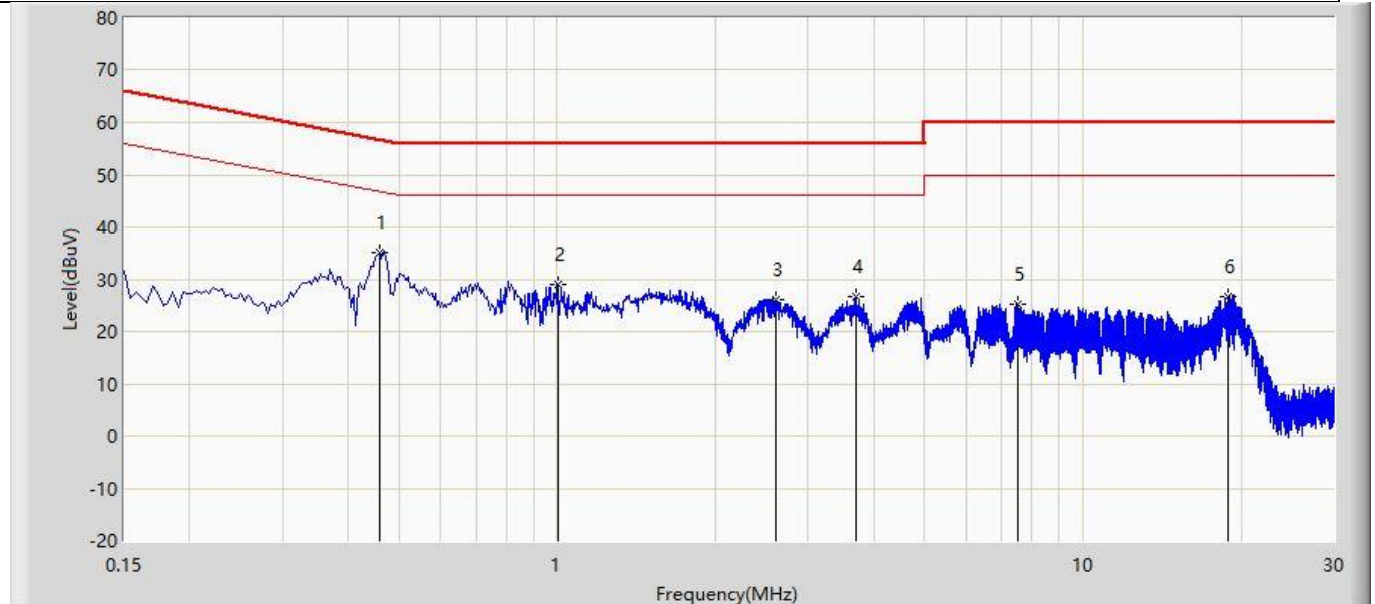


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.458	35.142	25.542	-21.587	56.729	9.600	QP
2		1.006	28.952	19.272	-27.048	56.000	9.680	QP
3		2.606	26.170	16.443	-29.830	56.000	9.727	QP
4		3.694	26.608	16.843	-29.392	56.000	9.765	QP
5		7.498	25.140	15.219	-34.860	60.000	9.921	QP
6		18.918	26.801	16.454	-33.199	60.000	10.347	QP

Profile: 2560874R	Page No.: 3
Engineer: Yu Liu	
Site: TR1	Time: 2025/08/10 - 13:22
Limit: FCC_Part 15.107_CE_AC Power_Class B	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Line
EUT: Prysm iO	Power: AC 120V/60Hz
Note: Transmit at 2402MHz by LE_2Mbps	

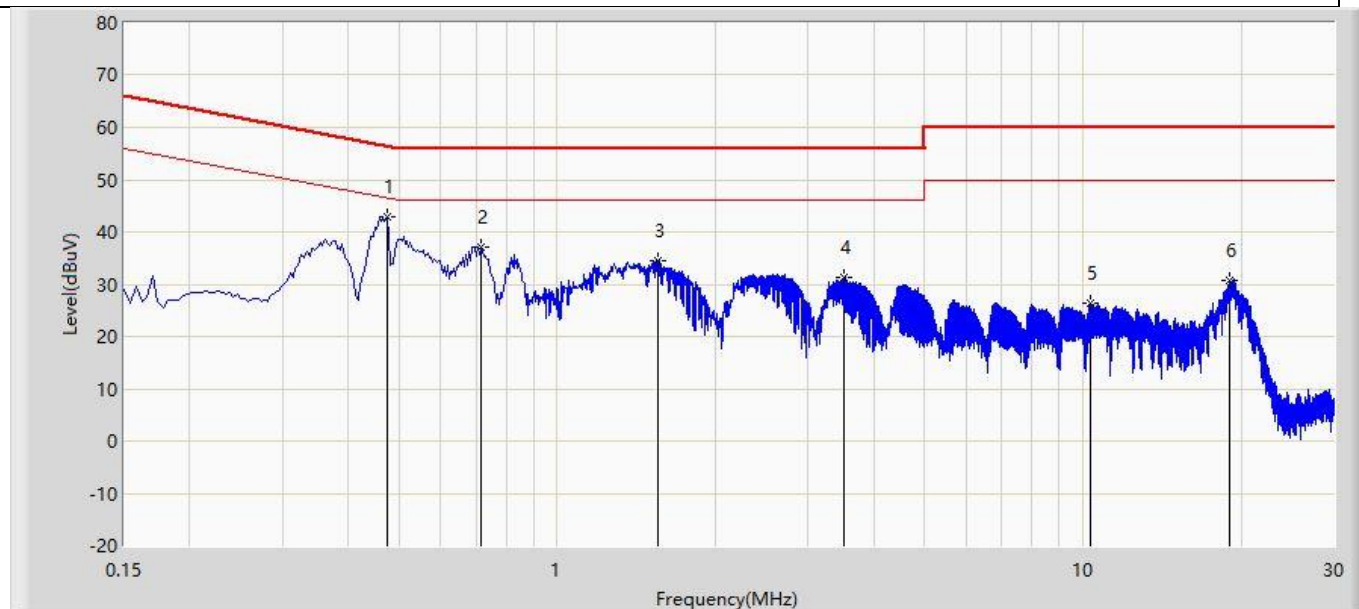

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.474	42.763	33.064	-13.680	56.444	9.699	QP
2		0.714	37.141	27.479	-18.859	56.000	9.662	QP
3		1.554	34.635	24.899	-21.365	56.000	9.736	QP
4		3.518	31.231	21.431	-24.769	56.000	9.800	QP
5		10.358	26.260	16.272	-33.740	60.000	9.988	QP
6		18.998	30.814	20.386	-29.186	60.000	10.428	QP

Profile: 2560874R	Page No.: 4
Engineer: Yu Liu	
Site: TR1	Time: 2025/08/10 - 13:24
Limit: FCC_Part 15.107_CE_AC Power_Class B	Margin: 0
Probe: ENV216_101189(0.009-30MHz)	Polarity: Neutral
EUT: Prysm iO	Power: AC 120V/60Hz
Note: Transmit at 2402MHz by LE_2Mbps	

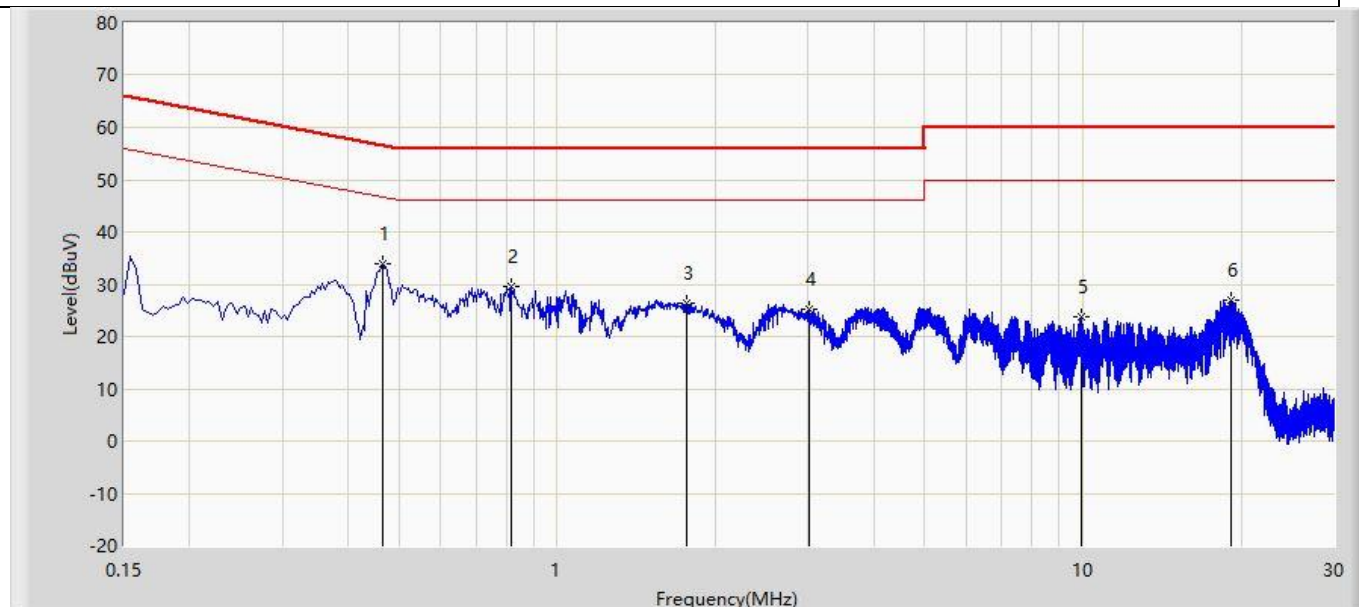

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.466	33.941	24.342	-22.644	56.585	9.599	QP
2		0.818	29.574	19.912	-26.426	56.000	9.662	QP
3		1.758	26.437	16.746	-29.563	56.000	9.691	QP
4		3.018	25.337	15.590	-30.663	56.000	9.747	QP
5		9.894	23.656	13.650	-36.344	60.000	10.006	QP
6		19.162	27.051	16.696	-32.949	60.000	10.355	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

The End