

FCC TEST REPORT

FCC:2AZ3Z-ZSF5272

Product : Electric scooter
Model Name : 5272/A11
Brand : N/A
Report No. : NCT25015190E1-2

Prepared for

Shenzhen Z.S.F Technology Co.,Ltd
Room 101-301, Building HC, Room 101-301, Building HD, beibu Industrial Park,
Yanchuan Community,Yanluo Street, Bao'an District, Shenzhen

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Z.S.F Technology Co.,Ltd
Address : Room 101-301, Building HC, Room 101-301, Building HD, beibu Industrial Park, Yanchuan Community, Yanluo Street, Bao'an District, Shenzhen
Manufacture's name : Shenzhen Z.S.F Technology Co.,Ltd
Address : Room 101-301, Building HC, Room 101-301, Building HD, beibu Industrial Park, Yanchuan Community, Yanluo Street, Bao'an District, Shenzhen
Product name : Electric scooter
Model number : 5272/A11
Standards : FCC CFR47 Part 15 Section 15.225
Test procedure : ANSI C63.10:2020
Date of test : Apr. 09, 2025 to May 29, 2025
Date of Issue : May 29, 2025

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Keven Wu / Engineer

Technical Manager:


Henry Wang, Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 TEST SETUP CONFIGURATION	6
3.3 TEST MODE	7
3.4 TEST SITE	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST	9
4.2 MEASUREMENT UNCERTAINTY	11
4.3 DESCRIPTION OF SUPPORT UNITS	11
5 CONDUCTED EMISSION	12
5.1 E.U.T. OPERATION	12
5.2 EUT SETUP	12
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
5.4 MEASUREMENT PROCEDURE	13
5.5 CONDUCTED EMISSION LIMIT	13
5.6 MEASUREMENT DESCRIPTION	13
5.7 CONDUCTED EMISSION TEST RESULT	13
6 RADIATED SPURIOUS EMISSIONS & RESTRICTED SPURIOUS EMISSION	16
6.1 EUT OPERATION	16
6.2 TEST SETUP	17
6.3 SPECTRUM ANALYZER SETUP	18
6.4 TEST PROCEDURE	19
6.5 SUMMARY OF TEST RESULTS	20
7 20DB&99% BANDWIDTH MEASUREMENT	24
7.1 TEST PROCEDURE	24
7.2 TEST RESULT	24

8 FREQUENCY STABILITY	25
8.1 TEST PROCEDURE	25
8.2 TEST RESULT	25
9 ANTENNA APPLICATION	27
9.1 ANTENNA REQUIREMENT	27
9.2 RESULT	27
10 TEST SETUP & EUT PHOTOS	28

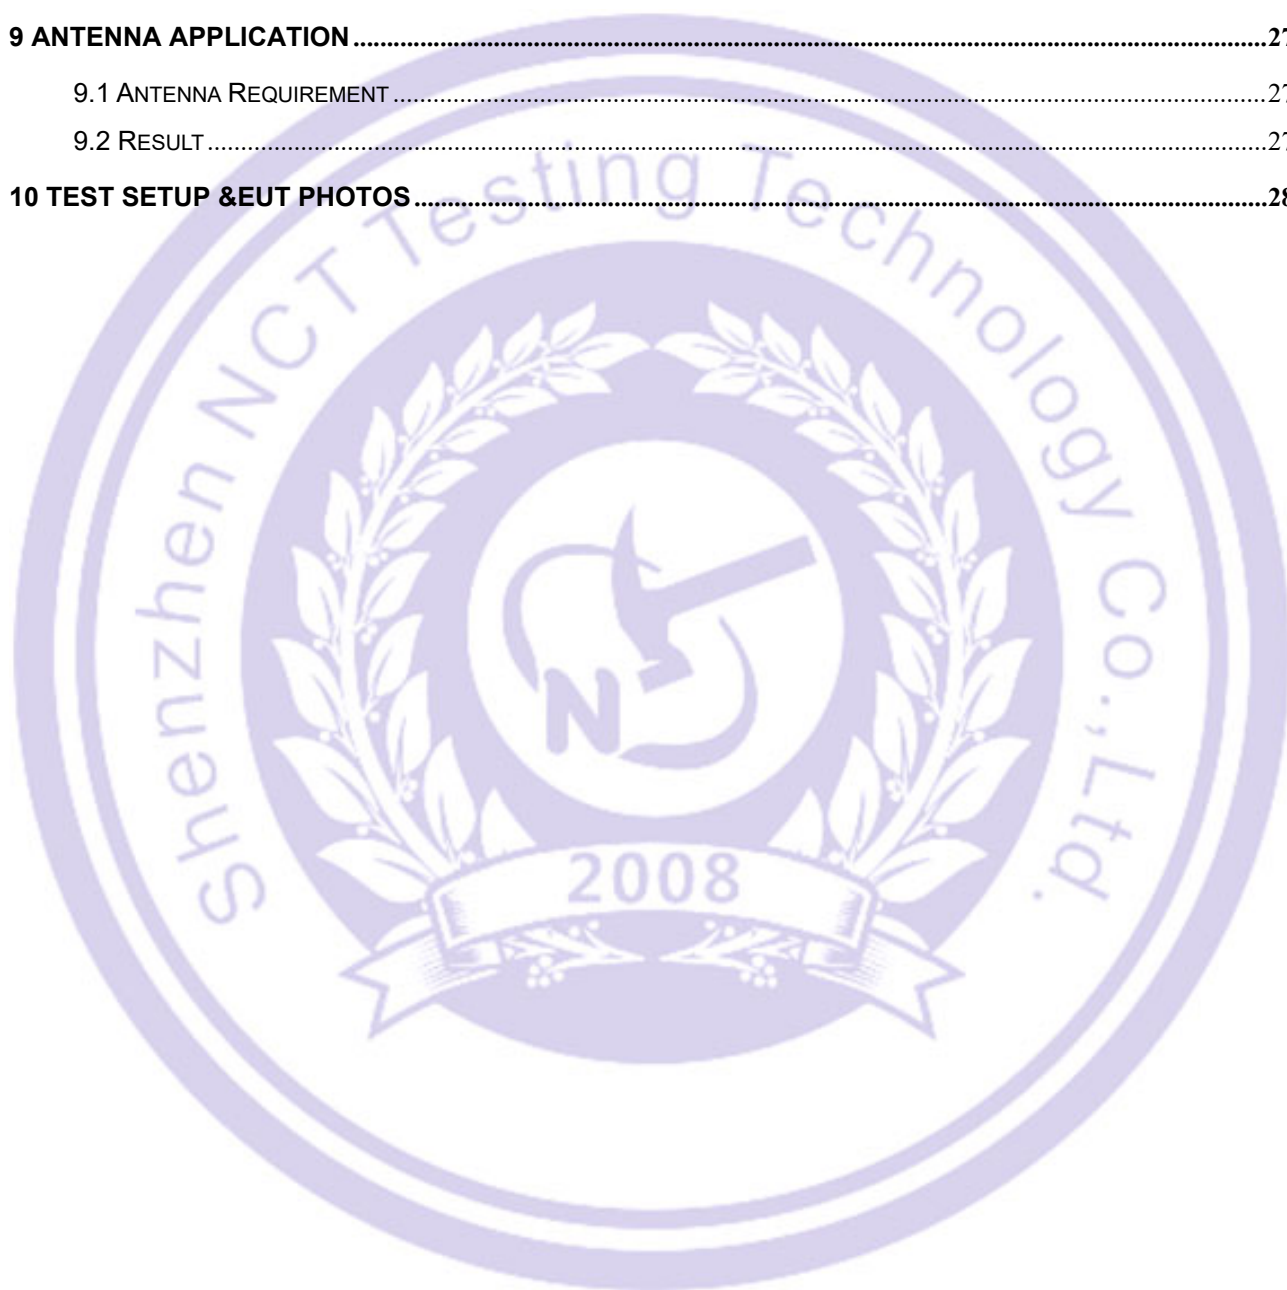

2 Test Summary

FCC CFR47 Part 15 Section 15.225			
Standard Section	Test Item	Result	Remark
15.203	Antenna requirement	PASS	
15.207	Conducted Emission	PASS	
15.225(d) 15.209	Radiated Spurious Emission	PASS	
15.215	Bandwidth	PASS	
15.225(d) 15.209	Restricted Spurious Emission	PASS	
15.225(e)	Frequency Stability Tolerance	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Electric scooter
Model Name	:	5272/A11
Sample ID	:	25015190-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	N/A
Model Different.:	:	N/A
Operation Frequency	:	13.56 MHz
Number of Channel	:	1
Type of Modulation	:	ASK
Antenna installation	:	Coil Antenna
Antenna Gain	:	0 dBi
Power supply	:	DC 51.8V from Battery or AC 120V/60Hz
Hardware Version	:	N/A
Software Version	:	N/A
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Test Setup Configuration

Conducted Emission


AC Line




Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



3.3 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

3.4 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Cable	RG223-1500MM	NA	RG	2024/6/17	2025/6/16

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/17	2025/6/16
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2025/3/08	2026/3/07
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2025/3/10	2026/3/09
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2024/6/17	2025/6/16
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2024/6/17	2025/6/16
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/17	2025/6/16
Pream plifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2025/3/10	2026/3/09
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2024/6/17	2025/6/16
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2024/6/17	2025/6/16

Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2024/6/17	2025/6/16
MXG Signal Analyzer	N9020A	101178	RS	2024/6/17	2025/6/16
MXG Vector Signal Generator	N5182A	MY50510202	Agilent	2024/6/17	2025/6/16
MXG Analog Signal Generator	N5181A	00374	SCHWARZBECK	2024/6/17	2025/6/16
Power Sensor	TR1029-2	00473	SCHNARZBECK	2024/6/17	2025/6/16
RF Swith	TR1029-1	02622	SCHNARZBECK	2024/6/17	2025/6/16
Cable	DA800- 4000MM	NA	DA	2024/6/17	2025/6/16
Cable	DA800- 11000MM	NA	DA	2022/5/31	2025/5/30

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHZ~30MHz)	±3.82dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Electric scooter	N/A	5272/A11	N/A	EUT
E-2	LITHIUM Battery Charger	N/A	SPC-180WW-588030	N/A	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2020
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :

Temperature	: 25 °C
Humidity	: 54% RH
Atmospheric Pressure	: 101kPa


5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2020.

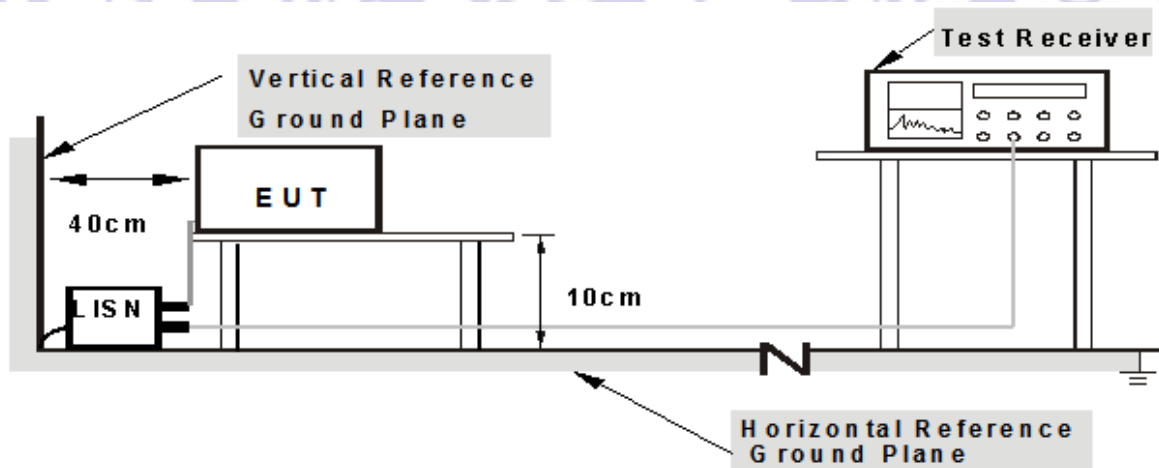

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 10 cm from EUT and at least 10 from other units and other metal planes

5.3 Test SET-UP (Block Diagram of Configuration)

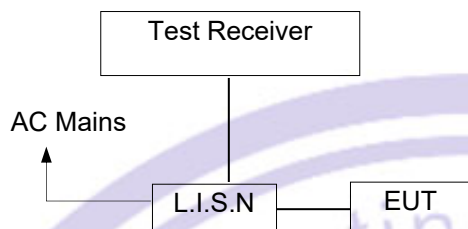

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode is recorded in the following pages.

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

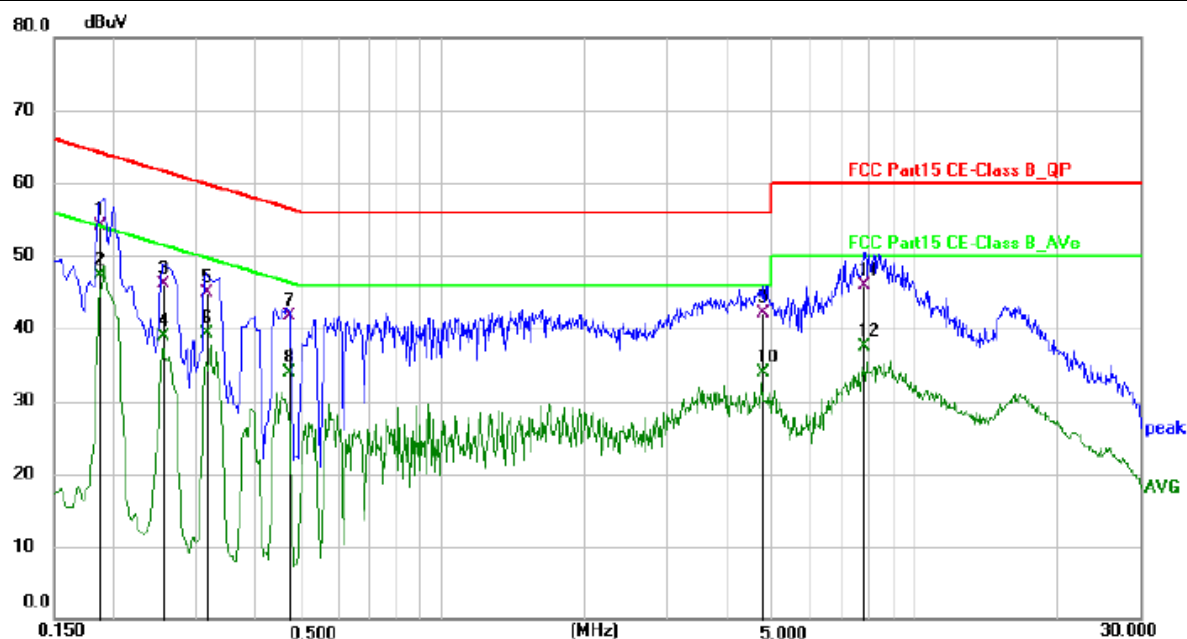

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1875	44.43	9.68	54.11	64.15	-10.04	QP
2 *	0.1875	37.56	9.68	47.24	54.15	-6.91	AVG
3	0.2552	36.46	9.67	46.13	61.59	-15.46	QP
4	0.2552	29.26	9.67	38.93	51.59	-12.66	AVG
5	0.3171	35.20	9.67	44.87	59.78	-14.91	QP
6	0.3171	29.68	9.67	39.35	49.78	-10.43	AVG
7	0.4715	31.97	9.66	41.63	56.49	-14.86	QP
8	0.4715	24.32	9.66	33.98	46.49	-12.51	AVG
9	4.7683	32.32	9.72	42.04	56.00	-13.96	QP
10	4.7683	24.18	9.72	33.90	46.00	-12.10	AVG
11	7.8265	36.16	9.76	45.92	60.00	-14.08	QP
12	7.8265	27.79	9.76	37.55	50.00	-12.45	AVG

Temperature:	25 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

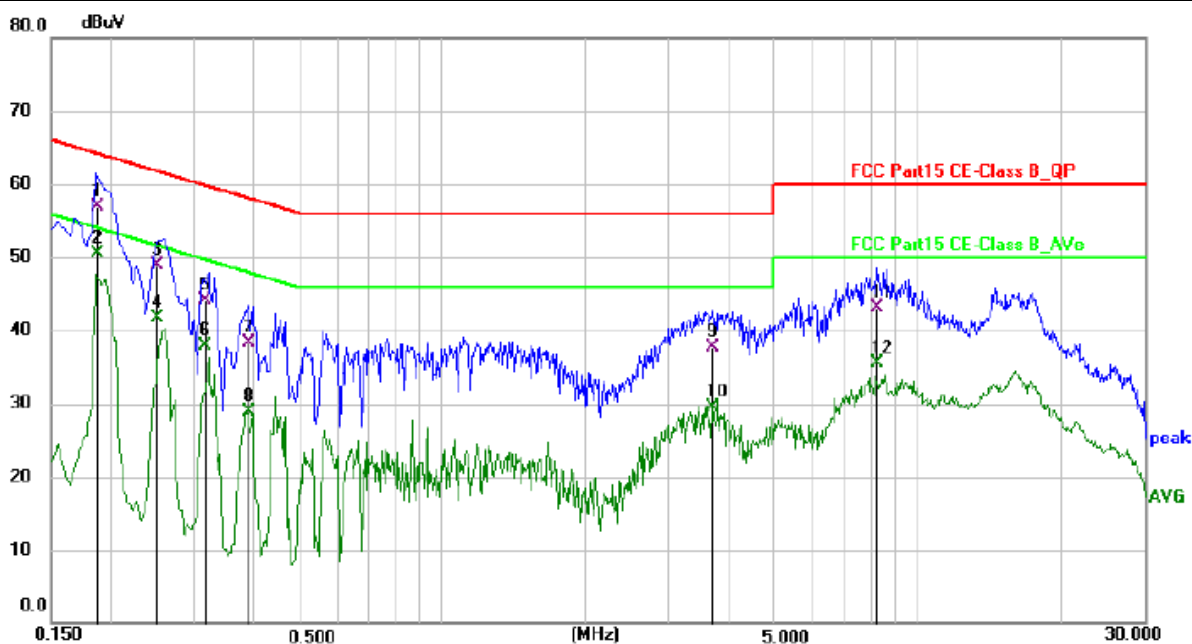

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1874	47.25	9.68	56.93	64.15	-7.22	QP
2 *	0.1874	40.79	9.68	50.47	54.15	-3.68	AVG
3	0.2513	39.25	9.66	48.91	61.71	-12.80	QP
4	0.2513	32.03	9.66	41.69	51.71	-10.02	AVG
5	0.3181	34.52	9.66	44.18	59.76	-15.58	QP
6	0.3181	28.18	9.66	37.84	49.76	-11.92	AVG
7	0.3928	28.55	9.67	38.22	58.00	-19.78	QP
8	0.3928	19.33	9.67	29.00	48.00	-19.00	AVG
9	3.6991	28.01	9.72	37.73	56.00	-18.27	QP
10	3.6991	19.77	9.72	29.49	46.00	-16.51	AVG
11	8.2276	33.37	9.77	43.14	60.00	-16.86	QP
12	8.2276	25.74	9.77	35.51	50.00	-14.49	AVG

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

6 Radiated Spurious Emissions & Restricted Spurious Emission

Test Requirement : FCC CFR 47 Part 15 Section 15.225(d)&15.209
Test Method : ANSI C63.10:2020
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

According to RSS-210 Annex B.6

Devices shall comply with the following requirements:

the field strength of any emission shall not exceed the following limits:

15.848 mV/m (84 dBuV/m) at 30 m, within the band 13.553-13.567 MHz

334 μ V/m (50.5 dBuV/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz

106 μ V/m (40.5 dBuV/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz

RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz

6.1 EUT Operation


Operating Environment :

Temperature: : 25°C
Humidity: : 54% RH
Atmospheric Pressure: : 101kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

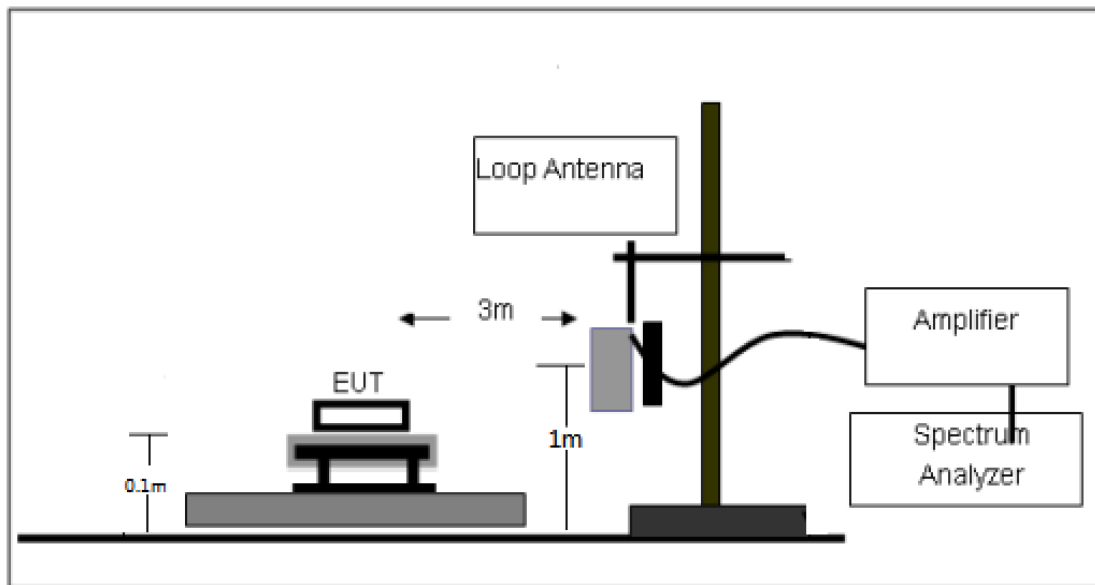

The test setup for emission measurement from 30 MHz to 1 GHz.

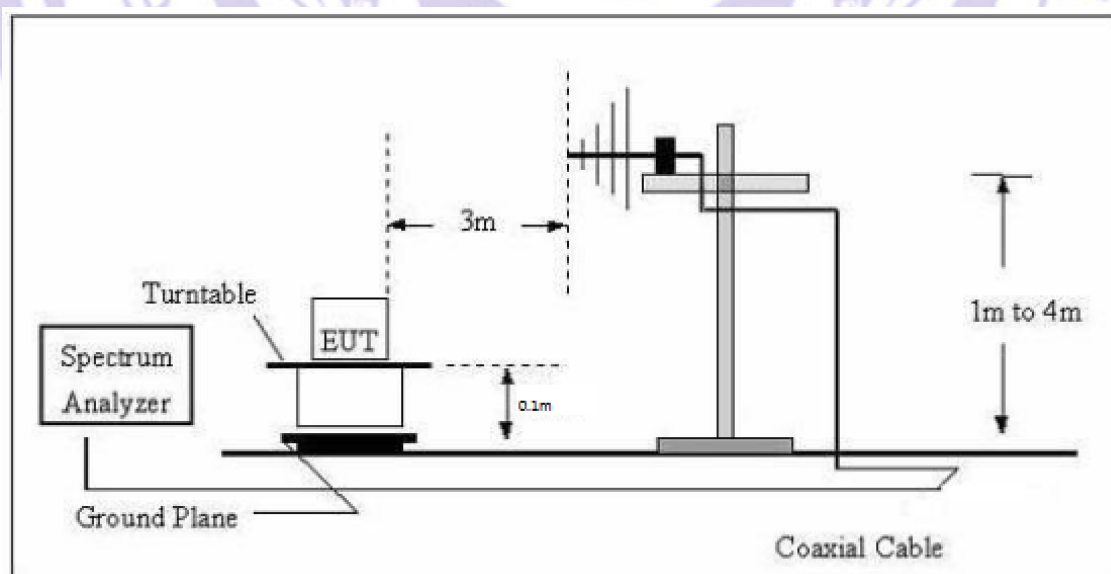

The test setup for emission measurement above 1 GHz

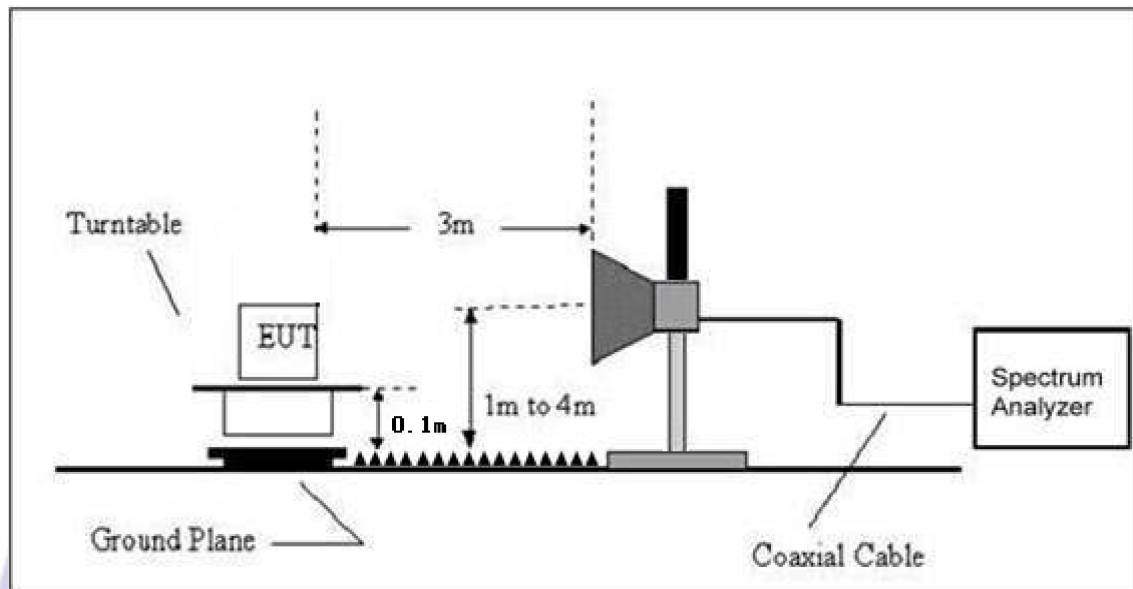

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.1m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 0.1m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Ant Pol.:Coplanar

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.101	73.57	20.94	52.63	107.52	-54.89	QP
0.151	71.35	20.86	50.49	104.8	-54.31	QP
1.818	43.52	20.73	22.79	69.54	-46.75	QP
4.521	36.03	20.58	15.45	69.54	-54.09	QP
6.637	33.92	20.07	13.85	69.54	-55.69	QP
18.169	34.69	19.11	15.58	69.54	-53.96	QP
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Ant Pol.:Coaxial


Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
0.635	21.56	20.94	42.5	71.55	-29.05	QP
1.438	15.86	20.86	36.72	64.33	-27.61	QP
1.618	16.96	20.73	37.69	63.42	-25.73	QP
3.235	16.03	20.58	36.61	69.54	-32.93	QP
6.637	17.96	20.07	38.03	69.54	-31.51	QP
19.143	18.69	19.11	37.8	69.54	-31.74	QP
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Note:

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBμV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz


Test plot for Horizontal

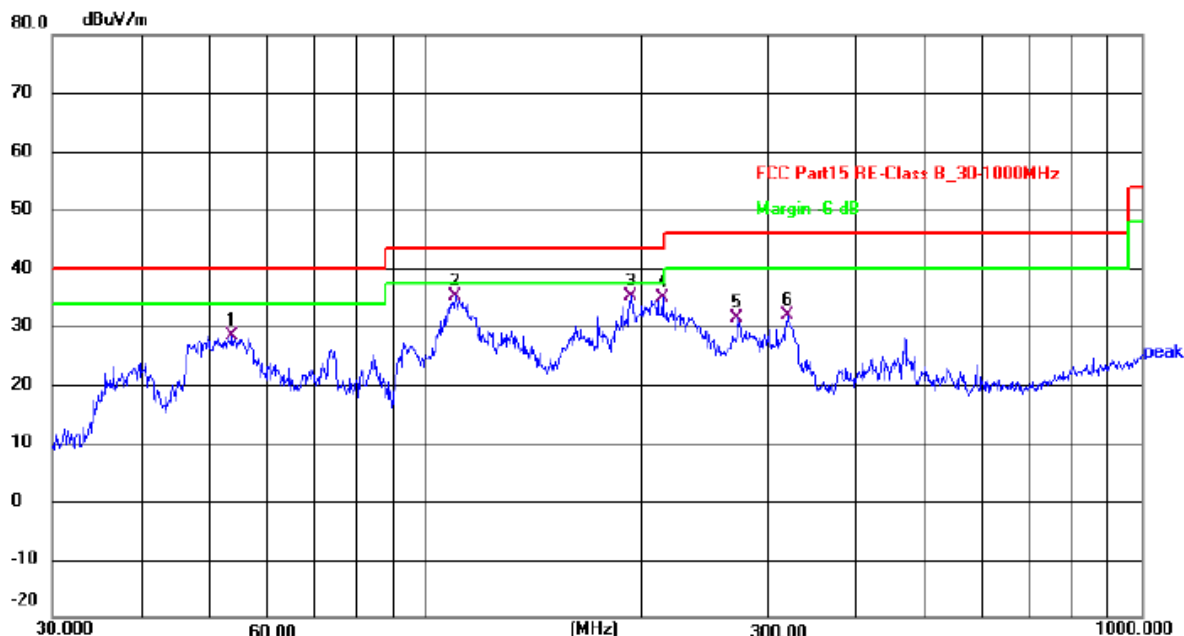

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.5052	42.98	-14.51	28.47	40.00	-11.53	QP
2	109.7960	50.78	-15.68	35.10	43.50	-8.40	QP
3	193.0944	51.98	-16.74	35.24	43.50	-8.26	QP
4	213.7632	50.69	-15.88	34.81	43.50	-8.69	QP
5	272.2776	45.79	-14.29	31.50	46.00	-14.50	QP
6	319.9370	45.30	-13.37	31.93	46.00	-14.07	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor


Test plot for Vertical

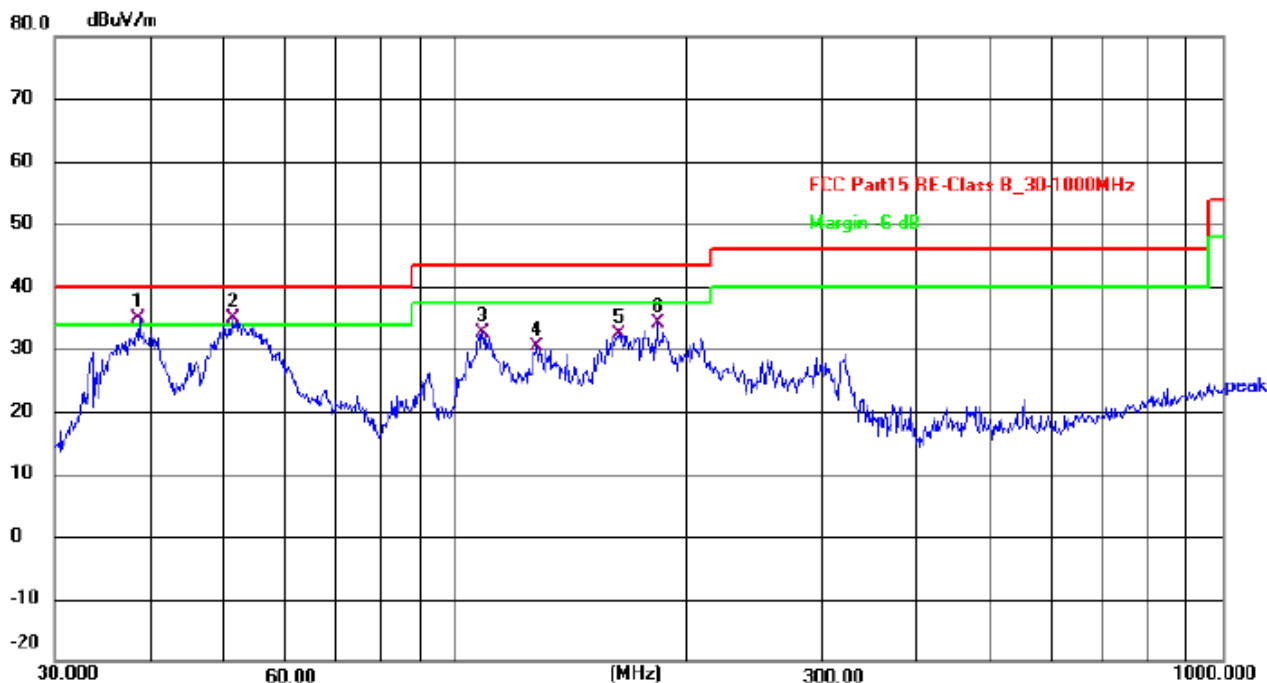

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	38.6160	50.38	-15.38	35.00	40.00	-5.00	QP
2	51.3004	49.26	-14.32	34.94	40.00	-5.06	QP
3	108.2664	48.23	-15.71	32.52	43.50	-10.98	QP
4	127.6645	49.05	-18.58	30.47	43.50	-13.03	QP
5	163.1817	51.07	-18.63	32.44	43.50	-11.06	QP
6	183.2005	51.40	-17.28	34.12	43.50	-9.38	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor

Restricted Spurious Emission

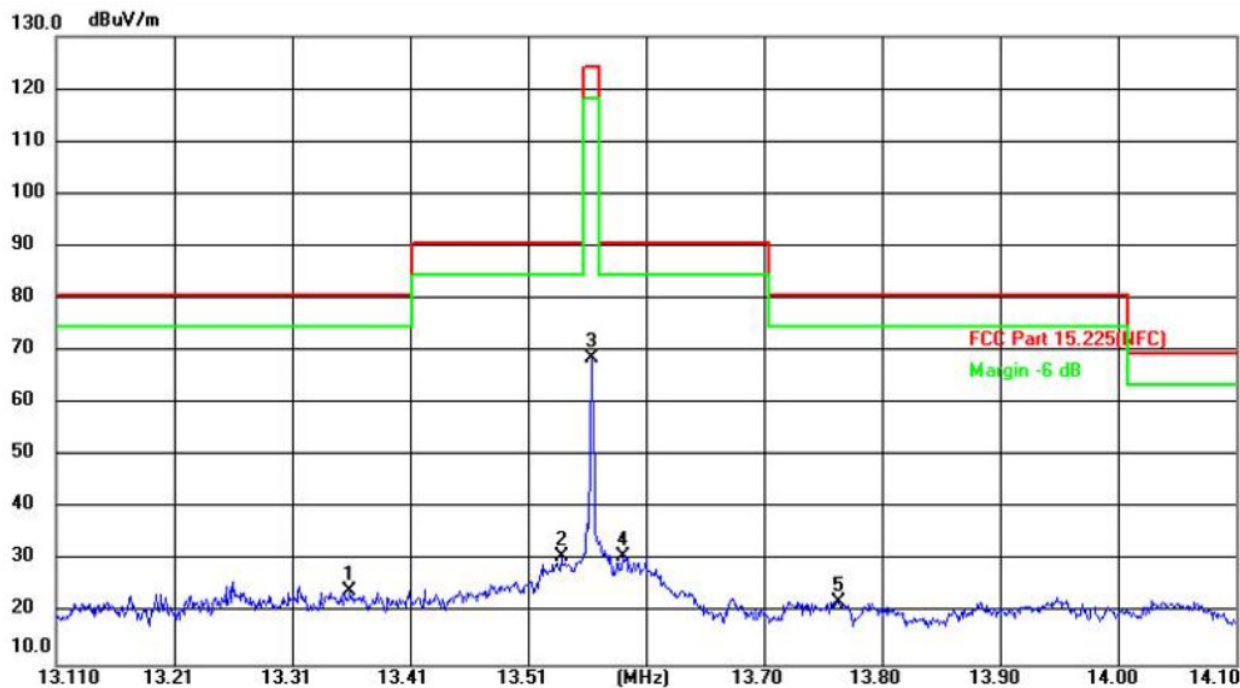

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Deterctor	P/F
1	13.3571	52.65	-28.31	24.34	80.5	-56.16	peak	P
2	13.5345	59.29	-28.33	30.96	90.5	-59.54	peak	P
3	13.5600	97.14	-28.33	68.81	124.00	-55.19	peak	P
4	13.5855	59.19	-28.34	30.85	90.5	-59.65	peak	P
5	13.7666	50.68	-28.36	22.32	80.5	-58.18	peak	P

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Margin = Measurement Level - Limit

7 20dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.215

Test Method : ANSI C63.10:2020


Test Limit /

7.1 Test Procedure

1. Set RBW = 1% to 5% of the OBW
2. Set the video bandwidth (VBW) = 3*RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.

7.2 Test Result

Modulation	Frequency (MHz)	20dB bandwidth (Hz)	99%dB bandwidth (Hz)	Result
ASK	13.56	192	734	Pass

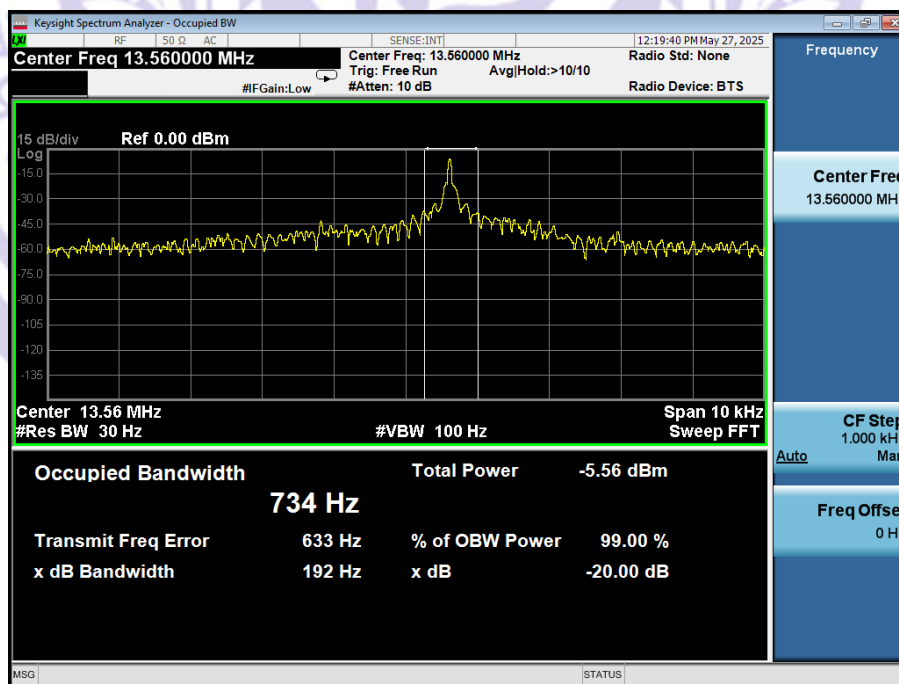

8 FREQUENCY STABILITY

Test Requirement : FCC CFR47 Part 15 Section 15.225(e)
Test Method : ANSI C63.10:2020
Test Limit : the carrier frequency stability shall not exceed ± 100 ppm

8.1 Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency.

Turn EUT off and set the chamber temperature to -20°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.

Repeat step measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

Reduce the input voltage to specified extreme voltage variation ($\pm 15\%$) or endpoint, record the maximum frequency change.

8.2 Test Result

Reference Frequency: 13.56MHz					
Voltage (V)	Temperature (°C)	Frequency (KHz)	Frequency Deviation (Hz)	Deviation (ppm)	Limit (ppm)
120	+20(Ref)	13.560105	0.000105	7.74	±100
	-20	13.560064	0.000064	4.72	±100
	-10	13.560188	0.000188	13.86	±100
	0	13.560132	0.000132	9.73	±100
	+10	13.560106	0.000106	7.82	±100
	+20	13.560092	0.000092	6.78	±100
	+25	13.560144	0.000144	10.62	±100
	+30	13.560152	0.000152	11.21	±100
	+40	13.560179	0.000179	13.20	±100
	+50	13.560064	0.000064	4.72	±100
132	+20	13.560033	0.000033	2.43	±100
108	+20	13.560109	0.000109	8.04	±100

9 Antenna Application

9.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Result

The antenna is coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

10 Test Setup &EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****

