

Appendix B

Detailed Test Results

BT for Head

Zigbee for Head

Test Laboratory: SGS-SAR Lab

Bluetooth 2DH5 0CH Front side 0mm

DUT: Shockwave MESH; Type: Shockwave MESH;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2402$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 38.475$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.32, 7.85, 7.73); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.11 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.33 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.289 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 43.8%

Maximum value of SAR (measured) = 1.42 W/kg

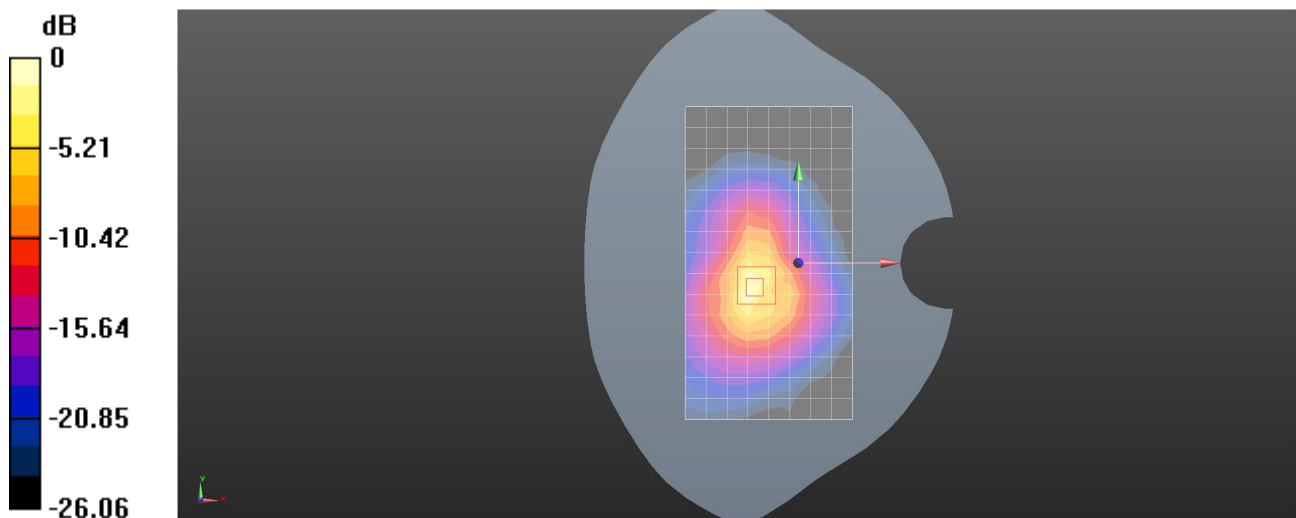

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Laboratory: SGS-SAR Lab

Bluetooth 3DH5 0CH Front side 0mm

DUT: Shockwave MESH; Type: Shockwave MESH;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2402$ MHz; $\sigma = 1.753$ S/m; $\epsilon_r = 38.475$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.32, 7.85, 7.73); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.589 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.190 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.803 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.110 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 41.6%

Maximum value of SAR (measured) = 0.633 W/kg

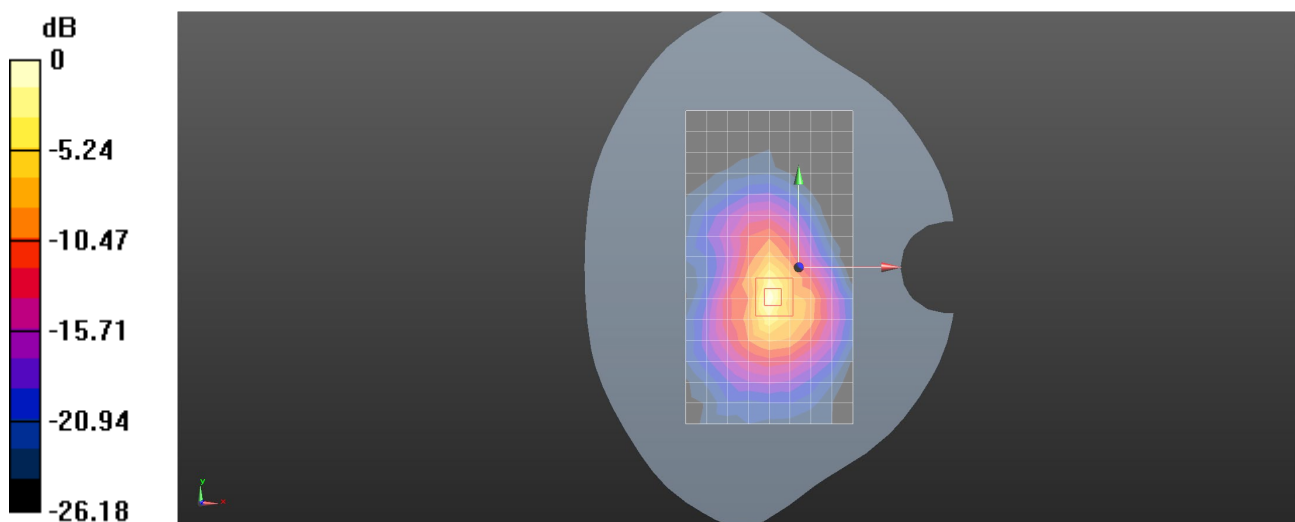

0 dB = 0.633 W/kg = -1.99 dBW/kg

Test Laboratory: SGS-SAR Lab

Zigbee 0CH Front side 0mm

DUT: Shockwave MESH; Type: Shockwave MESH;

Communication System: UID 0, Bluetooth (0); Frequency: 2405 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2405$ MHz; $\sigma = 1.756$ S/m; $\epsilon_r = 38.469$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.32, 7.85, 7.73); Calibrated: 2024/7/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2024/8/15
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.165 W/kg

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.559 V/m; Power Drift = -0.02 dB



Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 41.9%

Maximum value of SAR (measured) = 0.322 W/kg

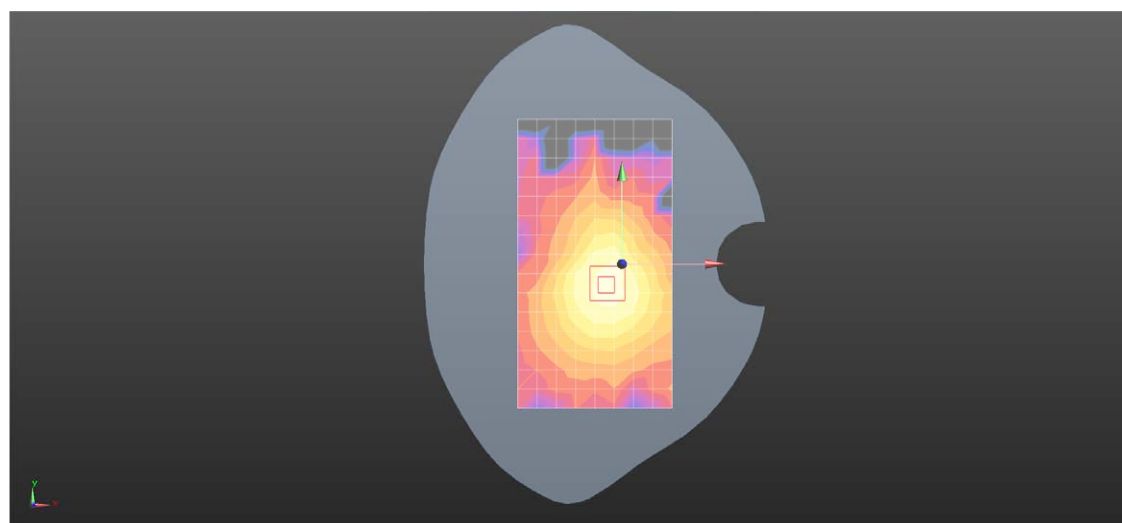

0 dB = 0.165 W/kg = -7.82 dBW/kg