



TEST REPORT

Applicant Name : Chillax Care Limited
Address : RM118, FLAT A, 8/F, WILLIAM INDUSTRIAL BUILDING, 23-25
NG FONG ST, SAN PO KONG, KOWLOON, HONG KONG
Report Number : SZNS4211222-66341E-RFB
FCC ID: 2AZ8M-DM640BU
IC 27169-DM640BU

Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

Sample Description

Product Type: 4.3" Smart HD Baby Monitor Baby Unit
Model No.: DM640BU
Multiple Model(s) No.: DM640-2, DM640-3, DM640-4, DM640 (please attach the
DOS showing the specific differences)
Trade Mark: ChillaxBaby
Date Received: 2021/12/22
Report Date: 2022/04/22

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Ding

Black Ding
EMC Engineer

Approved By:

Robert Li

Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RESULT	12
RSS-102 § 4 –EXPOSURE LIMITS.....	14
APPLICABLE STANDARD	14
FCC §15.203 & RSS-GEN §6.8– ANTENNA REQUIREMENT	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (A) & RSS-GEN §8.8– AC LINE CONDUCTED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.205, §15.209 & §15.247(D) & RSS-247§ 5.5 – RADIATED EMISSIONS.....	26
APPLICABLE STANDARD	26
EUT SETUP	26
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	27
TEST PROCEDURE	27
CORRECTED FACTOR & MARGIN CALCULATION	28
TEST DATA	28
FCC §15.247(A) (1) & RSS-247 § 5.1 (B)-CHANNEL SEPARATION TEST	39
APPLICABLE STANDARD	39
TEST PROCEDURE	39
TEST DATA	39

FCC §15.247(A) (1) & RSS-GEN § 6.7 & RSS-247 § 5.1 (A)–99% OCCUPIED BANDWIDTH & 20 DB EMISSION BANDWIDTH.....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST DATA	42
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D)-QUANTITY OF HOPPING CHANNEL TEST.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(A) (1) (III) & RSS-247 § 5.1 (D) - TIME OF OCCUPANCY (DWELL TIME)	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(B) (1) & RSS-247§ 5.1(B) &§ 5.4(B) - PEAK OUTPUT POWER MEASUREMENT.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	49
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST DATA	52

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

HVIN	DM640BU
FVIN	DM640BU
Frequency Range	2402-2480MHz
Maximum conducted Peak output power	9.68dBm
Modulation Technique	GFSK
Antenna Specification*	0 dBi(It is provided by the applicant)
Voltage Range	DC 5.0V from adapter
Sample serial number	SZNS4211222-66341E-RF-S2 for CE&RE SZNS4211222-66341E-RF-S1 for RF conducted (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: YWK-AD050100-U Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V, 1000mA
Adapter 2 information	Model: BQ05A-0501000-U Input: AC 100-240V, 50/60Hz, Max.300mA Output: DC 5.0V, 1000mA
Adapter 3 information	Model: PS05Q050K1000UD Input: AC 100-240V, 50/60Hz, 0.25A Max Output: DC 5.0V, 1.0A 5.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and RSS-247, Issue 2, February 2017, RSS-GEN Issue 5, Feb. 2021 Amendment 2 of the Innovation, Science and Economic Development Canada rules.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	11	2422	21	2442	31	2462
2	2404	12	2424	22	2444	32	2464
3	2406	13	2426	23	2446	33	2466
4	2408	14	2428	24	2448	34	2468
5	2410	15	2430	25	2450	35	2470
6	2412	16	2432	26	2452	36	2472
7	2414	17	2434	27	2454	37	2474
8	2416	18	2436	28	2456	38	2476
9	2418	19	2438	29	2458	39	2478
10	2420	20	2440	30	2460	40	2480

EUT was test in channel 1, 20, 40.

EUT Exercise Software

“SecureCRT*” software was use and power level is default*. The software and power level was provided by applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
aigo	SD Card	U312	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-Detachable AC cable	1.2	LISN	Receptacle
Unshielded Un-Detachable DC cable	1.5	Adapter	EUT

Block Diagram of Test Setup

For conducted emission:

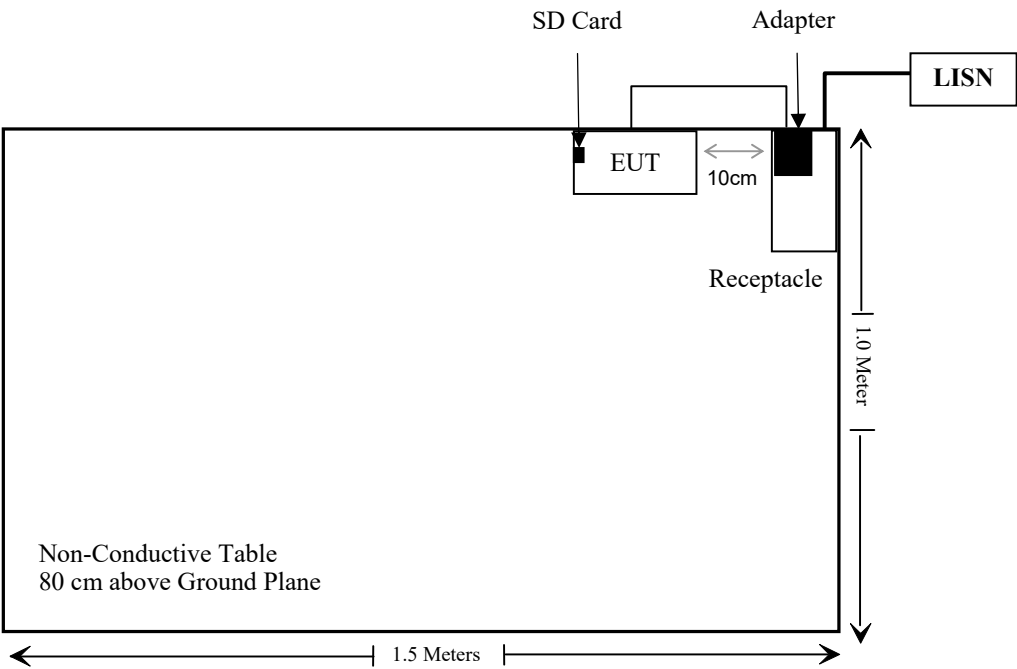

For radiated emission:

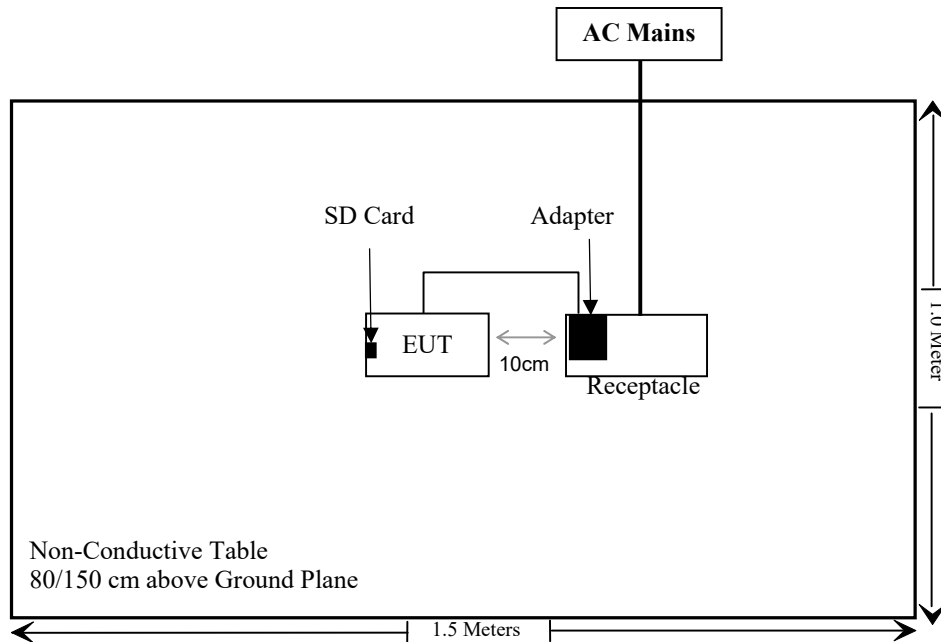

SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description of Test	Result
§15.247 (i), §2.1091	RSS-102 § 4	Maximum Permissible Exposure(MPE) & EXPOSURE LIMITS	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207(a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	RSS-247 § 5.5	Radiated Emissions	Compliant
§15.247(a)(1)	RSS- Gen§6.7, RSS-247 § 5.1 (a)	99% Occupied Bandwidth & 20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	RSS-247 § 5.1 (b)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	RSS-247 § 5.1 (d)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	RSS-247 § 5.1(b) & § 5.4(b)	Peak Output Power Measurement	Compliant
§15.247(d)	RSS-247 § 5.5	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2021/12/13	2022/12/12
HP	6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2021/12/14	2022/12/13
Unknown	RF Cable	Unknown	Unknown	Each time	/

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune Up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
FHSS	2402-2480	0	1	10.0	10.00	20	0.002	1.0
Wi-Fi	2412-2472	0	1	19.5	89.13	20	0.018	1.0

Note: 1. the tune up conducted power was declared by the applicant
 2. the FHSS can transmit at the same time with the Wi-Fi function.

Simultaneous transmitting consideration:

The ratio= $MPE_{FHSS}/limit + MPE_{Wi-Fi}/limit = 0.002/1 + 0.018/1 = 0.020 < 1.0$

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

RSS-102 § 4 –EXPOSURE LIMITS

Applicable Standard

According to RSS-102 §4:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ f ^{0.25}	0.1540/ f ^{0.25}	8.944/ f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	0.02619 f ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁵ f	616000/f ^{1.2}

Note: f is frequency in MHz.

* Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Mode	Frequency (MHz)	Antenna Gain		Tune Up Conducted Power		Evaluation Distance (m)	Power Density (W/m ²)	MPE Limit (W/m ²)
		(dBi)	(numeric)	(dBm)	(W)			
FHSS	2402-2480	0	1	10.0	0.010	0.2	0.020	5.35
Wi-Fi	2412-2472	0	1	19.5	0.089	0.2	0.177	5.37

Note: 1. the tune up conducted power was declared by the applicant
 2. the FHSS can transmit at the same time with the Wi-Fi function.

Simultaneous transmitting consideration:

The ratio= $MPE_{FHSS}/limit + MPE_{Wi-Fi}/limit = 0.020/5.35 + 0.177/5.37 = 0.037 < 1.0$

To maintain compliance with the ISED's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 & RSS-GEN §6.8– ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device. Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has one internal antenna arrangements which were permanently attached and the gain is 0dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Type	Antenna Gain	Impedance
Monopole	0 dBi	50 Ω

Result: Compliance.

FCC §15.207 (a) & RSS-GEN §8.8– AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

EUT Setup

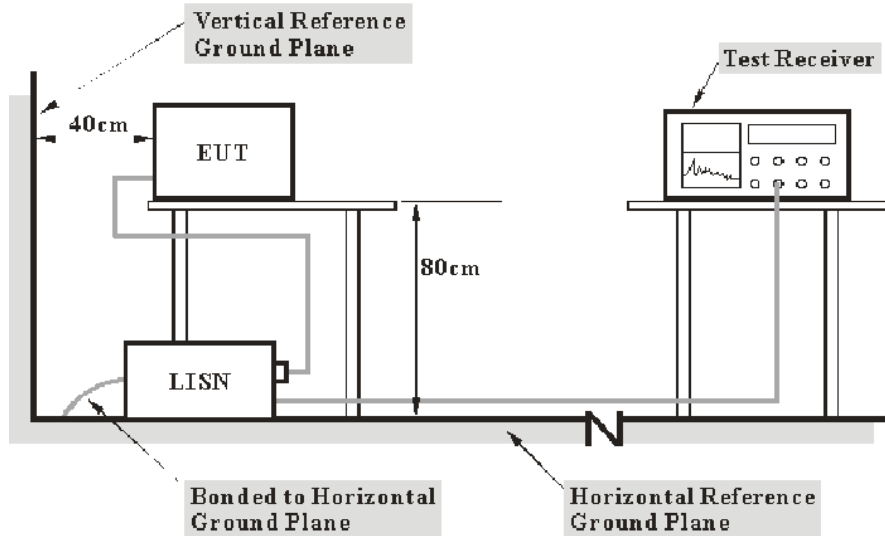

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207 and RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{reading level} + \text{Transd Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	23 °C
Relative Humidity:	53 %
ATM Pressure:	101.0 kPa

The testing was performed by Caro Hu on 2022-03-09.


EUT operation mode: Transmitting (worst case is low channel)

For adapter: YWK-AD050100-U

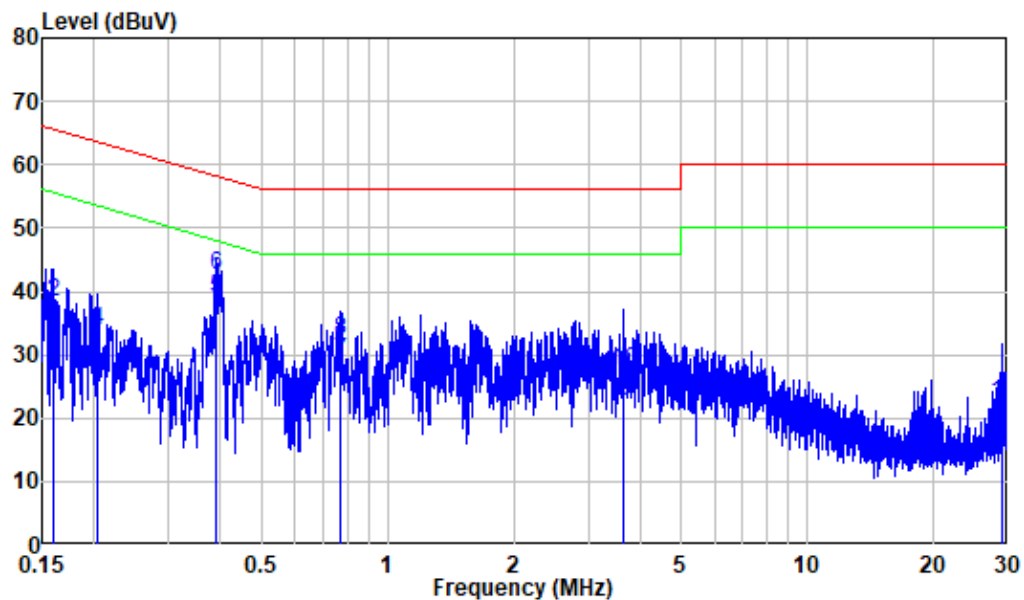AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Mode : Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : YWK-AD050100-U


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	9.80	18.25	28.05	55.49	-27.44	Average
2	0.160	9.80	28.51	38.31	65.49	-27.18	QP
3	0.203	9.80	16.31	26.11	53.49	-27.38	Average
4	0.203	9.80	24.05	33.85	63.49	-29.64	QP
5	0.391	9.80	29.29	39.09	48.05	-8.96	Average
6	0.391	9.80	32.78	42.58	58.05	-15.47	QP
7	0.775	9.81	19.02	28.83	46.00	-17.17	Average
8	0.775	9.81	22.40	32.21	56.00	-23.79	QP
9	3.639	9.84	12.88	22.72	46.00	-23.28	Average
10	3.639	9.84	17.58	27.42	56.00	-28.58	QP
11	29.177	10.09	8.30	18.39	50.00	-31.61	Average
12	29.177	10.09	12.32	22.41	60.00	-37.59	QP

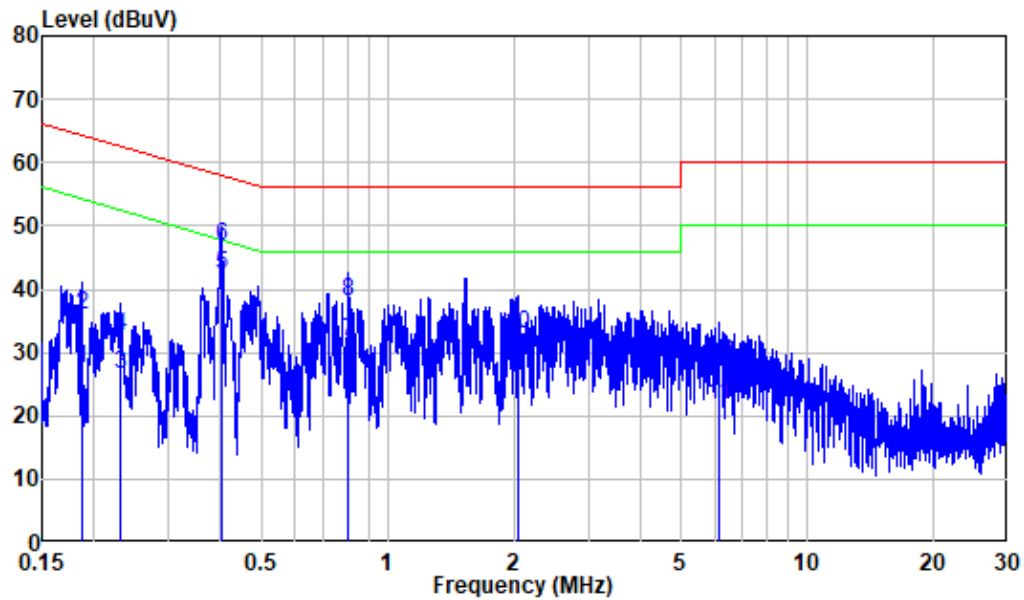AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : YWK-AD050100-U


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.186	9.80	17.74	27.54	54.20	-26.66	Average
2	0.186	9.80	26.24	36.04	64.20	-28.16	QP
3	0.231	9.80	16.77	26.57	52.42	-25.85	Average
4	0.231	9.80	22.68	32.48	62.42	-29.94	QP
5	0.402	9.80	32.53	42.33	47.82	-5.49	Average
6	0.402	9.80	37.06	46.86	57.82	-10.96	QP
7	0.805	9.81	21.95	31.76	46.00	-14.24	Average
8	0.805	9.81	28.11	37.92	56.00	-18.08	QP
9	2.035	9.82	17.69	27.51	46.00	-18.49	Average
10	2.035	9.82	23.18	33.00	56.00	-23.00	QP
11	6.153	9.94	11.68	21.62	50.00	-28.38	Average
12	6.153	9.94	18.32	28.26	60.00	-31.74	QP

For adapter: BQ05A-0501000-U

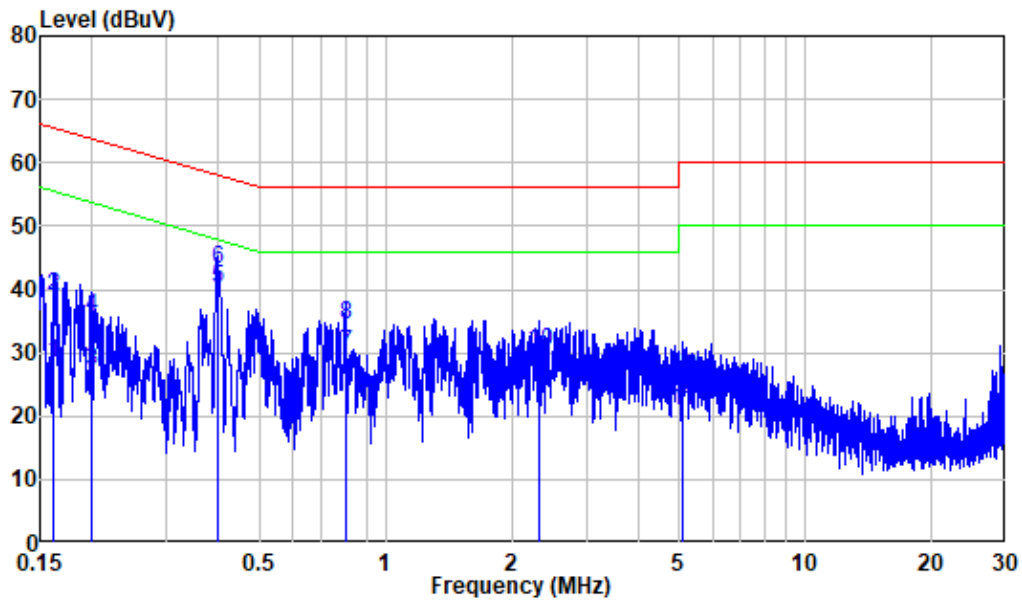AC 120V/60 Hz, Line

Site : Shielding Room
 Condition: Line
 Mode : | Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : BQ05A-0501000-U

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.80	18.47	28.27	55.36	-27.09	Average
2	0.162	9.80	29.03	38.83	65.36	-26.53	QP
3	0.200	9.80	17.43	27.23	53.61	-26.38	Average
4	0.200	9.80	25.92	35.72	63.61	-27.89	QP
5	0.397	9.80	30.21	40.01	47.92	-7.91	Average
6	0.397	9.80	33.35	43.15	57.92	-14.77	QP
7	0.803	9.81	20.05	29.86	46.00	-16.14	Average
8	0.803	9.81	24.71	34.52	56.00	-21.48	QP
9	2.314	9.82	16.55	26.37	46.00	-19.63	Average
10	2.314	9.82	20.26	30.08	56.00	-25.92	QP
11	5.078	9.85	10.92	20.77	50.00	-29.23	Average
12	5.078	9.85	16.25	26.10	60.00	-33.90	QP

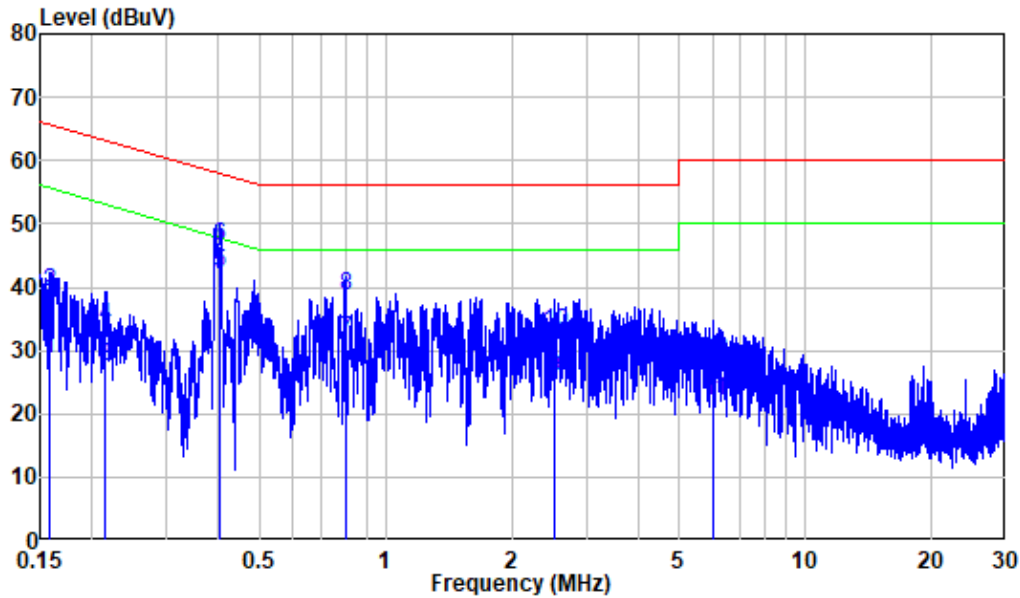
AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : BQ05A-0501000-U

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.159	9.80	18.74	28.54	55.52	-26.98	Average
2	0.159	9.80	29.49	39.29	65.52	-26.23	QP
3	0.215	9.80	17.71	27.51	53.00	-25.49	Average
4	0.215	9.80	23.94	33.74	63.00	-29.26	QP
5	0.403	9.80	32.37	42.17	47.80	-5.63	Average
6	0.403	9.80	36.71	46.51	57.80	-11.29	QP
7	0.801	9.81	21.91	31.72	46.00	-14.28	Average
8	0.801	9.81	28.79	38.60	56.00	-17.40	QP
9	2.517	9.83	15.94	25.77	46.00	-20.23	Average
10	2.517	9.83	22.97	32.80	56.00	-23.20	QP
11	6.056	9.93	11.99	21.92	50.00	-28.08	Average
12	6.056	9.93	18.39	28.32	60.00	-31.68	QP


For adapter: PS05Q050K1000UD

AC 120V/60 Hz, Line

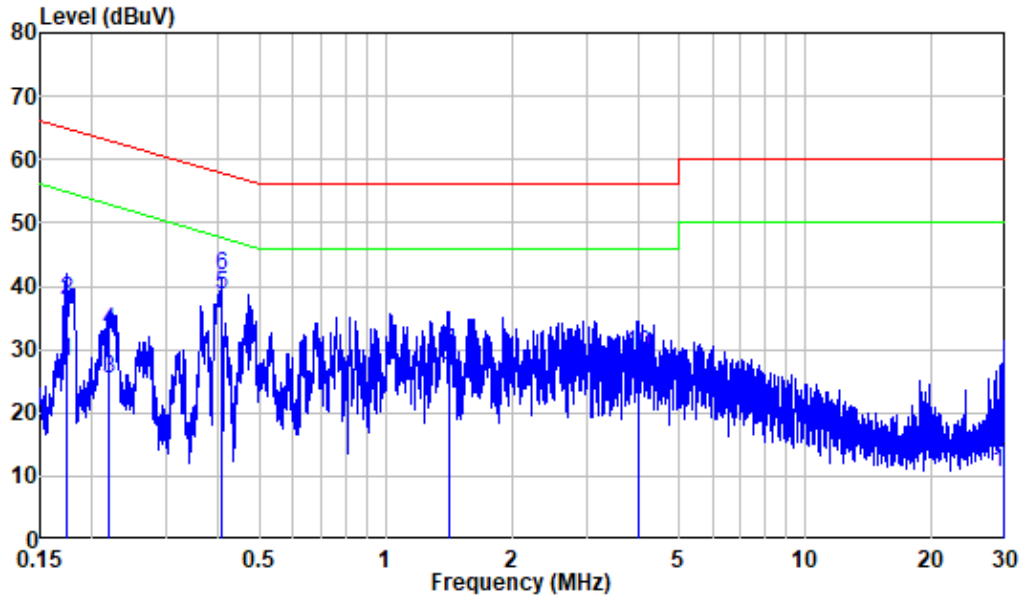

Site : Shielding Room
 Condition: Line
 Mode : Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : PS05Q050K1000UD

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.174	9.80	18.34	28.14	54.77	-26.63	Average
2	0.174	9.80	27.95	37.75	64.77	-27.02	QP
3	0.219	9.80	15.68	25.48	52.88	-27.40	Average
4	0.219	9.80	23.02	32.82	62.88	-30.06	QP
5	0.405	9.80	28.93	38.73	47.76	-9.03	Average
6	0.405	9.80	31.83	41.63	57.76	-16.13	QP
7	1.410	9.81	15.37	25.18	46.00	-20.82	Average
8	1.410	9.81	19.75	29.56	56.00	-26.44	QP
9	3.982	9.84	14.26	24.10	46.00	-21.90	Average
10	3.982	9.84	19.35	29.19	56.00	-26.81	QP
11	29.644	10.10	0.52	10.62	50.00	-39.38	Average
12	29.644	10.10	5.12	15.22	60.00	-44.78	QP

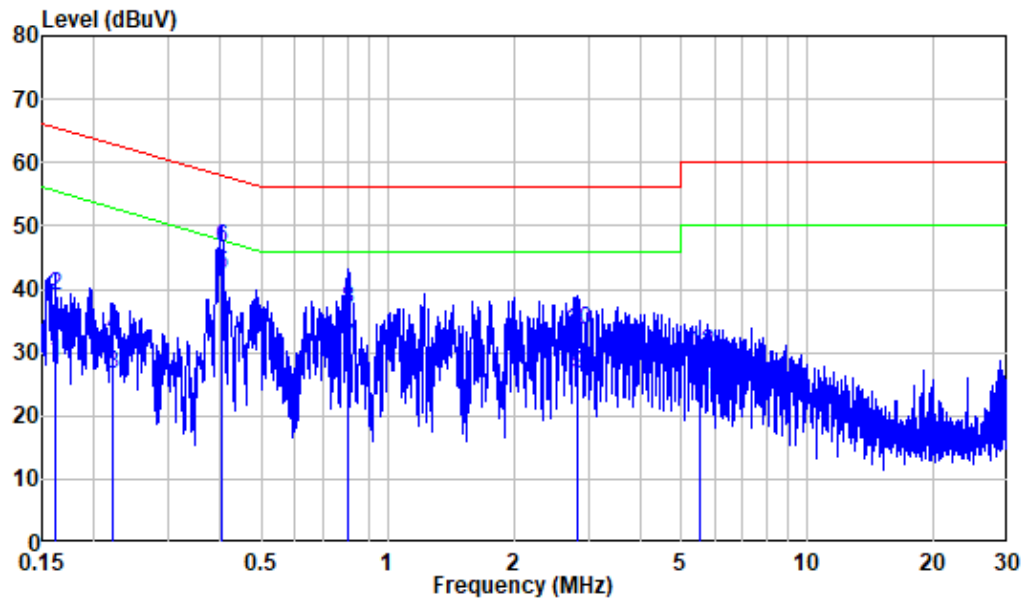AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Transmitting
 Model : DM640BU
 Power : AC 120V 60Hz
 Note : PS05Q050K1000UD

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.162	9.80	18.54	28.34	55.38	-27.04	Average
2	0.162	9.80	29.00	38.80	65.38	-26.58	QP
3	0.220	9.80	16.77	26.57	52.81	-26.24	Average
4	0.220	9.80	22.75	32.55	62.81	-30.26	QP
5	0.402	9.80	32.45	42.25	47.80	-5.55	Average
6	0.402	9.80	36.77	46.57	57.80	-11.23	QP
7	0.807	9.81	21.10	30.91	46.00	-15.09	Average
8	0.807	9.81	27.07	36.88	56.00	-19.12	QP
9	2.841	9.83	16.80	26.63	46.00	-19.37	Average
10	2.841	9.83	23.55	33.38	56.00	-22.62	QP
11	5.524	9.92	13.27	23.19	50.00	-26.81	Average
12	5.524	9.92	20.00	29.92	60.00	-30.08	QP

FCC §15.205, §15.209 & §15.247(d) & RSS-247§ 5.5 – RADIATED EMISSIONS


Applicable Standard


FCC §15.205; §15.209; §15.247(d) and RSS-247 §5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

EUT Setup

Below 1 GHz:

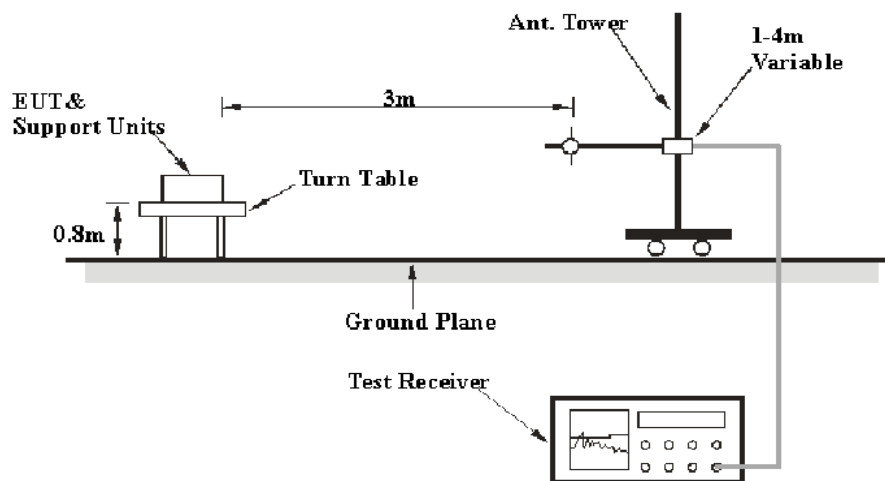

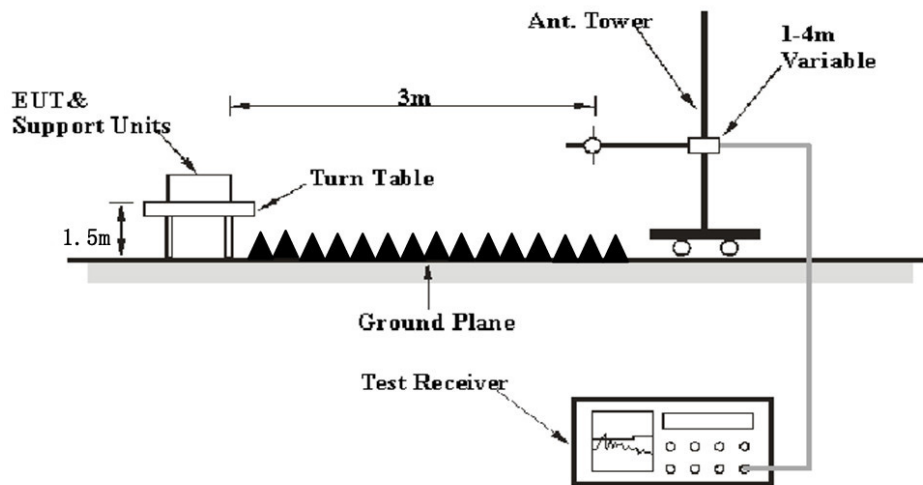Above 1GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits and RSS-247/RSS-Gen limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Corrected Factor}\end{aligned}$$

Test Data

Environmental Conditions


Temperature:	19 °C
Relative Humidity:	58 %
ATM Pressure:	101.0 kPa

The testing was performed by Chao Mo on 2022-03-13 for below 1GHz and Bin Deng 2022-02-09 for above 1GHz.

EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: (worst case for low channel)


For adapter: YWK-AD050100-U

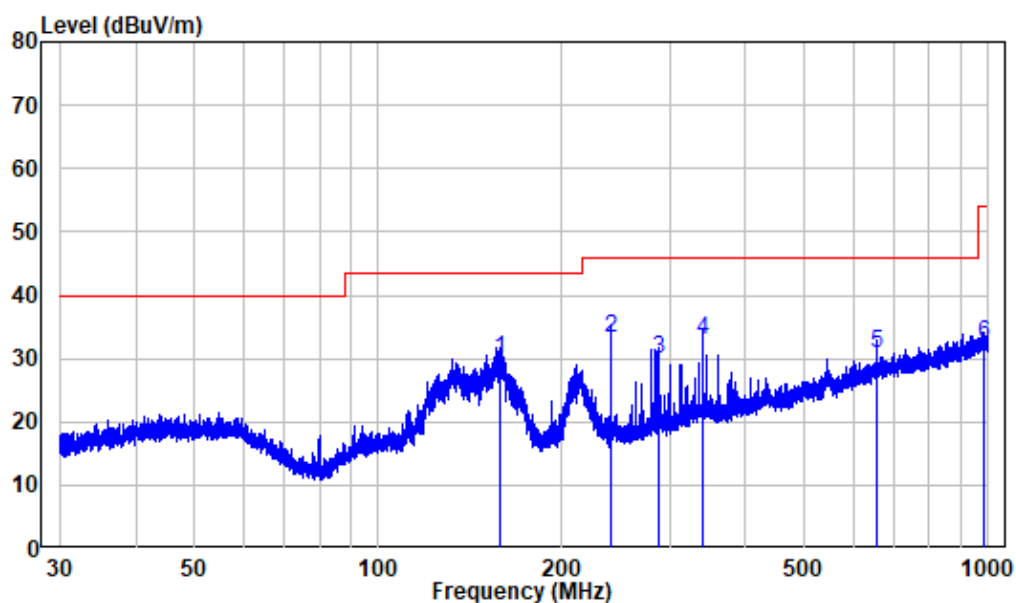Horizontal:

Site : chamber
Condition : 3m HORIZONTAL
Job No. : SZNS4211222-66341E-RF
Test Mode : Transmitting
Adapter Model: YWK-AD050100-U

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	158.043	-14.49	44.31	29.82	43.50	-13.68	QP
2	239.987	-10.91	44.15	33.24	46.00	-12.76	QP
3	287.990	-9.36	39.19	29.83	46.00	-16.17	QP
4	340.036	-7.43	40.19	32.76	46.00	-13.24	QP
5	654.519	-1.60	32.45	30.85	46.00	-15.15	QP
6	983.913	2.65	29.54	32.19	54.00	-21.81	QP

Vertical

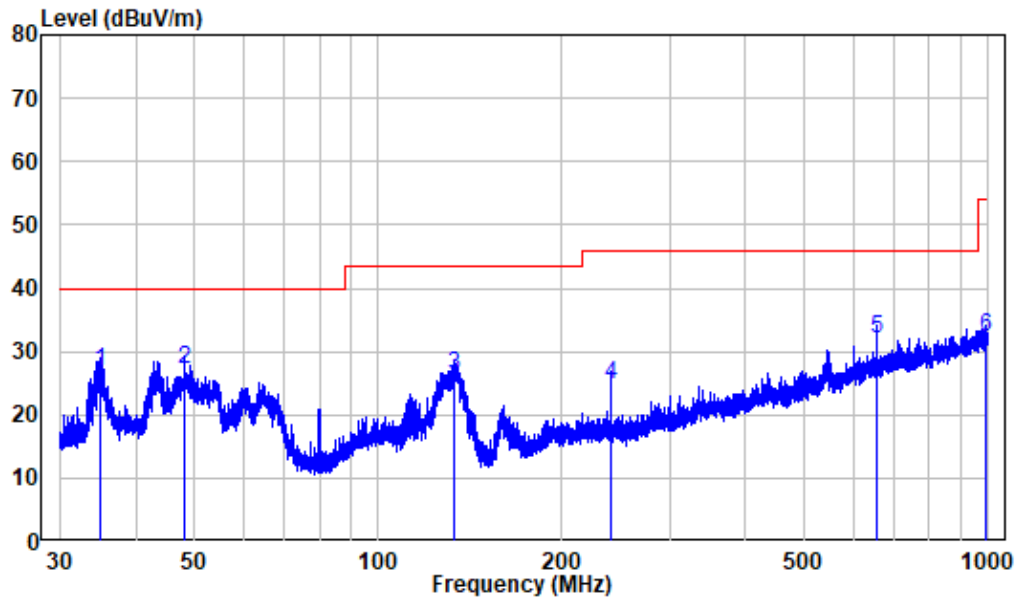


Site : chamber
 Condition : 3m VERTICAL
 Job No. : SZNS4211222-66341E-RF
 Test Mode : Transmitting
 Adapter Model: YWK-AD050100-U

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.082	-11.52	38.37	26.85	40.00	-13.15	QP
2	47.994	-10.00	37.15	27.15	40.00	-12.85	QP
3	133.443	-14.98	41.27	26.29	43.50	-17.21	QP
4	239.987	-10.91	35.68	24.77	46.00	-21.23	QP
5	654.519	-1.60	33.70	32.10	46.00	-13.90	QP
6	993.447	2.89	29.29	32.18	54.00	-21.82	QP

For adapter: BQ05A-0501000-U


Horizontal:

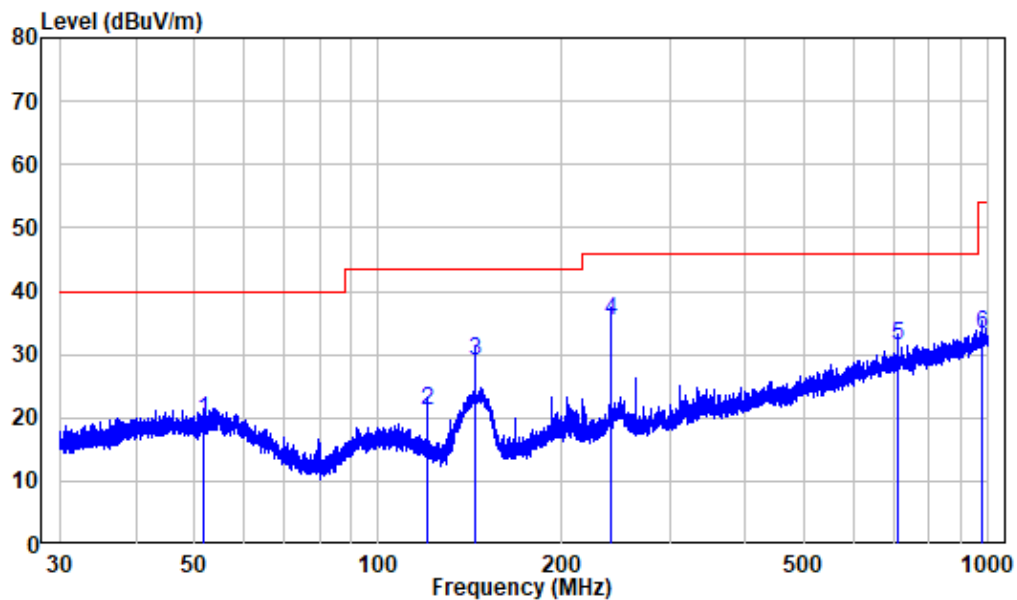

Site : chamber
Condition : 3m HORIZONTAL
Job No. : SZNS4211222-66341E-RF
Test Mode : Transmitting
Adapter Model: BQ05A-0501000-U

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	51.684	-9.96	29.51	19.55	40.00	-20.45	QP
2	120.013	-13.53	34.64	21.11	43.50	-22.39	QP
3	144.019	-15.52	44.54	29.02	43.50	-14.48	QP
4	239.987	-10.91	46.25	35.34	46.00	-10.66	QP
5	709.182	-1.48	32.77	31.29	46.00	-14.71	QP
6	974.898	2.35	30.91	33.26	54.00	-20.74	QP

Vertical

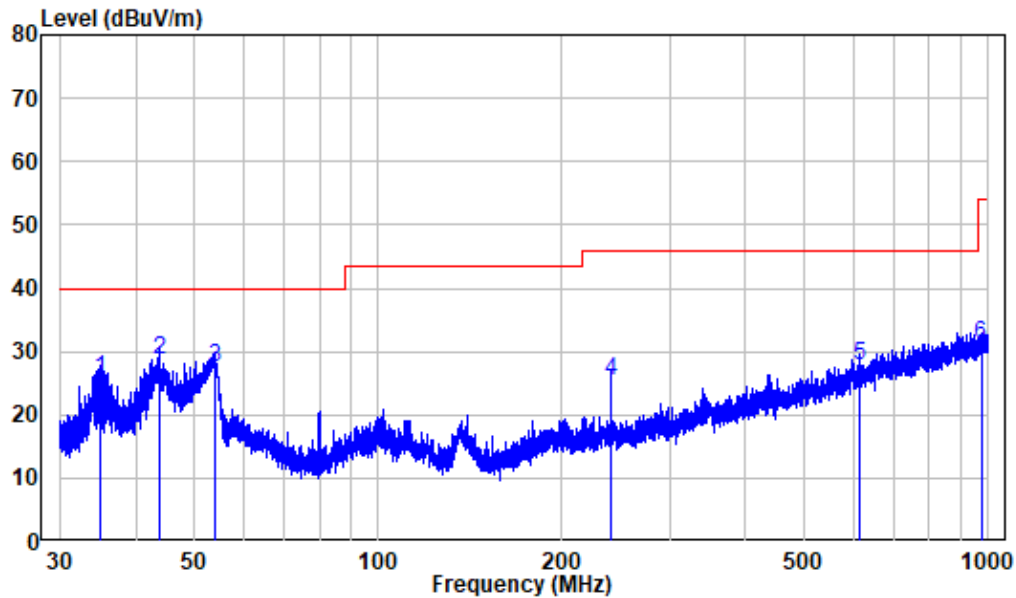


Site : chamber
 Condition : 3m VERTICAL
 Job No. : SZNS4211222-66341E-RF
 Test Mode : Transmitting
 Adapter Model: BQ05A-0501000-U

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.082	-11.52	37.25	25.73	40.00	-14.27	QP
2	43.620	-9.92	38.48	28.56	40.00	-11.44	QP
3	54.071	-10.35	37.83	27.48	40.00	-12.52	QP
4	239.987	-10.91	36.22	25.31	46.00	-20.69	QP
5	616.642	-2.48	30.19	27.71	46.00	-18.29	QP
6	973.190	2.39	28.62	31.01	54.00	-22.99	QP

For adapter: PS05Q050K1000UD


Horizontal:

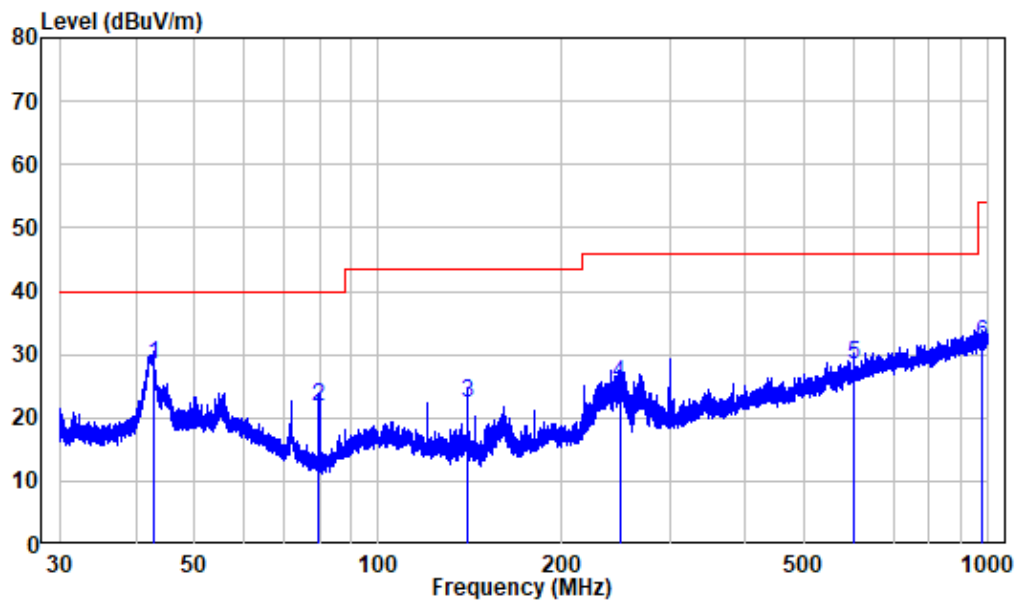

Site : chamber
Condition : 3m HORIZONTAL
Job No. : SZNS4211222-66341E-RF
Test Mode : Transmitting
Adapter Model: PS05Q050K1000UD

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.693	-9.98	38.36	28.38	40.00	-11.62	QP
2	79.975	-16.79	38.67	21.88	40.00	-18.12	QP
3	139.974	-15.45	37.92	22.47	43.50	-21.03	QP
4	248.552	-10.69	36.18	25.49	46.00	-20.51	QP
5	600.110	-2.43	30.67	28.24	46.00	-17.76	QP
6	979.610	2.41	29.36	31.77	54.00	-22.23	QP

Vertical

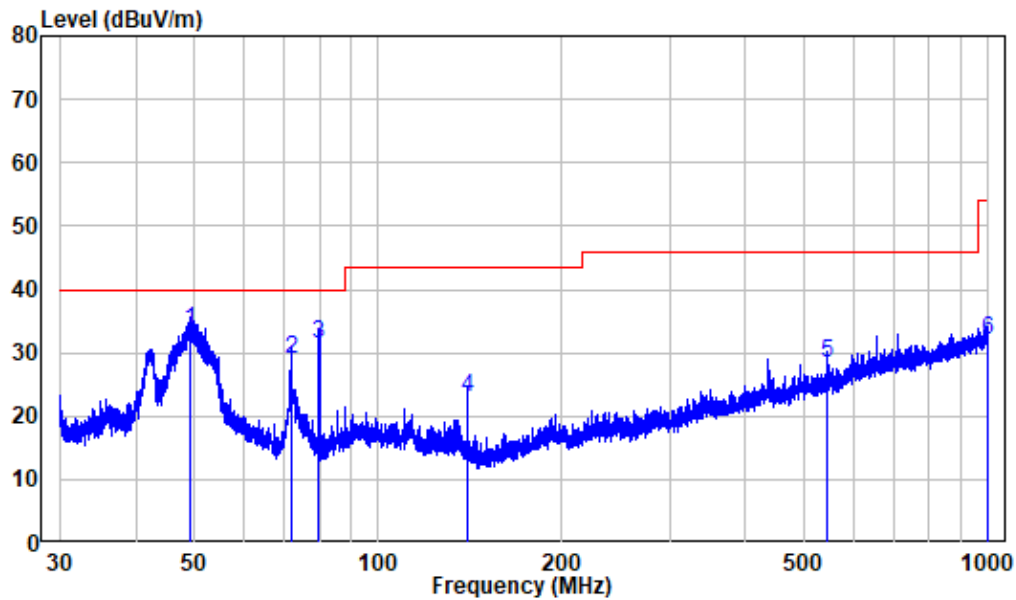

Site : chamber
 Condition : 3m VERTICAL
 Job No. : SZNS4211222-66341E-RF
 Test Mode : Transmitting
 Adapter Model: PS05Q050K1000UD

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.036	-9.96	43.52	33.56	40.00	-6.44	QP
2	71.990	-15.62	44.48	28.86	40.00	-11.14	QP
3	79.975	-16.79	48.31	31.52	40.00	-8.48	QP
4	140.035	-15.45	38.31	22.86	43.50	-20.64	QP
5	545.422	-4.02	32.30	28.28	46.00	-17.72	QP
6	997.374	2.97	29.16	32.13	54.00	-21.87	QP

Above 1GHz: (worst case adapter 3)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	67.24	PK	210	1.1	H	-7.24	60.00	74	-14.00
2310	53.00	AV	210	1.1	H	-7.24	45.76	54	-8.24
2310	67.81	PK	16	2.4	V	-7.24	60.57	74	-13.43
2310	53.12	AV	16	2.4	V	-7.24	45.88	54	-8.12
2390	68.08	PK	158	1.8	H	-7.22	60.86	74	-13.14
2390	54.44	AV	158	1.8	H	-7.22	47.22	54	-6.78
2390	68.40	PK	26	1.1	V	-7.22	61.18	74	-12.82
2390	54.89	AV	26	1.1	V	-7.22	47.67	54	-6.33
4804	59.49	PK	120	1.1	H	-3.52	55.97	74	-18.03
4804	42.99	AV	120	1.1	H	-3.52	39.47	54	-14.53
4804	60.16	PK	202	2.2	V	-3.52	56.64	74	-17.36
4804	44.02	AV	202	2.2	V	-3.52	40.50	54	-13.50
Middle Channel (2440 MHz)									
4880	59.71	PK	146	1.2	H	-3.37	56.34	74	-17.66
4880	43.24	AV	146	1.2	H	-3.37	39.87	54	-14.13
4880	60.16	PK	117	2.2	V	-3.37	56.79	74	-17.21
4880	43.37	AV	117	2.2	V	-3.37	40.00	54	-14.00
High Channel (2480 MHz)									
2483.5	79.27	PK	199	2.0	H	-7.20	72.07	74	-1.93
2483.5	55.94	AV	199	2.0	H	-7.20	48.74	54	-5.26
2483.5	78.02	PK	196	1.0	V	-7.20	70.82	74	-3.18
2483.5	55.79	AV	196	1.0	V	-7.20	48.59	54	-5.41
2500	76.03	PK	275	2.5	H	-7.18	68.85	74	-5.15
2500	55.50	AV	275	2.5	H	-7.18	48.32	54	-5.68
2500	75.94	PK	175	2.3	V	-7.18	68.76	74	-5.24
2500	55.40	AV	175	2.3	V	-7.18	48.22	54	-5.78
4960	58.90	PK	256	1.3	H	-3.01	55.89	74	-18.11
4960	42.39	AV	256	1.3	H	-3.01	39.38	54	-14.62
4960	59.51	PK	112	2.3	V	-3.01	56.50	74	-17.50
4960	42.93	AV	112	2.3	V	-3.01	39.92	54	-14.08

Simultaneous transmitting:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/AV		Height (m)	Polar (H/V)				
Worst case 2.4G FHSS 2402 MHz+802.11b Mode 2472MHz									
49.51	42.68	QP	136	1.2	H	-9.91	32.77	40	-7.23
49.51	38.21	QP	125	1.5	V	-9.91	28.30	40	-11.70
4804	59.12	PK	118	1.1	H	-3.52	55.60	74	-18.40
4804	42.76	AV	118	1.1	H	-3.52	39.24	54	-14.76
4804	59.93	PK	205	2.1	V	-3.52	56.41	74	-17.59
4804	43.87	AV	205	2.1	V	-3.52	40.35	54	-13.65
4944	56.18	PK	108	1.9	H	-3.06	53.12	74	-20.88
4944	54.83	PK	132	1.2	V	-3.06	51.77	74	-22.23

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

The other spurious emission which is 20dB to the limit or in noise floor level was not recorded.


1-18GHz

Pre-scan for Low Channel

Horizontal:

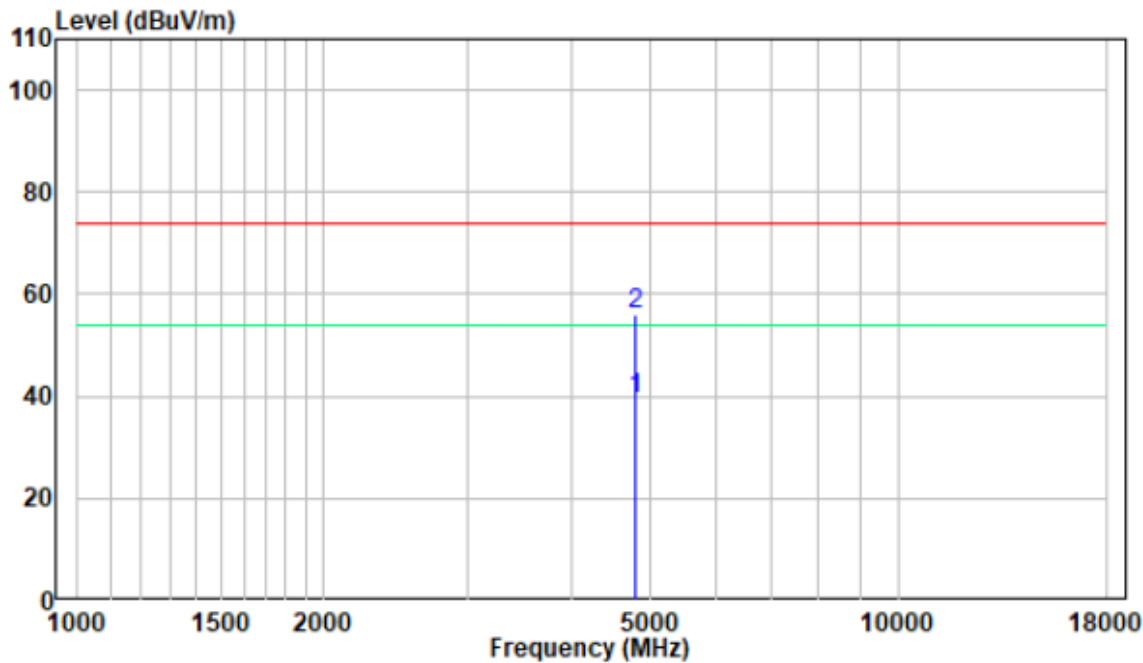


Vertical:

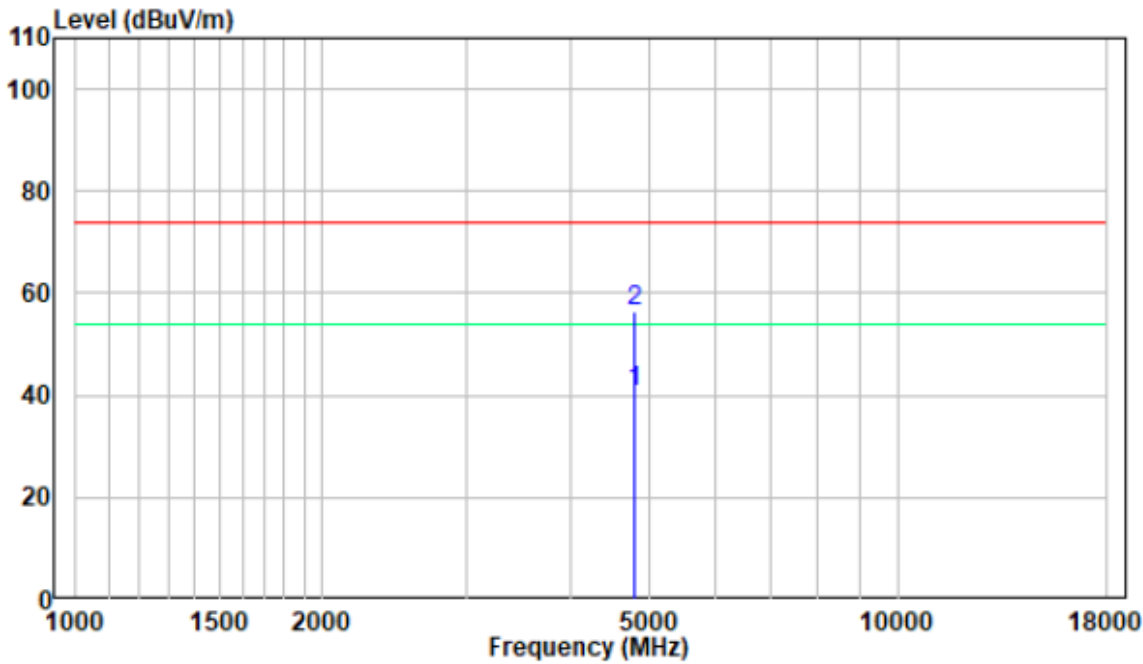


18-25GHz

Pre-scan for Low Channel

Horizontal:

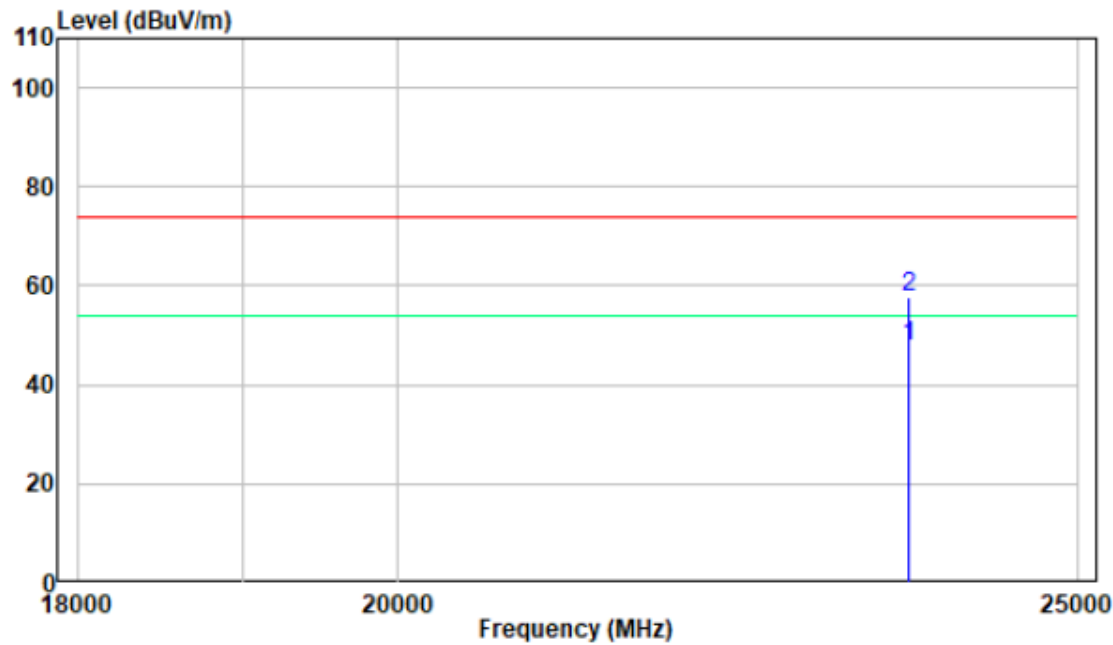

Vertical:

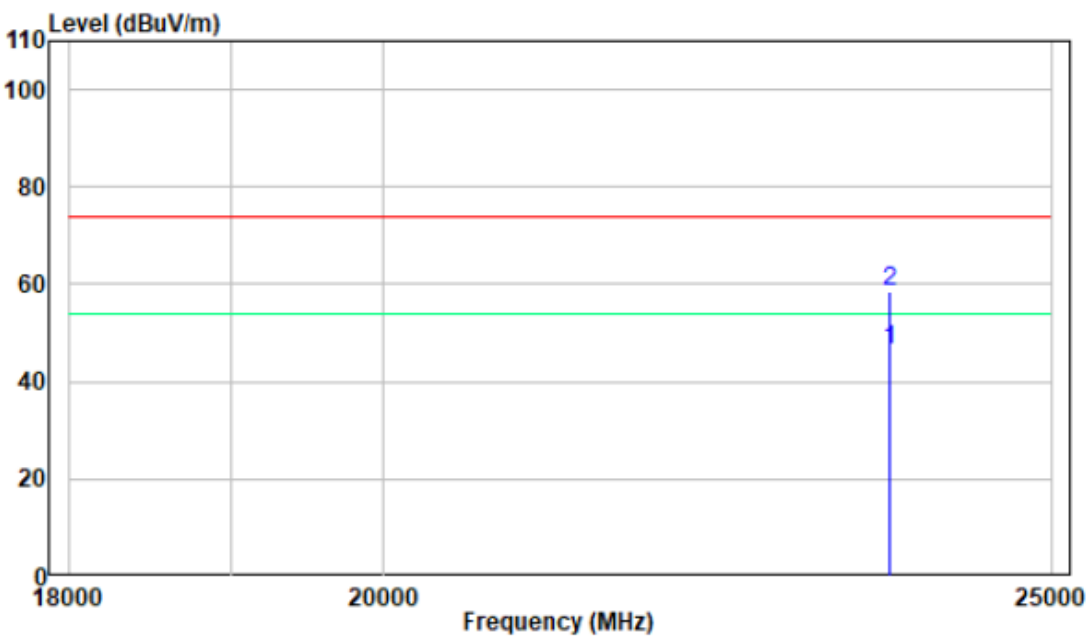


FCC §15.247(a) (1) & RSS-247 § 5.1 (b)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel and in Operating mode, RBW was set at 30 kHz, VBW $\geq$ 3RBW max-hold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lu on 2022-01-28.


EUT operation mode: Transmitting

Test Result: Compliant.

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit
Hop	1.997	1.957	1.305	> two-thirds of the 20 dB bandwidth

Please refer to the below plot:

Hop

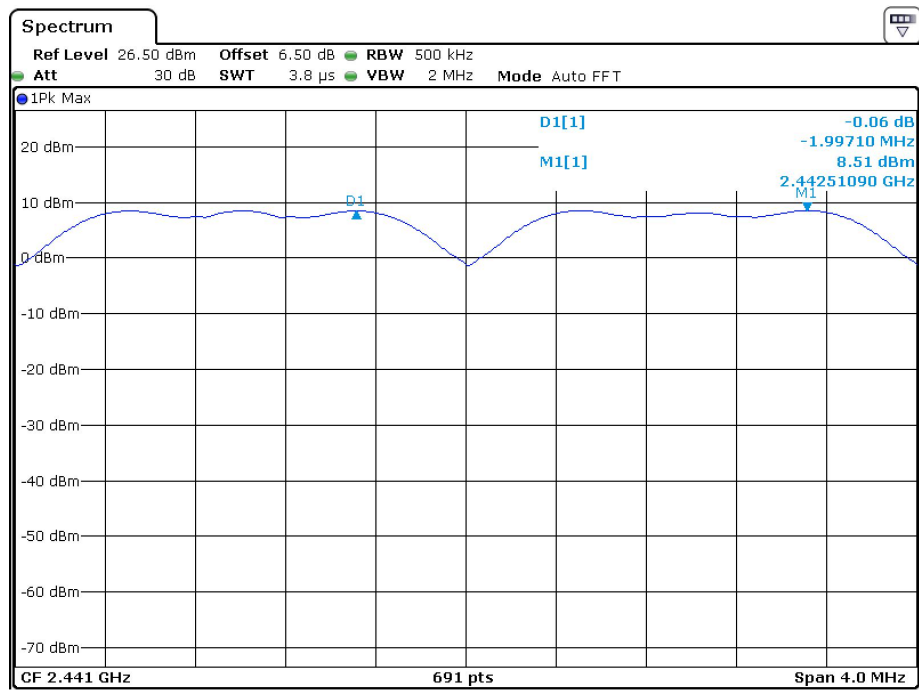

Date: 28.JAN.2022 09:16:16

FCC §15.247(a) (1) & RSS-GEN § 6.7 & RSS-247 § 5.1 (a)–99% OCCUPIED BANDWIDTH & 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “20 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 20 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lu on 2022-01-28.


EUT operation mode: Transmitting

Test Result: Compliant.

Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)
Low	2402	1.951	1.945
Middle	2440	1.951	1.957
High	2480	1.957	1.962


Please refer to the below plots:

Low Channel

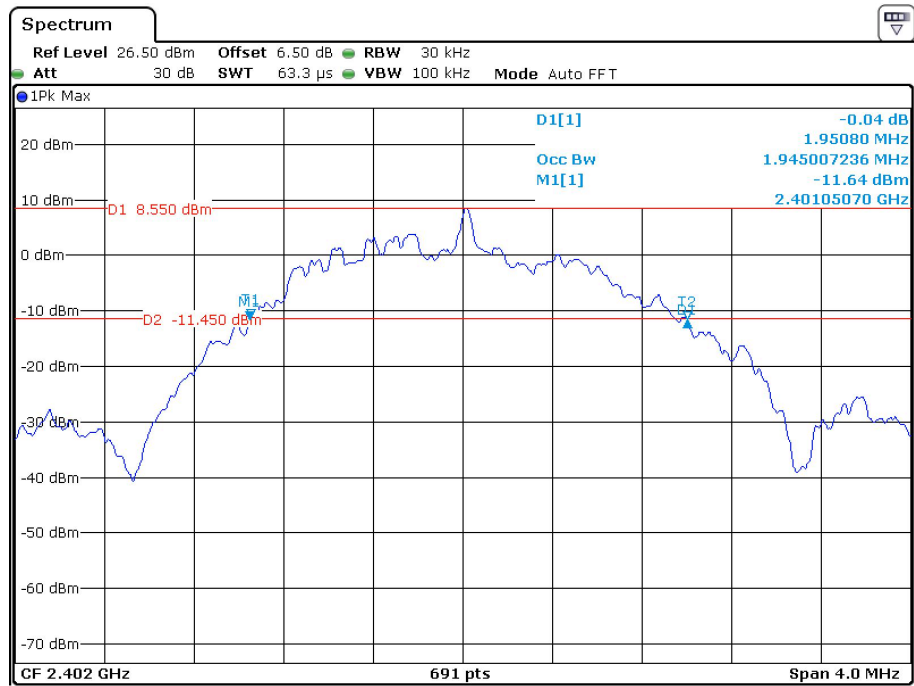


Date: 28.JAN.2022 09:09:02

Middle Channel

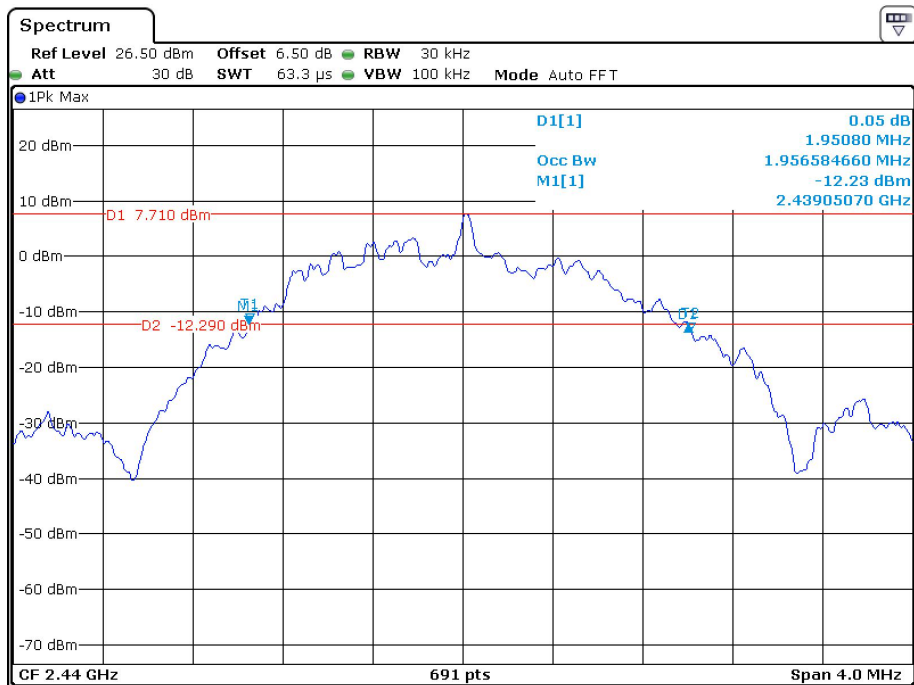

Date: 28.JAN.2022 09:09:40

High Channel

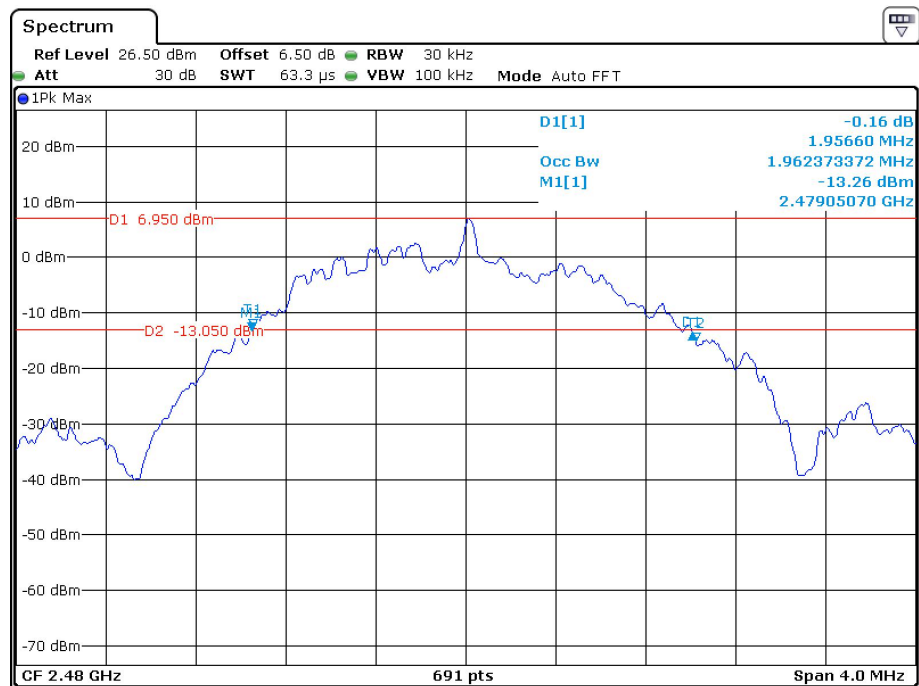

Date: 28.JAN.2022 09:12:30


FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems (FHSs) in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lu on 2022-01-28.

EUT operation mode: Transmitting

Test Result: Compliant.

Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
2400-2483.5	40	≥15

Hop

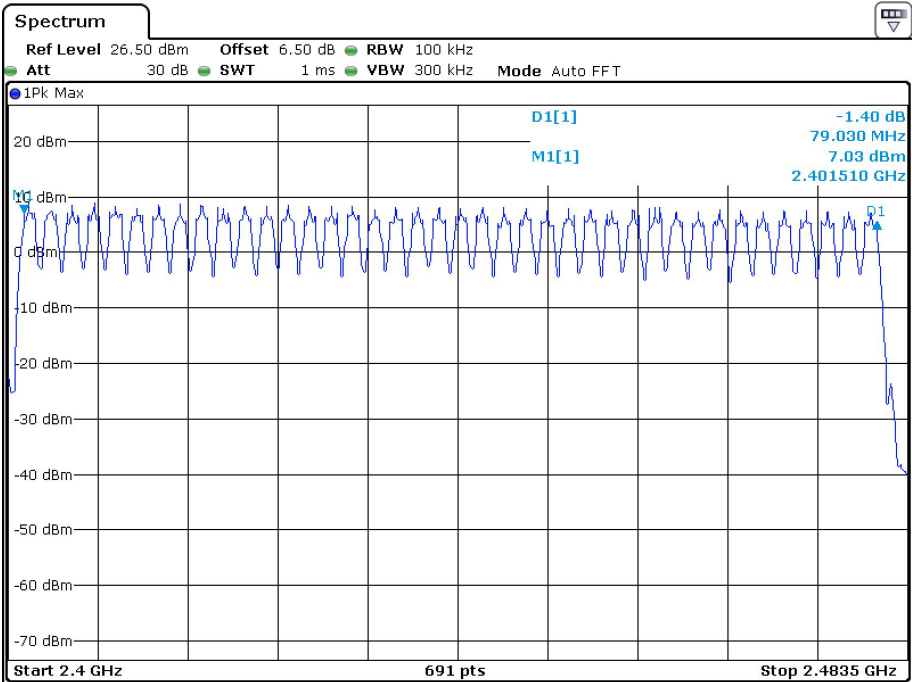

Date: 28.JAN.2022 09:17:15


FCC §15.247(a) (1) (iii) & RSS-247 § 5.1 (d) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems (FHSs) in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lu on 2022-01-28.

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Channel	Pulse Time [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
GFSK	Hop	0.196	110	0.022	≤ 0.4	PASS

Note1: A period time=0.4*40=16(s), Result= Pulse Time *Total hops


Note 2: Total hops=Hopping Number in 1.6s*10

Hops

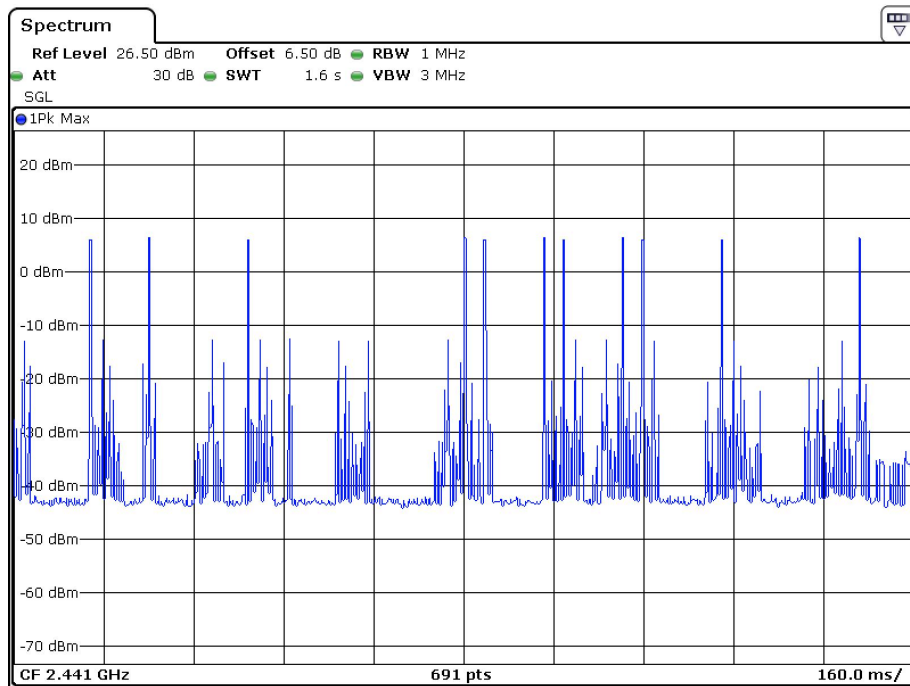

Date: 28.JAN.2022 09:41:09

Pulse time

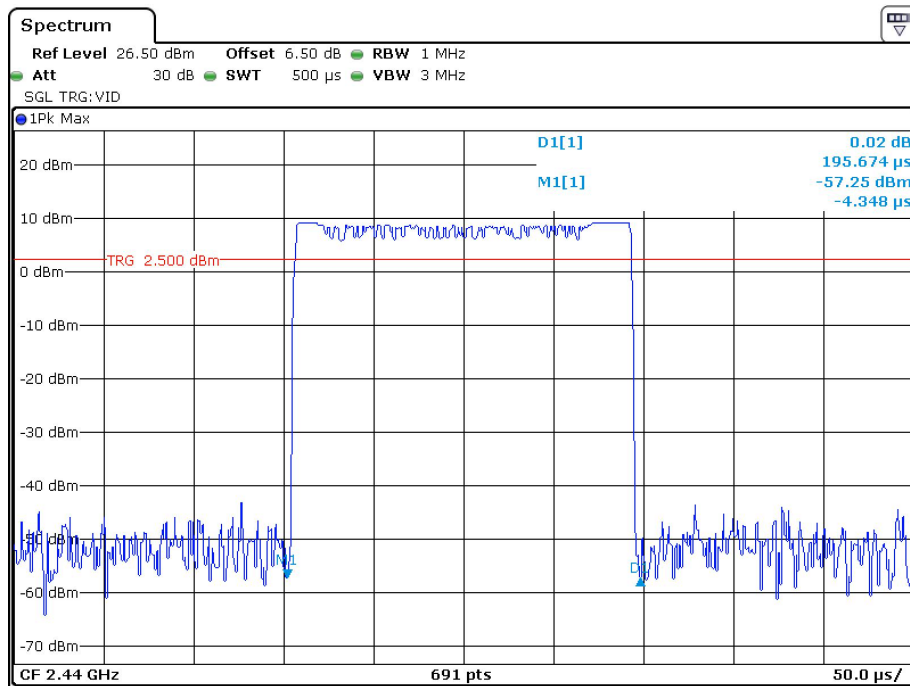

Date: 28.JAN.2022 09:07:13

FCC §15.247(b) (1) & RSS-247§ 5.1(b) &§ 5.4(b) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard


According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

For frequency hopping systems (FHSs) operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W (see Section 5.4(e) for exceptions).

Frequency hopping systems (FHSs) shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lu on 2022-01-28.

EUT operation mode: Transmitting

Test Result: Compliant.


Channel	Frequency (MHz)	Peak Output Power	Limit (dBm)
		(dBm)	
Low	2402	9.68	21
Middle	2440	9.11	21
High	2480	8.34	21

Note: the antenna gain is 0dBi, the maximum EIRP=9.68dBm+0dBi=9.68dBm<36dBm, so it's compliance with EIRP limit of ISERC.

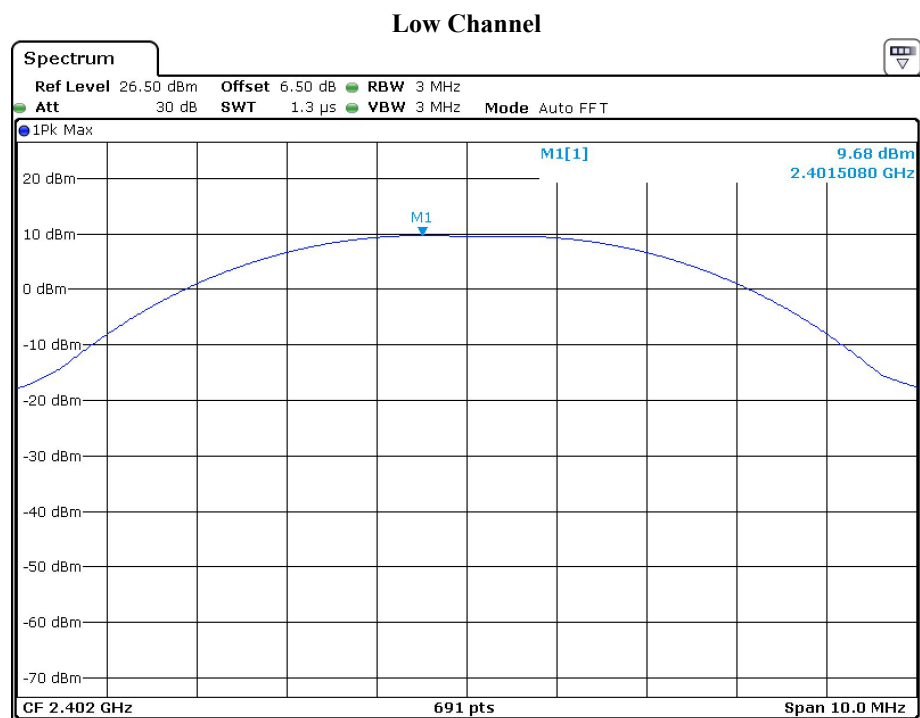


Date: 28.JAN.2022 09:10:07

Middle Channel

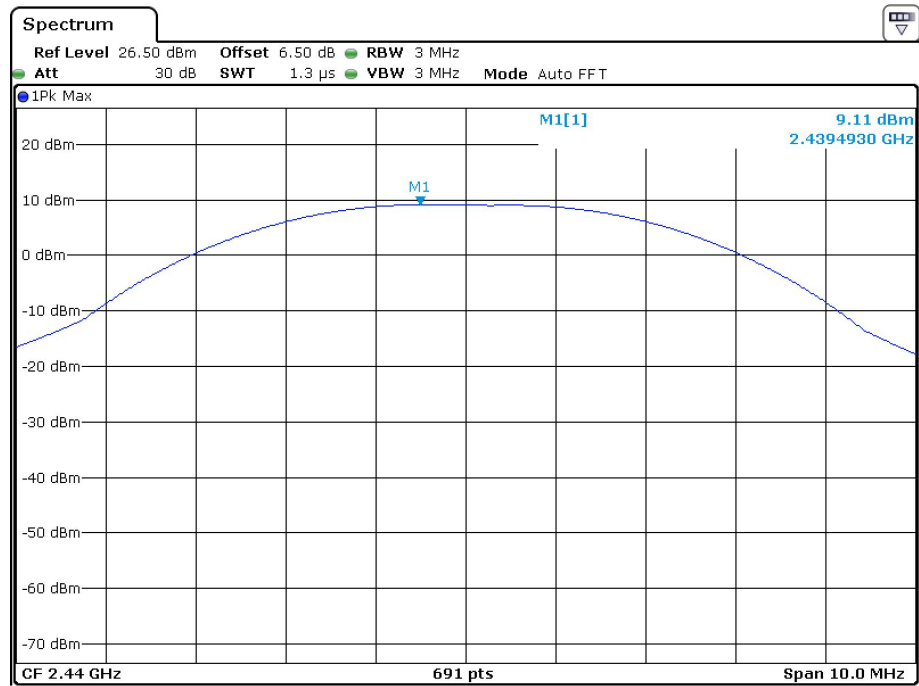

Date: 28.JAN.2022 09:04:59

High Channel

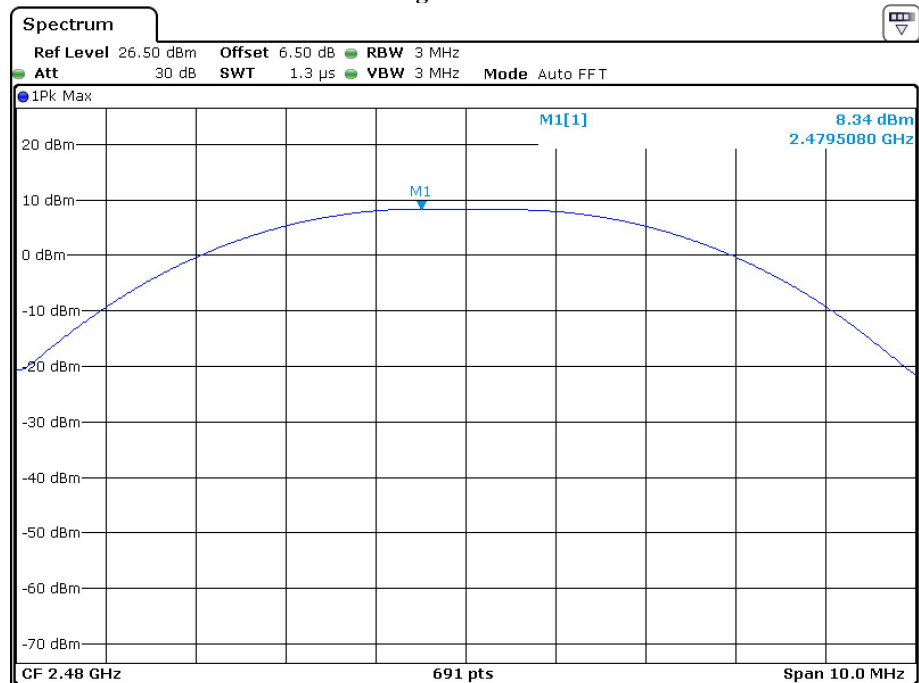

Date: 28.JAN.2022 09:13:00

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING


Applicable Standard

According to FCC §15.247(d) & RSS-247 § 5.5.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)) & RSS-Gen.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data


Environmental Conditions

Temperature:	26 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lu on 2022-01-28.

EUT operation mode: Transmitting

Test Result: Compliant.

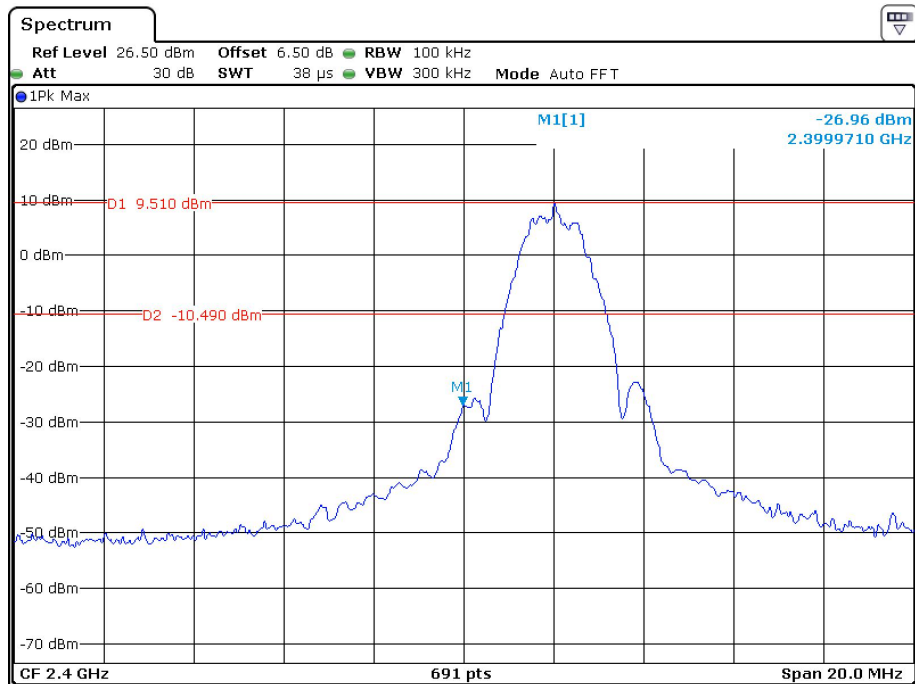
Conducted Band Edge Result:**FHSS_Low Channel**

Date: 28.JAN.2022 09:11:08

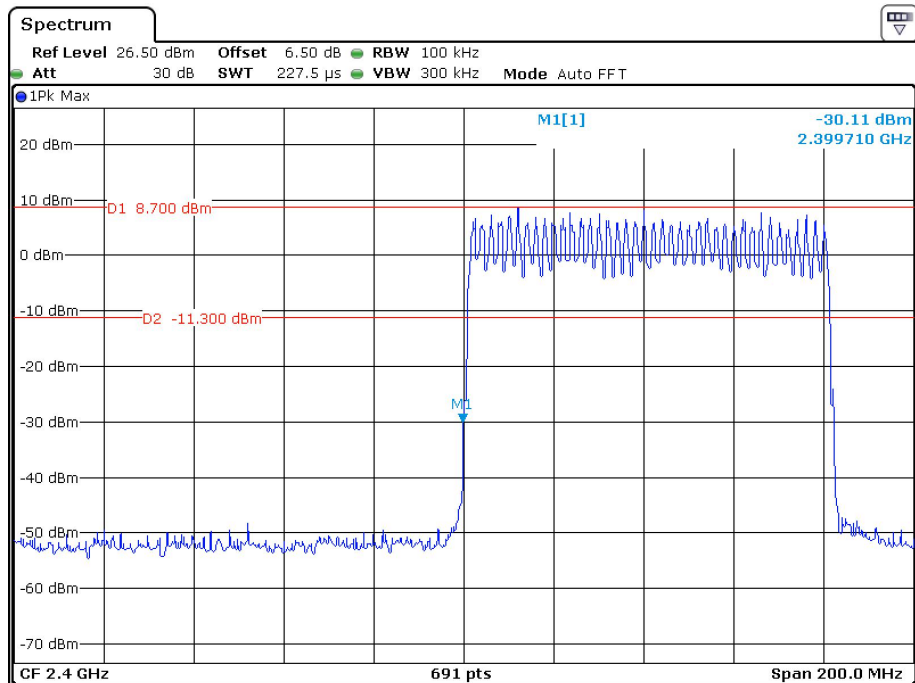FHSS_Hop_Low Channel


Date: 28.JAN.2022 09:14:37

FHSS_High Channel

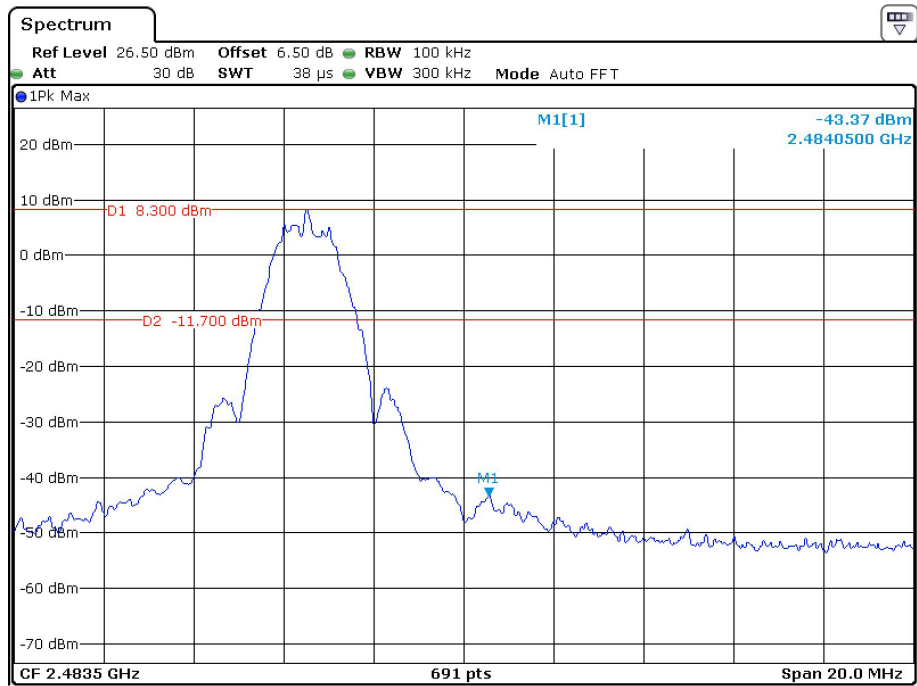

Date: 28.JAN.2022 09:11:43

FHSS_Hop_High Channel

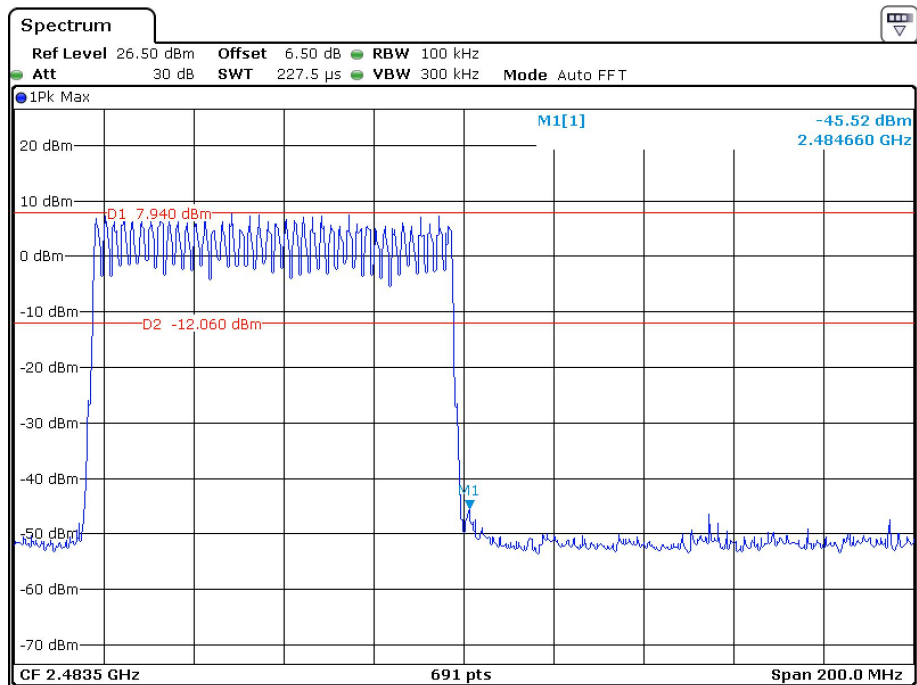

Date: 28.JAN.2022 09:15:20

***** END OF REPORT *****