



Electro Magnetic Field(EMF) Radiation Exposure TEST REPORT

No. 24B01Z100078-001

For

Peak Design, Ltd.

Wireless Charging Car Mount

Model Name: M-CM-AD-BK-2, M-CM-AA-BK-2, M-CM-AE-BK-2, M-CM-AF-BK-2, M-CP-AA-BK-2

with

Hardware Version: V2.3

Software Version: V0.30

FCC ID: 2AZ94MCMAA2

Issued Date: 2024-04-02

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
24B01Z100078-001	Rev.0	2024-03-05	Initial creation of test report
24B01Z100078-001	Rev.1	2024-03-28	Update the information for FCC ID. Update the information for software version.
24B01Z100078-001	Rev.2	2024-04-02	Update the information on section 7.

TABLE OF CONTENT

1 TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	4
1.4. PROJECT DATA	4
1.5. SIGNATURE.....	4
2 STATEMENT OF COMPLIANCE.....	5
3 CLIENT INFORMATION	5
3.1 APPLICANT INFORMATION	5
3.2 MANUFACTURER INFORMATION	5
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
4.1 ABOUT EUT	6
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
5 TEST METHODOLOGY.....	7
5.1 APPLICABLE MEASUREMENT STANDARDS.....	7
5.2 RF EXPOSURE REQUIREMENTS	7
6 TEST SETUP	8
7 H-FIELD STRENGTH TEST RESULTS	9
8 MAIN TEST INSTRUMENTS	10
ANNEX A H-FIELD AND SAR SIMULATION RESULTS	10
ANNEX B ACCREDITATION CERTIFICATE	10

1 Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Extreme Temperature: -10/+55°C
Relative Humidity: 20-75%


1.4. Project data

Testing Start Date: 2024-03-01
Testing End Date: 2024-03-01


1.5. Signature



Wang Meng
(Prepared this test report)

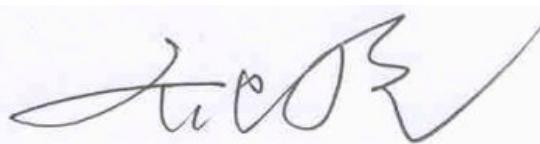

Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

According to 'KDB 680106 D01 Wireless Power Transfer v04', for mobile WPT equipment, its H-field needs to be measured at 15 cm and is limited to 1.63A/m. the measured value at 14cm is 0.00.

3 Client Information

3.1 Applicant Information

Company Name:	Peak Design, Ltd.
Address/Post:	2325 3rd St, Suite 410, San Francisco CA 94107, United States
Contact Person:	/
Contact Email:	/
Telephone:	/
Fax	/

3.2 Manufacturer Information

Company Name:	Peak Design, Ltd.
Address/Post:	2325 3rd St, Suite 410, San Francisco CA 94107, United States
Contact Person:	/
Contact Email:	/
Telephone:	/
Fax	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Wireless Charging Car Mount
Model Name:	M-CM-AD-BK-2, M-CM-AA-BK-2, M-CM-AE-BK-2, M-CM-AF-BK-2, M-CP-AA-BK-2
Tested mode:	Wireless Charging
Operating Frequency:	114.4–148.0 kHz & 354.2–369.4 kHz
Test device Production information:	Production unit
Antenna type:	Inductive Loop Coil Antenna

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	V2.3	V0.30

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test E-field strength with the EUT1.

5 TEST METHODOLOGY

5.1 Applicable Measurement Standards

KDB 680106 D01 Wireless Power Transfer v04

TCB Workshop April 2022: Part 18 & Wireless Power Transfer

5.2 RF Exposure Requirements

For equipment authorization of RF devices operating between 100 kHz and 4 MHz, the use of MPE limits in 47 CFR § 1.1310 (with the 300 kHz limit applicable all the way down to 100 kHz) for both E- and H- field strength is allowed in lieu of SAR.

For loop/coil emitting structures (dominant H-field near-field emission), only H-field measurements are acceptable for MPE limit compliance

According to 'KDB 680106 D01 Wireless Power Transfer v04', for mobile WPT equipment, its H-field needs to be measured at 15 cm and is limited to 1.63A/m.

Table 1 to [§ 1.1310\(e\)\(1\)](#) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
-----------------------	-------------------------------	-------------------------------	-------------------------------------	--------------------------

(i) Limits for Occupational/Controlled Exposure

0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6

(ii) Limits for General Population/Uncontrolled Exposure

0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

6 Test Setup

For the EHP-200A the sensitive element is located approximately 8mm bellow the external surface like Figure 1.

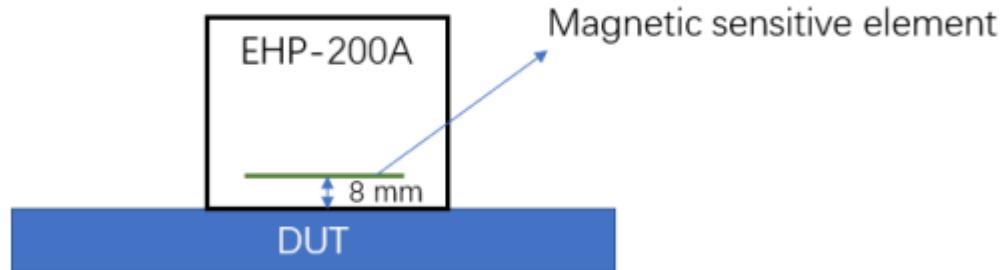


Figure 1. The located of sensitive element

E- and H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.

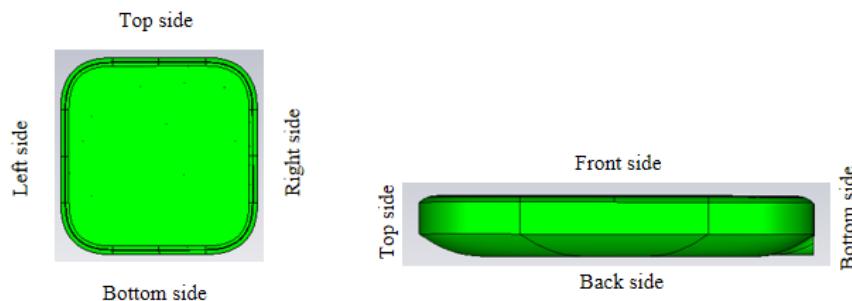


Figure 2. DUT test diagram

7 H-field strength Test Results

Position	Distance (cm)	Tx Power (W)	H-field (A/m)
Front Side	0	15	5.83
Front Side	2	15	2.78
Front Side	4	15	1.22
Front Side	6	15	0.65
Front Side	8	15	0.25
Front Side	10	15	0.08
Front Side	12	15	0.04
Front Side	14	15	0.00
Front Side	16	15	0.00
Front Side	18	15	0.00
Front Side	20	15	0.00
Back Side	3.5	15	0.21
Back Side	4	15	0.06
Back Side	6	15	0.00
Back Side	8	15	0.00
Back Side	10	15	0.00
Back Side	12	15	0.00
Back Side	14	15	0.00
Back Side	16	15	0.00
Back Side	18	15	0.00
Back Side	20	15	0.00
Right Side	0	15	1.05
Right Side	2	15	0.62
Right Side	4	15	0.31
Right Side	6	15	0.25
Right Side	8	15	0.10
Right Side	10	15	0.03
Right Side	12	15	0.00
Right Side	14	15	0.00
Right Side	16	15	0.00
Right Side	18	15	0.00
Right Side	20	15	0.00
Left Side	0	15	1.22
Left Side	2	15	0.83
Left Side	4	15	0.60
Left Side	6	15	0.43
Left Side	8	15	0.19
Left Side	10	15	0.08
Left Side	12	15	0.02
Left Side	14	15	0.00
Left Side	16	15	0.00
Left Side	18	15	0.00
Left Side	20	15	0.00
Bottom Side	0	15	0.00
Bottom Side	2	15	0.00
Bottom Side	4	15	0.00
Bottom Side	6	15	0.00
Bottom Side	8	15	0.00
Bottom Side	10	15	0.00
Bottom Side	12	15	0.00
Bottom Side	14	15	0.00
Bottom Side	16	15	0.00
Bottom Side	18	15	0.00
Bottom Side	20	15	0.00
Top Side	0	15	1.61
Top Side	2	15	0.97
Top Side	4	15	0.68
Top Side	6	15	0.52
Top Side	8	15	0.27
Top Side	10	15	0.11
Top Side	12	15	0.03
Top Side	14	15	0.00
Top Side	16	15	0.00
Top Side	18	15	0.00
Top Side	20	15	0.00

8 MAIN TEST INSTRUMENTS

	Name	Type	Serial Number	Calibration Date	Valid Period
01	Electromagnetic field probe	EHP-200AC	180ZX10205	May 18, 2023	One year

ANNEX A H-field and SAR Simulation Results

Refer to WPT SAR Compliance Simulation Report for M-CM-AD-BK-2, M-CM-AA-BK-2, M-CM-AE-BK-2, M-CM-AF-BK-2, M-CP-AA-BK-2 report

ANNEX B Accreditation Certificate

