

TEST REPORT

Applicant: Xiamen Lenz Communication Co.,Ltd

Address of Applicant: Unit 2001, NO. 365 Chengyi Street, Software Park 3, Jimei District, Xiamen, China

Manufacturer/Factory: Xiamen Lenz Communication Co.,Ltd

Address of Manufacturer/Factory: Unit 2001, NO. 365 Chengyi Street, Software Park 3, Jimei District, Xiamen, China

Equipment Under Test (EUT)

Product Name: Mobile DVR

Model No.: LZE500

FCC ID: 2AZ97-LZE500

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E

Date of sample receipt: April 15, 2021


Date of Test: April 16, 2021-May 18, 2021

Date of report issued: May 19, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

1 Version

Version No.	Date	Description
00	May 19, 2021	Original

Prepared By:




Date:

May 19, 2021

Project Engineer

Check By:


Reviewer

Date:

May 19, 2021

2 Contents

Page

1	VERSION	2
2	CONTENTS	3
3	TEST SUMMARY	4
4	GENERAL INFORMATION	5
4.1	GENERAL DESCRIPTION OF EUT	5
4.2	RELATED SUBMITTAL(S) / GRANT (S)	7
4.3	TEST METHODOLOGY.....	7
4.4	DEVIATION FROM STANDARDS	7
4.5	ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.6	TEST FACILITY	7
4.7	TEST LOCATION.....	7
5	TEST INSTRUMENTS LIST	8
6	SYSTEM TEST CONFIGURATION	10
6.1	TEST MODE	10
6.2	CONFIGURATION OF TESTED SYSTEM	10
6.3	CONDUCTED PEAK OUTPUT POWER & ERP/EIRP	11
6.4	PEAK-TO-AVERAGE RATIO	13
6.5	OCCUPY BANDWIDTH.....	15
6.6	MODULATION CHARACTERISTIC.....	23
6.7	OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	23
6.8	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	32
6.9	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	36
6.10	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	39
7	TEST SETUP PHOTO	42
8	EUT CONSTRUCTIONAL DETAILS	42

3 Test Summary

Test Item	Section in CFR 47	Result
RF Exposure	Part 1.1307 Part 2.1091	Pass (Please refer to MPE)
RF Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c)	Pass
Peak-to-Average Ratio	Part 2.1046 Part 22.913(d) Part 24.232(d)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% Occupied Bandwidth & 26dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 Part 24.238	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 Part 24.238	Pass
Out of band emission, Band Edge	Part 2.1051 Part 22.917 Part 24.238	Pass
ERP and EIRP	Part 22.913(a) Part 24.232(b)	Pass
Frequency stability vs. temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235	Pass
Frequency stability vs. voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235	Pass

Pass: The EUT complies with the essential requirements in the standard.

4 General Information

4.1 General Description of EUT

Product Name:	Mobile DVR
Model No.:	LZE500
Test sample(s) ID:	GTS202104000126-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Support Networks:	GSM, GPRS, EGPRS
Support Bands:	GSM850, PCS1900
TX Frequency:	GSM850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz
GPRS Class:	10
EGPRS Class	12
Release	R99
Modulation type:	GSM/GPRS: GMSK EGPRS: GMSK/8PSK
Antenna type:	External antenna
Antenna gain:	GSM850:3.5dBi PCS1900:3.5dBi
Power supply:	DC 12-24V

Operation Frequency List:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
· ∴	· ∴	· ∴	· ∴
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
· ∴	· ∴	· ∴	· ∴
250	848.60	809	1909.60
251	848.80	810	1909.80

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Final test channel:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
190	836.60	661	1880.00
251	848.80	810	1909.80

4.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22/24 of the FCC CFR 47 Rules.

4.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on ANSI C63.26:2015 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

4.4 Deviation from Standards

None.

4.5 Abnormalities from Standard Conditions

None.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

4.7 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 18 2020	Oct. 17 2021
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 18 2020	Oct. 17 2021
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 18 2020	Oct. 17 2021
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Note: The maximum power levels are GSM mode for GMSK link, GPRS multi-slot class 10 mode for GMSK link, EGPRS multi-slot class 12 mode for 8PSK link, RMC12.2Kbps mode for WCDMA Band V/II. only these modes were used for all tests.

120 Vac / 60 Hz

EUT (Adapter)

EUT (USB Cable)


EUT

EUT (Earphone)

Dipole Antenna

System Simulator

6.3 Conducted Peak Output Power & ERP/EIRP

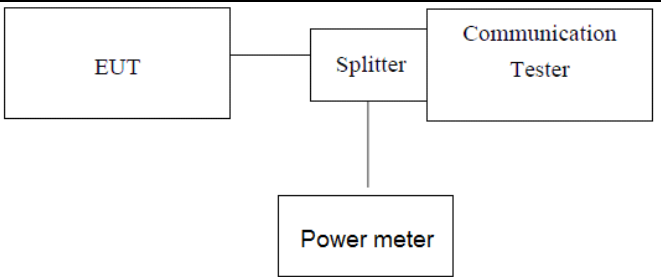
Test Requirement:	FCC part 22.913(a) and FCC part 24.232(c)
Test Method:	FCC part 2.1046
Limit:	GSM850: 7W(38.45dBm) PCS1900: 2W(33dBm)
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The transmitter output port was connected to base station. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement. 3. Set EUT at maximum power through base station. 4. Select lowest, middle, and highest channels for each band and different modulation. 5. Measure the maximum burst peak power.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Conducted Power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM (GMSK, 1 TX slot)	33.23	33.29	33.39	27.14	27.71	28.05
GPRS (GMSK, 1 TX slot)	33.16	33.28	33.34	27.37	28.78	27.55
GPRS (GMSK, 2 TX slot)	32.91	32.94	32.92	28.02	27.89	27.58
GPRS (GMSK, 3 TX slot)	32.40	32.37	32.49	28.76	28.63	28.21
GPRS (GMSK, 4 TX slot)	31.62	31.64	31.65	28.05	28.56	28.02
EGPRS (8PSK, 1 TX slot)	33.19	33.11	33.06	27.78	28.72	28.67
EGPRS (8PSK, 2 TX slot)	32.86	32.84	32.62	27.48	28.99	28.31
EGPRS (8PSK, 3 TX slot)	32.22	32.18	32.13	28.95	27.58	28.2
EGPRS (8PSK, 4 TX slot)	31.27	31.35	31.35	27.23	28.64	27.19

ERP/EIRP (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM (GMSK, 1 TX slot)	34.58	34.64	34.74	30.64	31.21	31.55
GPRS (GMSK, 1 TX slot)	34.51	34.63	34.69	30.87	32.28	31.05
GPRS (GMSK, 2 TX slot)	34.26	34.29	34.27	31.52	31.39	31.08
GPRS (GMSK, 3 TX slot)	33.75	33.72	33.84	32.26	32.13	31.71
GPRS (GMSK, 4 TX slot)	32.97	32.99	33	31.55	32.06	31.52
EGPRS (8PSK, 1 TX slot)	34.54	34.46	34.41	31.28	32.22	32.17
EGPRS (8PSK, 2 TX slot)	34.21	34.19	33.97	30.98	32.49	31.81
EGPRS (8PSK, 3 TX slot)	33.57	33.53	33.48	32.45	31.08	31.7
EGPRS (8PSK, 4 TX slot)	32.62	32.7	32.7	30.73	32.14	30.69

6.4 Peak-to-Average Ratio

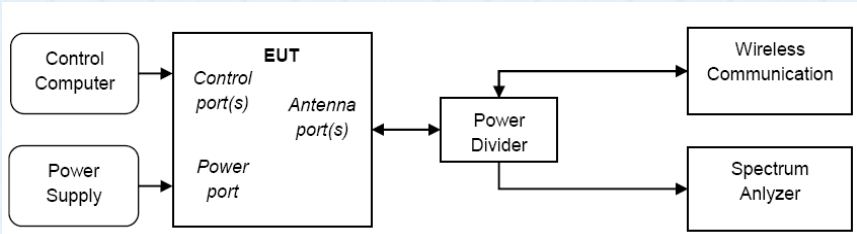Test Requirement:	FCC Part 22.913(d) and FCC Part 24.232(d)
Test Method:	FCC part2.1046
Limit:	13db
Test setup:	 <pre> graph LR CC[Control Computer] --> EUT[EUT] PS[Power Supply] --> EUT EUT --> PD[Power Divider] PD --> WC[Wireless Communication] PD --> SA[Spectrum Analyzer] </pre>
Test Procedure:	A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode. Test Settings 1. The signal analyzer's CCDF measurement profile enabled 2. Frequency= carrier center frequency 3. Measurement BW > EBW of signal 4. for continuous transmissions, set to 1ms 5. Record the maximum PAPR level associated with a probability of 0.1%.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement data

Test Band	Peak to Average Ratio (dB)			Limit (dB)	Result
	Low Ch.	Middle Ch.	High Ch.		
GSM850	0.27	0.29	0.28	13	PASS
GSM1900	0.28	0.30	0.31	13	PASS

6.5 Occupy Bandwidth


Test Requirement:	FCC part 22.917(b) and FCC part 24.238(b)
Test Method:	FCC part2.1049
Test setup:	<i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850 (GSM link)	128	824.20	242.204	314.655
	190	836.60	249.864	320.858
	251	848.80	245.889	318.888
GSM 850 (GPRS 1 link)	128	824.20	244.607	325.305
	190	836.60	247.825	322.287
	251	848.80	238.501	318.152
GSM 850 (EGPRS 1 link)	128	824.20	258.927	322.721
	190	836.60	244.148	310.927
	251	848.80	246.204	322.467
PCS 1900 (GSM link)	512	1850.20	248.260	328.024
	661	1880.00	238.894	307.431
	810	1909.80	244.754	310.120
PCS 1900 (GPRS 1 link)	512	1850.20	238.544	310.560
	661	1880.00	239.531	315.469
	810	1909.80	242.693	322.977
PCS 1900 (EGPRS 1 link)	512	1850.20	250.828	324.146
	661	1880.00	245.708	313.735
	810	1909.80	239.479	312.668

Test plot as follows:


Test band:	GSM 850 (GSM link)
------------	--------------------

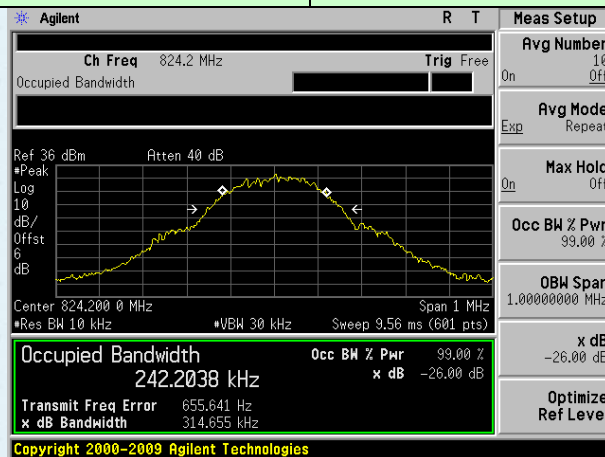

Lowest channel

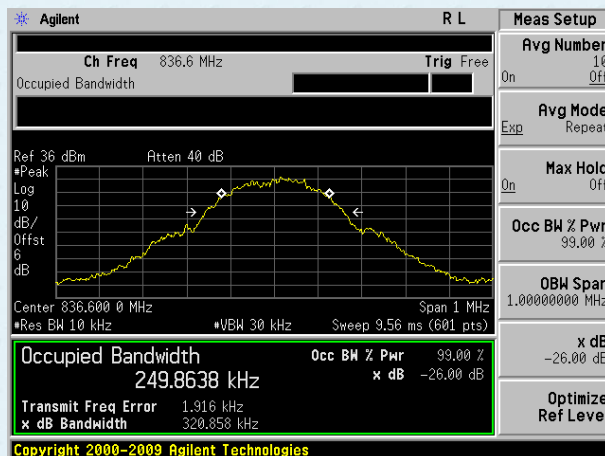


Middle channel

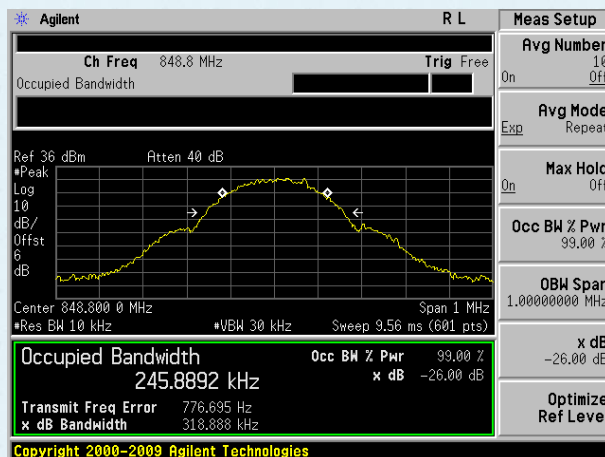


Highest channel


Test band:	GSM 850 (GPRS 1 link)
------------	-----------------------

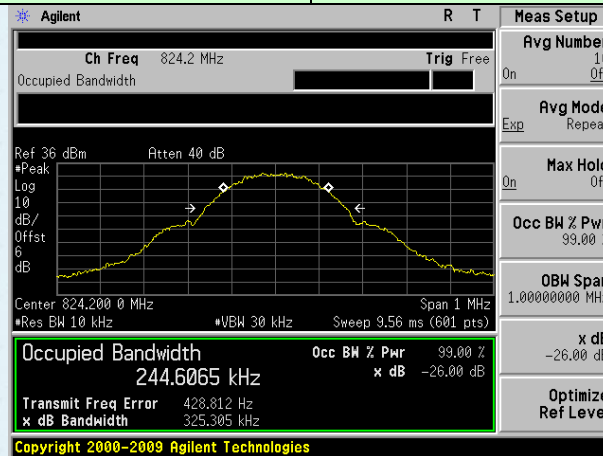

Lowest channel

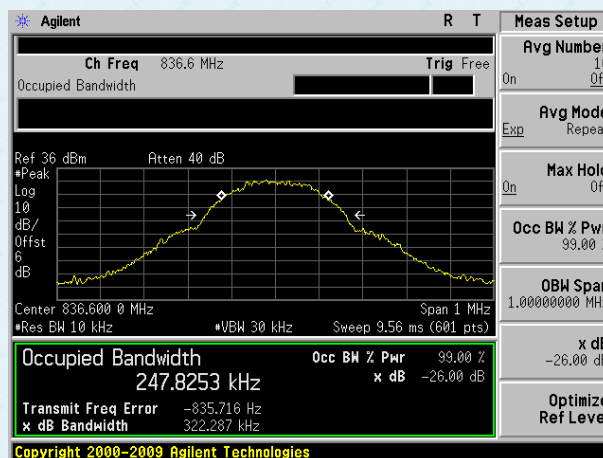


Middle channel

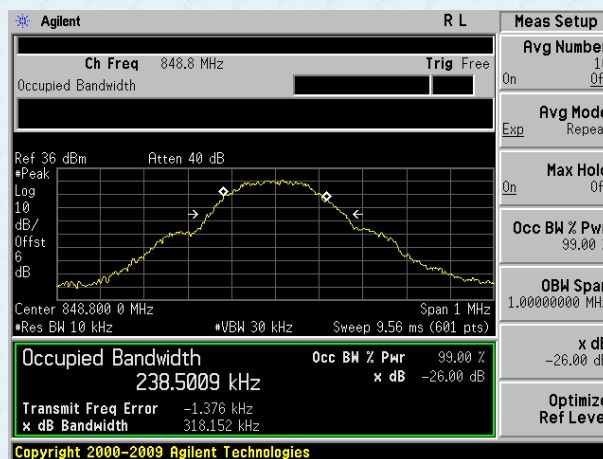


Highest channel


Test band:	GSM 850 (EGPRS 1 link)
------------	------------------------

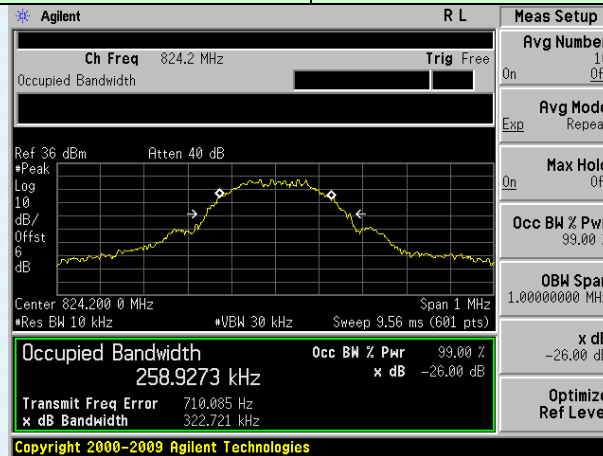

Lowest channel

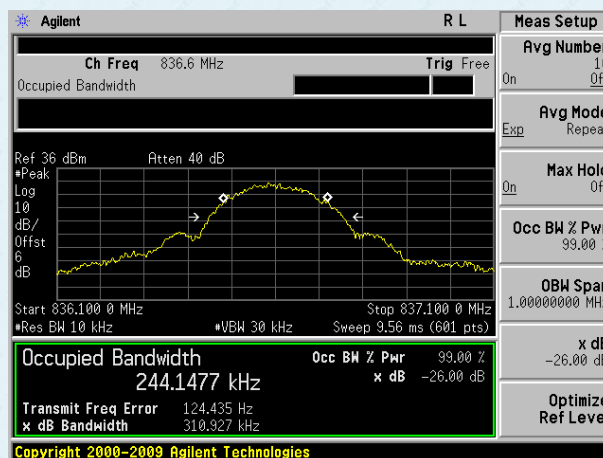


Middle channel

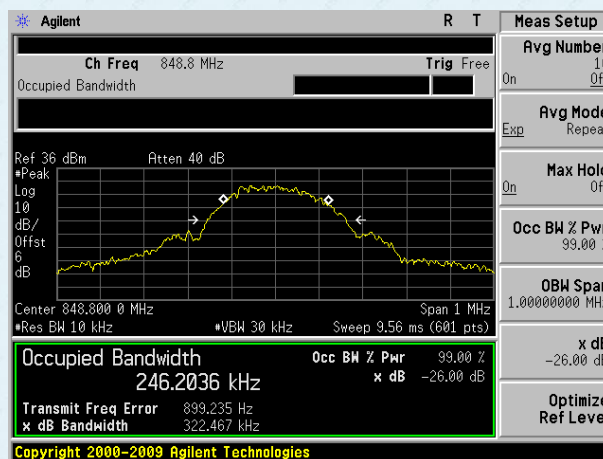


Highest channel


Test band:	PCS 1900 (GSM link)
------------	---------------------

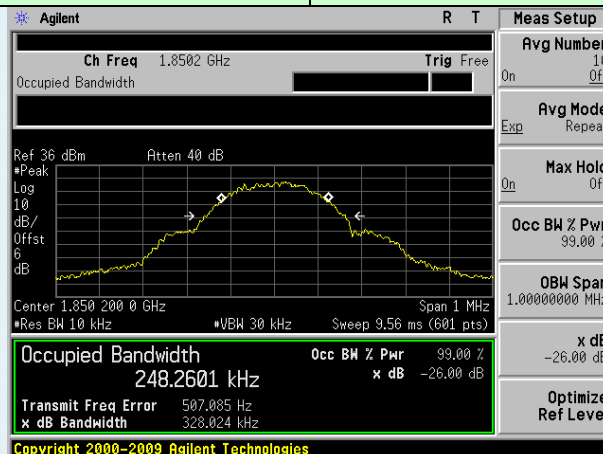

Lowest channel

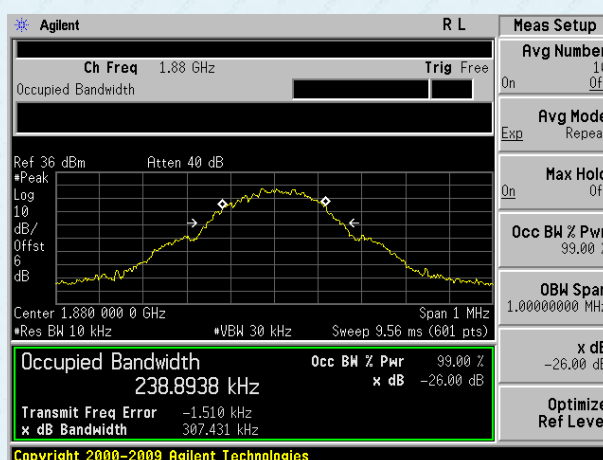


Middle channel

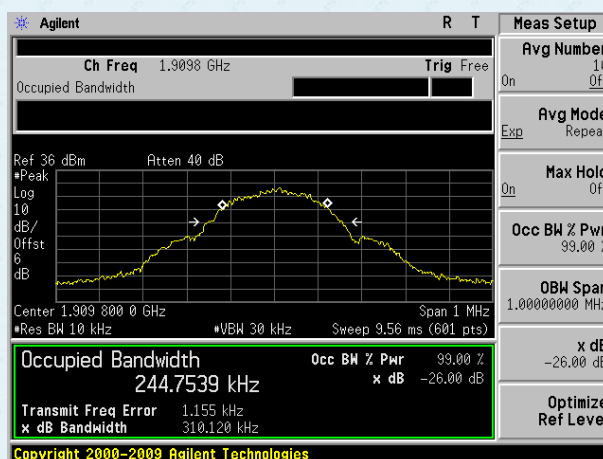


Highest channel

Test band:


PCS 1900 (GPRS 1 link)

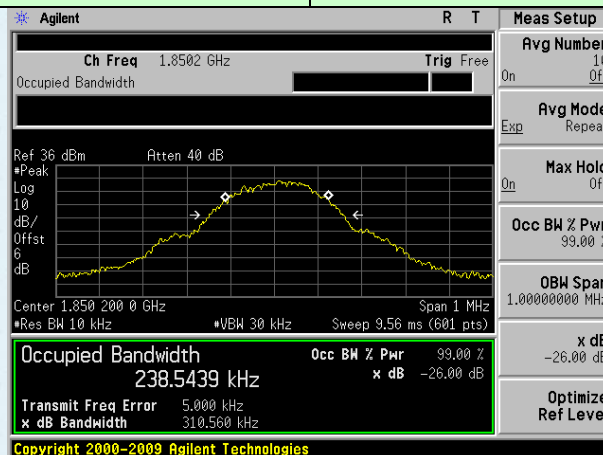

Lowest channel

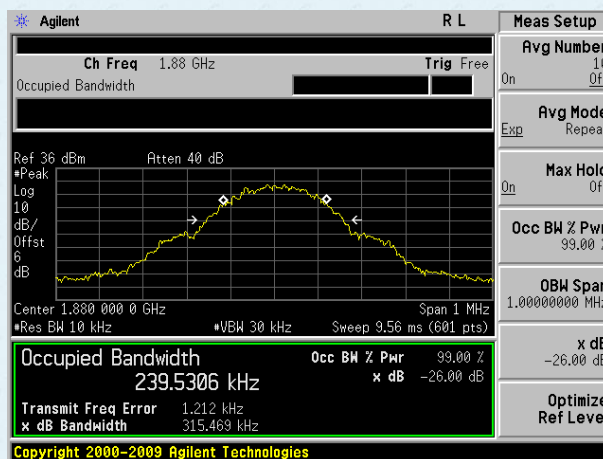


Middle channel

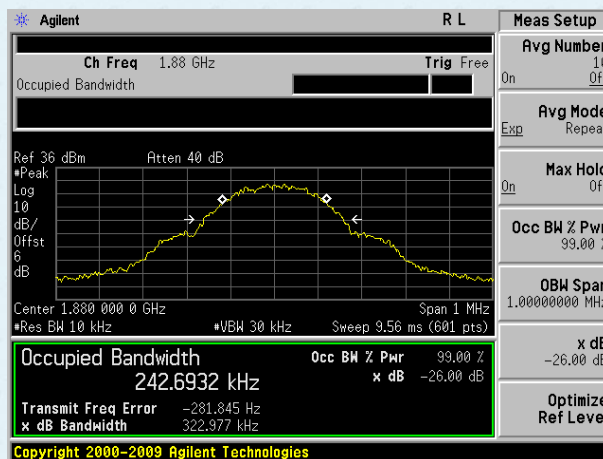


Highest channel

Test band:


PCS 1900 (EGPRS 1 link)

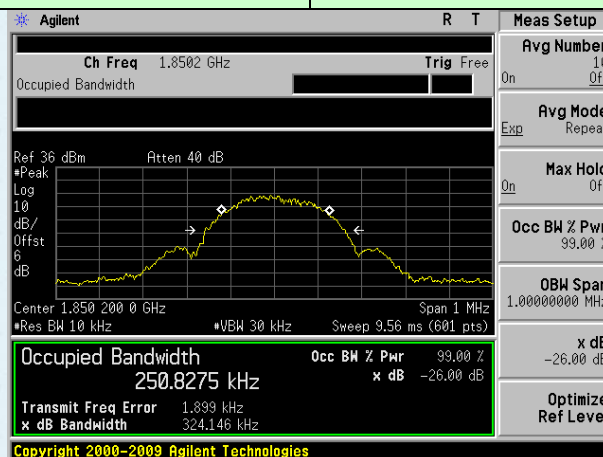

Lowest channel

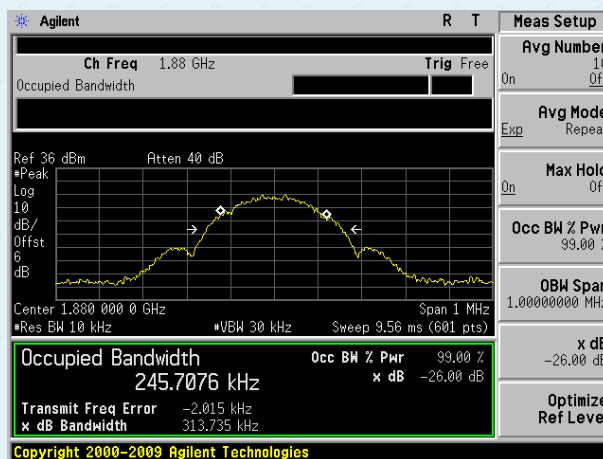

Middle channel

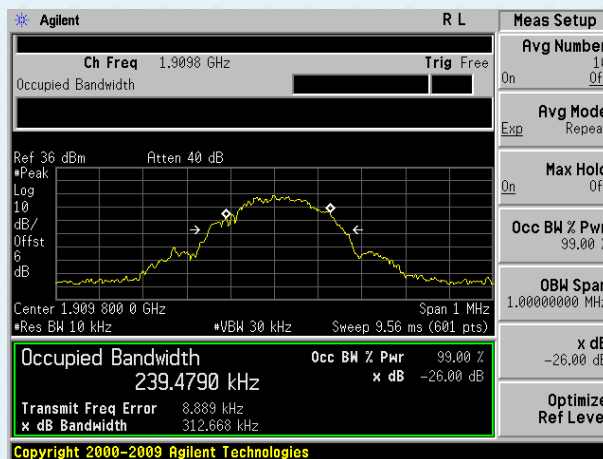


Highest channel

6.6 MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.



6.7 Out of band emission at antenna terminals

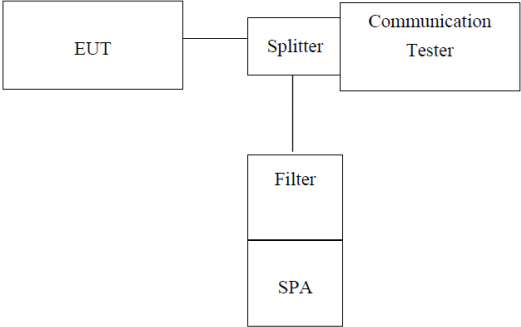Test Requirement:	FCC part 22.917 and FCC part 24.238
Test Method:	FCC part2.1051
Limit:	-13dBm
Test setup:	 <i>Note: Measurement setup for testing on Antenna connector</i>
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass



Test plot as follows:

Note: During the conducted spurious emission test, a band filter was used. The information of the filter is reported at section 6.0 (refer to item 24, 25).



Test Mode: Traffic mode	GSM 850 (GSM link)
-------------------------	--------------------

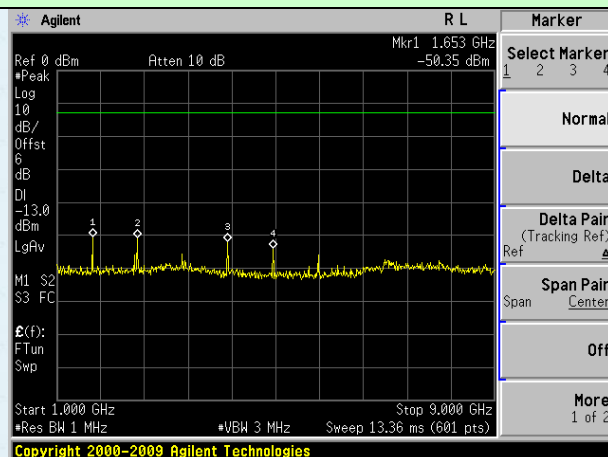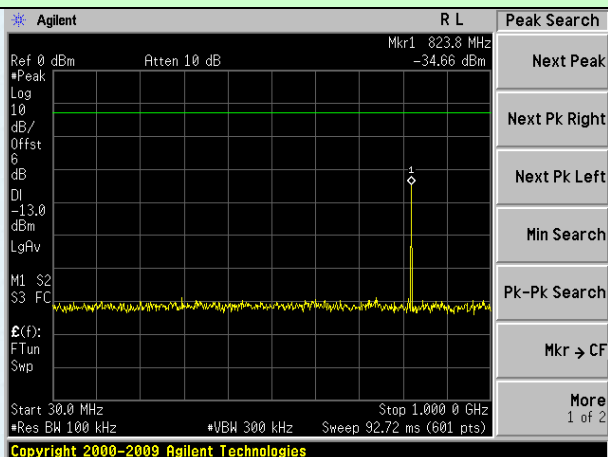

Lowest channel

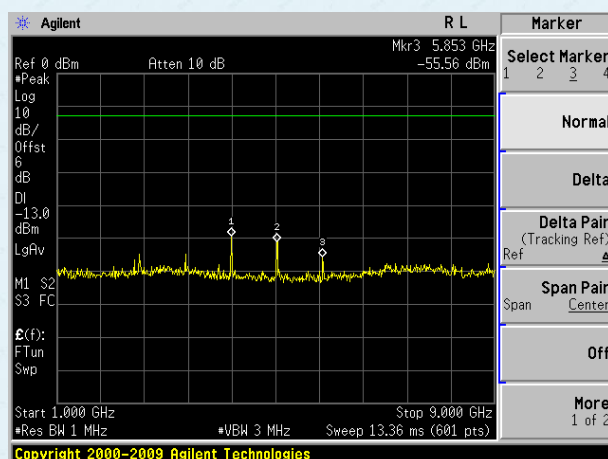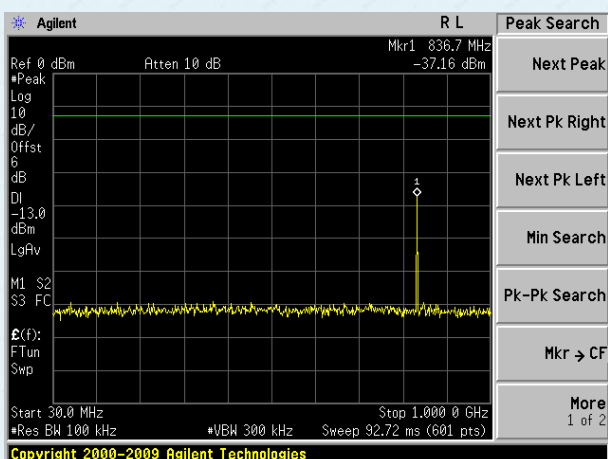



Middle channel

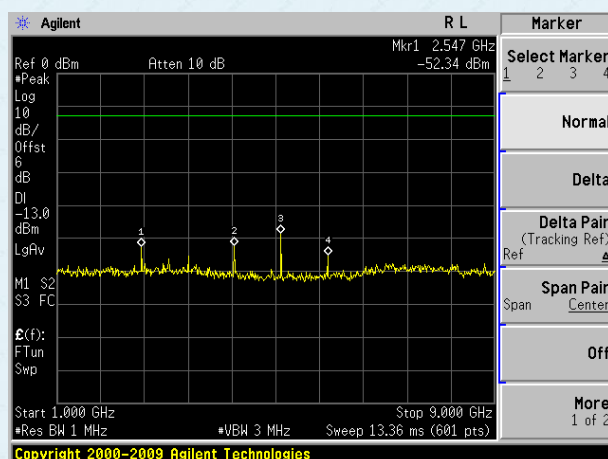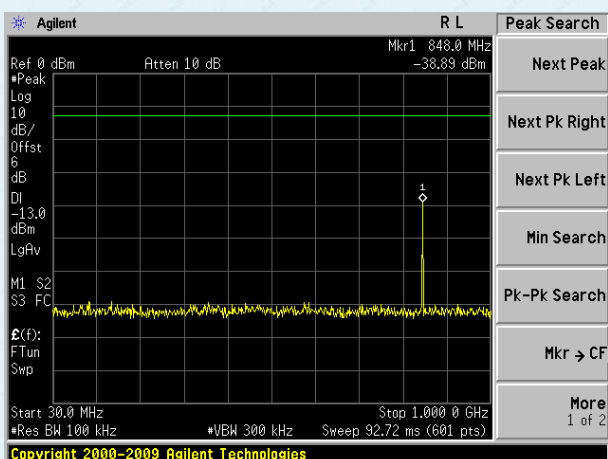



Highest channel

Test Mode: Traffic mode



GSM 850 (GPRS 1 link)

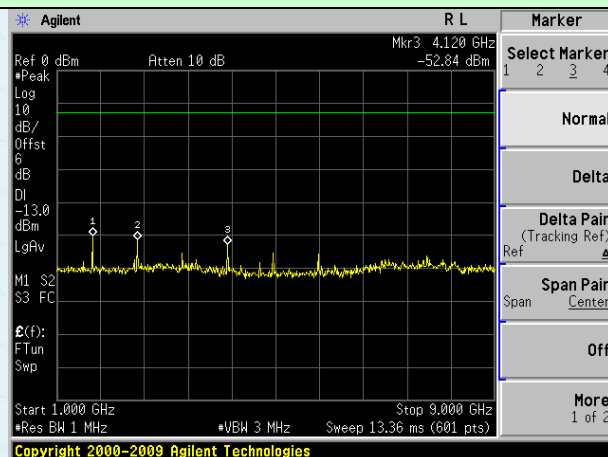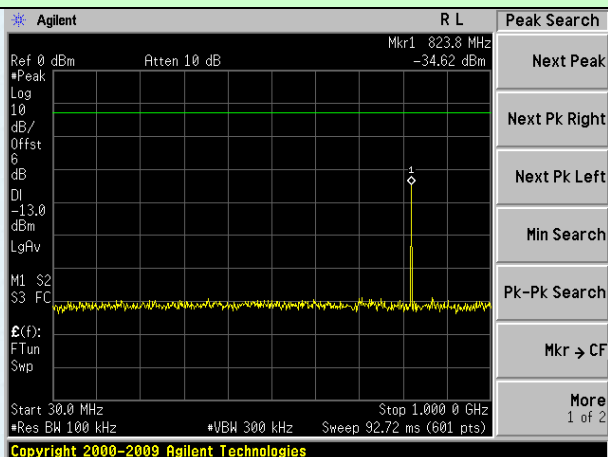

Lowest channel

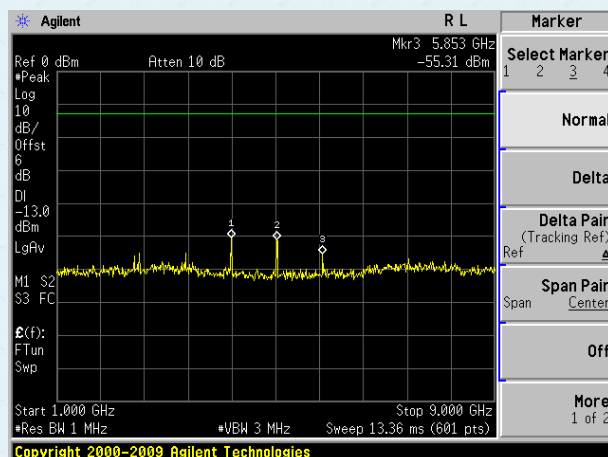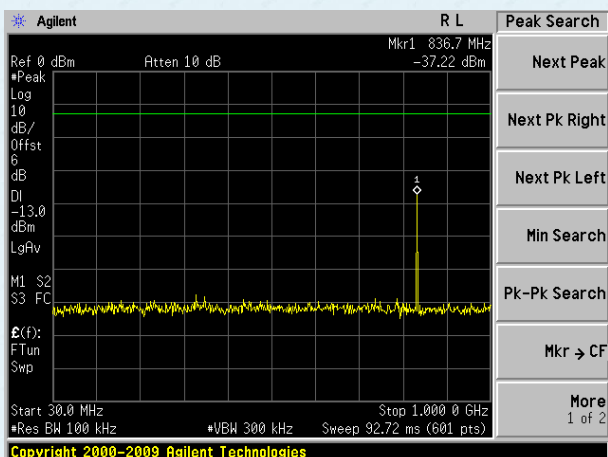



Middle channel

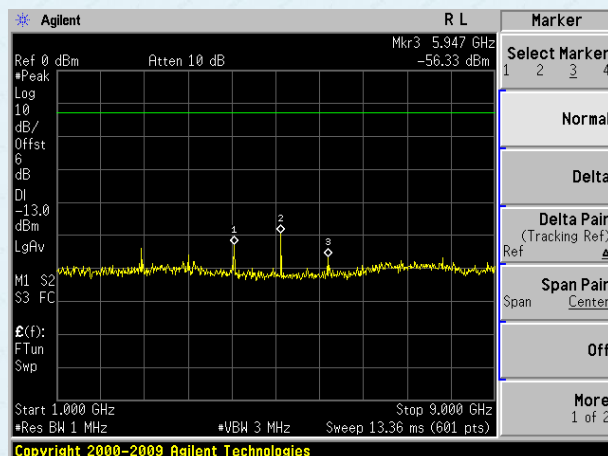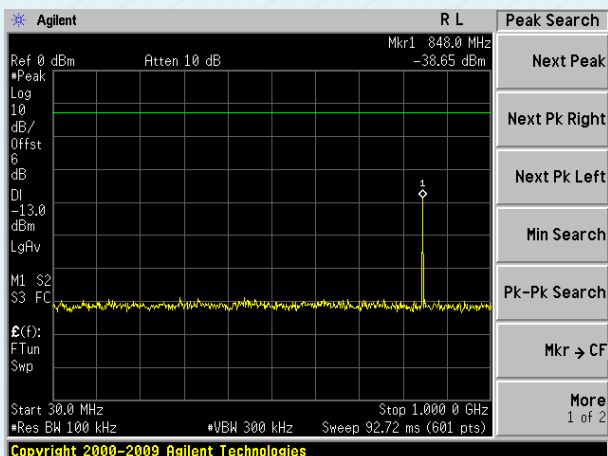



Highest channel

Test Mode: Traffic mode



GSM 850 (EGPRS 1 link)

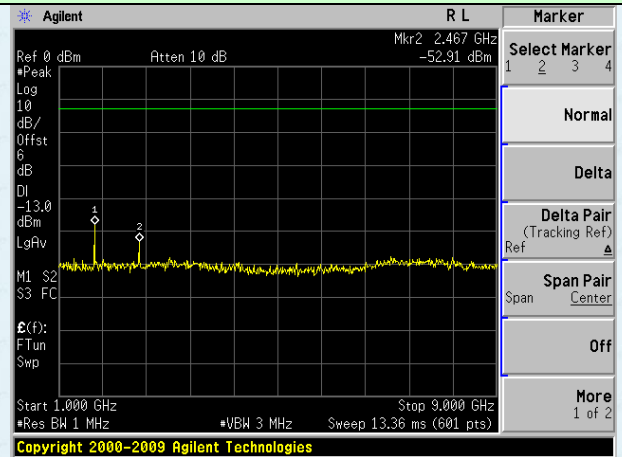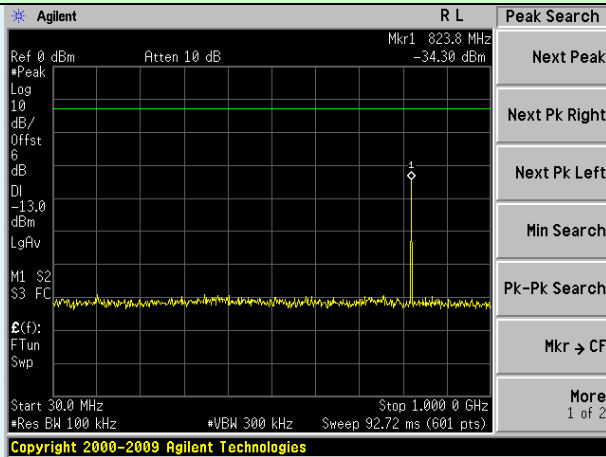

Lowest channel

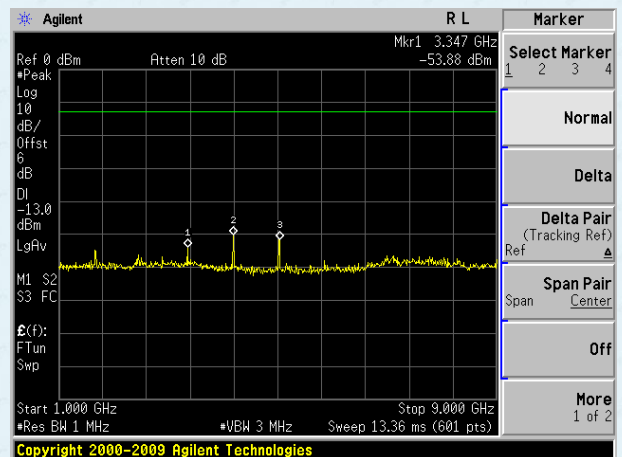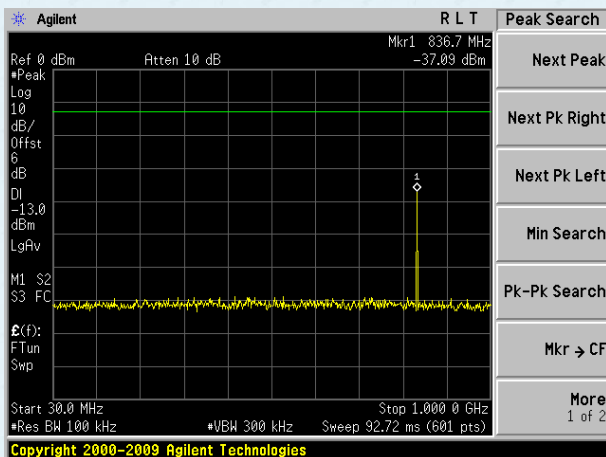



Middle channel

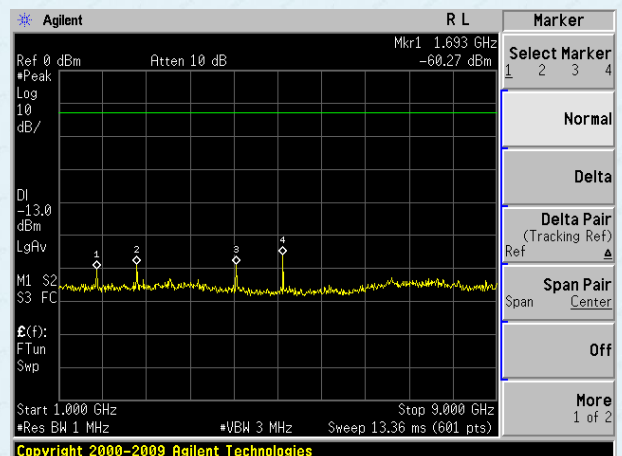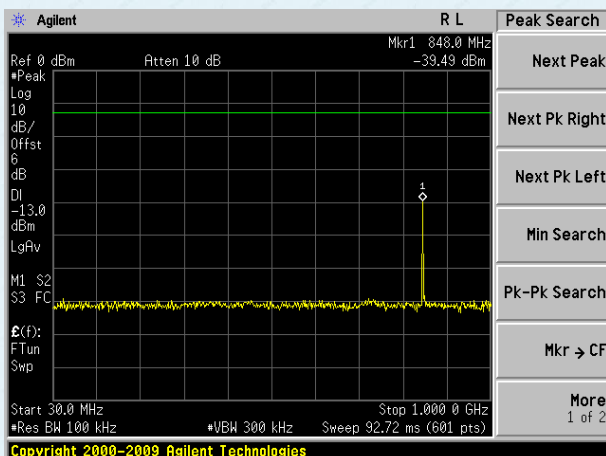



Highest channel

Test Mode: Traffic mode



PCS1900 (GSM link)

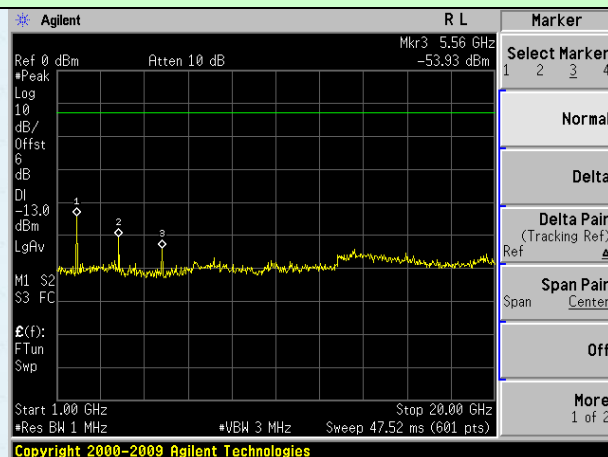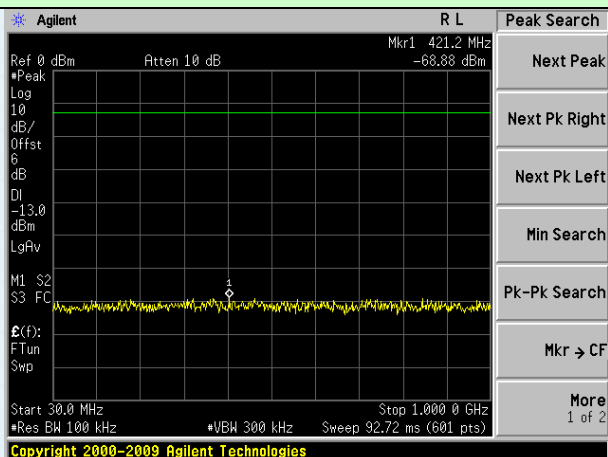

Lowest channel

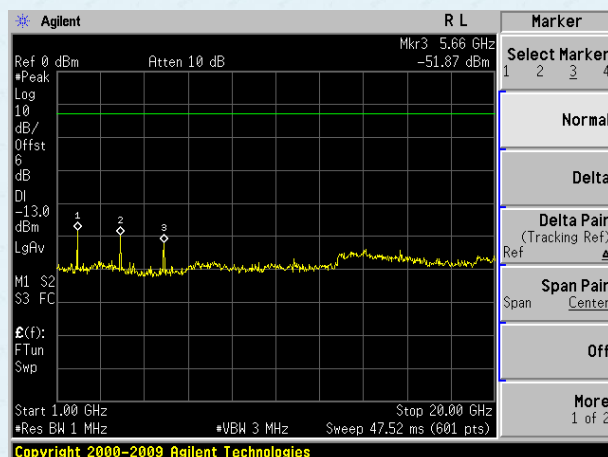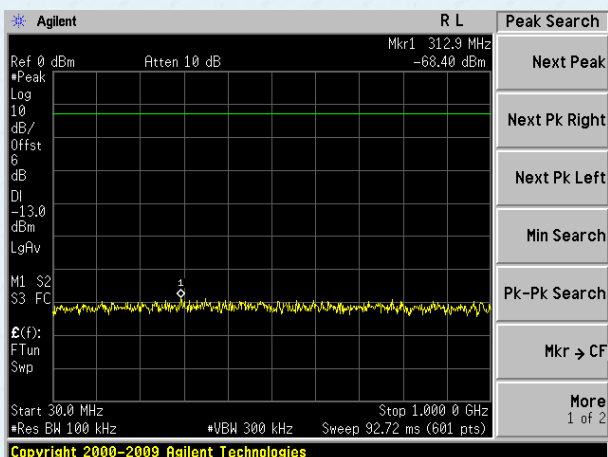



Middle channel

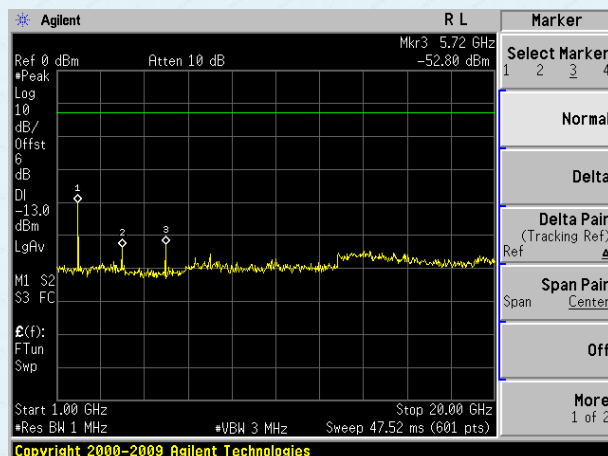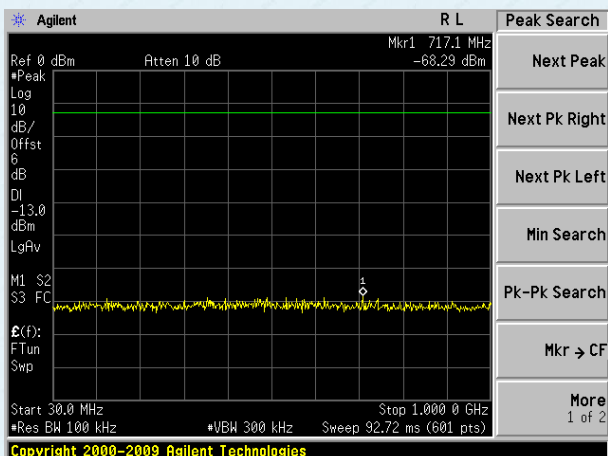



Highest channel

Test Mode: Traffic mode



PCS1900 (GPRS 1 link)

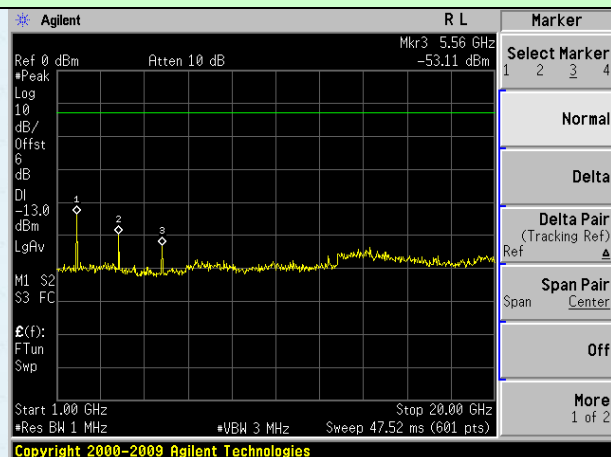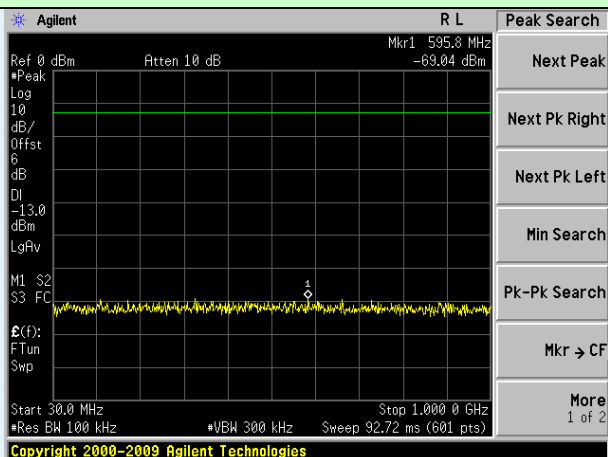

Lowest channel

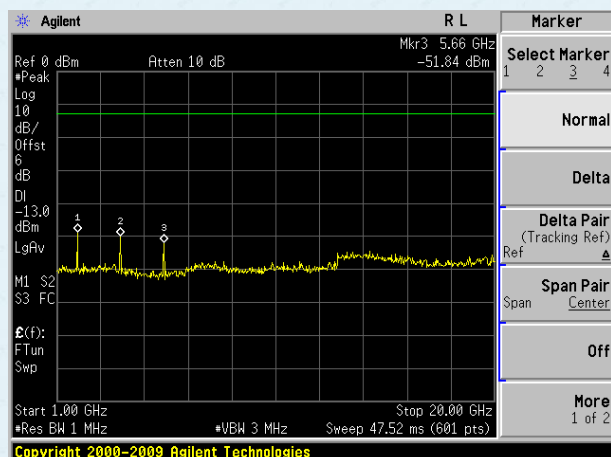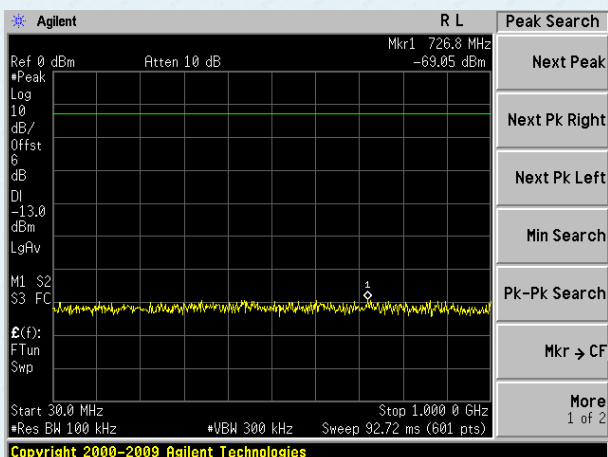



Middle channel

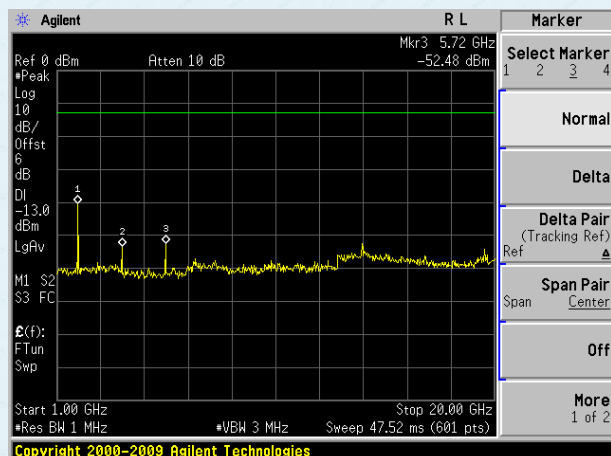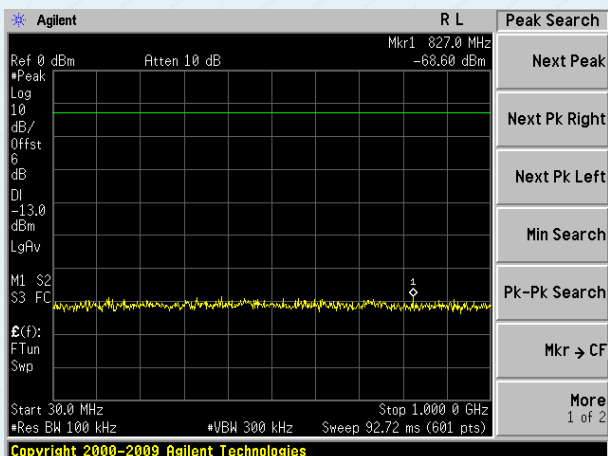



Highest channel

Test Mode: Traffic mode



PCS1900 (EGPRS 1 link)

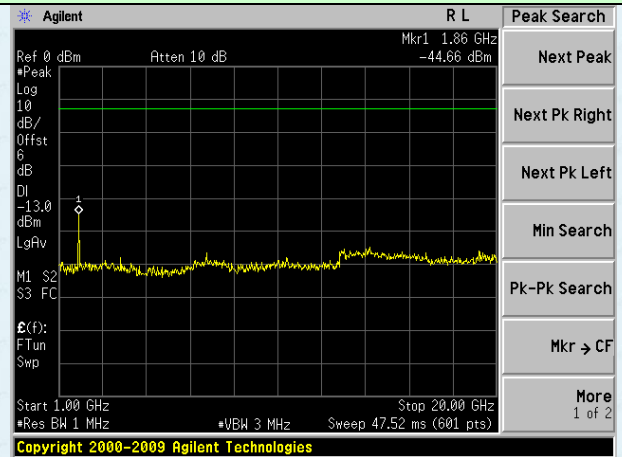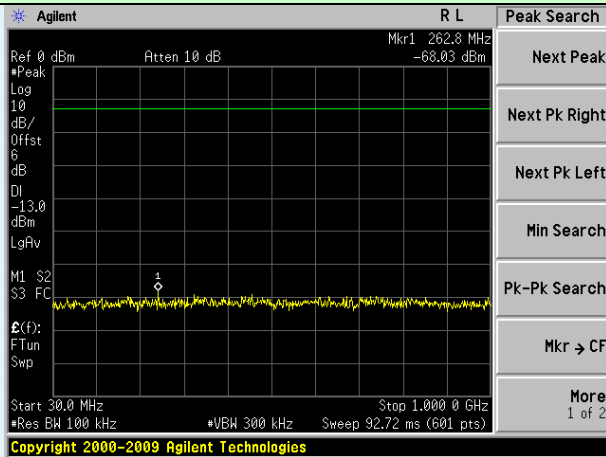

Lowest channel

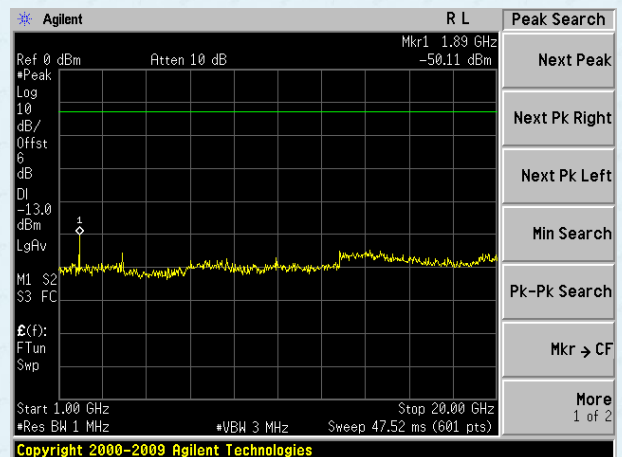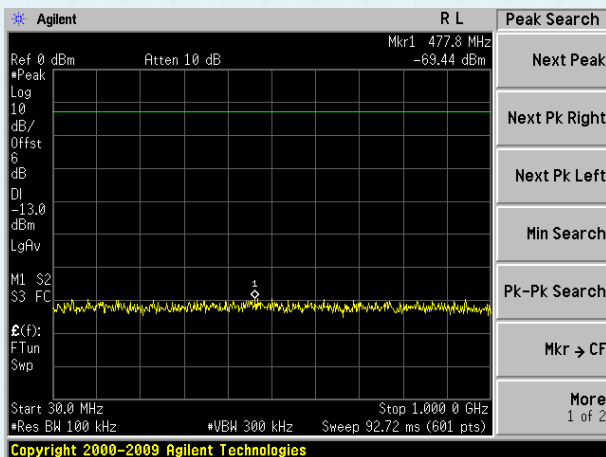



Middle channel

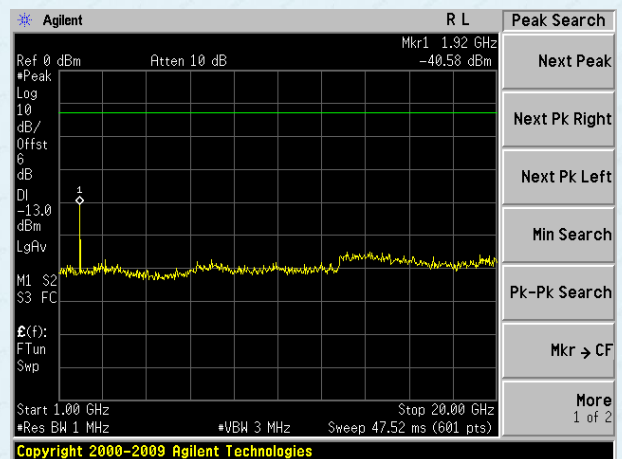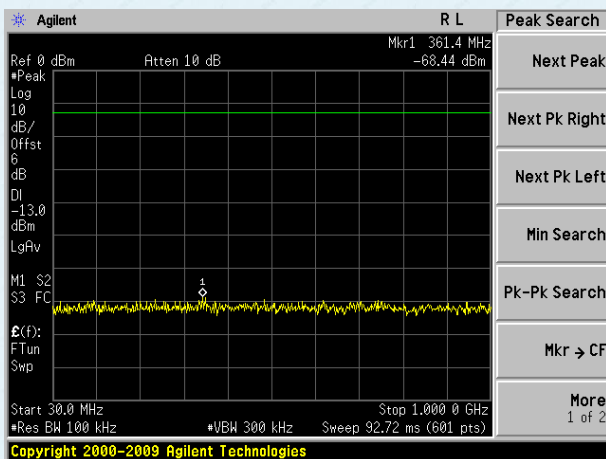




Highest channel

Band Edge:

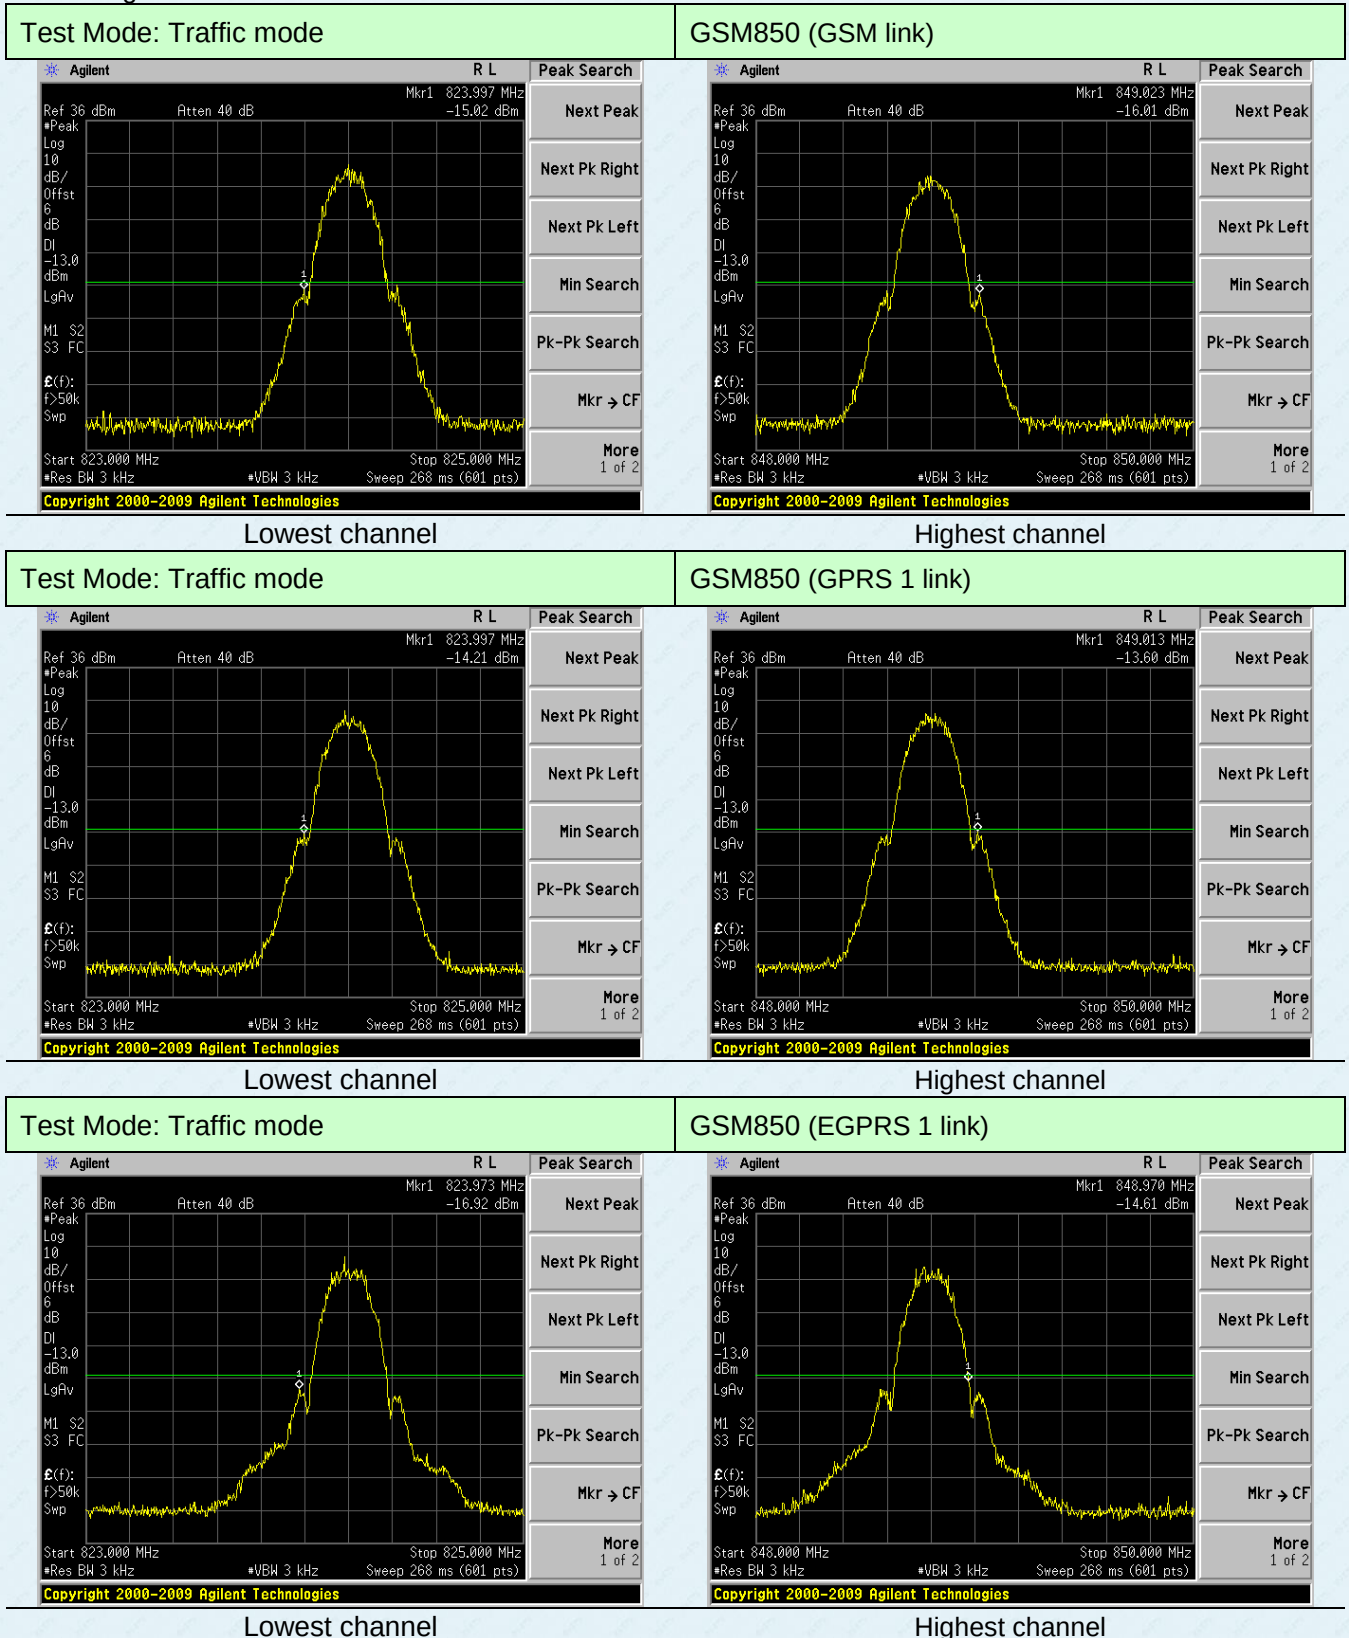

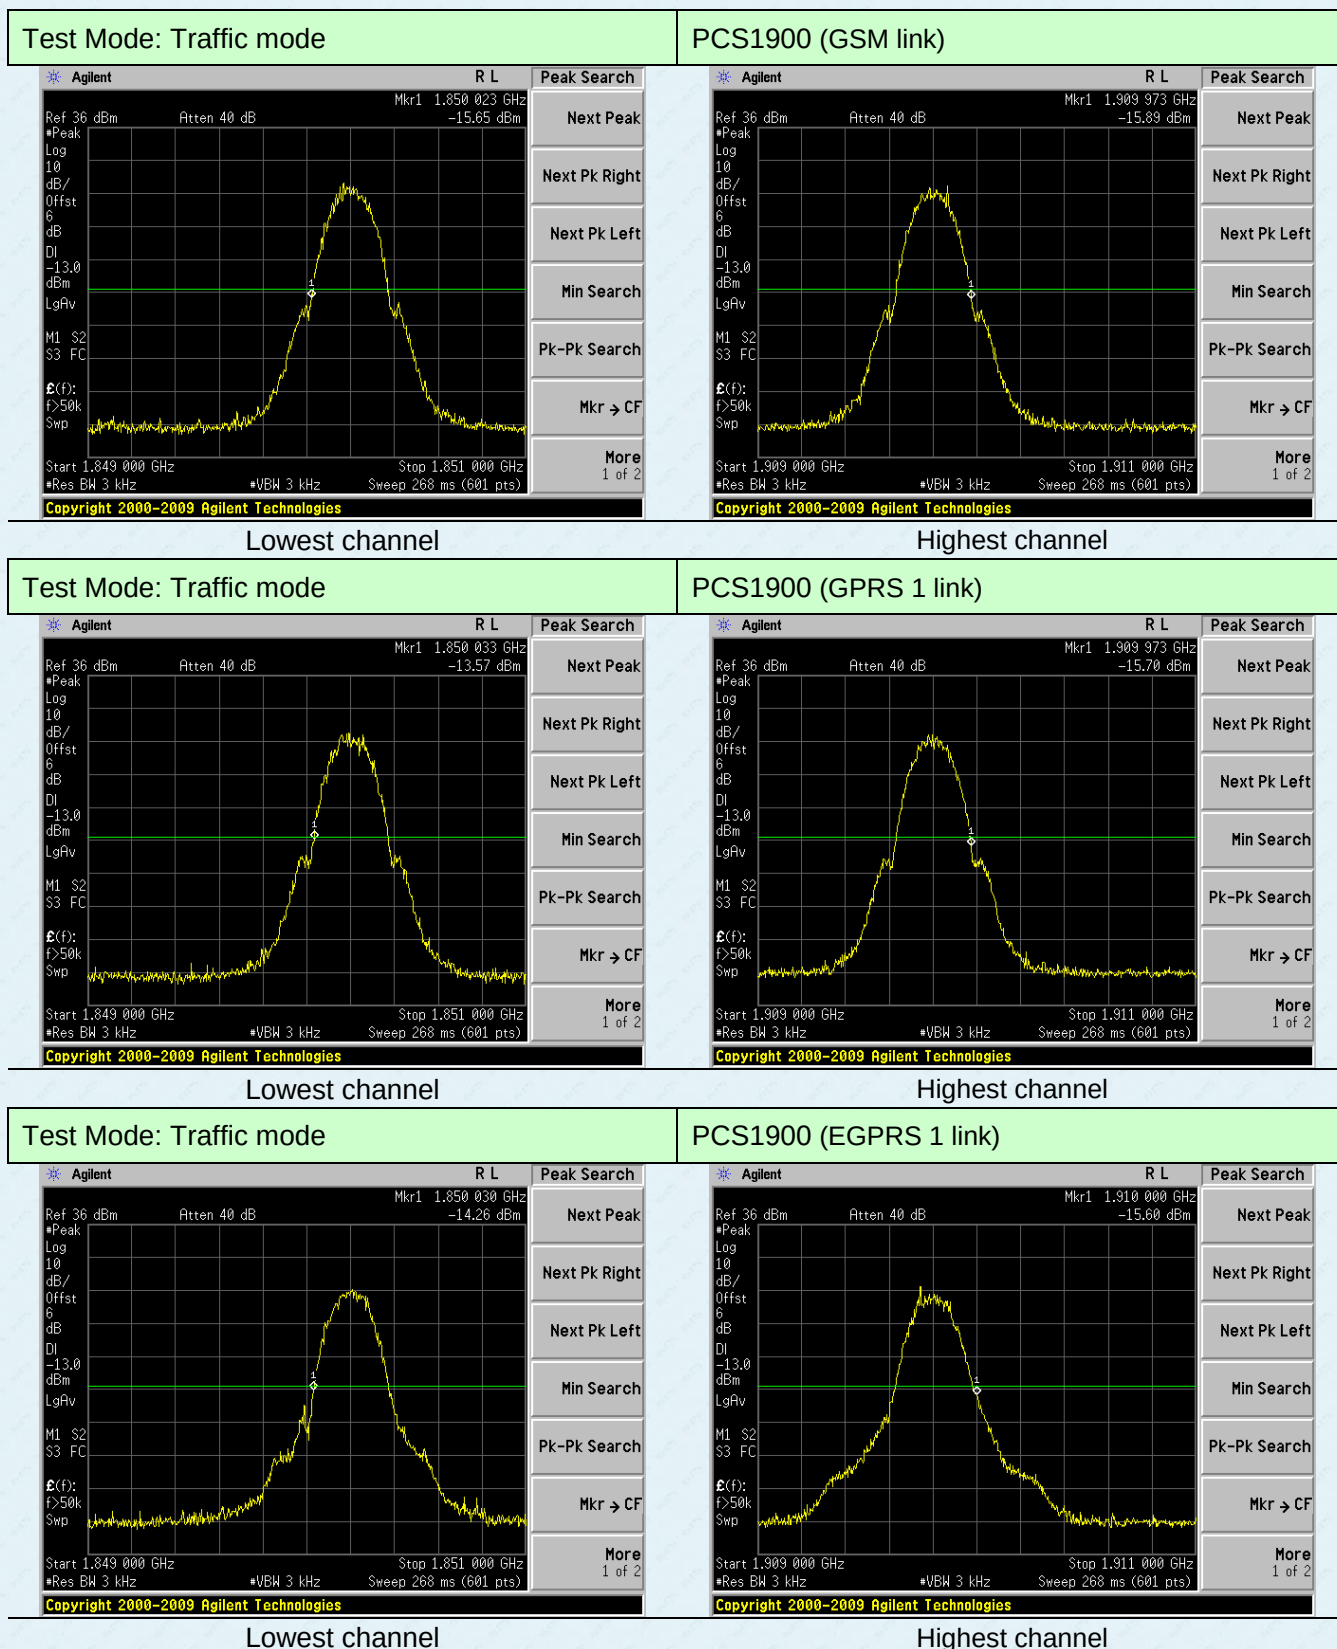

6.8 Field strength of spurious radiation measurement

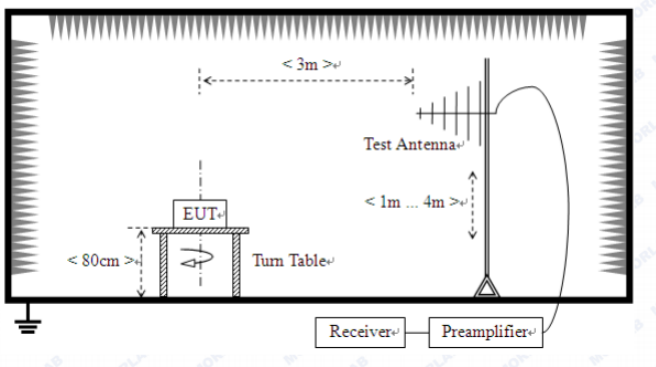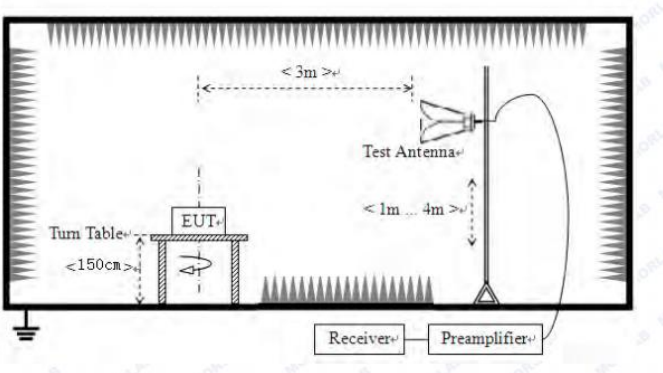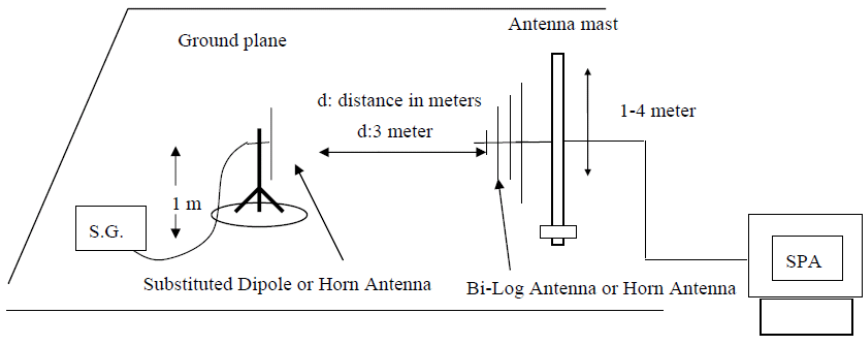Test Requirement:	FCC part22.917 and FCC part24.238
Test Method:	FCC part 2.1053 and ANSI C63.26:2015
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz  Substituted method: 

Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data


GSM 850								
Channel	Frequency(MHz)	Polarization	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	ERP (dBm)	Limit (dBm)	Over Limit (dBm)
Lowest	1648.40	H	-50.18	6.74	2.37	-47.96	-13	-34.96
	2472.60	H	-49.5	8.94	3.18	-45.89	-13	-32.89
	3296.80	H	-55.98	10.62	3.62	-51.13	-13	-38.13
	1648.40	V	-53.24	6.74	2.37	-51.02	-13	-38.02
	2472.60	V	-46.71	8.94	3.18	-43.1	-13	-30.1
	3296.80	V	-51.59	10.62	3.62	-46.74	-13	-33.74
Middle	1673.20	H	-51.38	6.74	2.39	-49.18	-13	-36.18
	2509.80	H	-46.67	8.94	3.03	-42.91	-13	-29.91
	3346.40	H	-53.66	10.62	3.63	-48.82	-13	-35.82
	1673.20	V	-46.36	6.74	2.39	-44.16	-13	-31.16
	2509.80	V	-53.31	8.94	3.03	-49.55	-13	-36.55
	3346.40	V	-46.93	10.62	3.63	-42.09	-13	-29.09
Highest	1697.60	H	-55.7	6.74	2.4	-53.51	-13	-40.51
	2546.40	H	-52.09	8.94	3.06	-48.36	-13	-35.36
	3395.20	H	-55.22	10.62	3.64	-50.39	-13	-37.39
	1697.60	V	-48.73	6.74	2.4	-46.54	-13	-33.54
	2546.40	V	-55.09	8.94	3.06	-51.36	-13	-38.36
	3395.20	V	-48.33	10.62	3.64	-43.5	-13	-30.5

The emission levels of below 1 GHz are very lower than the limit so not show in test report

GSM 1900								
Channel	Frequency(MHz)	Polarization	SGP [dBm]	Substitution Gain[dBi]	Cable loss[dB]	EIRP (dBm)	Limit (dBm)	Over Limit (dBm)
Lowest	3700.40	H	-51.69	13.13	3.88	-42.44	-13	-29.44
	5550.60	H	-47.39	11.62	5.27	-41.04	-13	-28.04
	7400.80	H	-48.05	10.22	6.73	-44.56	-13	-31.56
	3700.40	V	-51.8	13.13	3.88	-42.55	-13	-29.55
	5550.60	V	-49.72	11.62	5.27	-43.37	-13	-30.37
	7400.80	V	-52.79	10.22	6.73	-49.3	-13	-36.3
Middle	3760.00	H	-49.95	13.13	3.9	-40.72	-13	-27.72
	5640.00	H	-51.18	11.62	5.33	-44.89	-13	-31.89
	7520.00	H	-48.44	10.22	6.82	-45.04	-13	-32.04
	3760.00	V	-48.31	13.13	3.9	-39.08	-13	-26.08
	5640.00	V	-50.26	11.62	5.33	-43.97	-13	-30.97
	7520.00	V	-48.4	10.22	6.82	-45	-13	-32
Highest	3819.60	H	-52.32	13.13	3.92	-43.11	-13	-30.11
	5729.40	H	-46.97	11.62	5.4	-40.75	-13	-27.75
	7639.20	H	-46.47	10.22	6.8	-43.05	-13	-30.05
	3819.60	V	-47.82	13.13	3.92	-38.61	-13	-25.61
	5729.40	V	-52.64	11.62	5.4	-46.42	-13	-33.42
	7639.20	V	-50.05	10.22	6.8	-46.63	-13	-33.63

The emission levels of below 1 GHz are very lower than the limit so not show in test report

6.9 Frequency stability V.S. Temperature measurement

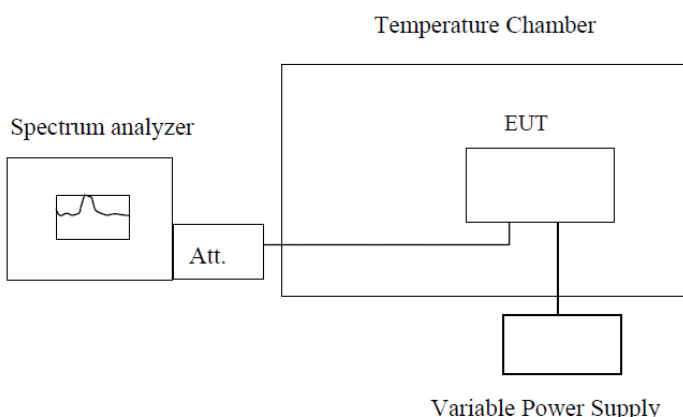
Test Requirement:	FCC part 22.355 and FCC part 24.235
Test Method:	FCC Part2.1055(a)(1)(b)
Limit:	2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	27	0.0329	2.5	Pass
	-10	23	0.0277		
	0	19	0.0225		
	10	22	0.0264		
	20	19	0.0225		
	30	32	0.0380		
	40	29	0.0342		
	50	27	0.0329		
Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	23	0.0276	2.5	Pass
	-10	20	0.0235		
	0	17	0.0208		
	10	19	0.0221		
	20	16	0.0194		
	30	29	0.0343		
	40	24	0.0289		
	50	23	0.0276		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12	-20	52	0.0619	2.5	Pass
	-10	43	0.0519		
	0	38	0.0452		
	10	42	0.0506		
	20	37	0.0441		
	30	62	0.0741		
	40	54	0.0646		
	50	51	0.0612		

Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	50	0.0266	2.5	Pass
	-10	42	0.0224		
	0	36	0.0189		
	10	42	0.0224		
	20	37	0.0196		
	30	59	0.0315		
	40	51	0.0273		
	50	49	0.0259		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	44	0.0236	2.5	Pass
	-10	36	0.0191		
	0	30	0.0158		
	10	37	0.0197		
	20	30	0.0158		
	30	50	0.0268		
	40	42	0.0223		
	50	44	0.0236		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error			Result
		Hz	ppm		
12	-20	81	0.0430	2.5	Pass
	-10	66	0.0352		
	0	55	0.0292		
	10	67	0.0357		
	20	57	0.0301		
	30	90	0.0481		
	40	76	0.0404		
	50	80	0.0424		

6.10 Frequency stability V.S. Voltage measurement

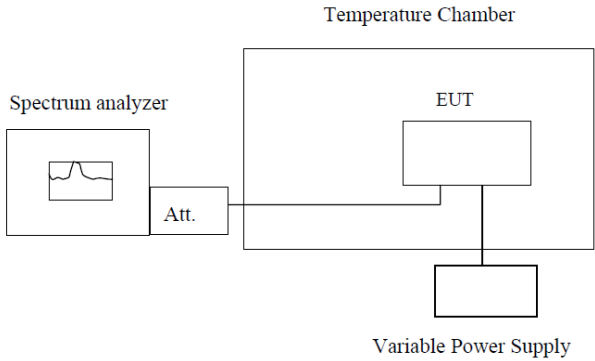Test Requirement:	FCC part 22.355 and FCC part 24.235
Test Method:	FCC Part2.1055(d)(1)(2)
Limit:	2.5ppm
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.0 for details
Test mode:	Refer to section 6.1 for details
Test results:	Pass

Measurement Data

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	15	0.0179	2.5	Pass
	24	17	0.0205		
Reference Frequency: GSM850 (GPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	28	0.0331	2.5	Pass
	24	18	0.0213		
Reference Frequency: GSM850 (EGPRS 1 link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	30	0.0357	2.5	Pass
	24	35	0.0423		

Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	30	0.0158	2.5	Pass
	24	31	0.0167		
Reference Frequency: PCS1900 (GPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	43	0.0226	2.5	Pass
	24	33	0.0177		
Reference Frequency: PCS1900 (EGPRS 1 link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	12	87	0.0463	2.5	Pass
	24	41	0.0220		

7 Test Setup Photo

Reference to the **appendix I** for details.

8 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----