

Product specification


Quick Reference Date

	Antenna module on the system board	
Frequenc Range	2400 ~ 2500MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	6 0.2 %	
Gain (dBi)	1.9	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Input Impedence(ohm)	50	
Polarization Type	Vertical /Horizontal	
V . S .W . R	<1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

Antenna type: PCB Antenna

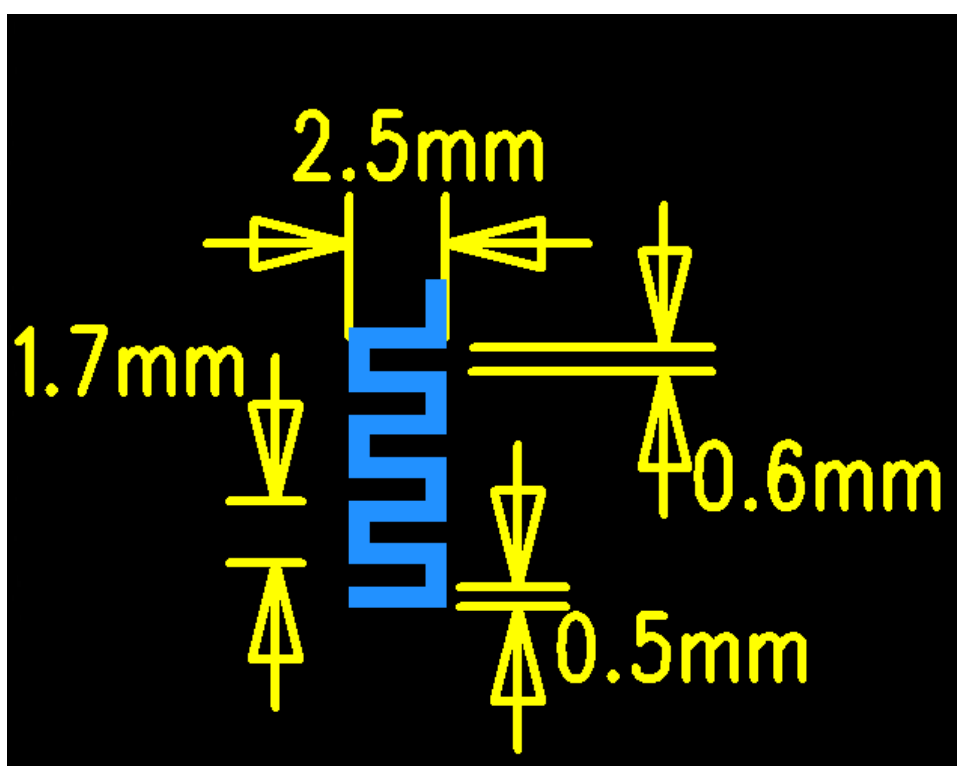


Antenna Gain



Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	0	1.9	0	1.1	0	60.2 %


Return Lo

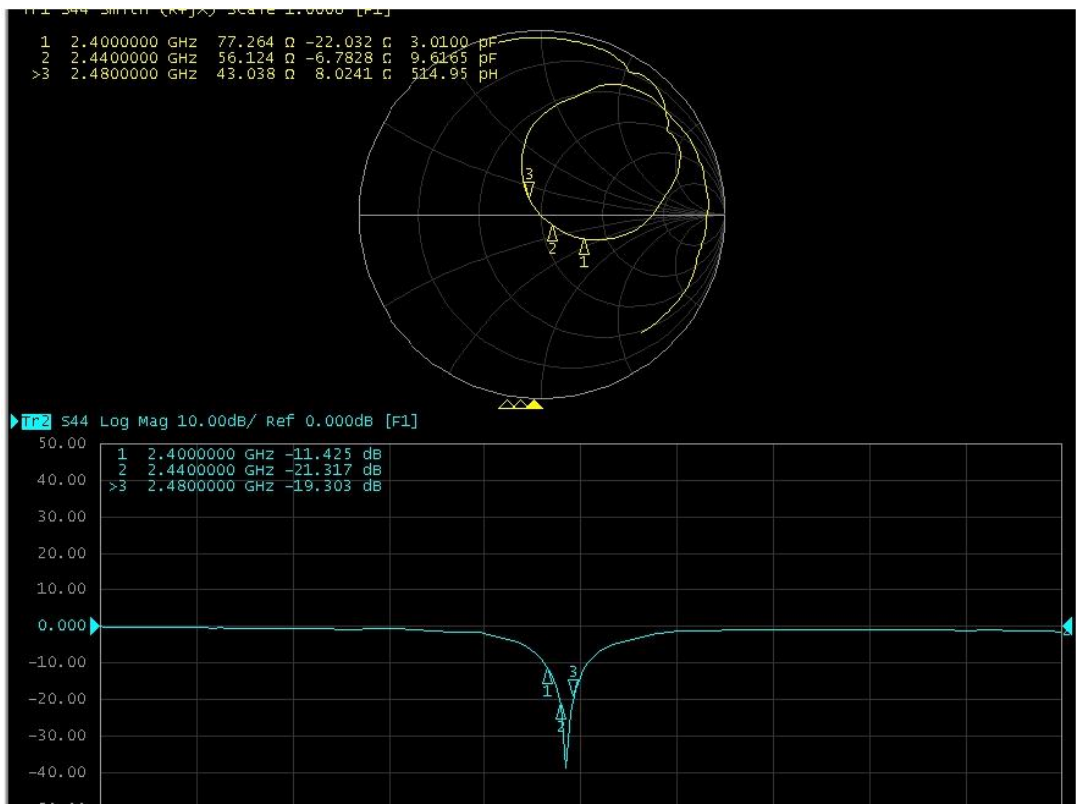


The Environment of Antenna Radiation Pattern

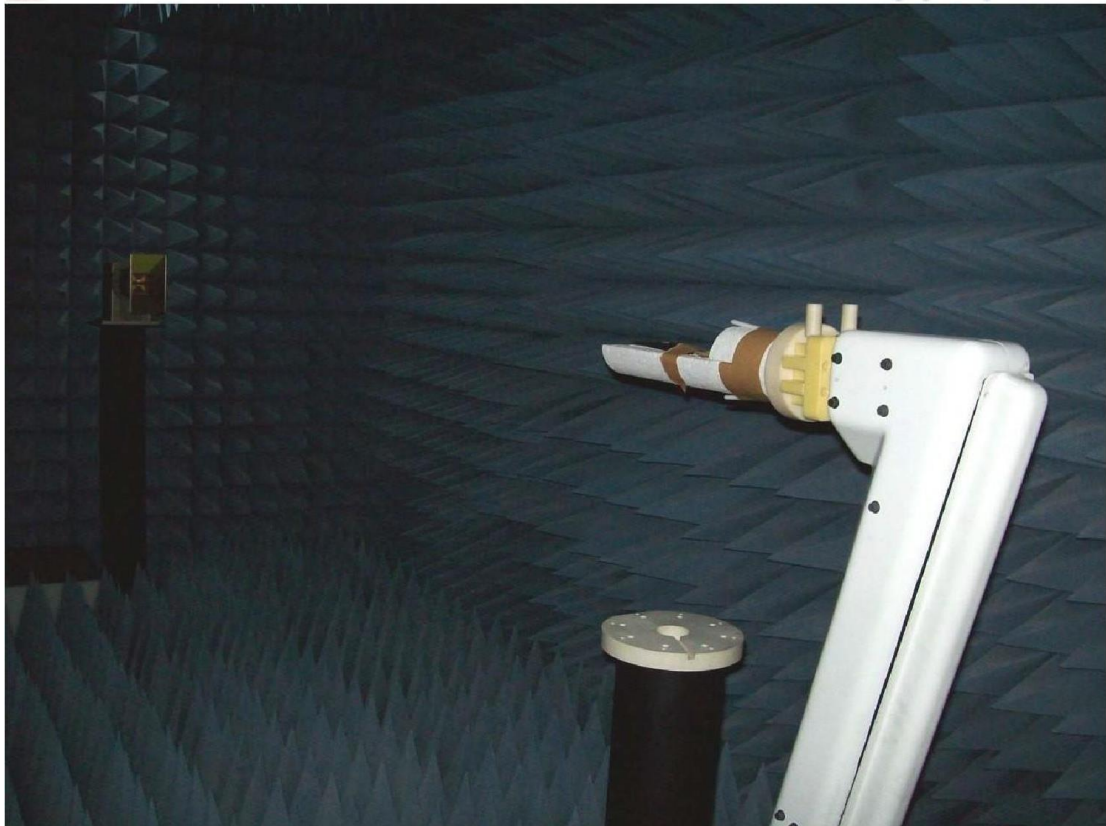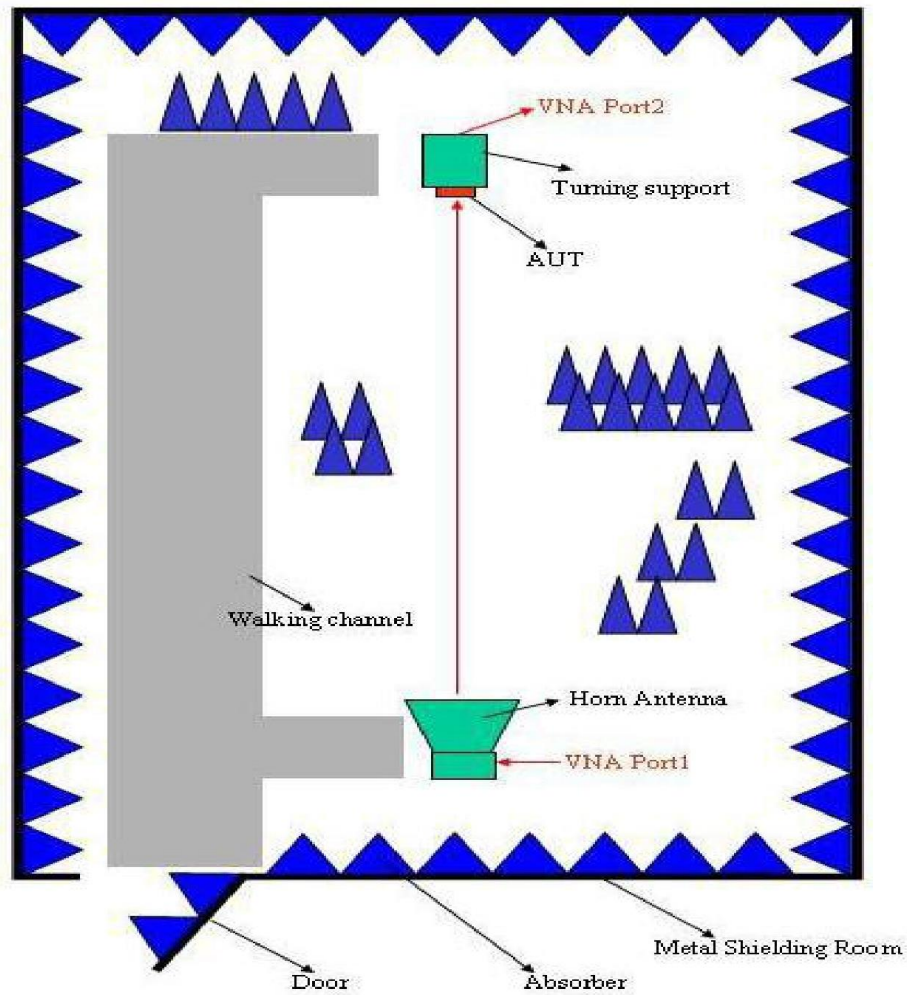


3D radiation pattern diagram

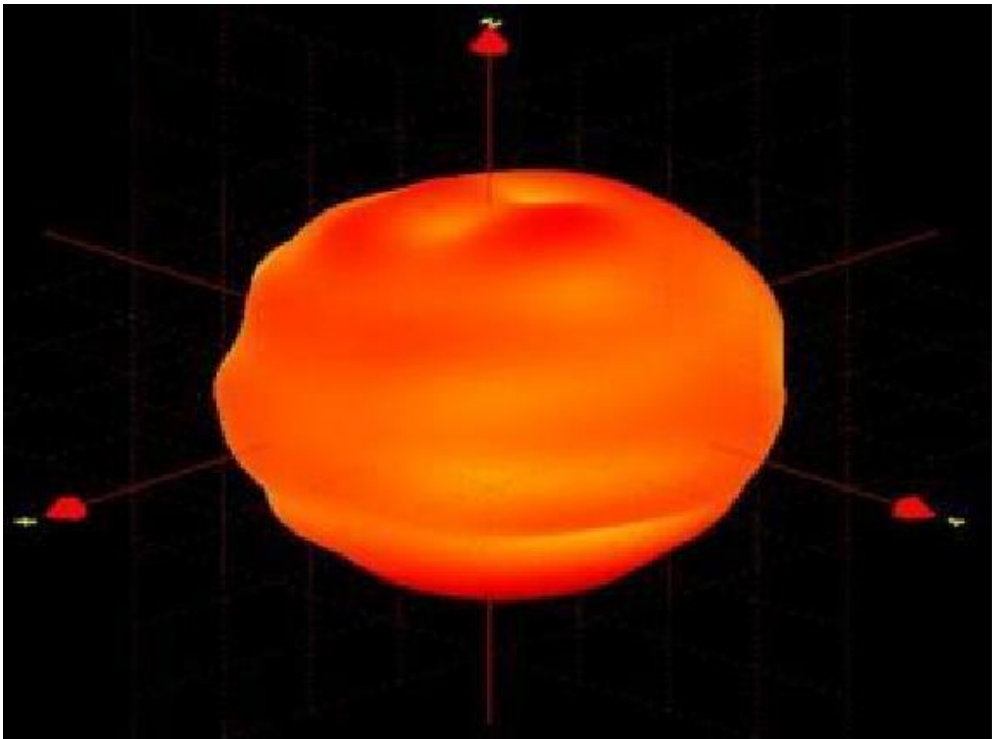


YZ-plane

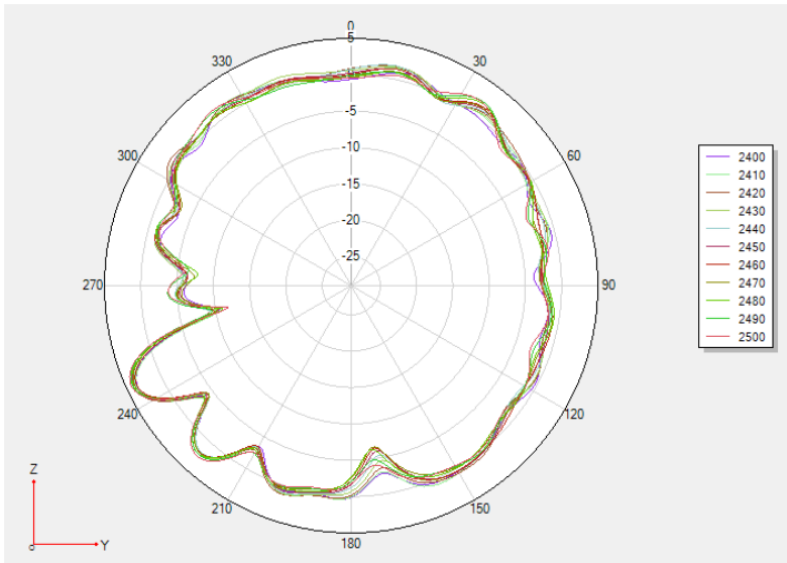

XZ-plane

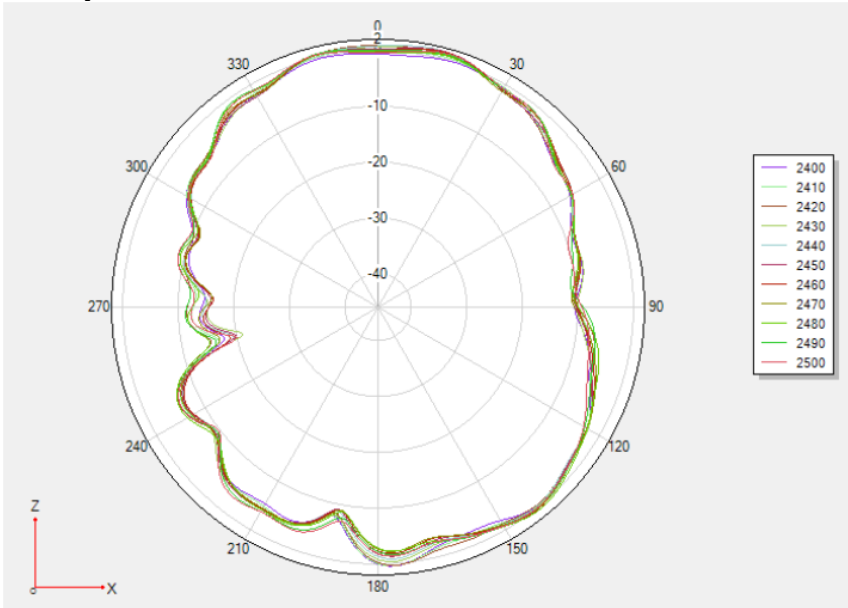

XY-plane

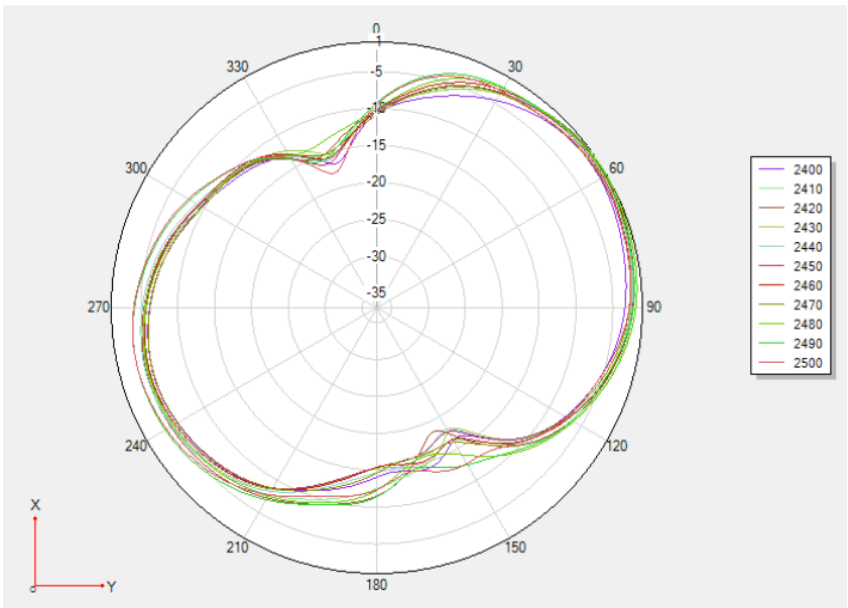

ANT manufactuer

Jiangmen yongxu circuit board co., ltd.

Factory address: Jiangmen Taishan City Chongling
Town Hongling Industrial Zone Hongling Road on the
7th plant

Office: Baoan District,Shenzhen City Tong Wei
Community Fenglang Avenue Atos Source Chi
Chuang Valley Building 5 103

Tel:0755-23309767 Email:JMSYXPCB@163.COM

Market Department QQ:3495845273

Website: WWW.JMYXPCB.COM