



# RADIO TEST REPORT

Report No.: SHATBL2112037W02

Applicant:

Chengdu Just Do It Information and Technology Co., Ltd.

Address:

Rm 604&605, Unit 1, Building 2, No. 1, Section 1, Huifu Avenue,  
Huayang Street, Tianfu New District, Chengdu, China.

Product Name	:	Bobcat LoRa Gateway Module
Brand Name	:	BOBCAT
Model Name	:	B100
Series Model	:	N/A
FCC ID	:	2AZCK-B100
Test Standard	:	FCC Part 15.247

"Shanghai ATBL Technology Co., Ltd." hereby certifies that according to actual testing conditions. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, ATBL shall not assume any responsibility. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material. This report will be void without authorized signature or special seal for testing report. Do not copied without authorization.

Tel:+86(0)21-51298625

Web:[www.atbl-lab.com](http://www.atbl-lab.com)

Email:[atbl@atbl-lab.com](mailto:atbl@atbl-lab.com)

**TEST RESULT CERTIFICATION**

Applicant's Name .....: Chengdu Just Do It Information and Technology Co., Ltd.  
Address.....: Rm 604&605, Unit 1, Building 2, No. 1, Section 1, Huafu Avenue, Huayang Street, Tianfu New District, Chengdu, China.  
Manufacturer's Name .....: Chengdu Just Do It Information and Technology Co., Ltd.  
Address.....: Rm 604&605, Unit 1, Building 2, No. 1, Section 1, Huafu Avenue, Huayang Street, Tianfu New District, Chengdu, China.

**Product Description**

Product Name .....: Bobcat LoRa Gateway Module  
Brand Name .....: BOBCAT  
Model Name.....: B100  
SeriesModel .....: N/A  
Test Standards .....: FCC Part15.247

Test Procedure .....: ANSI C63.10-2013

This device described above has been tested by ATBL, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ATBL, this document may be altered or revised by ATBL, personal only, and shall be noted in the revision of the document.

**Date of Test**.....:

Date of receipt of test item .....: 30 Dec. 2021

Date (s) of performance of tests : 31 Dec. 2021~07 Jan. 2022

Date of Issue .....: 20 Jan. 2022

Test Result .....: Pass

Report Prepared by :

*Roean wei*

(Roean wei)



Report Approved by :

*Ghost li.*

(Ghost li)

Authorized Signatory :

*Terry yang*

(Terry yang)

Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 LABORATORY INFORMATION	12
2.7 MEASUREMENT UNCERTAINTY	12
2.8 EQUIPMENTS LIST	13
<b>3. EMC EMISSION TEST</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>27</b>
4.1 LIMIT	27
4.2 TEST PROCEDURE	27
4.3 TEST SETUP	27
4.4 EUT OPERATION CONDITIONS	28
4.5 TEST RESULTS	28
<b>5. NUMBER OF HOPPING CHANNEL</b>	<b>32</b>
5.1 LIMIT	32
5.2 TEST PROCEDURE	32
5.3 TEST SETUP	32
5.4 EUT OPERATION CONDITIONS	32
5.5 TEST RESULTS	33
<b>6. AVERAGE TIME OF OCCUPANCY</b>	<b>34</b>
6.1 LIMIT	34
6.2 TEST PROCEDURE	34
6.3 TEST SETUP	34
6.4 EUT OPERATION CONDITIONS	34
6.5 TEST RESULTS	35

Table of Contents	Page
<b>7. HOPPING CHANNEL SEPARATION MEASUREMEN</b>	<b>39</b>
7.1 LIMIT	39
7.2 TEST PROCEDURE	39
7.3 TEST SETUP	39
7.4 EUT OPERATION CONDITIONS	39
7.5 TEST RESULTS	40
<b>8. BANDWIDTH TEST</b>	<b>42</b>
8.1 LIMIT	42
8.2 TEST PROCEDURE	42
8.3 TEST SETUP	42
8.4 EUT OPERATION CONDITIONS	42
8.5 TEST RESULTS	43
<b>9. OUTPUT POWER TEST</b>	<b>45</b>
9.1 LIMIT	45
9.2 TEST PROCEDURE	45
9.3 TEST SETUP	45
9.4 EUT OPERATION CONDITIONS	45
9.5 TEST RESULTS	46
<b>10. ANTENNA REQUIREMENT</b>	<b>47</b>
10.1 STANDARD REQUIREMENT	47
10.2 EUT ANTENNA	47
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>48</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	20 Jan. 2022	SHATBL2112037W02	ALL	Initial Issue

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

<b>FCC Part15.247,Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247(b)(2)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(1)(i)	Number of Hopping Frequency	PASS	--
15.247(f)	Dwell Time	PASS	--
15.247(a)(1)	20dB Bandwidth 99% Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Bobcat LoRa Gateway Module
Trade Name	BOBCAT
Model Name	B100
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Frequency	902.3~915.1MHz (125KHz)
Modulation Type	LoRa
Power Rating	DC 3.3V 1A
Hardware version number	VER:03
Software versionnumber	VER:01
Connecting I/O Port(s)	Please refer to the Note 1.

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.3	/	/	/	/
2	902.5	32	908.5	/	/
3	902.7	33	908.7	/	/
/	/	34	908.9	/	/
/	/	/	/	63	914.7
/	/	/	/	64	914.9
/	/	/	/	65	915.1

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	BOBCAT	B100	Non-common Interface Antenna	N/A	4	Antenna

## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Modulation
Mode 1	TX CH01	LoRa
Mode 2	TX CH33	LoRa
Mode 3	TX CH65	LoRa

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have been tested for all available U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.

### For Conducted Emission

Test Case	
Conducted Emission	Mode4 : Keeping EUT TX


## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	Ant Gain(dBi)	Power Class	Software For Testing
LORA	125KHz	902.3MHz-915.1MHz	4	30	SecureCRTPortable

#### 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

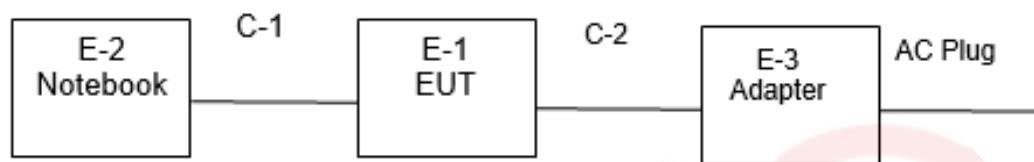

Conducted Emission Test



**2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

**Necessary accessories**

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-3	Adapter	N/A	A-938-120100W-US1	N/A	N/A
C-2	DC Cable	N/A	N/A	110cm	N/A

**Support units**

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook	Lenovo	DESKTOP-USDEO09	/	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

Note:

(1) For detachable type I/O cable should be specified the length in cm in «Length» column.

## 2.6 LABORATORY INFORMATION

Company Name:	Shanghai ATBL Technology Co., Ltd.
Address:	Building 8, No.160 Basheng Road, Waigaoqiao Free Trade Zone, Pudong New Area, Shanghai
Telephone:	+86(0)21-51298625
A2LA Number:	6184.01
CNAS Number:	CNAS L14531

## 2.7 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.958\text{dB}$
2	Conducted spurious emissions	$\pm 2.988\text{dB}$
3	All emissions, radiated 30MHz-1GHz	$\pm 2.50\text{dB}$
4	All emissions, radiated 1GHz-18GHz	$\pm 3.51\text{dB}$
5	Occupied bandwidth	$\pm 23.20\text{dB}$
6	Power spectral density	$\pm 0.886\text{dB}$

## 2.8 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Management number	Calibrated until
Test Receiver	R&S	ESCI	100469	SHATBL-E003	2022.07.13
Spectrum Analyzer	Agilent	N9020A	MY50200811	SHATBL-E017	2022.07.13
Bilog Antenna	SCHWARZBECK	VLUB 9168	01174	SHATBL-E008	2023.09.27
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	SHATBL-E009	2023.09.27
Pre-Amplifier (0.1M-3GHz)	JPT	JPA-10M1G35	2101010003500 1	SHATBL-E005	2022.10.07
Pre-Amplifier (1G-18GHz)	JPT	JPA0118-55-30 3A	1910001800055 000	SHATBL-E006	2022.07.13
Temperature & Humidity	DeLi	DeLi	N/A	SHATBL-E016	2022.10.08
Antenna/Turntable Controller	Brilliant	N/A	N/A	SHATBL-E007	N/A
Test SW	FALA	EMC-RI(Ver.4A2)		SHATBL-E046	N/A

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Equipment number	Calibrated until
MIMO Power measurement test Set	DARE	RPR3006W	16I00054SN01 6	SHATBL-W006	2022.10.07
			RPR6W-20001 005	SHATBL-W013	2022.10.07
Signal Analyzer	Agilent	N9020A	MY57300196	SHATBL-W004	2022.10.07
Signal Generator	Agilent	N5182B	MY46240556	SHATBL-W005	2022.10.07
Wireless Communications Test Set	R&S	CMW500	101331	SHATBL-W007	2022.10.07
Temperature & Humidity	Deli	deli	N/A	SHATBL-W011	2022.10.07
Attenuator	Agilent	8494B	DC-18G	SHATBL-W009	2022.10.07
Attenuator	Agilent	8496B	DC-18G	SHATBL-W010	2022.10.07
power splitter	MNK	MPD-DC/6-2 S	62315 G51	SHATBL-W015	2022.10.07
			62315 G52	SHATBL-W016	2022.10.07
Filter	Chengdu kangmaiwei	ZBSF-C2400 -2483.5-T3	N/A	SHATBL-W021	N/A
Constant temperature and humidity box	KSON	THS-B6C-15 0	6159K	SHATBL-W019	2022.01.26
Test SW	FALA	LZ-RF(Ver.LzRF-03A3.1)		SHATBL-W020	N/A

### 3.EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on art 207(a)&RSS-Genlimit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “\*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground planewith EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

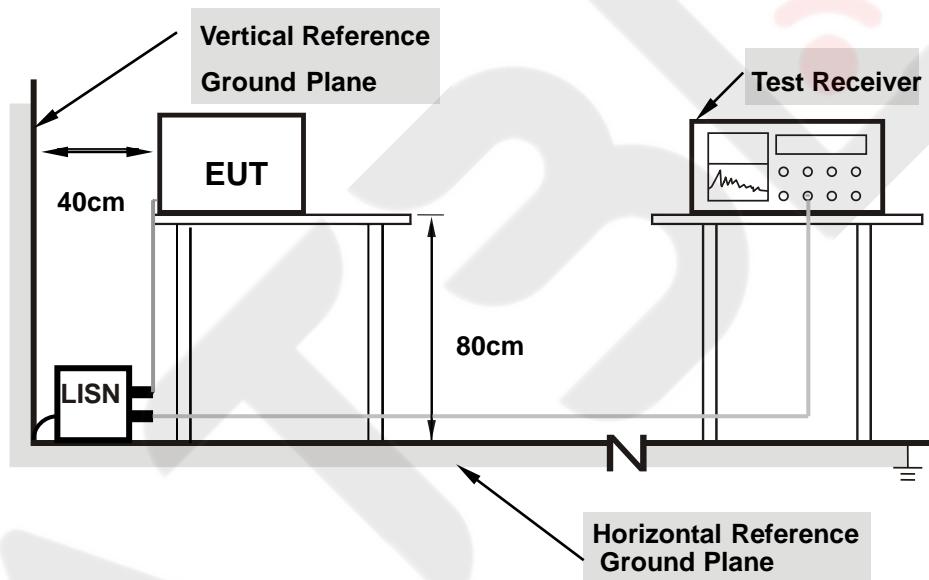

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.5 TEST RESULT

Temperature:	27.4(C)	Relative Humidity:	66%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2490	42.13	10.08	52.21	61.79	-9.58	QP
2	0.2490	31.40	10.08	41.48	51.79	-10.31	AVG
3	0.7574	40.20	9.97	50.17	56.00	-5.83	QP
4	0.7574	29.64	9.97	39.61	46.00	-6.39	AVG
5	1.4008	38.76	9.96	48.72	56.00	-7.28	QP
6	1.4008	28.05	9.96	38.01	46.00	-7.99	AVG
7	2.5845	32.40	9.99	42.39	56.00	-13.61	QP
8	2.5845	21.83	9.99	31.82	46.00	-14.18	AVG
9	9.1320	29.31	10.27	39.58	60.00	-20.42	QP
10	9.1320	18.32	10.27	28.59	50.00	-21.41	AVG
11	23.8470	31.04	11.02	42.06	60.00	-17.94	QP
12	23.8470	22.54	11.02	33.56	50.00	-16.44	AVG

#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit
3. Factor=LISN factor+Cableloss+Limiter (10dB)

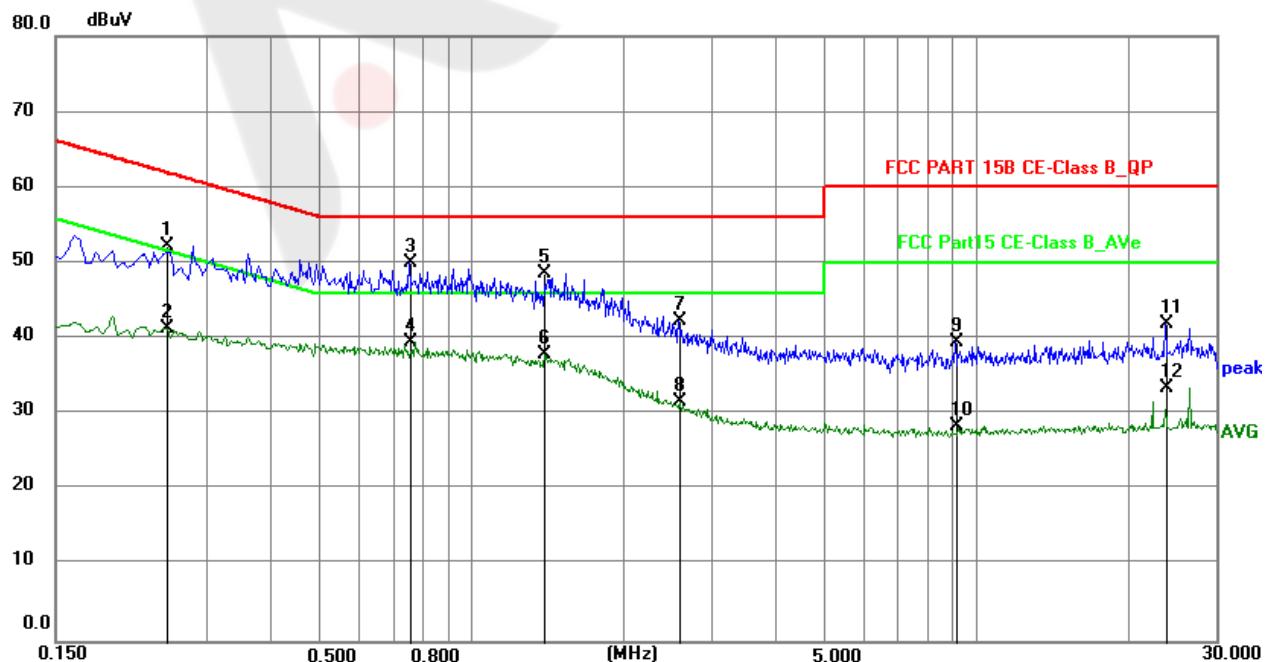


Temperature:	27.4(C)	Relative Humidity:	66%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2355	41.83	10.36	52.19	62.25	-10.06	QP
2	0.2355	32.25	10.36	42.61	52.25	-9.64	AVG
3	0.4920	40.65	10.19	50.84	56.13	-5.29	QP
4	0.4920	29.83	10.19	40.02	46.13	-6.11	AVG
5	1.1174	38.22	10.16	48.38	56.00	-7.62	QP
6	1.1174	28.63	10.16	38.79	46.00	-7.21	AVG
7	2.3504	31.84	10.24	42.08	56.00	-13.92	QP
8	2.3504	23.14	10.24	33.38	46.00	-12.62	AVG
9	6.0314	30.02	10.17	40.19	60.00	-19.81	QP
10	6.0314	18.49	10.17	28.66	50.00	-21.34	AVG
11	23.8335	28.84	10.86	39.70	60.00	-20.30	QP
12	23.8335	21.53	10.86	32.39	50.00	-17.61	AVG

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit
3. Factor=LISN factor+Cableloss+Limiter (10dB)

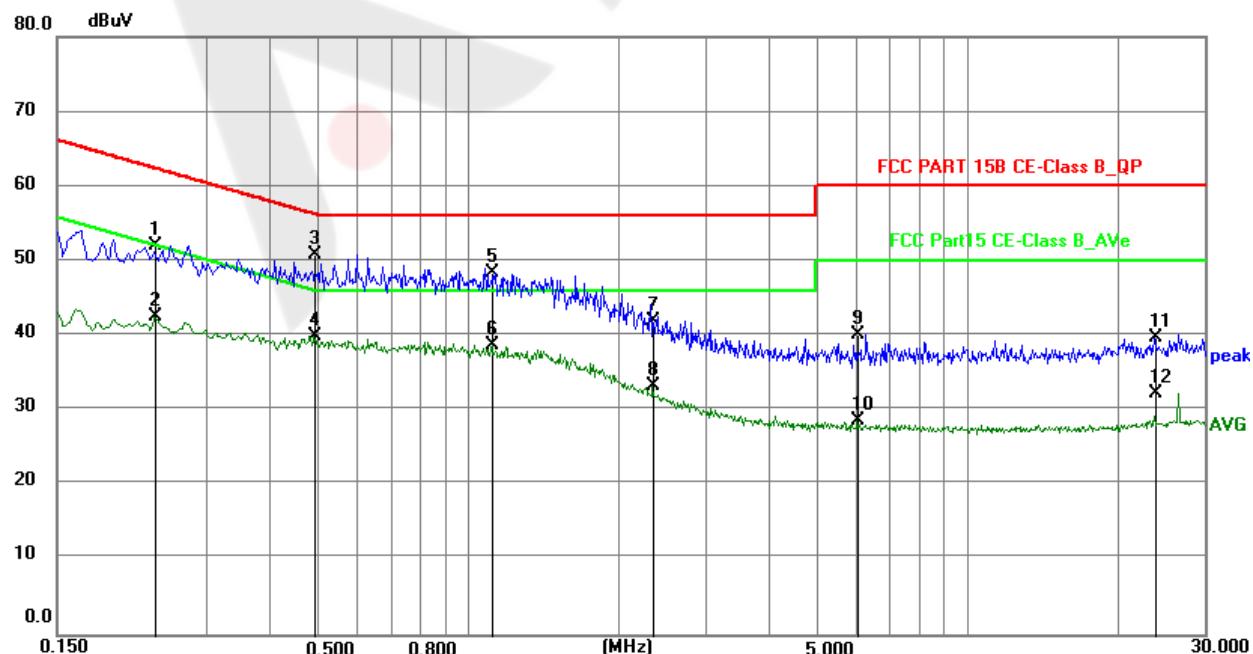

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a), RSS-Gen Issue 5 and RSS-247 Issue 2, February 2017 (5.5) limit in the table and according to ANSI C63.10-2013below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FCC:

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

## For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	1MHz / 3MHz(Peak) 1 MHz/ 3 MHz(AVG)

## For Band Edge

Note: The EUT main frequency is too far away from the restricted band, so the band edge of the radiation method is not tested.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation.

### 3.2.4 TESTSETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

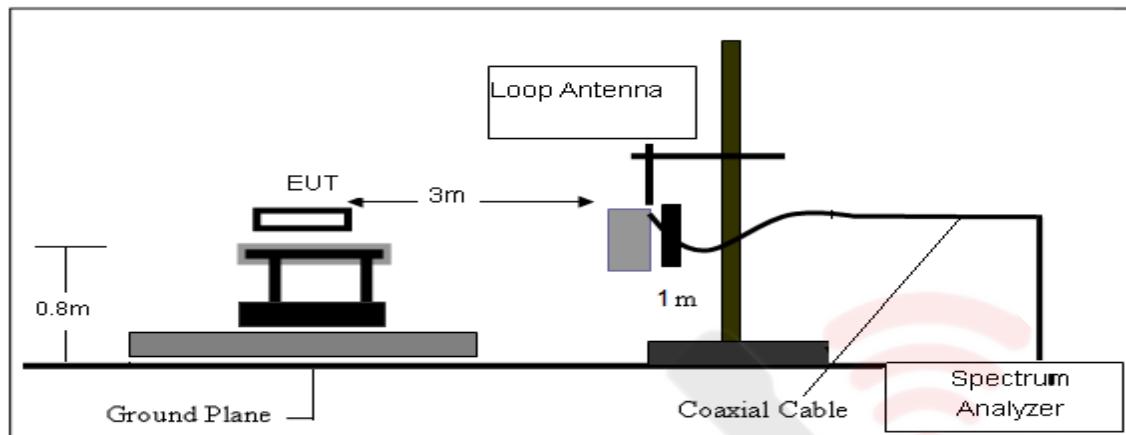

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

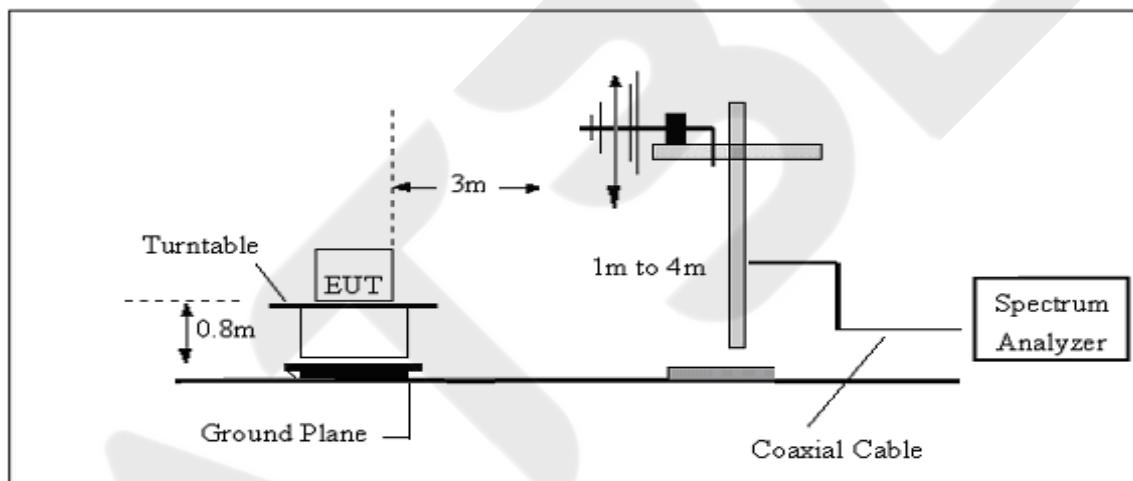

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

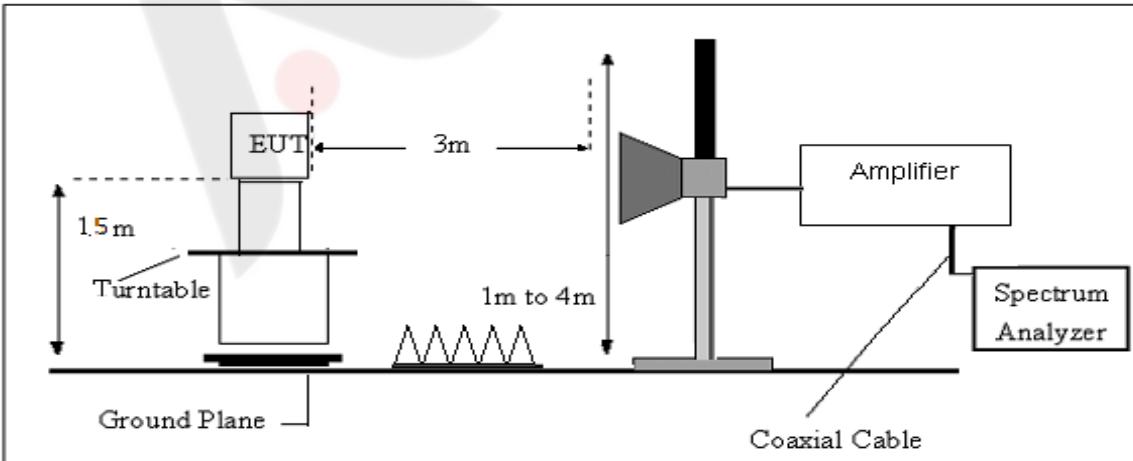

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = AF + CL - AG$$

### 3.2.7 TEST RESULTS

(9KHz-30MHz)

Temperature:	23.3(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3V	Test Mode:	TX Mode

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


(30MHz-1000MHz)

Temperature:	23.3(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Mode 1 worst case)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark.
1	38.6160	34.05	-18.06	15.99	40.00	-24.01	QP
2	64.8865	41.26	-20.60	20.66	40.00	-19.34	QP
3	138.8735	39.04	-18.56	20.48	43.50	-23.02	QP
4	188.4125	42.57	-20.52	22.05	43.50	-21.45	QP
5	524.5541	27.87	-12.67	15.20	46.00	-30.80	QP
6	752.7432	28.62	-8.69	19.93	46.00	-26.07	QP

Remark:

- Margin = Result (Result =Reading + Factor )-Limit
- Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

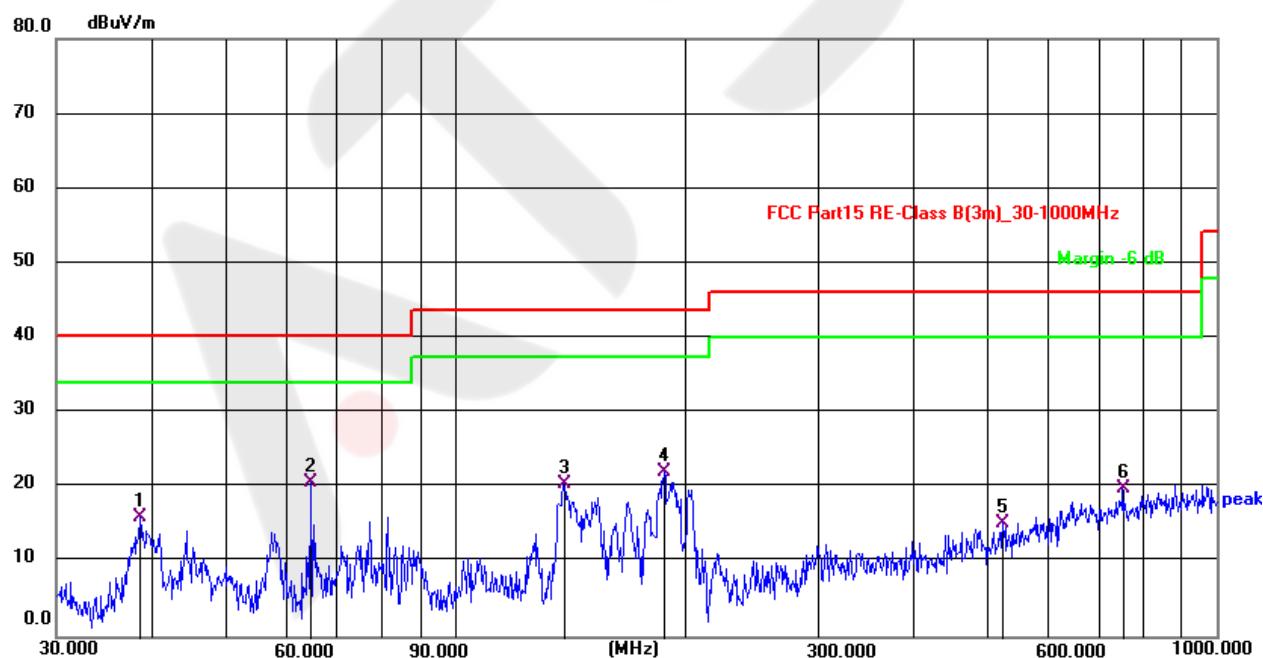


Temperature:	23.3(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.3V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Mode 1 worst case)		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark.
1	37.9450	41.30	-18.12	23.18	40.00	-16.82	QP
2	60.2801	40.34	-19.70	20.64	40.00	-19.36	QP
3	111.3468	50.34	-20.70	29.64	43.50	-13.86	QP
4	171.3926	48.33	-18.57	29.76	43.50	-13.74	QP
5	296.1836	36.77	-17.32	19.45	46.00	-26.55	QP
6	435.5898	35.64	-14.26	21.38	46.00	-24.62	QP

Remark:

1. Margin = Result (Result =Reading + Factor )-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

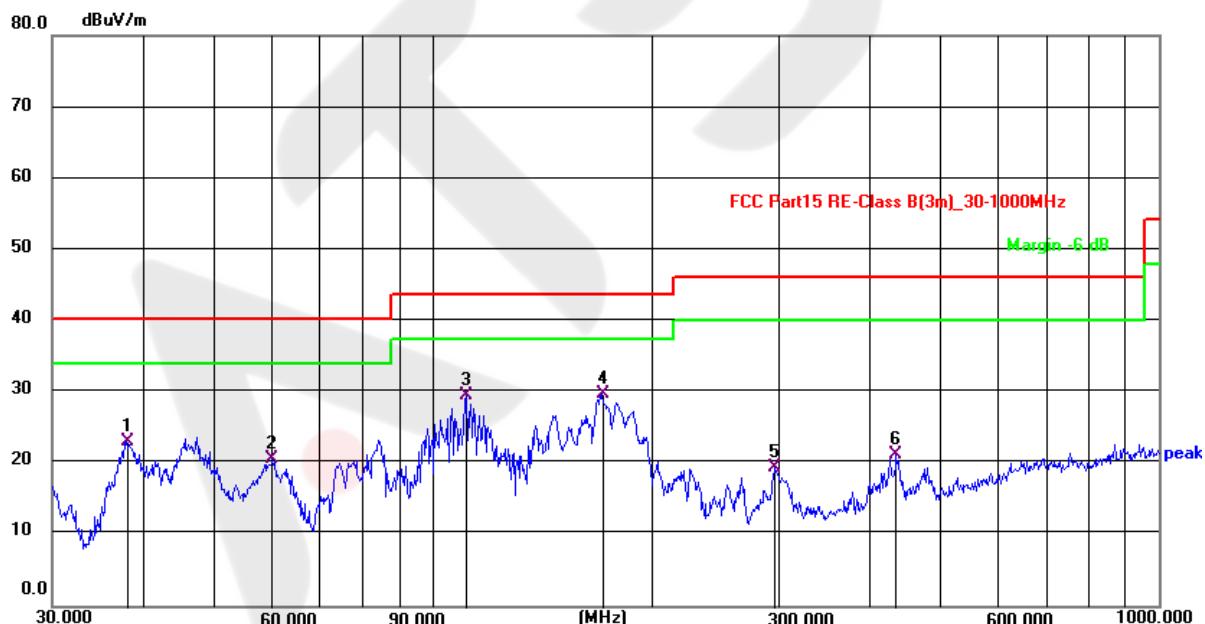

## (1GHz~12.75GHz)Spurious emission Requirements

## LoRa

Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Deg.(deg.)	Ant.F/G.(dB/m)	Amp.G.(dB)	Detector	Polarity
Low channel								
1795.838767	43.1	74.0	30.9	202	21.7	53.0	PK	Horizontal
1889.633354	35.0	54.0	19.0	332	21.8	51.7	AV	Horizontal
1795.838767	45.9	74.0	28.1	172	21.7	53.0	PK	Vertical
1856.260721	35.0	54.0	19.0	333	21.8	52.2	AV	Vertical
2698.664972	47.8	74.0	26.2	106	23.3	50.8	PK	Horizontal
2796.572706	36.5	54.0	17.5	332	23.6	51.1	AV	Horizontal
2796.572706	42.4	74.0	31.6	219	24.0	51.1	PK	Vertical
2782.371360	33.6	54.0	20.4	202	24.0	51.1	AV	Vertical
4512.965665	36.0	74.0	38.0	140	24.7	50.1	PK	Horizontal
4547.561279	27.0	54.0	17.0	360	24.7	50.0	AV	Horizontal
4512.965665	38.3	74.0	35.7	301	24.9	50.1	PK	Vertical
4536.000040	27.0	54.0	27.0	336	24.9	50.0	AV	Vertical
9441.912751	44.8	74.0	29.2	121	27.2	48.6	PK	Horizontal
9465.978052	34.9	54.0	19.1	15	27.2	48.6	AV	Horizontal
9441.912751	44.7	74.0	29.3	358	27.8	48.6	PK	Vertical
9441.912751	35.5	54.0	18.5	336	27.8	48.6	AV	Vertical
High channel								
1832.784587	46.2	74.0	27.8	359	21.7	52.5	PK	Horizontal
1818.841662	37.8	54.0	16.2	324	21.7	52.7	AV	Horizontal
1832.784587	49.0	74.0	25.0	165	21.7	52.5	PK	Vertical
1865.735157	33.5	54.0	20.5	334	21.8	52.0	AV	Vertical
2747.182703	48.4	74.0	25.6	113	23.5	51.0	PK	Horizontal
2803.700537	37.8	54.0	16.2	335	23.6	51.2	AV	Horizontal
2747.182703	43.3	74.0	30.7	165	23.9	51.0	PK	Vertical
2796.572706	34.3	54.0	19.7	206	24.0	51.1	AV	Vertical
4501.492379	36.4	74.0	37.6	55	24.7	50.1	PK	Horizontal
4559.151984	26.8	54.0	27.2	0	24.7	50.0	AV	Horizontal
4570.772232	39.3	74.0	34.7	85	25.0	50.0	PK	Vertical
4582.422097	27.4	54.0	26.6	222	25.0	50.0	AV	Vertical
9441.912751	45.2	74.0	28.8	306	27.2	48.6	PK	Horizontal
9441.912751	35.4	54.0	18.6	90	27.2	48.6	AV	Horizontal
9417.908631	44.1	74.0	29.9	23	27.8	48.6	PK	Vertical
9441.912751	36.0	54.0	18.0	114	27.8	48.6	AV	Vertical

## 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 4.1 LIMIT

According to FCC section 15.247(d)&RSS-247 Issue 2, February 2017 (5.5), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 890 – 905 MHz Upper Band Edge: 912 – 940MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Hopping Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 890 – 905 MHz Upper Band Edge: 925 – 940 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

### 4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.


#### 4.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 4.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	LoRa-01/33/65 CH	Test Voltage:	DC 3.3V


01 CH

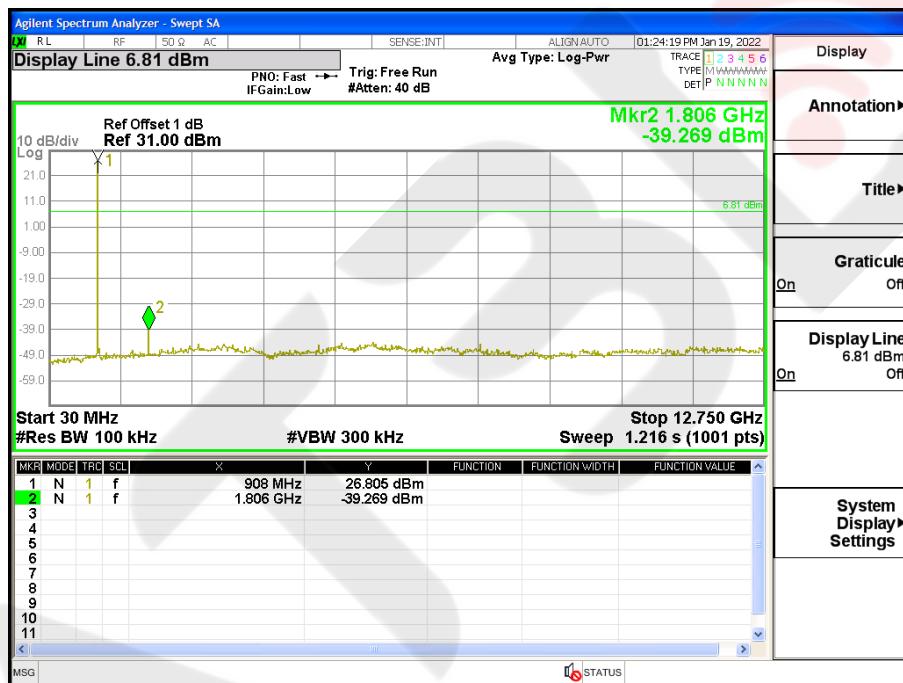

33 CH

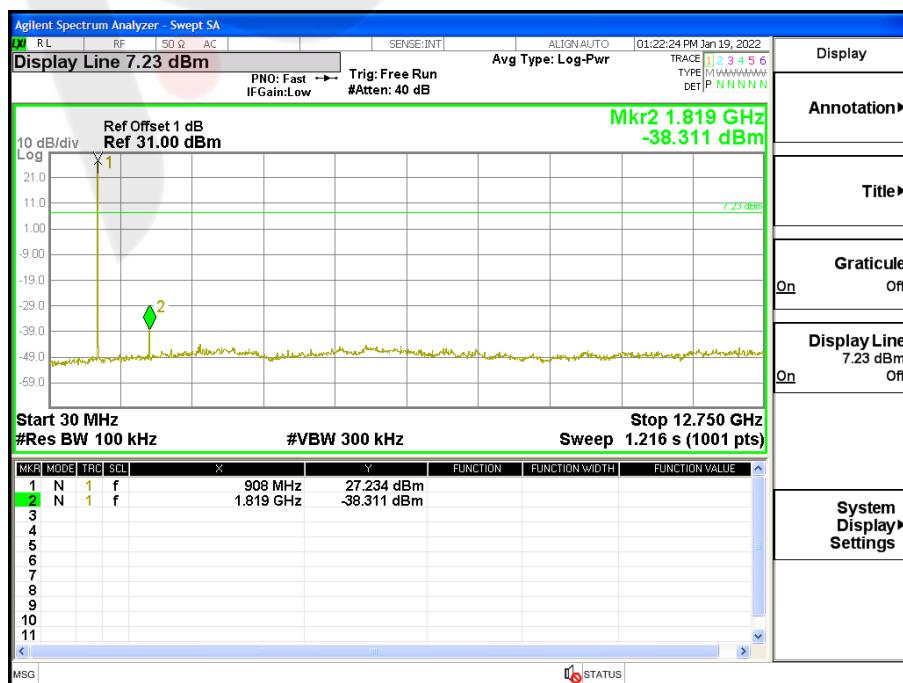


65 CH

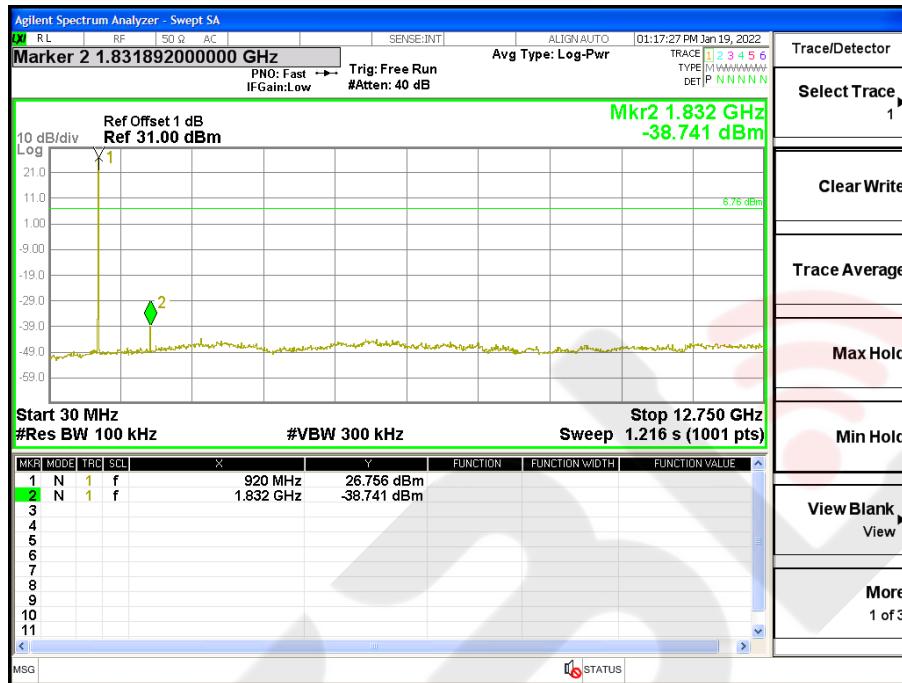


For Band edge(it's also the reference level for conducted spurious emission)

01 CH

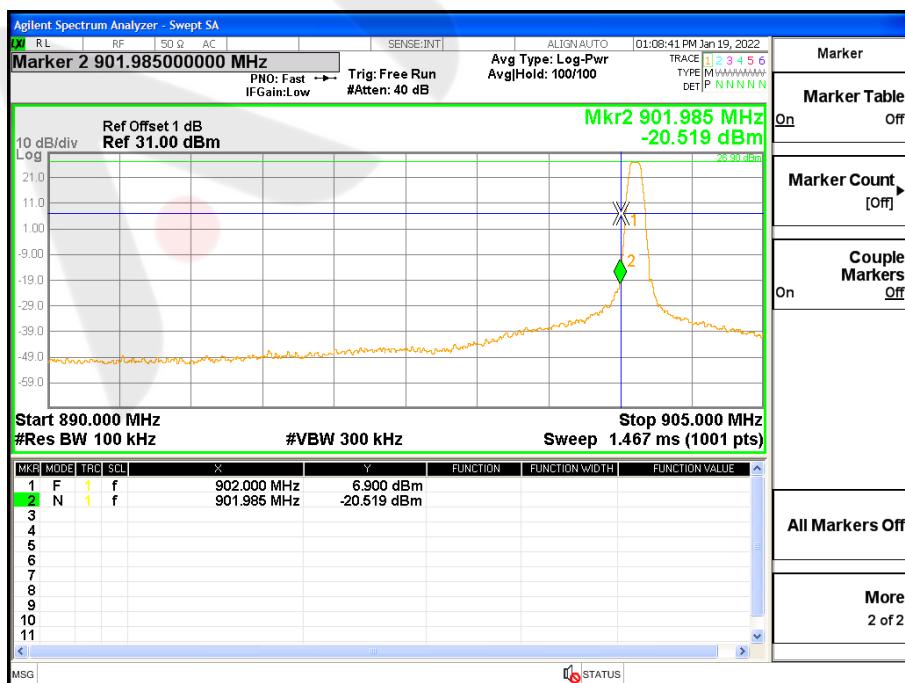


65 CH

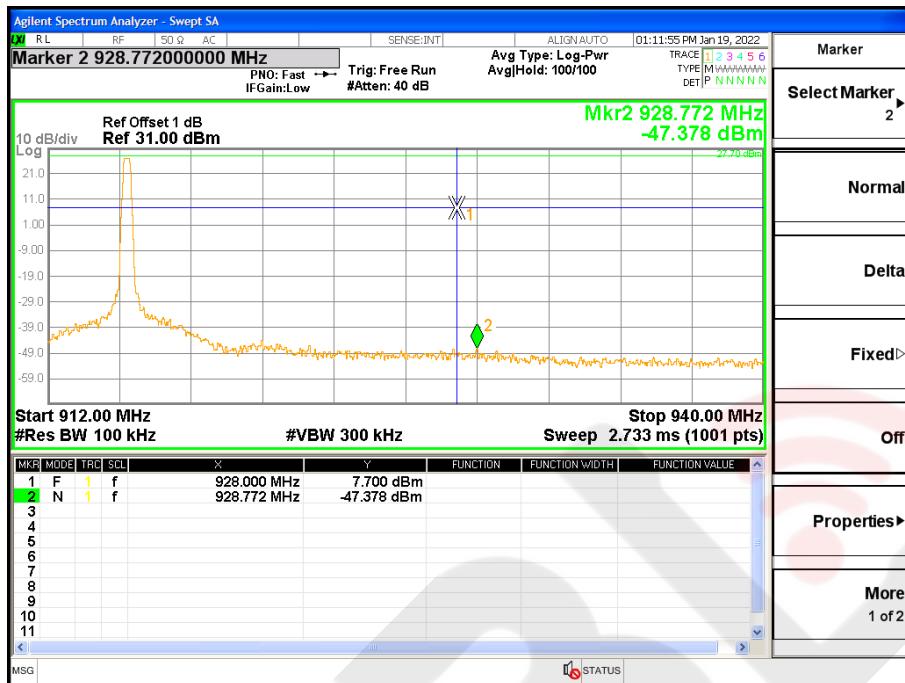


For Hopping Band edge

01 CH

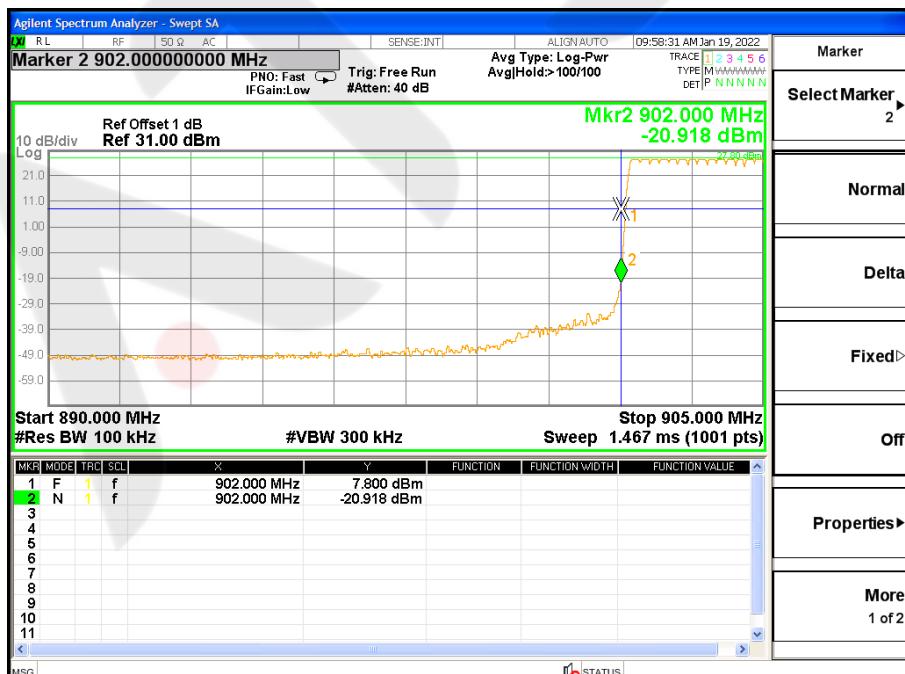

65 CH

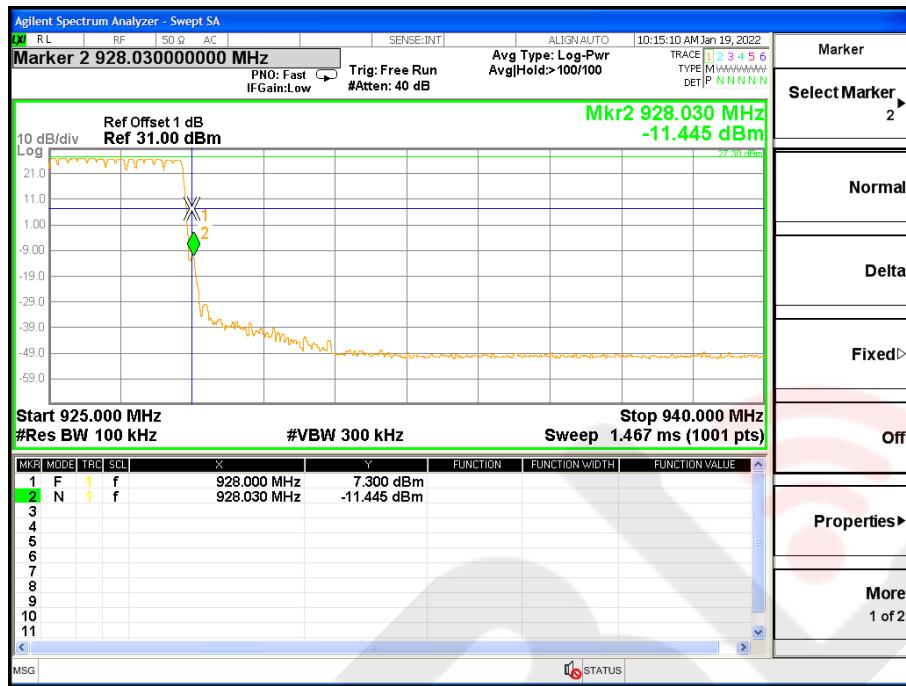

## 5. NUMBER OF HOPPING CHANNEL

### 5.1 LIMIT

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

EUT 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

### 5.3 TEST SETUP



### 5.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Hopping Mode -LoRa Mode	Test Voltage:	DC 3.3V

Number of Hopping Channel: 65

### Hopping channel

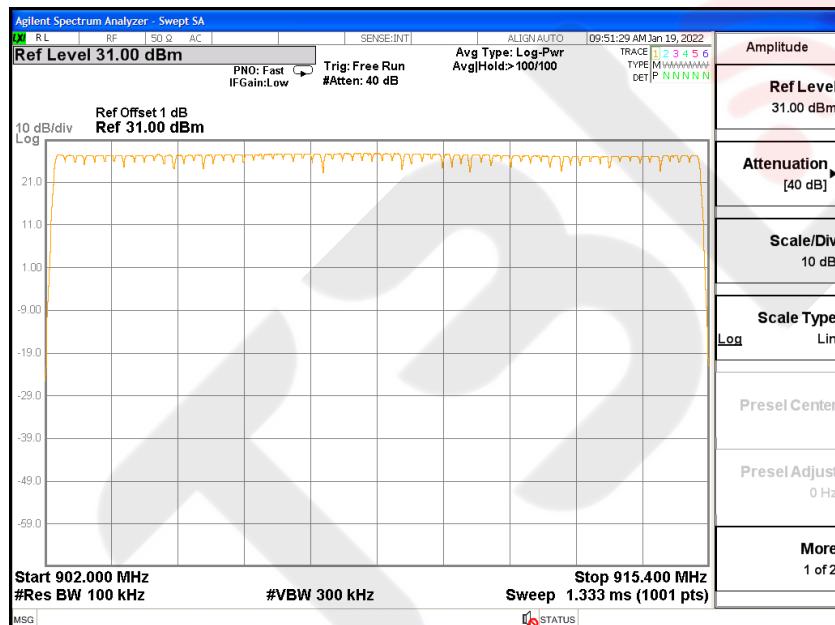

## 6. AVERAGE TIME OF OCCUPANCY

### 6.1 LIMIT

FCC Part 15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247(f)	Average Time of Occupancy	< 0.4sec	902-928	PASS

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =100KHz/VBW =300KHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is 0.4\* channel number.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.5 TEST RESULTS



Temperature:	25°C	Relative Humidity:	50%
Test Mode:	LoRa	Test Voltage:	DC 3.3V

Frequency (MHz)	Pulse time(ms)	Number of pulses	Dwell Time(s)	Limits(s)
902.3	34.24	2	0.069	0.4
908.7	34.28	2	0.069	0.4
915.1	34.28	2	0.069	0.4



## Mode 1

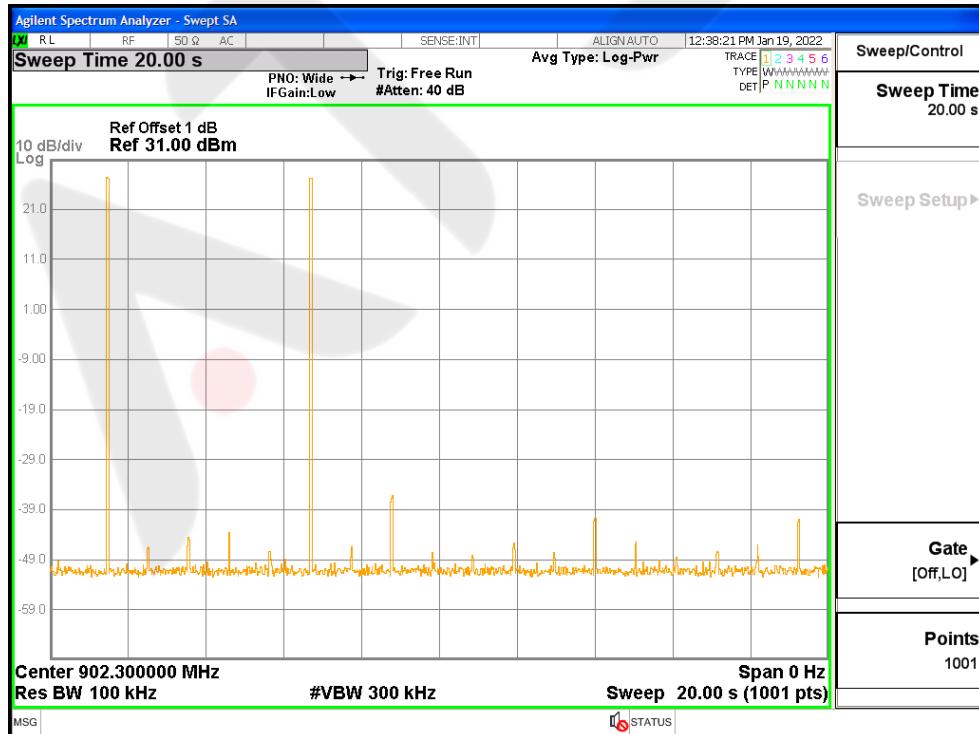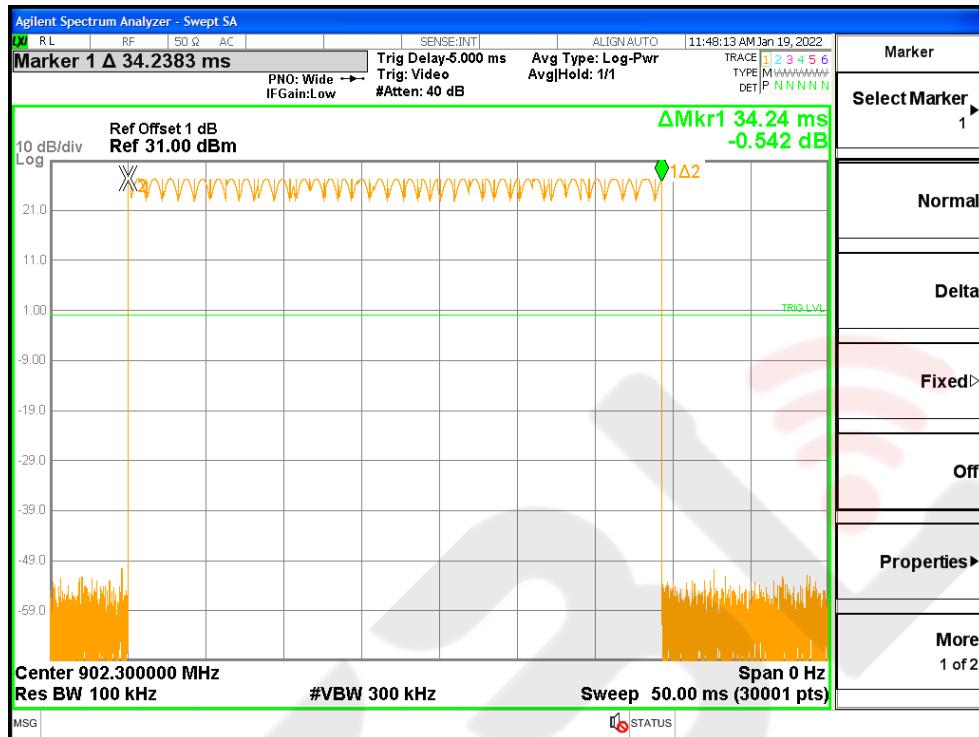

## Mode 2

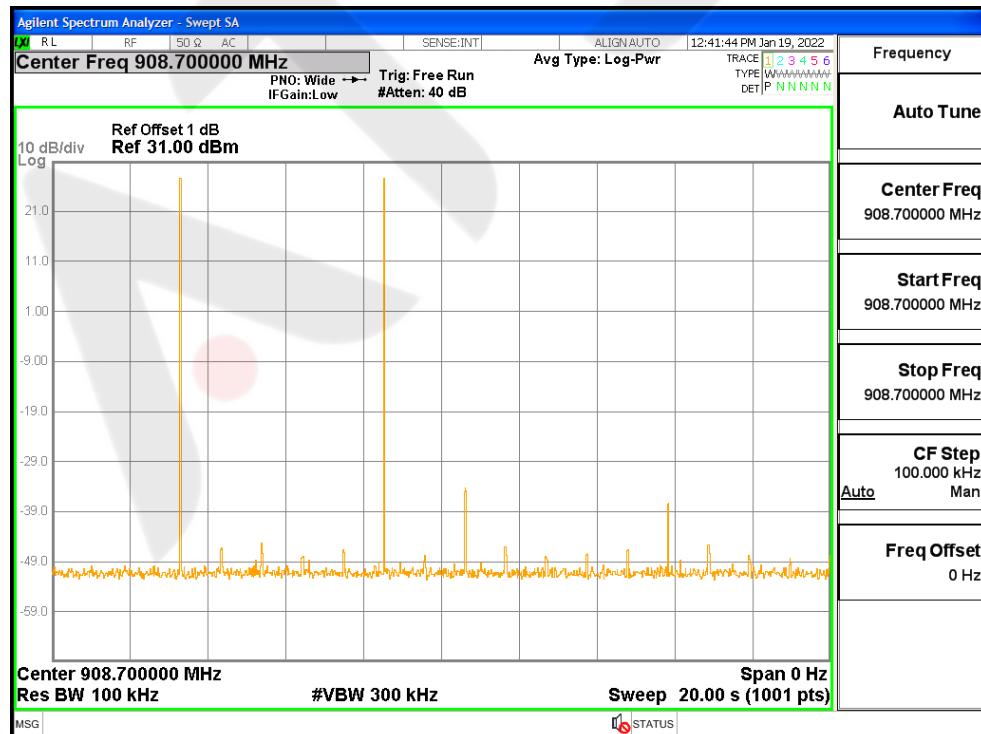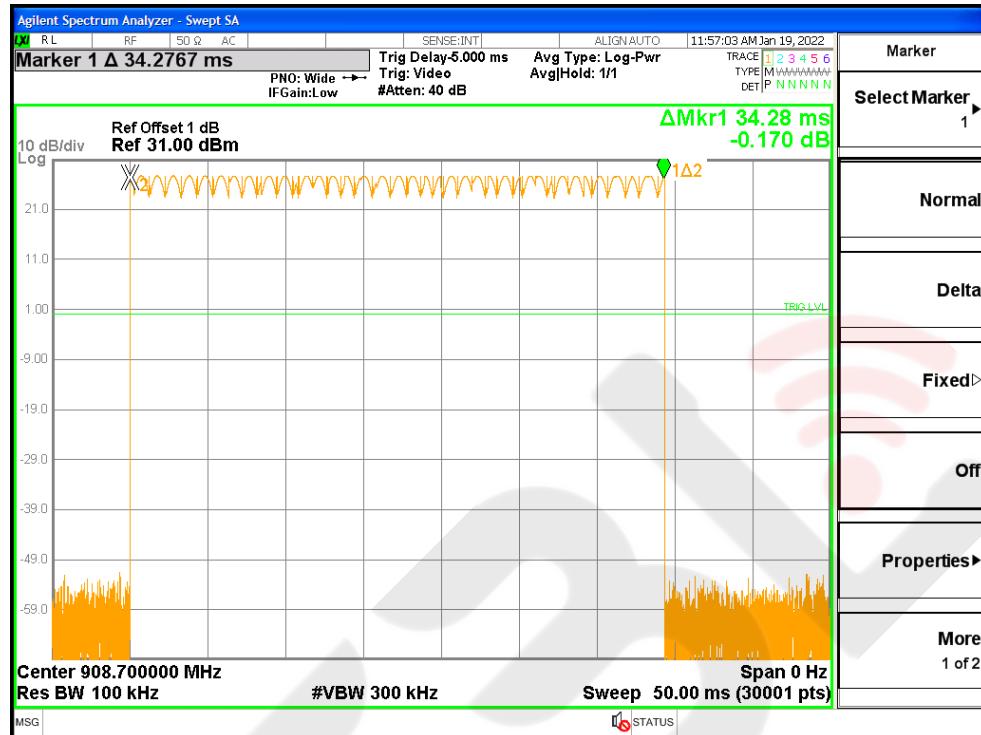

### Mode 3

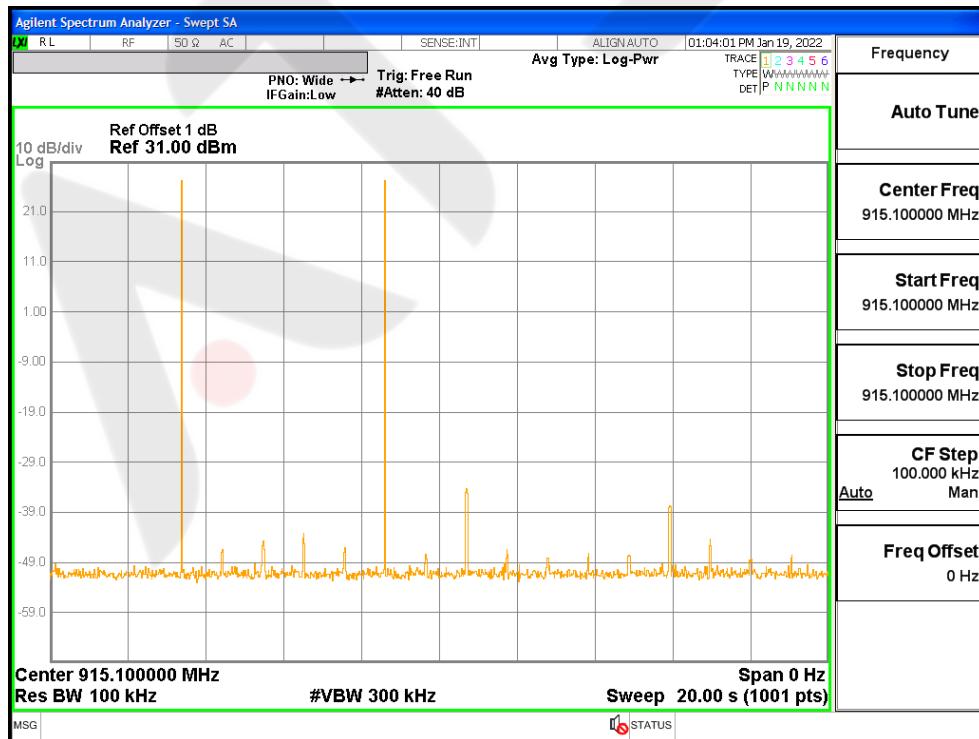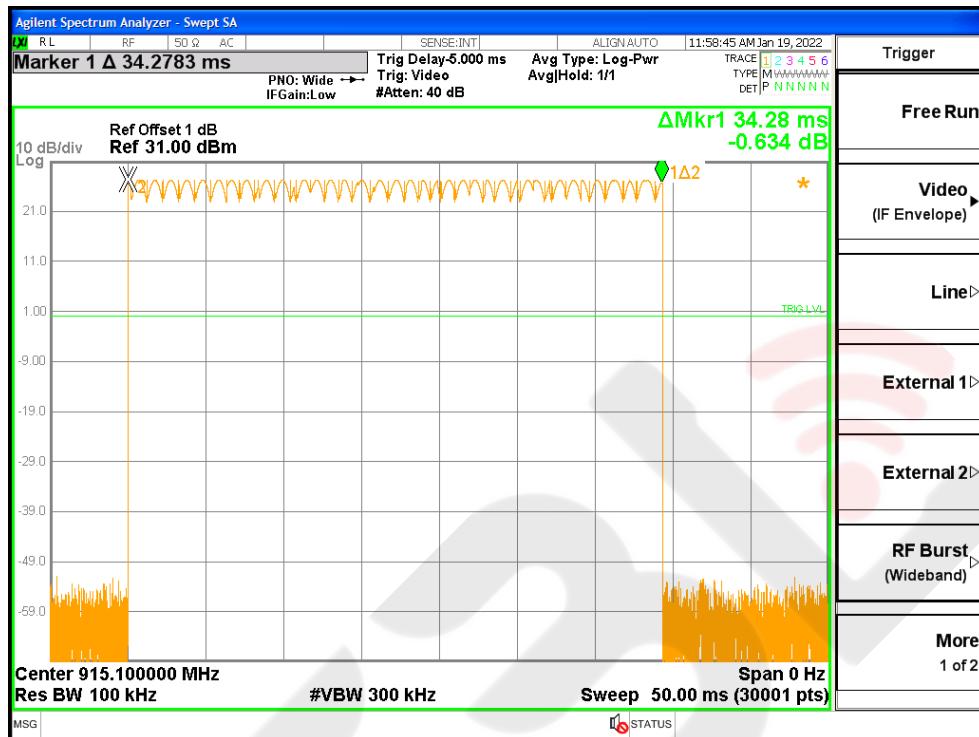

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Spectrum Parameter	Setting
Attenuation	Auto
Span	1MHz
RB	100 KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- Spectrum Setting: RBW= 100KHz, VBW= 300KHz, Sweep time = Auto.

### 7.3 TEST SETUP

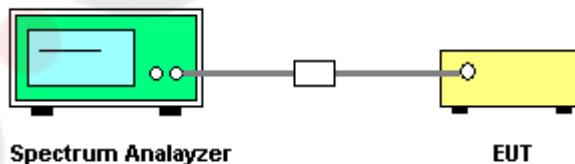

### 7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.


## 7.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH33 / CH65	Test Voltage:	DC 3.3V


Frequency (MHz)	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
902.3	902.253	902.471	0.218	0.134	Complies
908.7	908.676	908.858	0.182	0.134	Complies
915.1	914.872	915.100	0.228	0.136	Complies

For LoRa: Ch. Separation Limits: > 20dB bandwidth


**CH01**

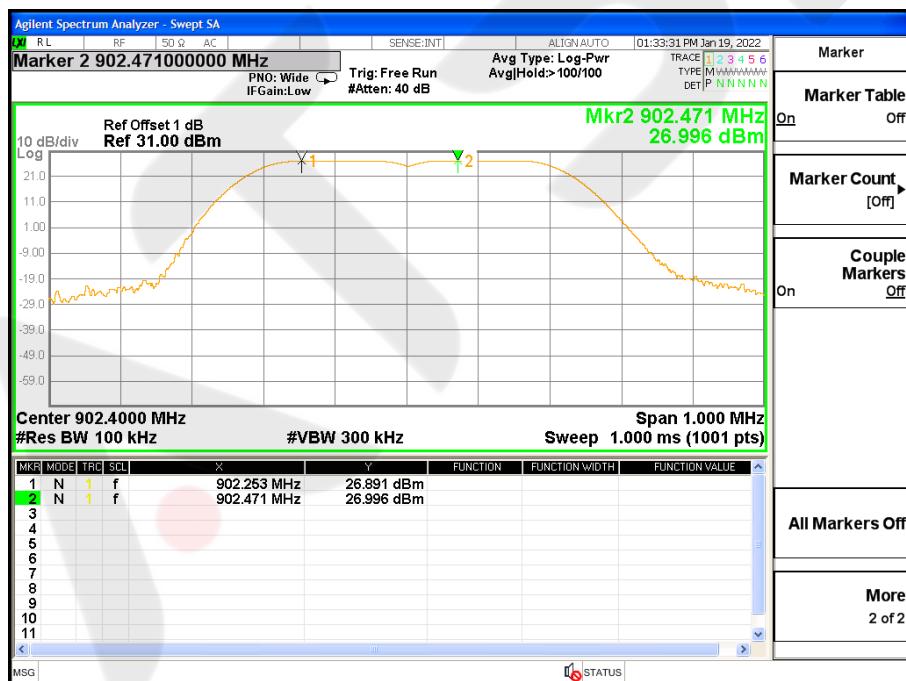

## CH33

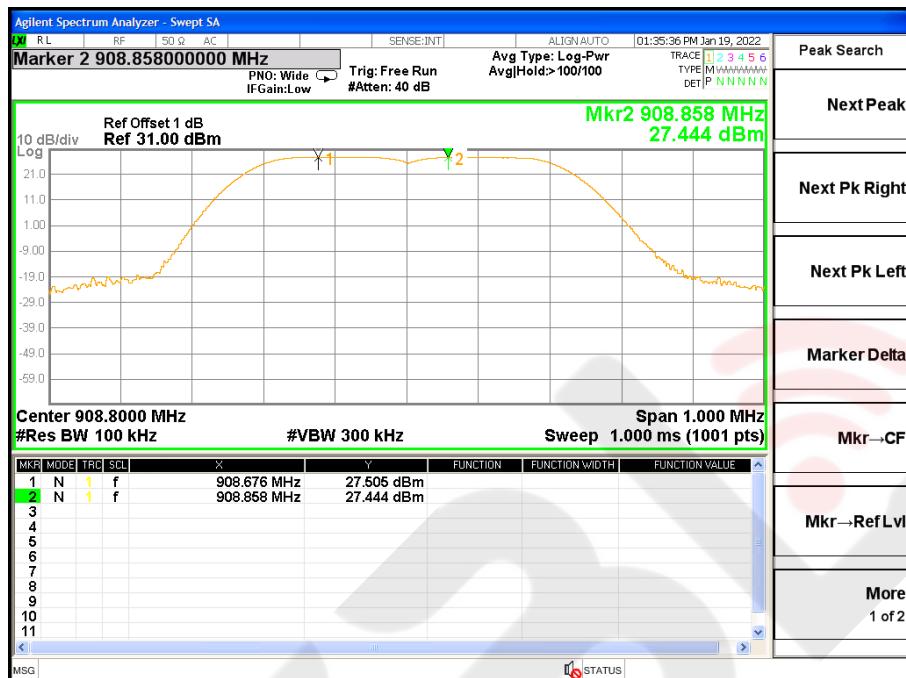

## CH65

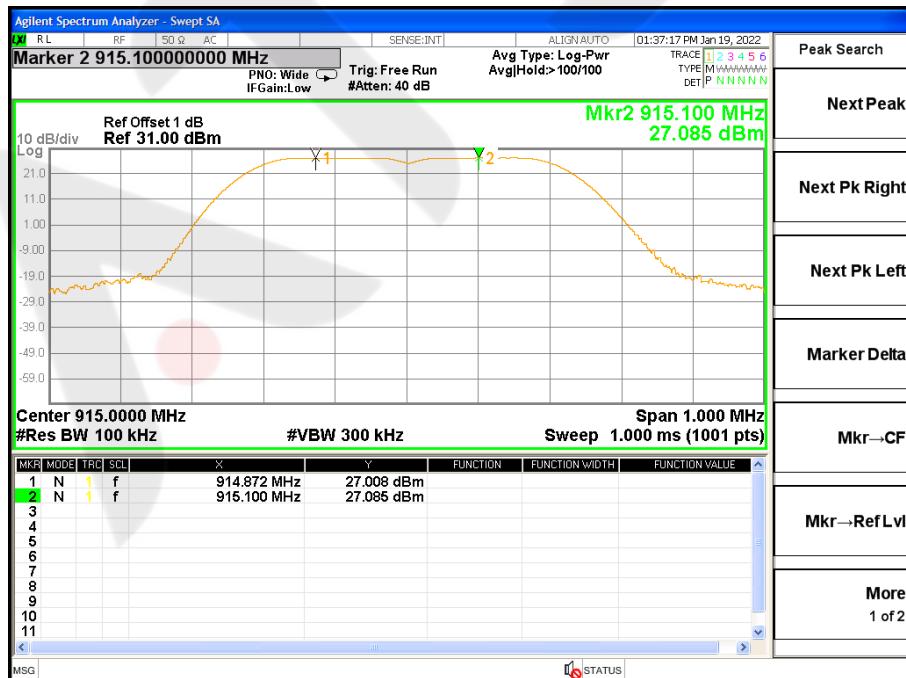

## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part1515.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247(a)(1)	Bandwidth	< 250kHz	902-928	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span	500KHz
RB	3 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 3KHz, VBW=10KHz, Sweep time = Auto.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


## 8.5 TEST RESULTS



Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH33 / CH65	Test Voltage:	DC 3.3V

Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
902.3	0.134	0.121	PASS
908.7	0.134	0.120	PASS
915.1	0.136	0.121	PASS

20dB Bandwidth&99% Bandwidth

**CH01**

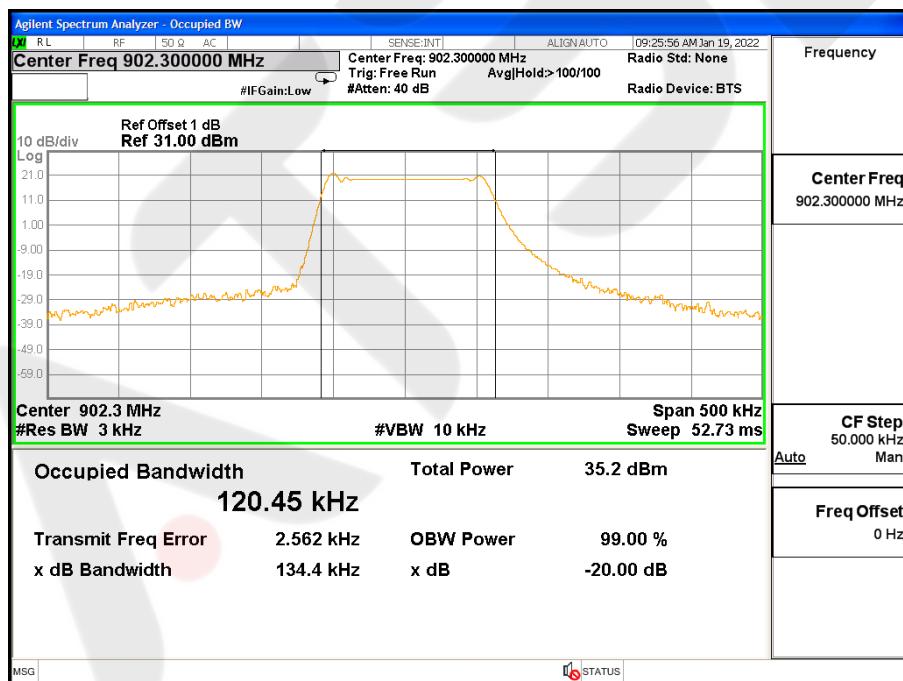

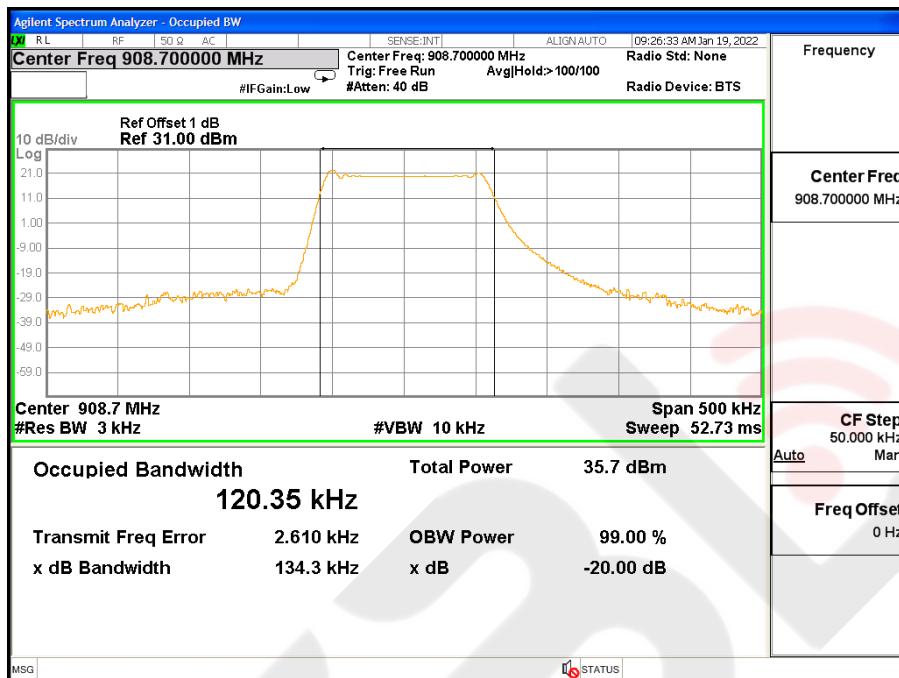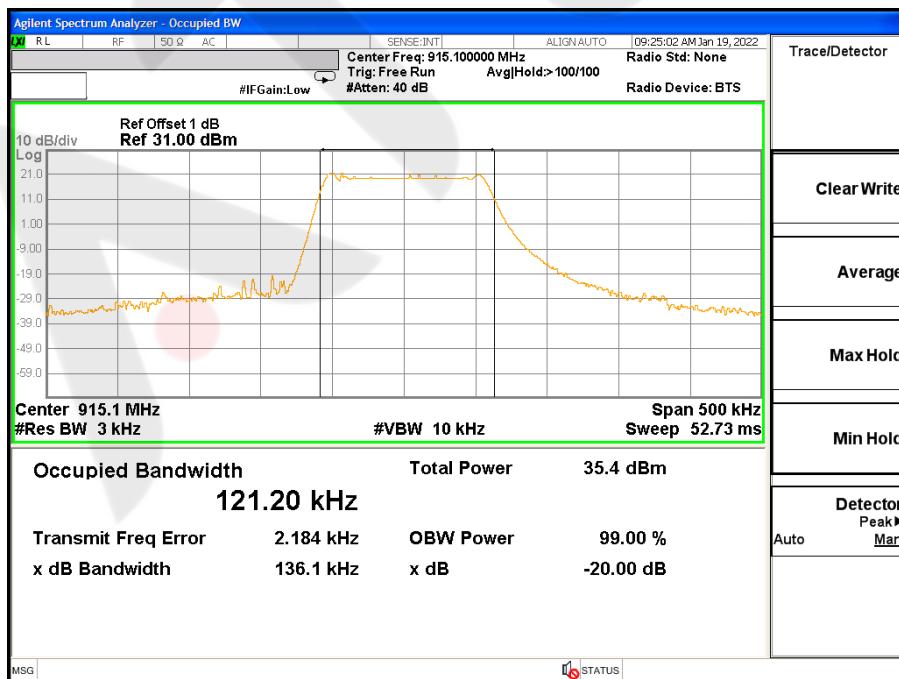**CH33**

**CH65**


## 9. OUTPUT POWER TEST

### 9.1 LIMIT


FCC Part15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247(b)(2)	Output Power	1 W	902-928	PASS

### 9.2 TEST PROCEDURE

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DSSS bandwidth and shall use a fast-responding diode detector.

### 9.3 TEST SETUP



### 9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 9.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.3V		

Test mode	Frequency	Peak Conducted Output Power	AVG Conducted Output Power	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
Mode 1	902.3	24.43	24.40	30
Mode 2	908.7	24.42	24.39	30
Mode 3	915.1	24.41	24.37	30

## EIRP Power

Test mode	Frequency	Peak Conducted Output Power	Antenna Gain	ERP Power	EIRP Power	LIMIT
	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	dBm
Mode 1	902.3	24.43	4.00	26.28	28.43	36
Mode 2	908.7	24.42	4.00	26.27	28.42	36
Mode 3	915.1	24.41	4.00	26.26	28.41	36

Note: EIRP = ERP+2.15dB.

## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203&RSS-Gen Issue 5 requirement: For intentional device, according to 15.203&RSS-Gen Issue 5: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

Antenna Type	Frequency range	Gain (dBi)
Non-common Interface Antenna	902MHz-928MHz	4

It comply with the standard requirement.


**APPENDIX-PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

Conducted for EMC



Conducted for RF

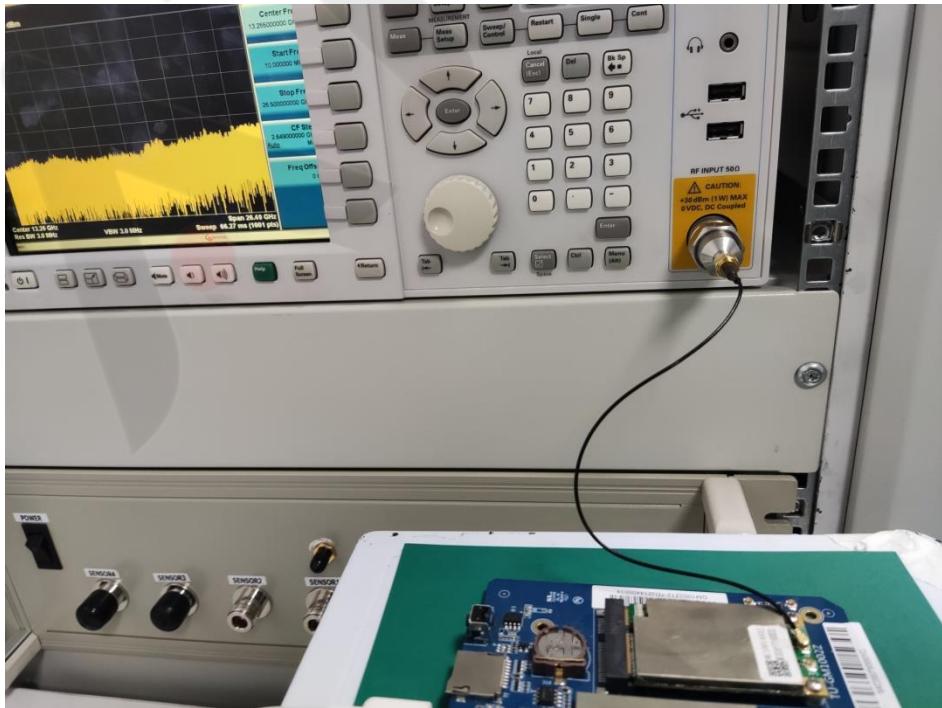

## Radiation Emission

30MHz-1000MHz




## Radiated Spurious Emission

30MHz-1000MHz



1GHz-18GHz

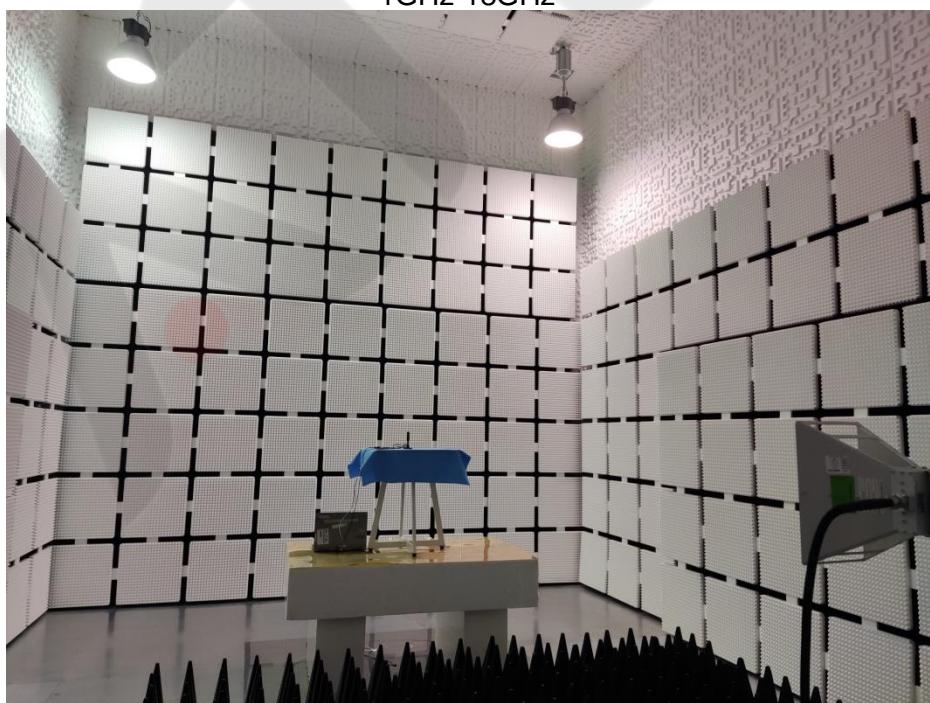

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*