

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

**Model No.: Delta-TG10, Theta(TG11), Alpha(G30B), TG12, TG20,
T26B(ClearBuds 2), P.SONG1, TS01, TS02, TE06(Cube X),
TN52(Liberbuds lipstick), TA02, TN33, TN73 (PRO) , TG73 (Pro) , TN39,
BN04, BN05, BN20**

Trademark: N/A

FCC ID: 2AZDD-DELTA-TG10

Report No.: E01A22100041F00101

Issue Date: October 19, 2022

Prepared for

**Guangzhou Langston Electronic Technology Co,Ltd
Room 502, Building 4, Phoenix Creative Industry Park, No. 67 North
Gongye Avenue, Haizhu District, Guangzhou, China**

Prepared by

**Dong Guan Anci Electronic Technology Co., Ltd.
1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake
Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr.,
China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**

VERIFICATION OF COMPLIANCE

Applicant:	Guangzhou Langston Electronic Technology Co,Ltd Room 502, Building 4, Phoenix Creative Industry Park, No. 67 North Gongye Avenue, Haizhu District, Guangzhou,China
Manufacturer:	Dongguan Doulan Electronic Technology Co. LTD No.3, Tangzhou Road, Lijiafang, Shipai Town, Dongguan
Product Description:	wireless earphones
Trade Mark:	N/A
Model Number:	Delta-TG10, Theta(TG11), Alpha(G30B), TG12, TG20, T26B(ClearBuds 2), P.SONG1, TS01, TS02, TE06(Cube X), TN52(Liberbuds lipstick), TA02, TN33, TN73 (PRO) , TG73 (Pro) , TN39, BN04, BN05, BN20 (All models are identical except for appearance color and model number, We choose model Delta-TG10 to do all tests.)

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd.The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2021).

Date of Test : October 09, 2022 to October 18, 2022

Prepared by :



Duke Liu/Editor

Reviewer & Authorized
Signer :

Tiger Xu/ Supervisor

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	E01A22100041F00101

Table of Contents

1.	GENERAL INFORMATION	6
1.1	PRODUCT DESCRIPTION.....	6
1.2	TEST METHODOLOGY	6
1.3	TEST FACILITY.....	7
2.	SYSTEM TEST CONFIGURATION.....	8
2.1	EUT CONFIGURATION	8
2.2	EUT EXERCISE	8
2.3	TEST PROCEDURE	8
2.4	CONFIGURATION OF TESTED SYSTEM.....	9
3.	SUMMARY OF TEST RESULTS.....	10
4.	DESCRIPTION OF TEST MODES	11
5.	TEST SYSTEM UNCERTAINTY.....	12
6.	CONDUCTED EMISSIONS TEST	13
6.1	MEASUREMENT PROCEDURE:	13
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
6.3	MEASUREMENT EQUIPMENT USED:	13
6.4	MEASUREMENT RESULT:	13
6.5	CONDUCTED MEASUREMENT PHOTOS:	16
7.	RADIATED EMISSION TEST.....	17
7.1	MEASUREMENT PROCEDURE	17
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	19
7.3	MEASUREMENT EQUIPMENT USED:	19
7.4	RADIATED EMISSION LIMIT.....	21
7.5	MEASUREMENT RESULT	22
7.5	RADIATED MEASUREMENT PHOTOS:	29
8.	CHANNEL SEPARATION TEST	30
8.1	MEASUREMENT PROCEDURE	30
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	30
8.3	MEASUREMENT EQUIPMENT USED:	30
8.4	MEASUREMENT RESULTS:.....	30
9.	20DB BANDWIDTH TEST	35
9.1	MEASUREMENT PROCEDURE	35
9.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	35
9.3	MEASUREMENT EQUIPMENT USED:	35
9.4	MEASUREMENT RESULTS:	35
10.	QUANTITY OF HOPPING CHANNEL TEST.....	40
10.1	MEASUREMENT PROCEDURE	40
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
10.3	MEASUREMENT EQUIPMENT USED:	40
10.4	MEASUREMENT RESULTS:	40

11.	TIME OF OCCUPANCY (DWELL TIME) TEST	41
11.1	TEST DESCRIPTION	41
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	41
11.3	MEASUREMENT EQUIPMENT USED:	41
11.4	TEST REQUIREMENTS / LIMITS	41
11.5	TEST RESULT	42
12.	MAXIMUM PEAK OUTPUT POWER TEST	49
12.1	MEASUREMENT PROCEDURE	49
12.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	49
12.3	MEASUREMENT EQUIPMENT USED:	49
12.4	MEASUREMENT RESULTS:	50
13.	BAND EDGE TEST	54
13.1	MEASUREMENT PROCEDURE	54
13.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	55
13.3	MEASUREMENT EQUIPMENT USED:	55
13.4	MEASUREMENT RESULTS:	56
14.	ANTENNA PORT EMISSION	73
14.1	TEST EQUIPMENT	73
14.2	MEASURING INSTRUMENTS AND SETTING	73
14.3	TEST PROCEDURES	73
14.4	BLOCK DIAGRAM OF TEST SETUP	73
14.5	TEST RESULT	73
15.	ANTENNA APPLICATION	80
15.1	ANTENNA REQUIREMENT	80
15.2	RESULT	80

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	wireless earphones
Model number	Delta-TG10
Input rating	DC 5V, DC 3.7V
Power Supply	DC 5V from adapter and battery 3.7V
Kind of Device	Bluetooth Ver. 5.3
Modulation	GFSK, $\pi/4$ -DQPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max(PK)	3.86dBm(0.002432W)
Antenna Type	Chip Antenna
Antenna Gain	1.24dBi
Sample Received Date	October 09, 2022

1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.3 Test Facility

Site Description

Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.

Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	wireless earphones	N/A	L1	2AZDD-DELTA-TG10	<i>EUT</i>
2.	Adapter	MI	Model:MDY-08-EH Input: AC 100-240V, 50/60Hz Output: DC 5V/2.5A,DC 9/2A	N/A	<i>Support EUT</i>

Note:

- (1)** Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209, §15.205	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting mode is programmed. EUT is connected by com port, and transmit the control instruction via test software(JL FCC Assist V2.4.exe). The test software power value is set to the maximum.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test(150KHz-30MHz)	$\pm 2.0\text{dB}$
Radiated Emission Test (30MHz-1000MHz)	$\pm 2.0\text{dB}$
Radiated Emission Test (1GHz-18GHz)	$\pm 2.5\text{dB}$
Radiated Emission Test (18GHz-25GHz)	$\pm 3.2\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

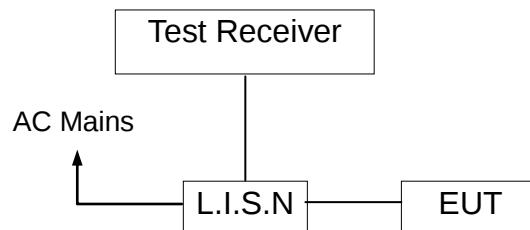

6.3 Measurement Equipment Used:


	EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
6	L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2023-05-12
	10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2023-05-12
	RF Cable	N/A	N/A	2#	2023-05-12
	EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2023-05-12
4	Test Software	Farad	EZ-EMC (Ver.ANCI-3A1)	N/A	N/A

Measurement Result:

Operation Mode:	TX	Test Date :	October 11, 2022
Frequency Range:	0.15MHz~30MHz	Temperature :	23.5°C
Test Result:	PASS	Humidity :	52.6 %
Test By:	Sunshine		

All the modulation modes were tested the data of the worst mode (Pi/4-DQPSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

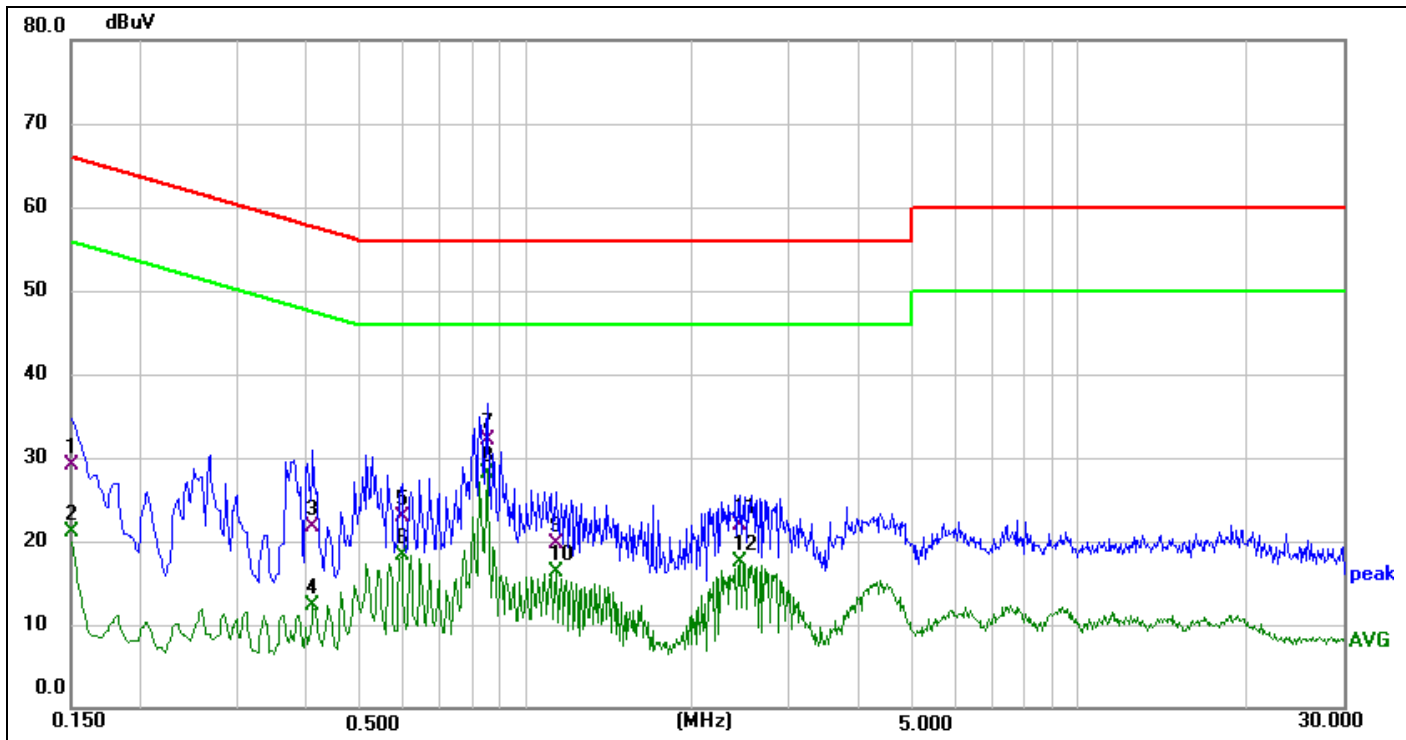

Site:	843	Phase:L1	Temperature(C):23.5(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:	Humidity(%):52.6%
EUT:	wireless earphones	Power Rating:	2022-10-11 21:01:15
M/N.:	Delta-TG10	Test Engineer:	DC 5V From adapter
Mode:	TX2402		Sunshine
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1500	18.92	10.25	29.17	66.00	-36.83	QP	
2	0.1500	10.77	10.25	21.02	56.00	-34.98	AVG	
3	0.4100	11.81	9.84	21.65	57.65	-36.00	QP	
4	0.4100	2.48	9.84	12.32	47.65	-35.33	AVG	
5	0.5940	13.17	9.72	22.89	56.00	-33.11	QP	
6	0.5940	8.62	9.72	18.34	46.00	-27.66	AVG	
7	0.8500	22.48	9.53	32.01	56.00	-23.99	QP	
8 *	0.8500	18.67	9.53	28.20	46.00	-17.80	AVG	
9	1.1300	10.53	9.23	19.76	56.00	-36.24	QP	
10	1.1300	7.07	9.23	16.30	46.00	-29.70	AVG	
11	2.4380	11.66	10.33	21.99	56.00	-34.01	QP	
12	2.4380	7.18	10.33	17.51	46.00	-28.49	AVG	

*:Maximum data x:Over limit !:over margin

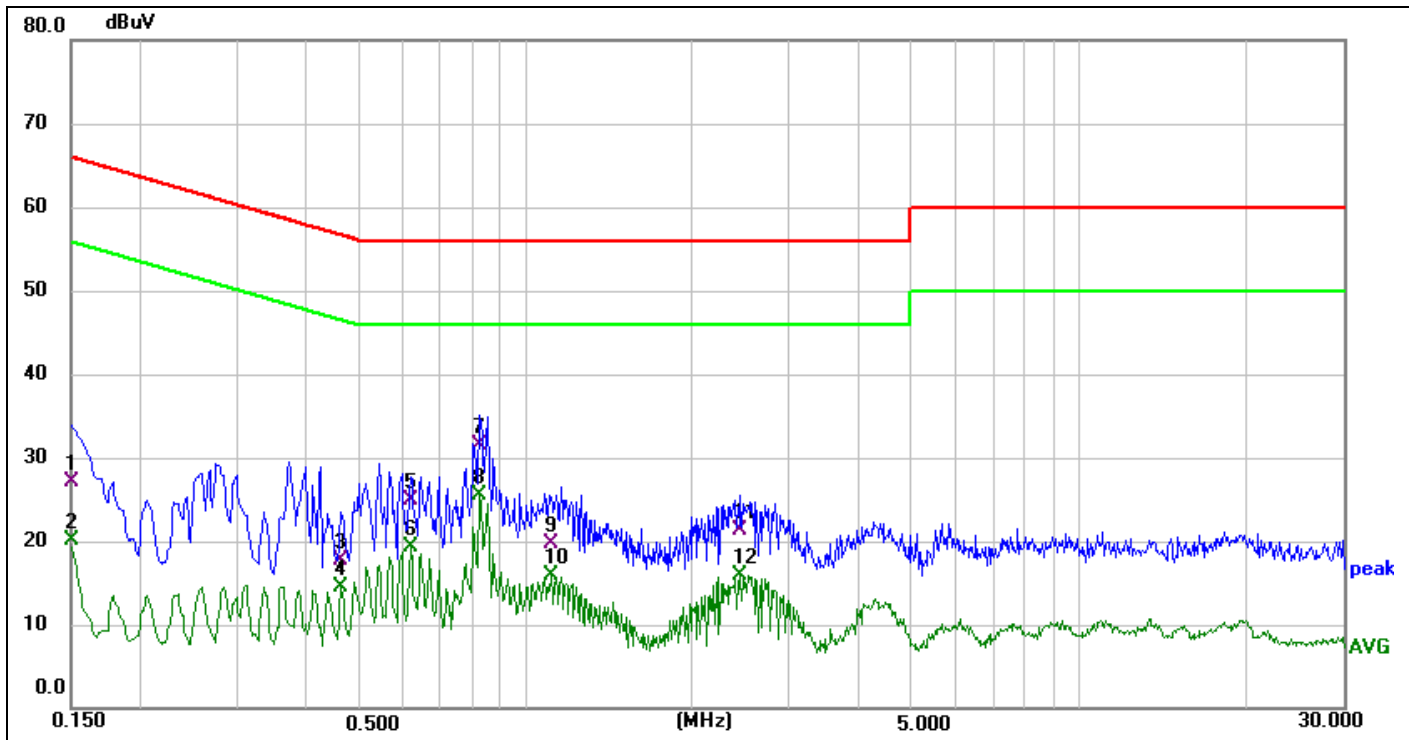

Site:	843	Phase:N	Temperature(C):23.5(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:	Humidity(%):52.6%
EUT:	wireless earphones	Power Rating:	2022-10-11 21:04:53
M/N.:	Delta-TG10	Test Engineer:	DC 5V From adapter
Mode:	TX2402		Sunshine
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1500	16.77	10.26	27.03	66.00	-38.97	QP	
2	0.1500	9.82	10.26	20.08	56.00	-35.92	AVG	
3	0.4620	7.92	9.82	17.74	56.66	-38.92	QP	
4	0.4620	4.61	9.82	14.43	46.66	-32.23	AVG	
5	0.6180	15.20	9.70	24.90	56.00	-31.10	QP	
6	0.6180	9.58	9.70	19.28	46.00	-26.72	AVG	
7	0.8260	21.99	9.55	31.54	56.00	-24.46	QP	
8 *	0.8260	15.91	9.55	25.46	46.00	-20.54	AVG	
9	1.1060	10.35	9.27	19.62	56.00	-36.38	QP	
10	1.1060	6.57	9.27	15.84	46.00	-30.16	AVG	
11	2.4380	10.96	10.37	21.33	56.00	-34.67	QP	
12	2.4380	5.55	10.37	15.92	46.00	-30.08	AVG	

*:Maximum data x:Over limit !:over margin

6.5 Conducted Measurement Photos:



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz

and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

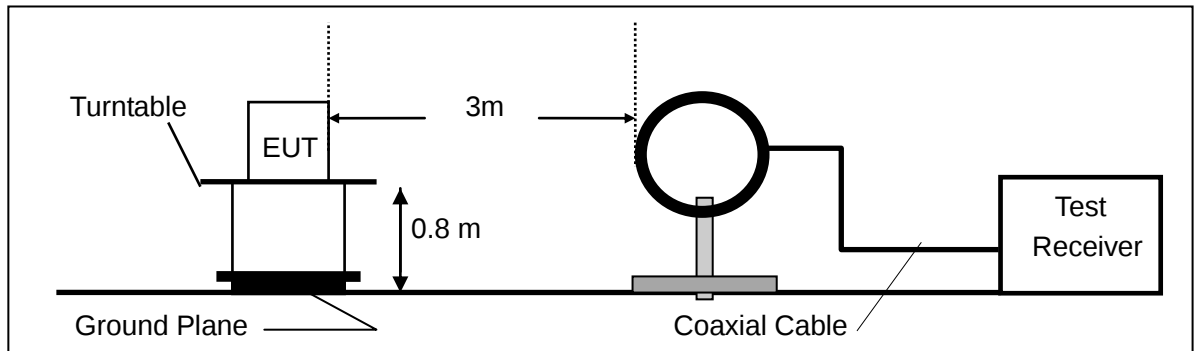

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

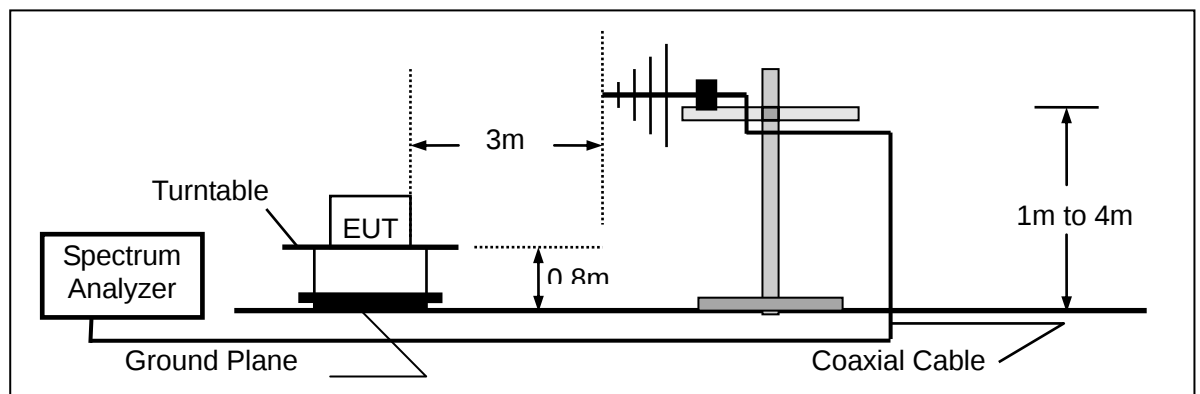

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

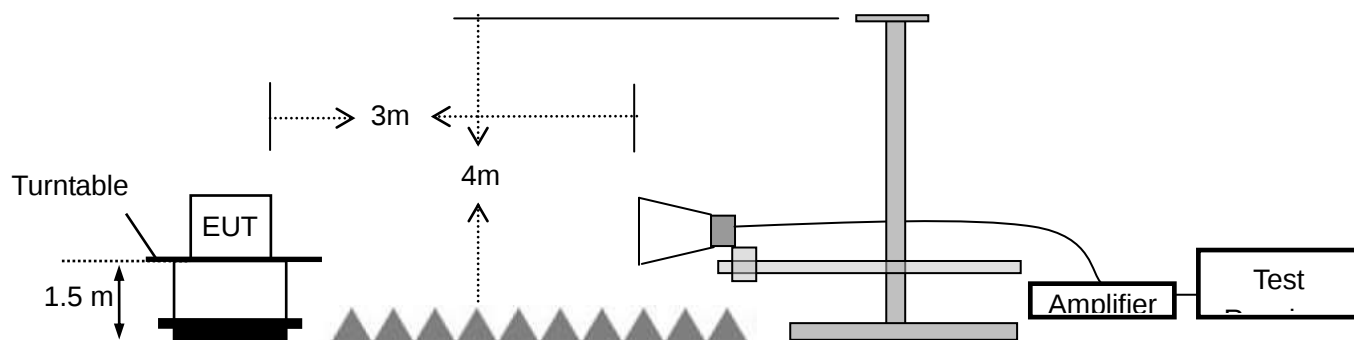

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until	Calibration interval
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2022-11-12	1 year
2.	Pre-Amplifier	HP	8447D	2727A06172	2023-05-13	1 year
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2023-05-13	1 year
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2022-11-12	1 year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
6.	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2023-05-13	1 year
7.	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2023-05-13	1 year
8.	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX10 0KHz-40GHz	J101313052400 1	2022-11-12	1 year
9.	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J203109061212 3	2022-11-12	1 year
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-2m	N/A	2022-11-12	1 year
11.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-0.3m	N/A	2022-11-12	1 year
12.	RF Cable	N/A	N/A	6#	2023-05-13	1 year
13.	RF Cable	N/A	N/A	1-1#	2023-05-13	1 year
14.	RF Cable	N/A	N/A	1-2#	2023-05-13	1 year
15.	RF Cable	N/A	N/A	7#	2023-05-13	1 year
16.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2023-05-13	3 year
17.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A	N/A

7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(3)

Remark 1. Emission level in dBuV/m=20 log (uV/m)

- :
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.5 Measurement Result

Operation Mode:	TX	Test Date :	October 11, 2022
Test By:	Sunshine	Temperature :	26°C
Test Result:	PASS	Humidity :	54 %
Measured Distance:	3m		

Below 30MHz:

Freq.	Ant.Pol.	Emission	Limit 3m	Over
(MHz)	H/V	Level	(dBuV/m)	(dB)
		(dBuV/m)		
--	--	--	--	--


Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode ((Pi/4-DQPSK TX 2402MHz)) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

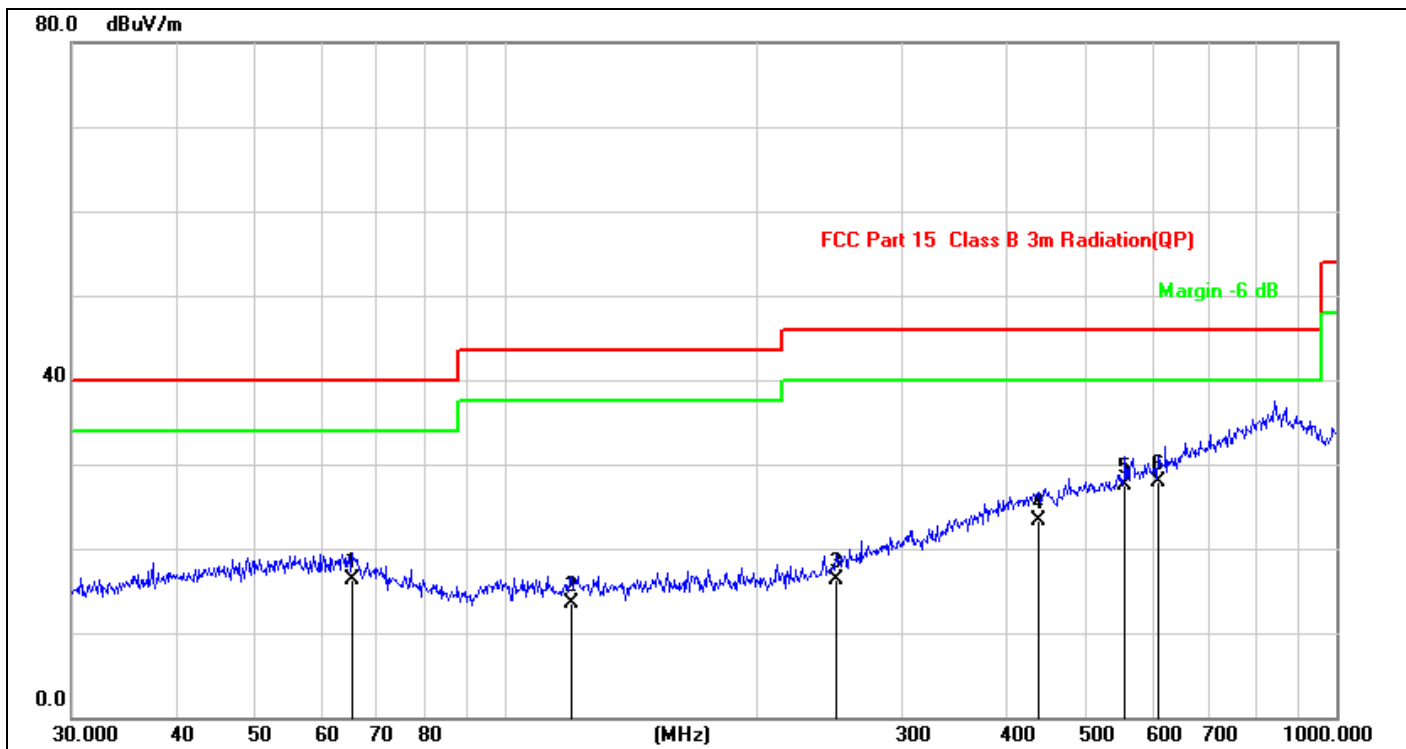

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation(QP)			Humidity(%):	54%
EUT:	wireless earphones	Test Time:		2022/10/11 6:23:20	
M/N.:	Delta-TG10	Power Rating:		DC 3.7V	
Mode:	TX2402	Test Engineer:		Sunshine	
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	65.3431	25.66	-9.41	16.25	40.00	-23.75	QP			
2	119.8555	25.15	-11.66	13.49	43.50	-30.01	QP			
3	249.4250	25.51	-9.26	16.25	46.00	-29.75	QP			
4	438.6553	25.48	-2.13	23.35	46.00	-22.65	QP			
5	556.7744	27.30	0.18	27.48	46.00	-18.52	QP			
6 *	609.9215	26.44	1.45	27.89	46.00	-18.11	QP			

*:Maximum data x:Over limit !:over margin

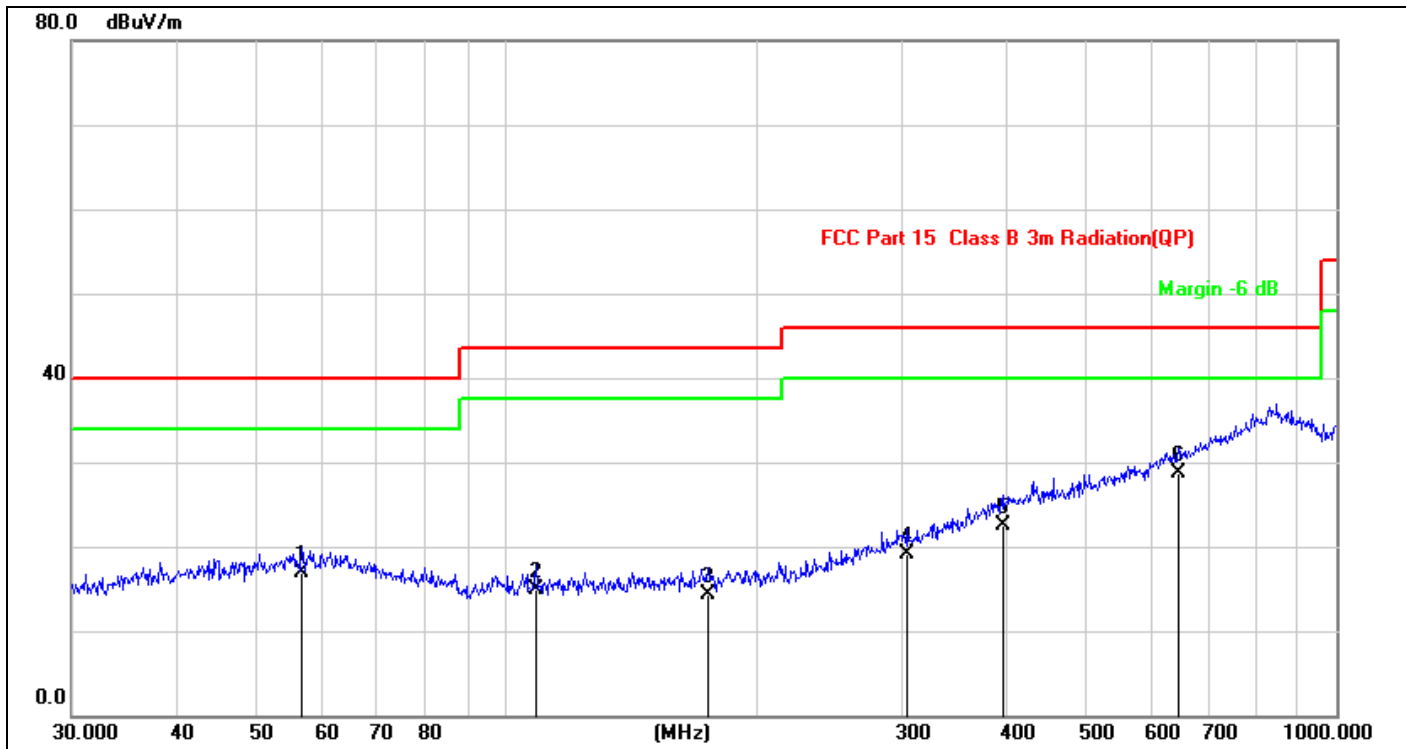

Site:	LAB	Antenna::	Horizontal	Temperature(C):	26(C)
Limit:	FCC Part 15C 3m Radiation(QP)			Humidity(%):	54%
EUT:	wireless earphones	Test Time:		2022/10/11 6:22:08	
M/N.:	Delta-TG10	Power Rating:		DC 3.7V	
Mode:	TX2402	Test Engineer:		Sunshine	
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	56.7916	25.98	-9.14	16.84	40.00	-23.16	QP			
2	108.6470	26.50	-11.63	14.87	43.50	-28.63	QP			
3	175.0367	25.64	-11.24	14.40	43.50	-29.10	QP			
4	304.6099	25.83	-6.68	19.15	46.00	-26.85	QP			
5	394.8544	25.68	-3.15	22.53	46.00	-23.47	QP			
6 *	645.1195	26.41	2.22	28.63	46.00	-17.37	QP			

*:Maximum data x:Over limit !:over margin

Above 1000MHz~10th Harmonics:

Please refer to the following data.

Operation Mode: GFSK (CH1: 2402MHz) Test Date : July 02, 2022

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	96.25	75.14	-32.3	63.95	42.84	74	54	-10.05	-11.16
7206	V	94.36	76.69	-37.25	57.11	39.44	74	54	-16.89	-14.56
9608	V	97.58	78.17	-39.8	57.78	38.37	74	54	-16.22	-15.63
12010	V	95.74	77.64	-40.5	55.24	37.14	74	54	-18.76	-16.86
14412	V	97.24	77.65	-41.7	55.54	35.95	74	54	-18.46	-18.05
16814	V	95.13	76.14	-40	55.13	36.14	74	54	-18.87	-17.86
4804	H	95.66	74.87	-31.4	64.26	43.47	74	54	-9.74	-10.53
7206	H	95.81	76.38	-35.5	60.31	40.88	74	54	-13.69	-13.12
9608	H	96.14	77.25	-38.3	57.84	38.95	74	54	-16.16	-15.05
12010	H	94.67	75.66	-39	55.67	36.66	74	54	-18.33	-17.34
14412	H	97.36	77.68	-42	55.36	35.68	74	54	-18.64	-18.32
16814	H	94.37	75.65	-39.3	55.07	36.35	74	54	-18.93	-17.65

Operation Mode: GFSK (CH40: 2441MHz) Test Date : July 02, 2022

(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
4882	V	96.58	75.36	-32.3	64.28	43.06	74	54	-9.72	-10.94
7323	V	98.24	78.24	-37.2	61.04	41.04	74	54	-12.96	-12.96
9764	V	97.865	77.27	-39.6	58.26	37.67	74	54	-15.74	-16.33
12205	V	96.387	77.53	-40.5	55.88	37.03	74	54	-18.12	-16.97
14646	V	96.57	78.04	-41	55.57	37.04	74	54	-18.43	-16.96
17087	V	96.24	77.25	-41.1	55.14	36.15	74	54	-18.86	-17.85
4882	H	95.37	72.67	-31.6	63.77	41.07	74	54	-10.23	-12.93
7323	H	97.04	78.07	-35.7	61.34	42.37	74	54	-12.66	-11.63
9764	H	97.28	77.09	-38.3	58.98	38.79	74	54	-15.02	-15.21
12205	H	96.31	76.07	-39	57.31	37.07	74	54	-16.69	-16.93
14646	H	98.36	79.14	-42	56.36	37.14	74	54	-17.64	-16.86
17087	H	96.69	77.34	-41.5	55.19	35.84	74	54	-18.81	-18.16

Operation Mode: GFSK (CH79: 2480MHz) Test Date : July 02, 2022

Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
4960	V	96.28	75.236	-32.3	63.98	42.936	74	54	-10.02	-11.06
7440	V	98.35	78.22	-37.2	61.15	41.02	74	54	-12.85	-12.98
9920	V	97.04	77.27	-39.6	57.44	37.67	74	54	-16.56	-16.33
12400	V	96.58	77.87	-40.7	55.88	37.17	74	54	-18.12	-16.83
14880	V	96.51	78.57	-41	55.51	37.57	74	54	-18.49	-16.43
17360	V	96.05	77.24	-41.1	54.95	36.14	74	54	-19.05	-17.86
4960	H	95.14	72.74	-31.6	63.54	41.14	74	54	-10.46	-12.86
7440	H	97.27	77.08	-35.7	61.57	41.38	74	54	-12.43	-12.62
9920	H	97.41	77.17	-38.1	59.31	39.07	74	54	-14.69	-14.93
12400	H	96.27	75.37	-39	57.27	36.37	74	54	-16.73	-17.63
14880	H	98.35	78.28	-42	56.35	36.28	74	54	-17.65	-17.72
17360	H	96.15	76.02	-41.5	54.65	34.52	74	54	-19.35	-19.48

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : July 02, 2022

Freq.	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	dB	PK	AV	PK	AV	PK	AV
4804	V	95.31	74.65	-32.3	63.01	42.35	74	54	-10.99	-11.65
7206	V	97.65	76.24	-37.2	60.45	39.04	74	54	-13.55	-14.96
9608	V	97.05	77.85	-39.8	57.25	38.05	74	54	-16.75	-15.95
12010	V	96.25	75.61	-40.5	55.75	35.11	74	54	-18.25	-18.89
14412	V	97.31	76.31	-41.7	55.61	34.61	74	54	-18.39	-19.39
16814	V	94.68	74.28	-40	54.68	34.28	74	54	-19.32	-19.72
4804	H	96.27	73.57	-31.6	64.67	41.97	74	54	-9.33	-12.03
7206	H	96.39	77.01	-35.5	60.89	41.51	74	54	-13.11	-12.49
9608	H	97.36	76.98	-38.3	59.06	38.68	74	54	-14.94	-15.32
12010	H	97.33	76.34	-39.4	57.93	36.94	74	54	-16.07	-17.06
14412	H	98.24	75.64	-42	56.24	33.64	74	54	-17.76	-20.36
16814	H	96.37	74.92	-39.3	57.07	35.62	74	54	-16.93	-18.38

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : July 02, 2022

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	96.21	75.36	-32.3	63.91	43.06	74	54	-10.09	-10.94
7323	V	98.67	77.64	-37.2	61.47	40.44	74	54	-12.53	-13.56
9764	V	97.36	78.54	-39.8	57.56	38.74	74	54	-16.44	-15.26
12205	V	97.12	76.38	-40.5	56.62	35.88	74	54	-17.38	-18.12
14646	V	98.38	77.82	-41	57.38	36.82	74	54	-16.62	-17.18
17087	V	95.78	75.24	-41.1	54.68	34.14	74	54	-19.32	-19.86
4882	H	96.34	74.68	-31.6	64.74	43.08	74	54	-9.26	-10.92
7323	H	96.27	77.24	-35.5	60.77	41.74	74	54	-13.23	-12.26
9764	H	97.04	77.61	-38.3	58.74	39.31	74	54	-15.26	-14.69
12205	H	98.37	77.02	-39	59.37	38.02	74	54	-14.63	-15.98
14646	H	97.39	76.34	-42	55.39	34.34	74	54	-18.61	-19.66
17087	H	98.12	74.68	-41.4	56.72	33.28	74	54	-17.28	-20.72

Pi/4-DQPSK (CH79: 2480MHz) Test Date : July 02, 2022

Operation Mode:

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	96.58	76.59	-32.3	64.28	44.29	74	54	-9.72	-9.71
7440	V	97.25	76.69	-37.2	60.05	39.49	74	54	-13.95	-14.51
9920	V	98.02	79.21	-39.8	58.22	39.41	74	54	-15.78	-14.59
12400	V	98.14	77.36	-40.5	57.64	36.86	74	54	-16.36	-17.14
14880	V	96.37	78.31	-41	55.37	37.31	74	54	-18.63	-16.69
17360	V	95.68	76.54	-41.1	54.58	35.44	74	54	-19.42	-18.56
4960	H	96.57	74.61	-31.6	64.97	43.01	74	54	-9.03	-10.99
7440	H	96.27	77.68	-35.5	60.77	42.18	74	54	-13.23	-11.82
9920	H	97.24	77.98	-38.3	58.94	39.68	74	54	-15.06	-14.32
12400	H	98.25	77.28	-39	59.25	38.28	74	54	-14.75	-15.72
14880	H	98.36	77.32	-42	56.36	35.32	74	54	-17.64	-18.68
17360	H	98.39	75.34	-41.5	56.89	33.84	74	54	-17.11	-20.16

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.5 Radiated Measurement Photos:




8. Channel Separation test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


8.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector: PK
 Test By: Jack
 Test Result: PASS
 Modulation: GFSK

Test Date : October 11, 2022
 Temperature : 24 °C
 Humidity : 53 %

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>630.13
40	2441	1001	>630.66
79	2480	1001	>632.67

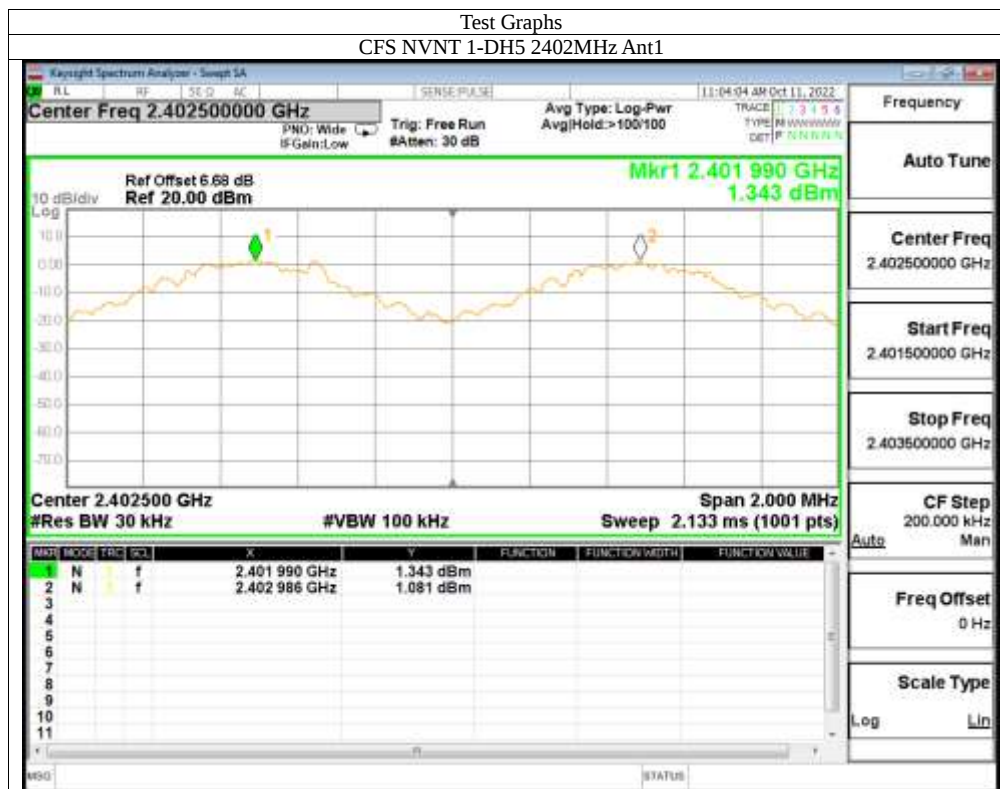

CFS NVNT 1-DH5 2441MHz Ant1

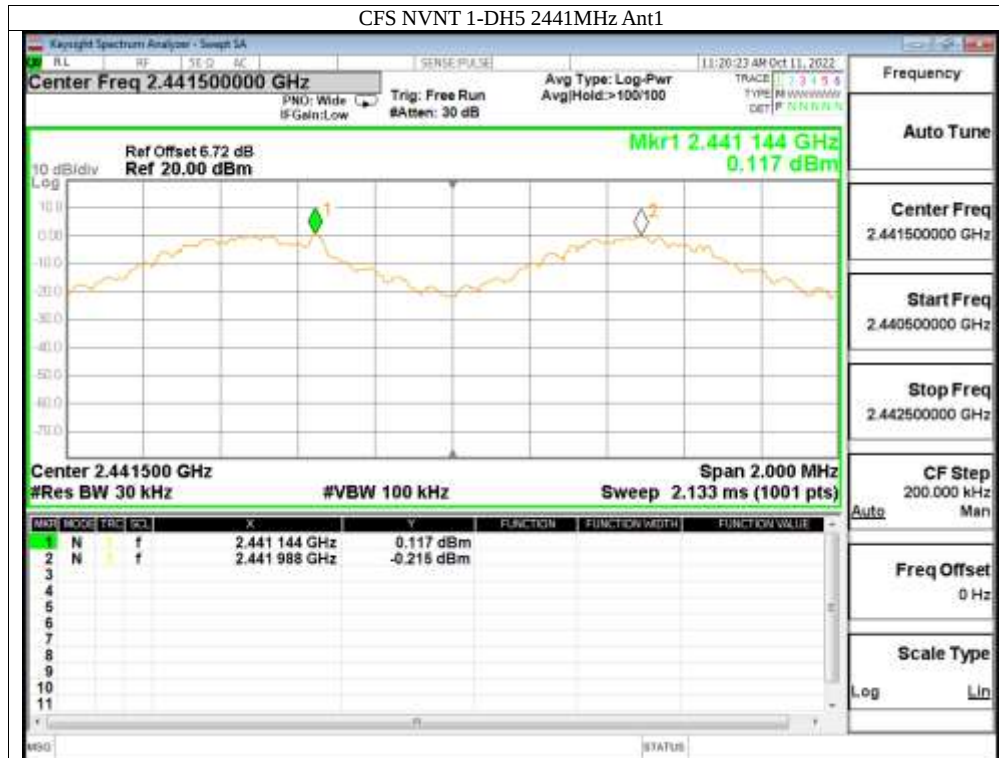


CFS NVNT 1-DH5 2480MHz Ant1




Spectrum Detector: PK
 Test By: Jack
 Test Result: PASS
 Modulation: $\Pi/4$ -DQPSK


Test Date : October 11, 2022
 Temperature : 24 °C
 Humidity : 53 %

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>872.67
40	2441	1001	>873.33
79	2480	1001	>876.00

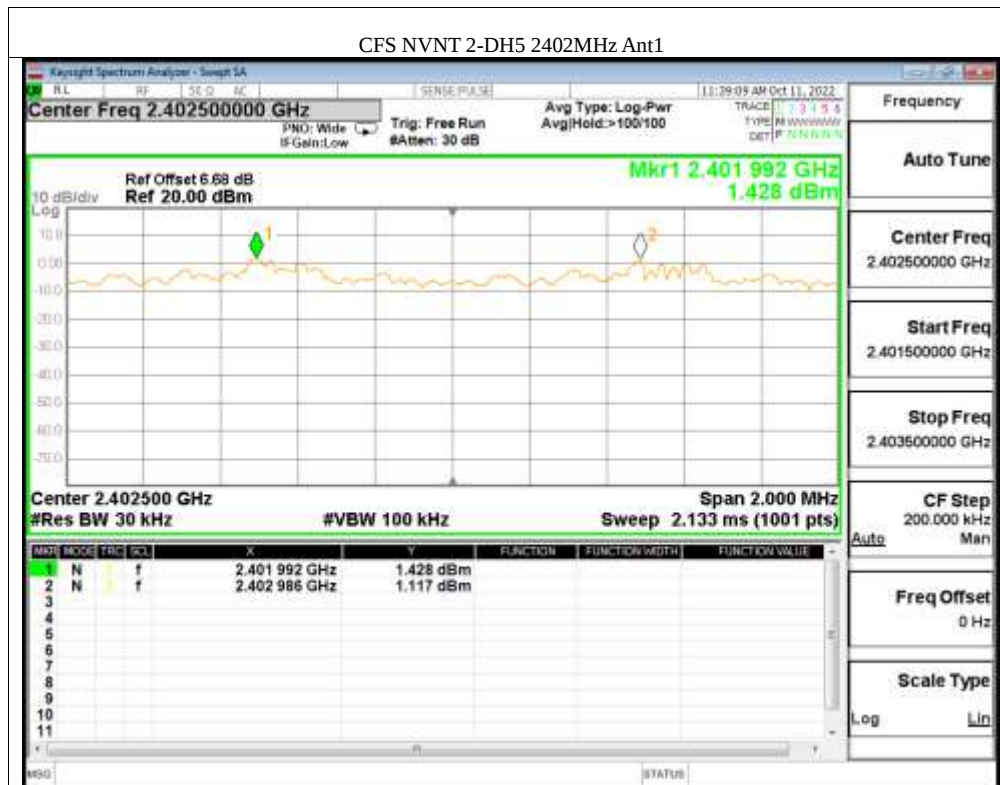

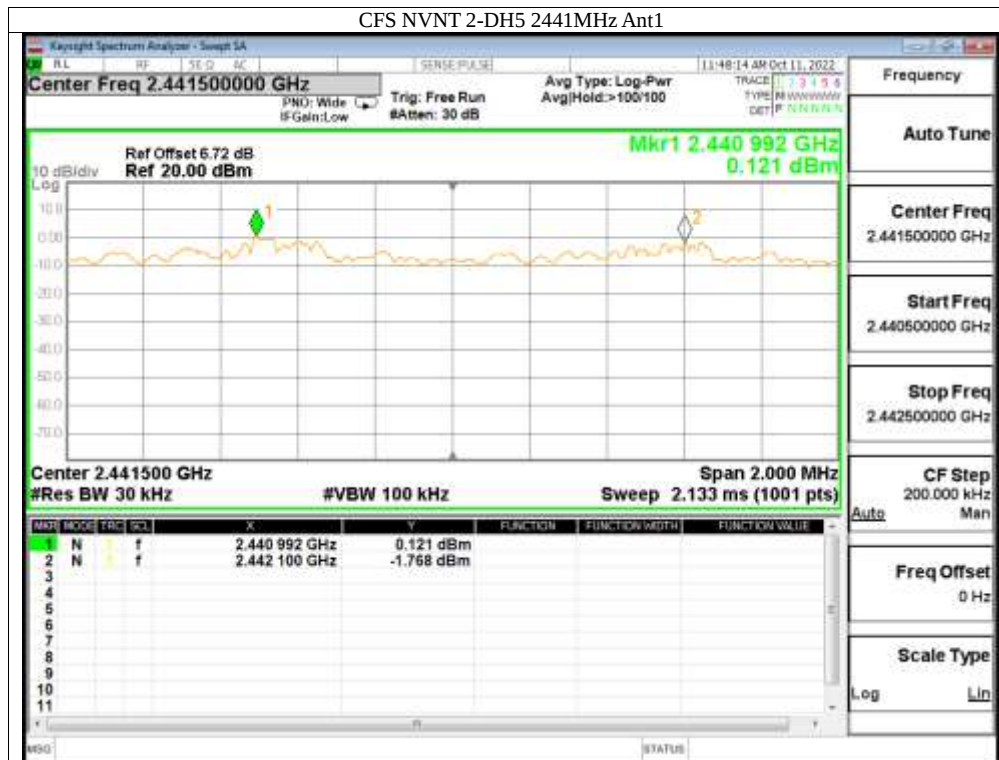

CFS NVNT 2-DH5 2480MHz Ant1

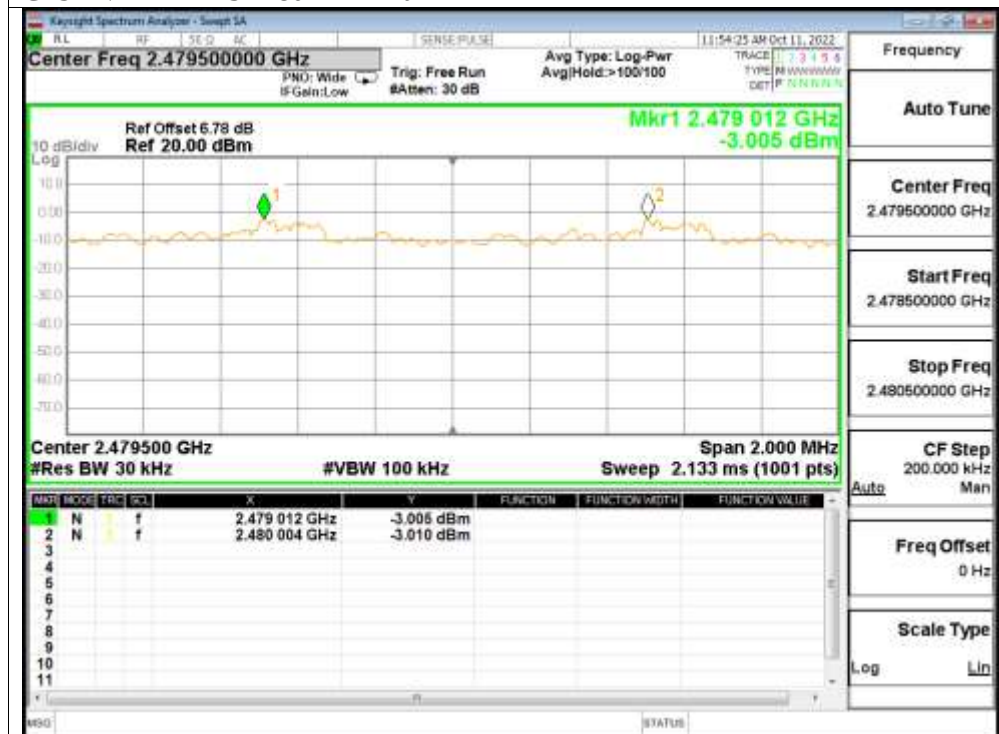


9. 20dB Bandwidth test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	October 11, 2022
Test By:	Jack	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel number	Channel frequency (MHz)	20dB Down BW(MHz)
1	2402	0.9437
40	2441	0.9461
79	2480	0.9543






Spectrum Detector: PK
 Test By: Jack
 Test Result: PASS
 Modulation: $\Pi/4$ -DQPSK

Test Date : October 11, 2022
 Temperature : 24°C
 Humidity : 53 %

Channel number	Channel frequency (MHz) •	20dB Down BW(MHz)
1	2402	1.311
40	2441	1.319
79	2480	1.280



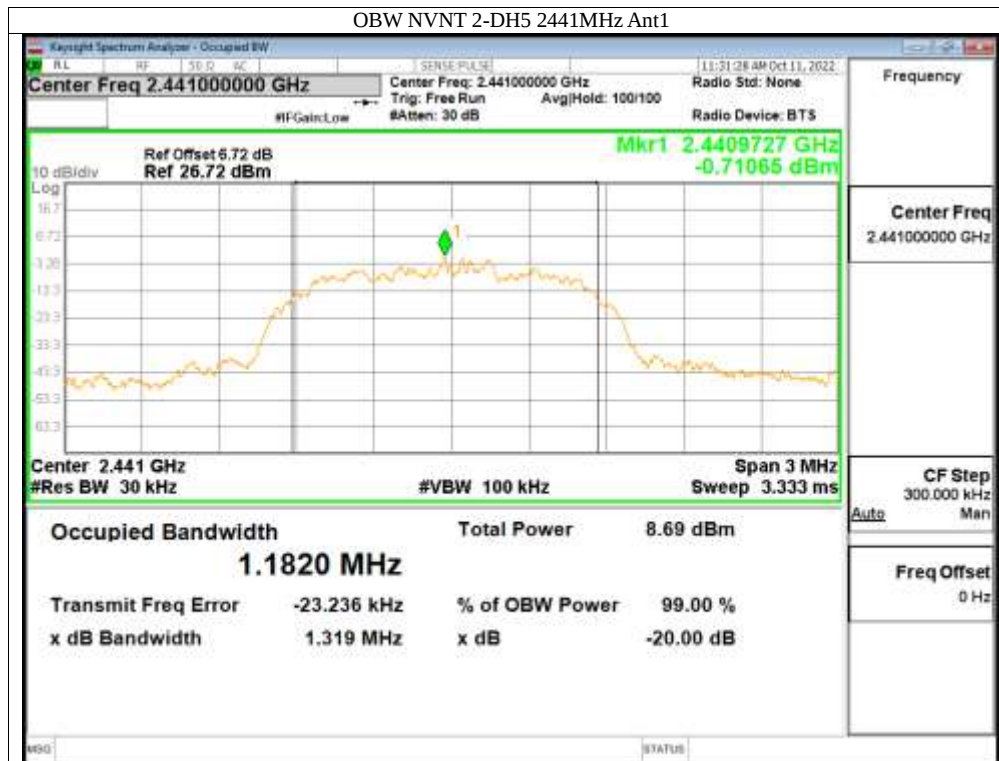


10. Quantity of Hopping Channel Test

10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	October 11, 2022
Test By:	Jack	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

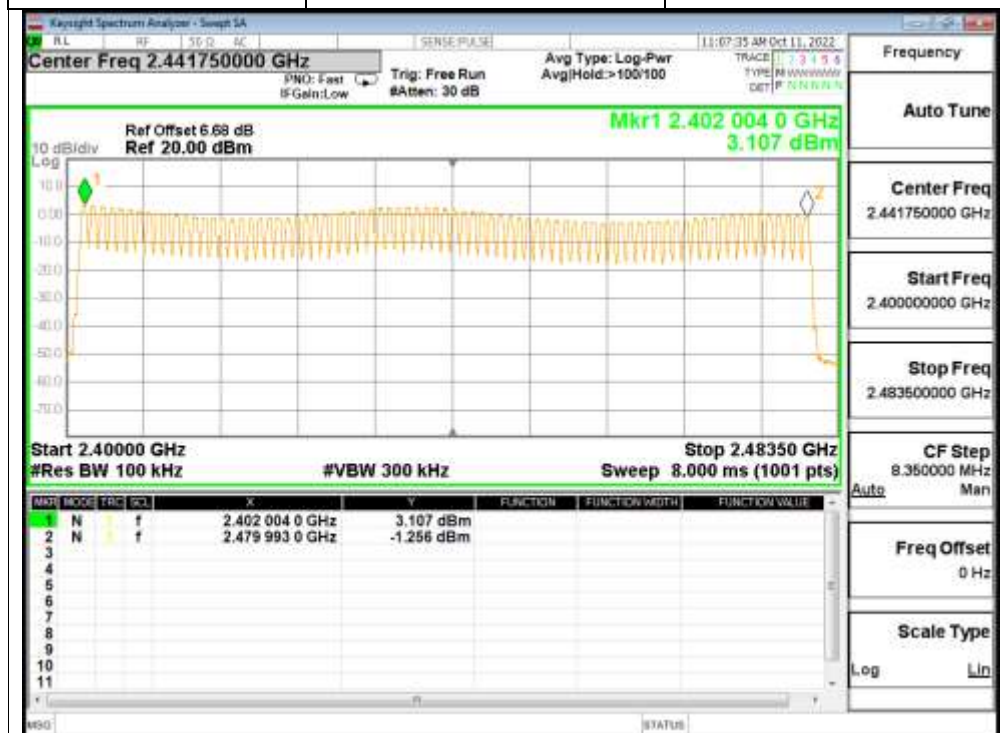

11. Time of Occupancy (Dwell Time) test

11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate = $1600 * 1/\text{s}$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/3 * 1/\text{s}$ for DH3 packets = 533.33 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.

Modulation: GFSK
Test By: Jack
Test Result: PASS

Test Date : October 11, 2022
Temperature : 24 °C
Humidity : 53 %

11.5 Test result


Remark: The results of worst cased was recorded.

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.904	325.248	112	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.9	292.9	101	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.9	304.5	105	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.891	323.792	112	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	283.318	98	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.906	296.412	102	31600	400	Pass

Test Graphs


Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

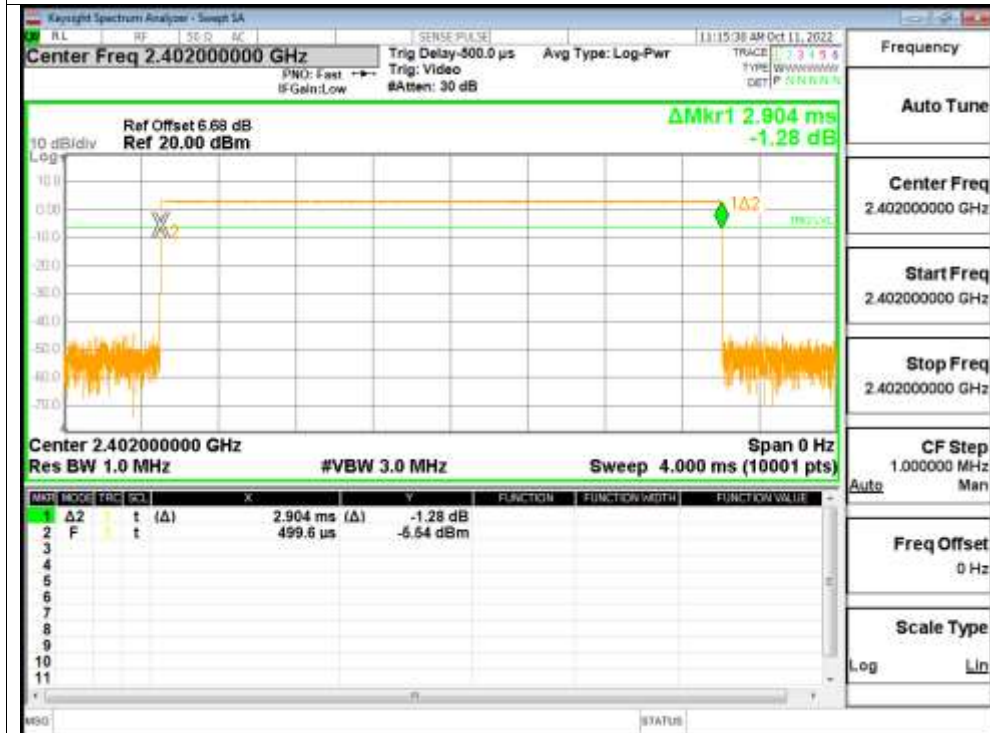

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated




Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

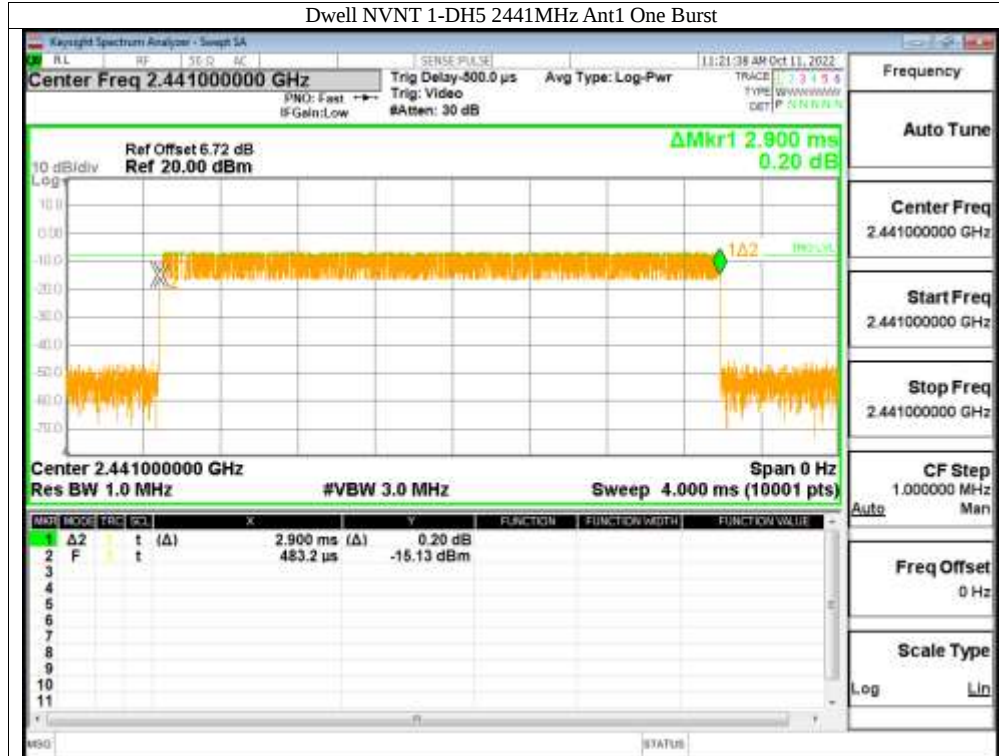

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated




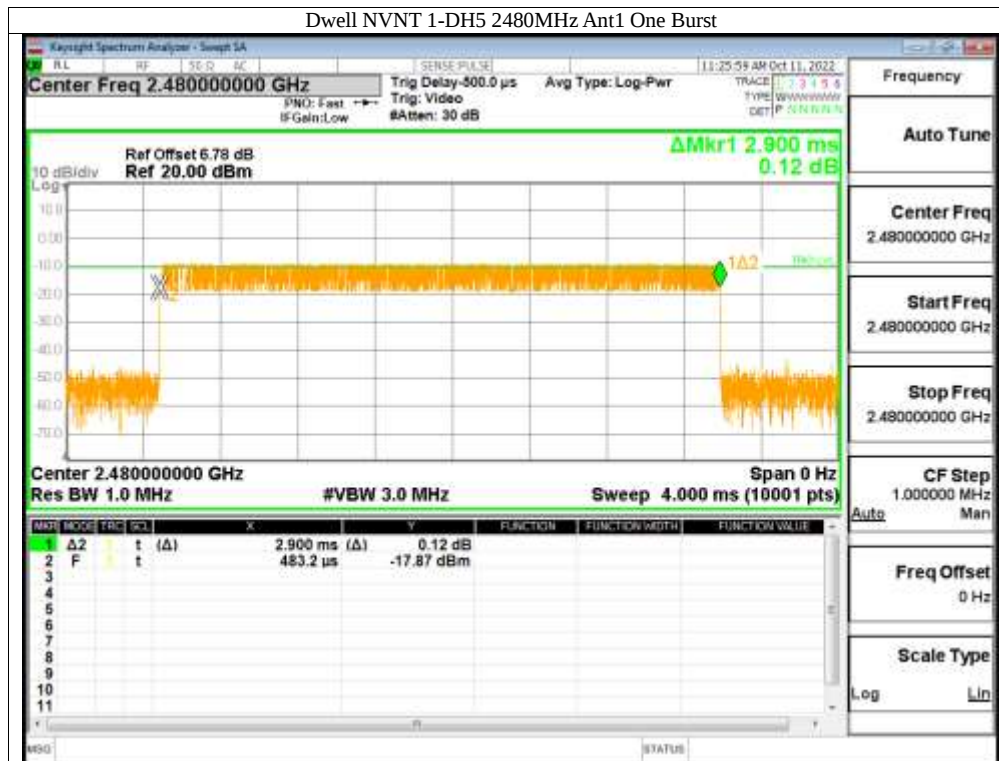

Dwell NVNT 1-DH5 2480MHz Ant1 Accumulated




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

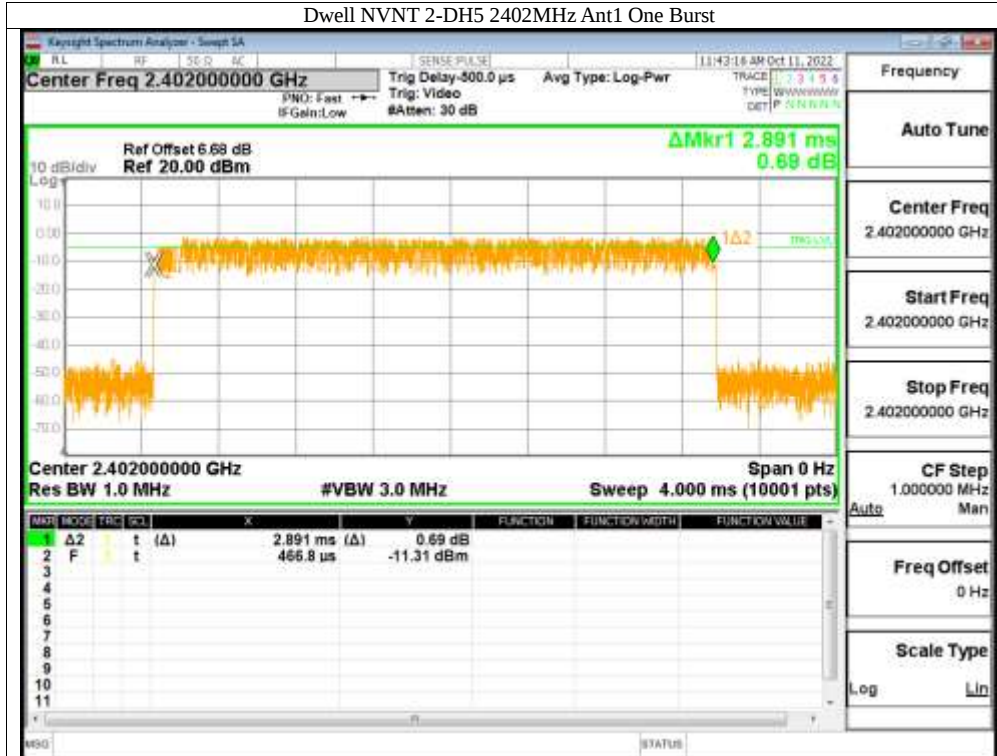

Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated




Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

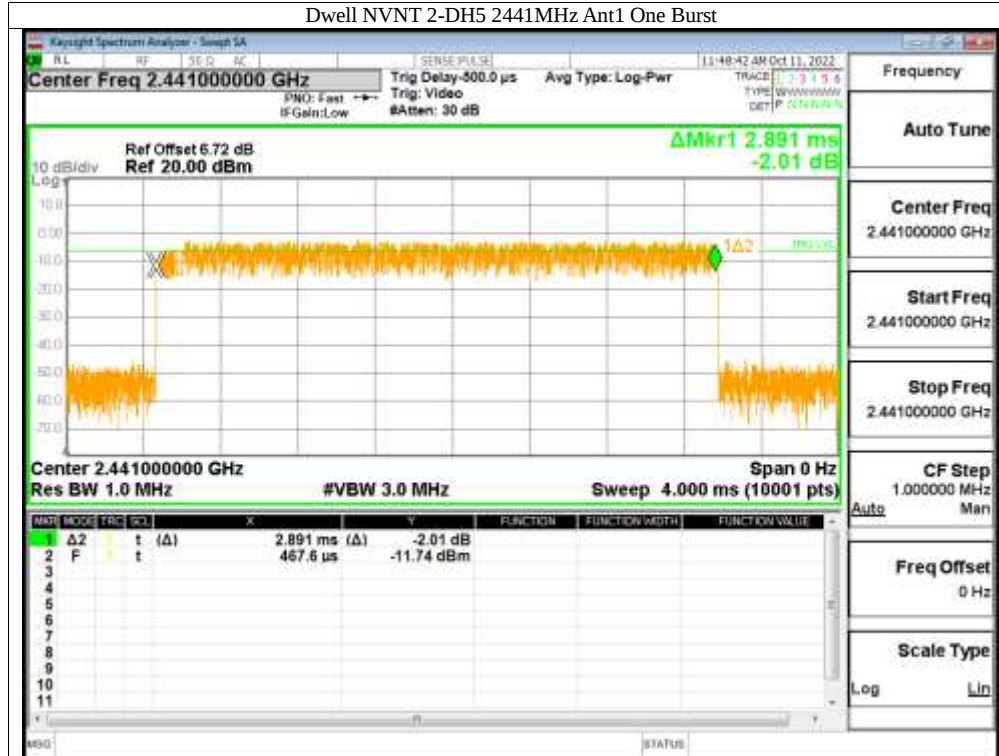

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated



Dwell NVNT 2-DH5 2480MHz Ant1 One Burst

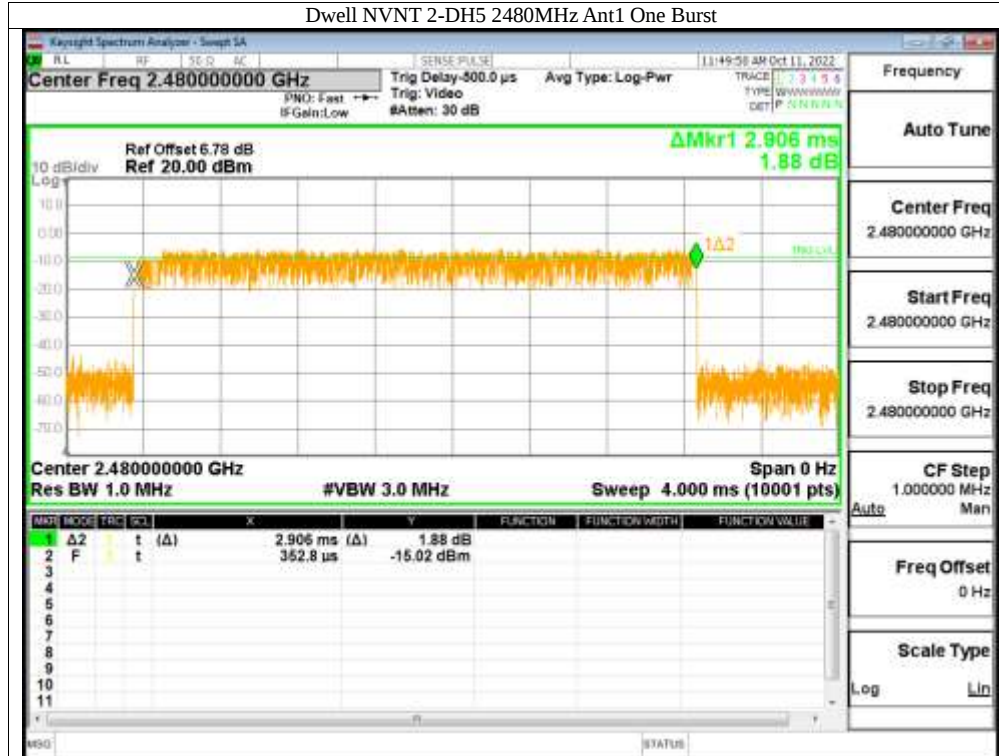

Dwell NVNT 2-DH5 2480MHz Ant1 Accumulated




12. MAXIMUM PEAK OUTPUT POWER TEST

12.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	October 11, 2022
Test By:	Jack	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	3.32	0	3.32	21	Pass
NVNT	1-DH5	2441	Ant1	2.22	0	2.22	21	Pass
NVNT	1-DH5	2480	Ant1	-0.25	0	-0.25	21	Pass
NVNT	2-DH5	2402	Ant1	2.69	0	2.69	21	Pass
NVNT	2-DH5	2441	Ant1	3.86	0	3.86	21	Pass
NVNT	2-DH5	2480	Ant1	1.19	0	1.19	21	Pass

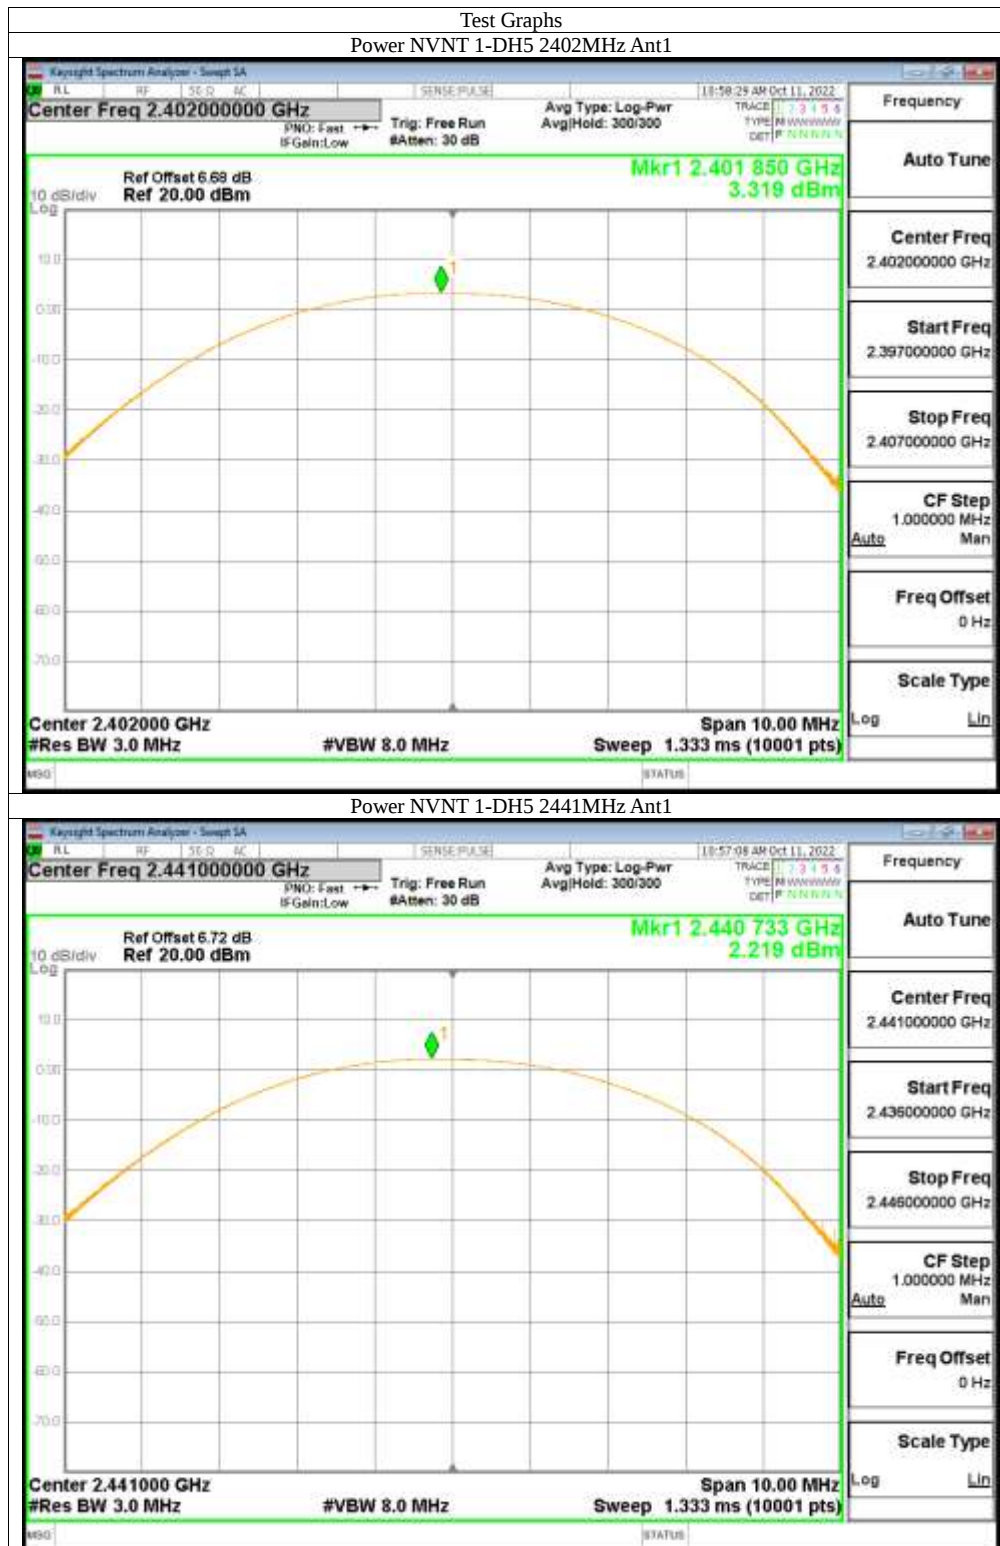





13. Band EDGE test

13.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

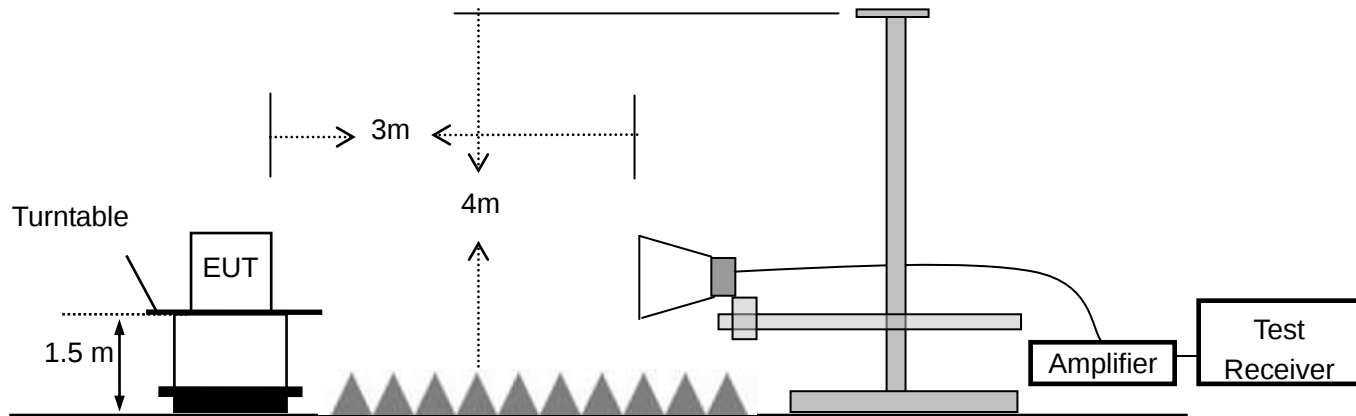

13.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until	Calibration interval
1	Signal Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
2	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX100KHz-40G Hz	J1013130524001	2022-11-12	1 year
3	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J2031090612123	2022-11-12	1 year
4	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-2m	N/A	2022-11-12	1 year
5	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-0.3m	N/A	2022-11-12	1 year

13.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK
Test By: Jack
Test Result: PASS

Test Date : October 11, 2022
Temperature : 24 °C
Humidity : 53 %

1. Conducted Test

For Hopping Mode:

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-50.52	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-51.43	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-46.51	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-52.21	-20	Pass

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

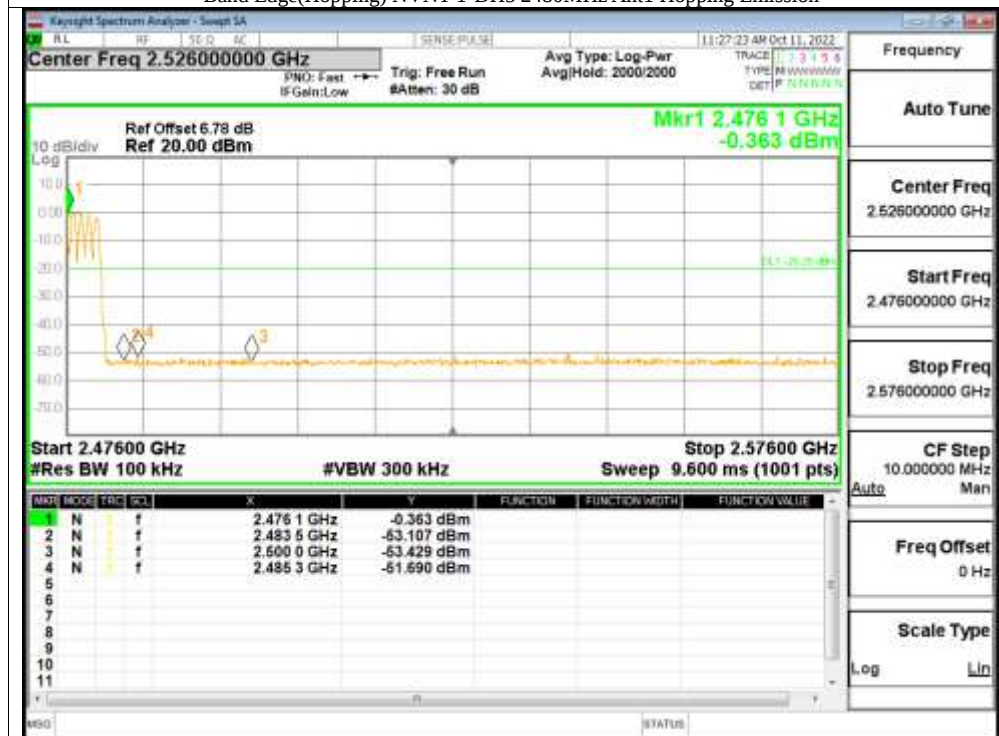




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref





Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

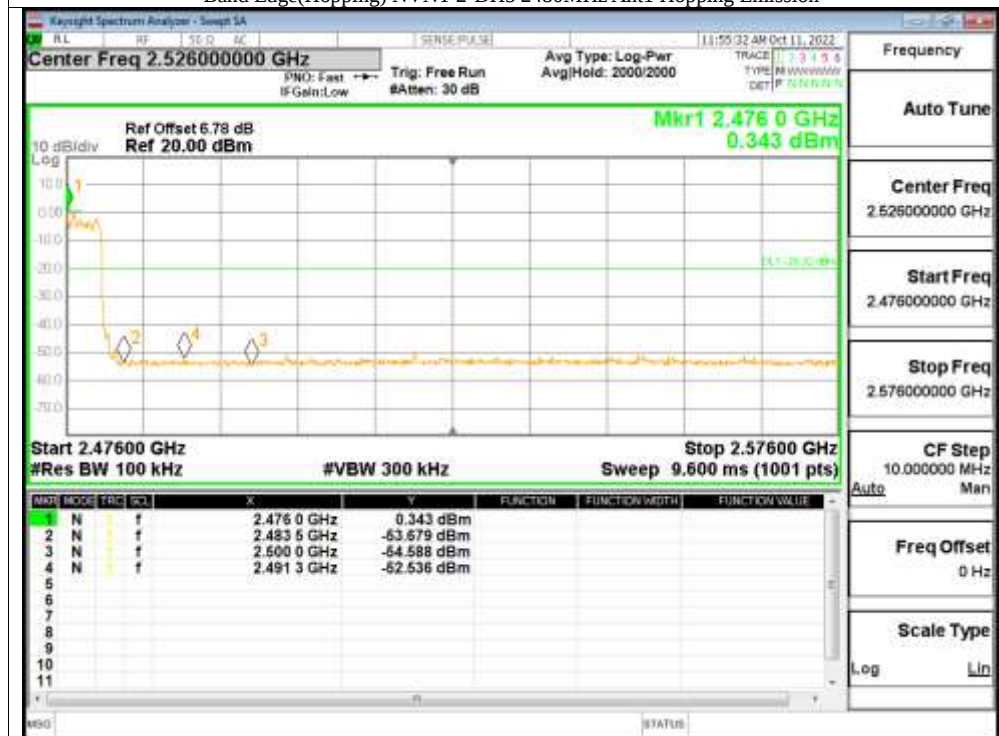



For NO-Hopping Mode:

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-53.73	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-52.38	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-49.28	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-52.39	-20	Pass

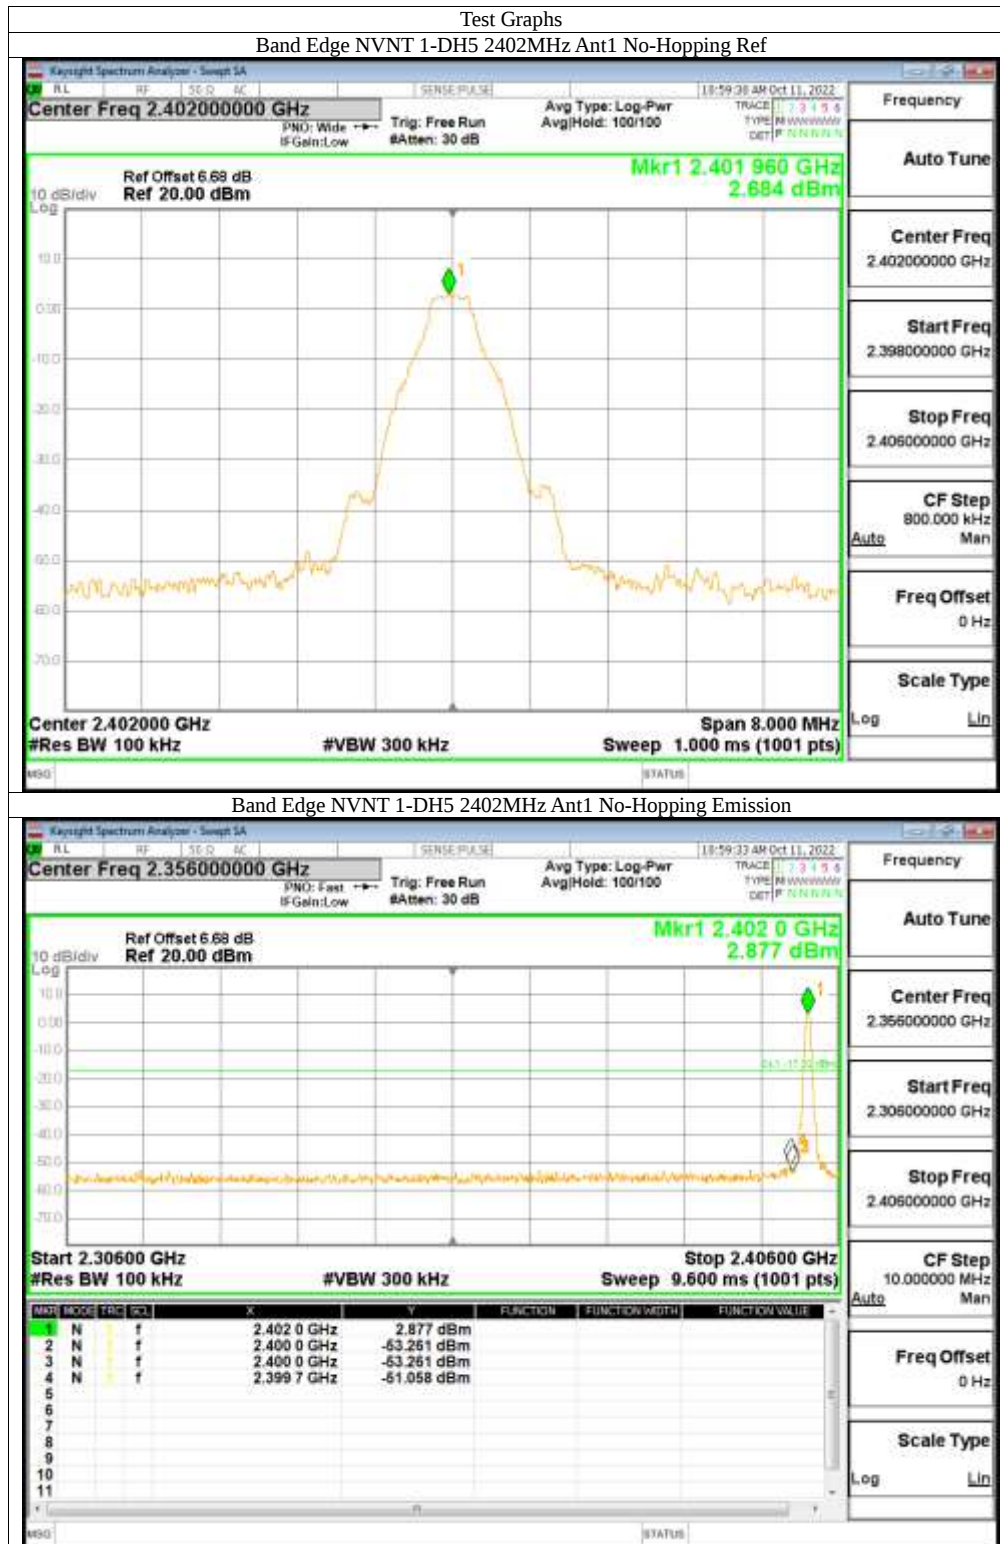

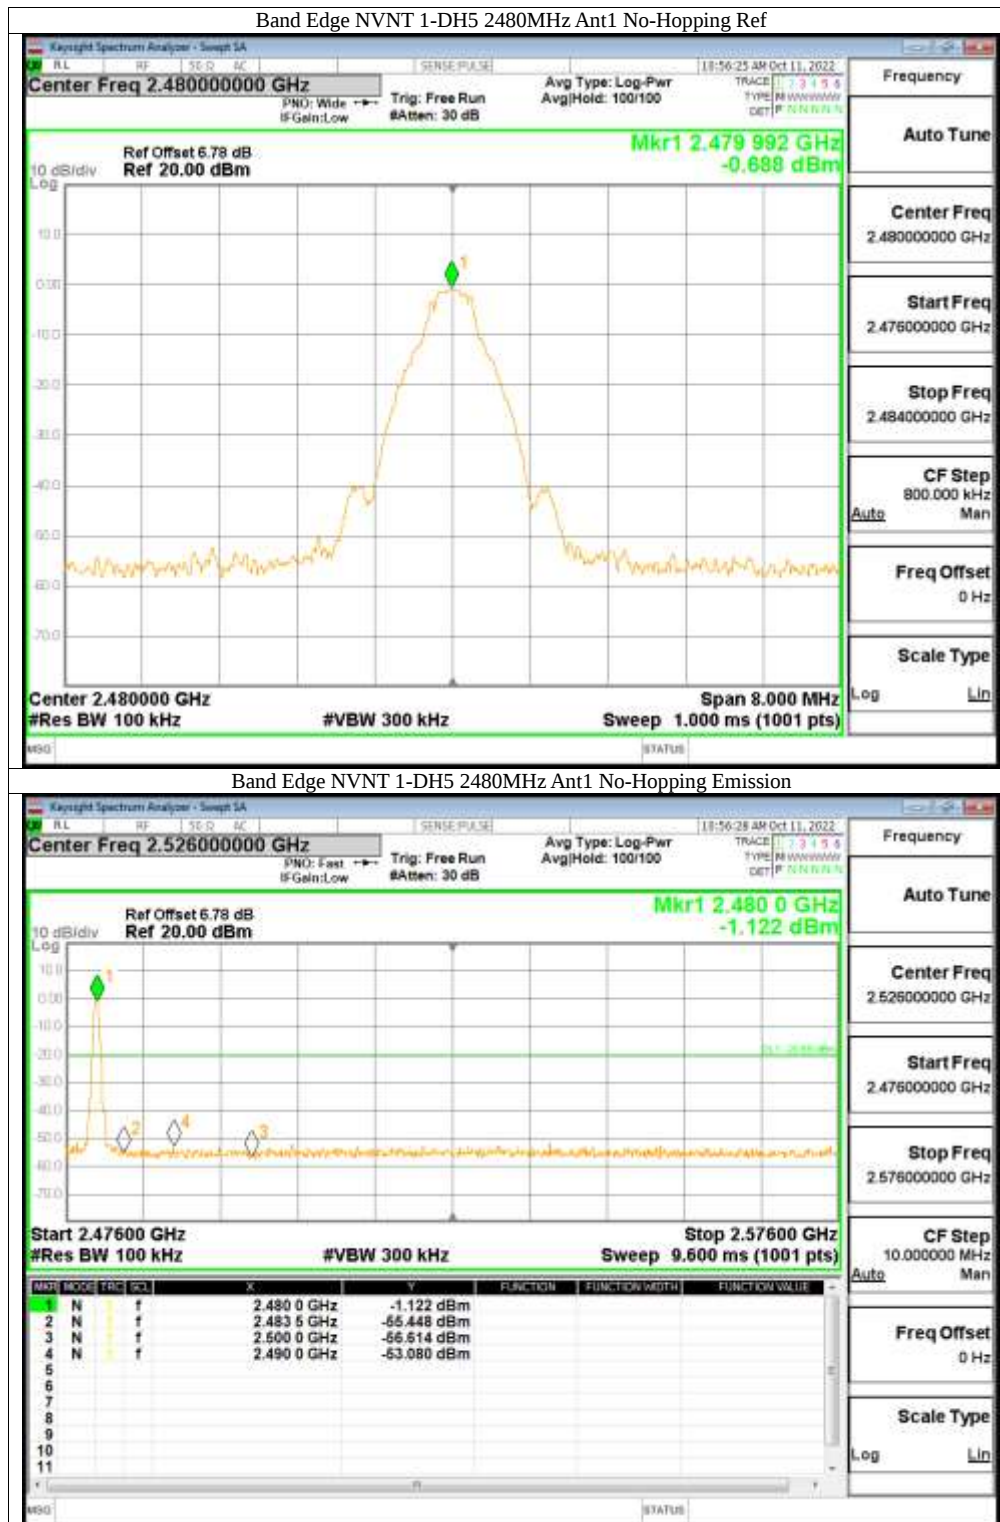

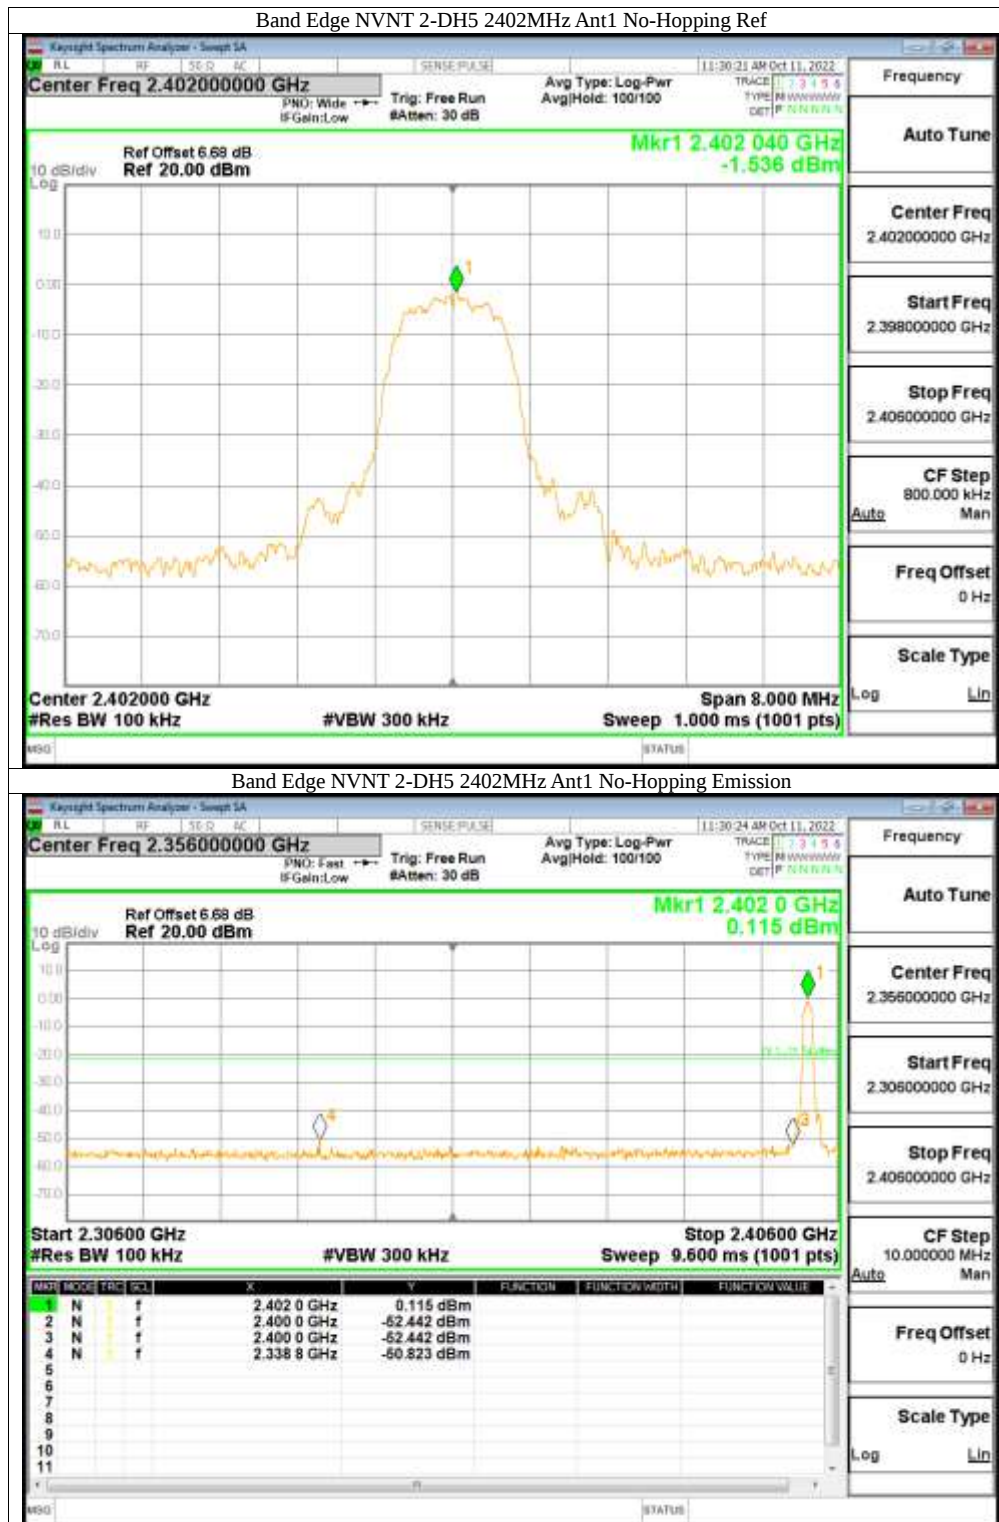

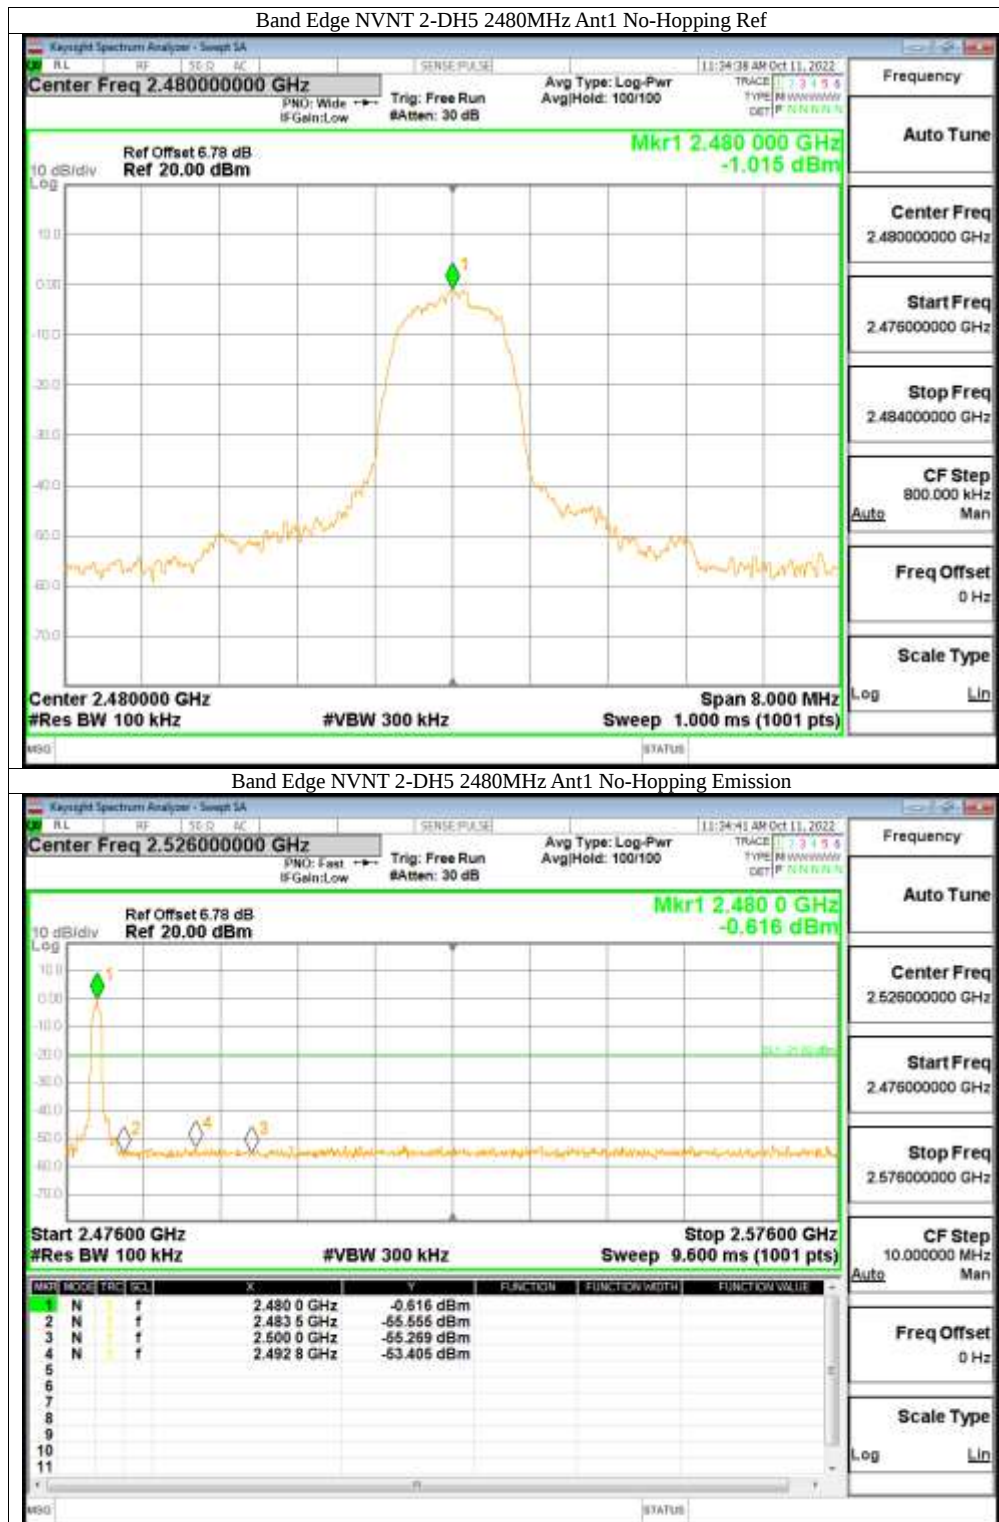


2. Radiated Test


Polarization: Vertical

Test Mode:

GFSK-Low

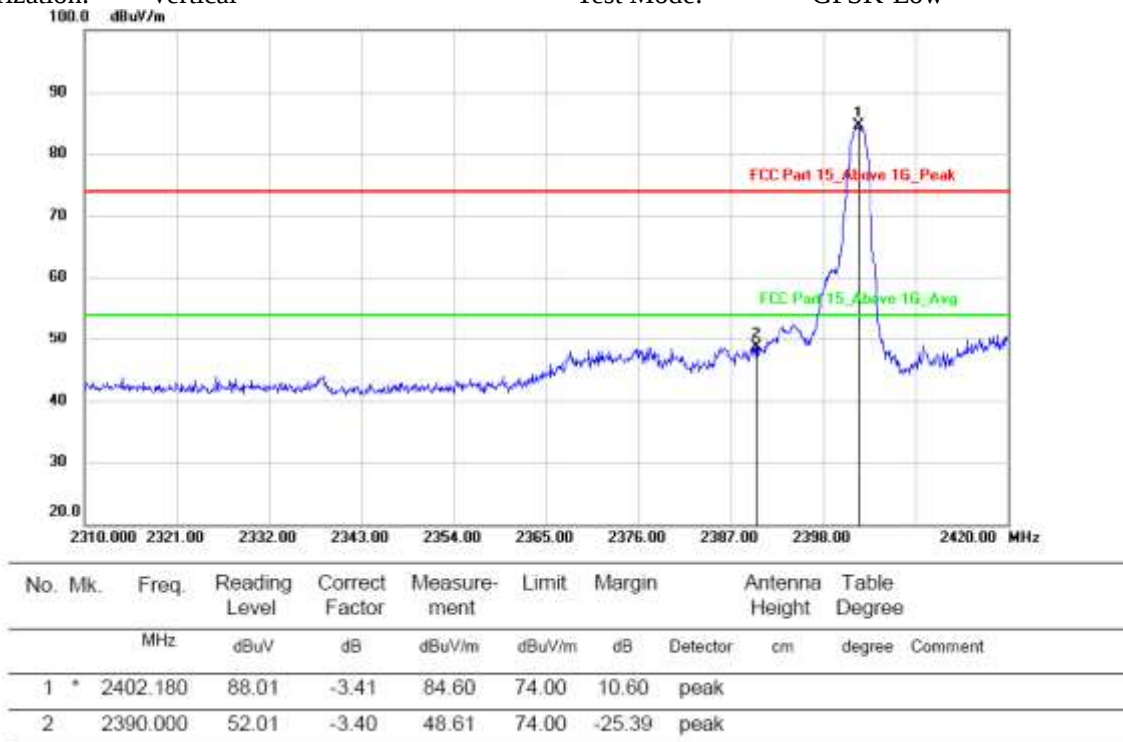

hopping-off

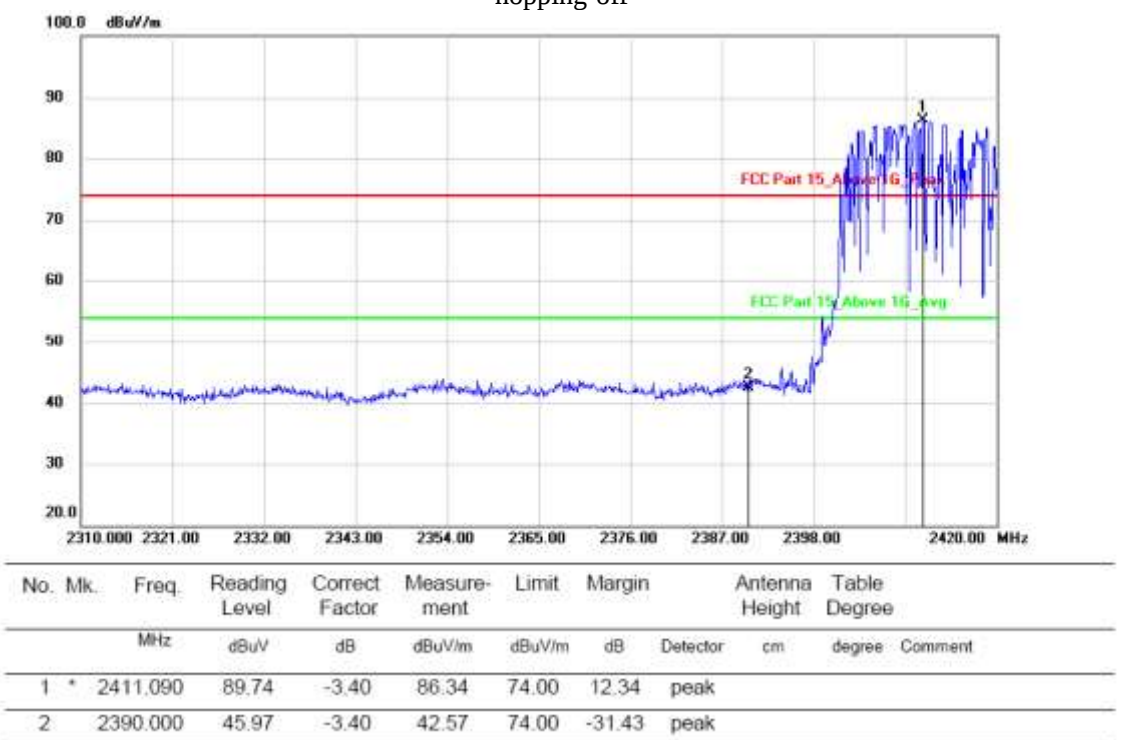


hopping-on

Polarization: Horizontal:


Test Mode:

GFSK-Low

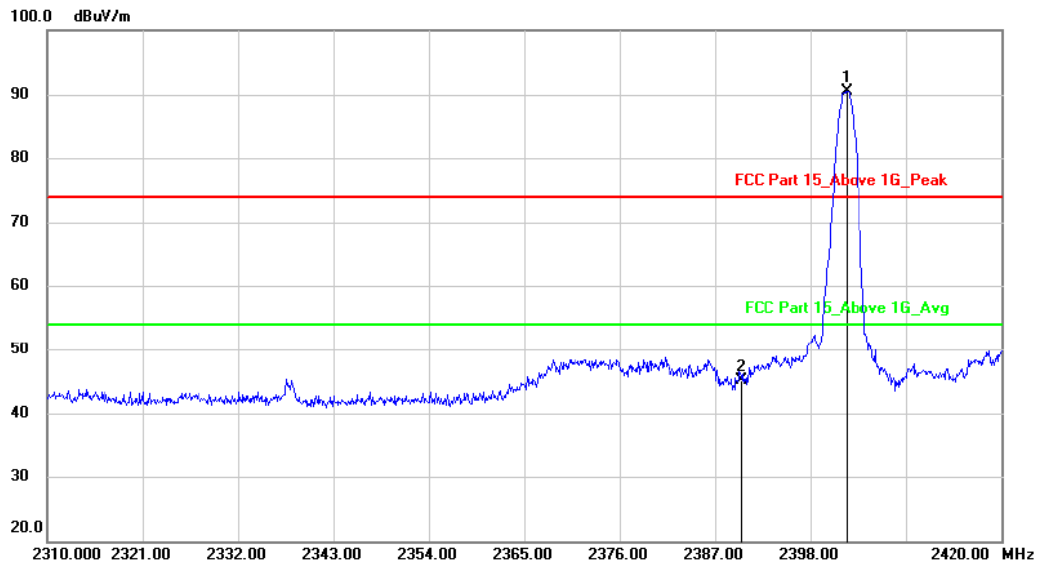

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2402.180	93.93	-3.41	90.52	74.00	16.52	peak		
2		2390.000	48.45	-3.40	45.05	74.00	-28.95	peak		

hopping-off

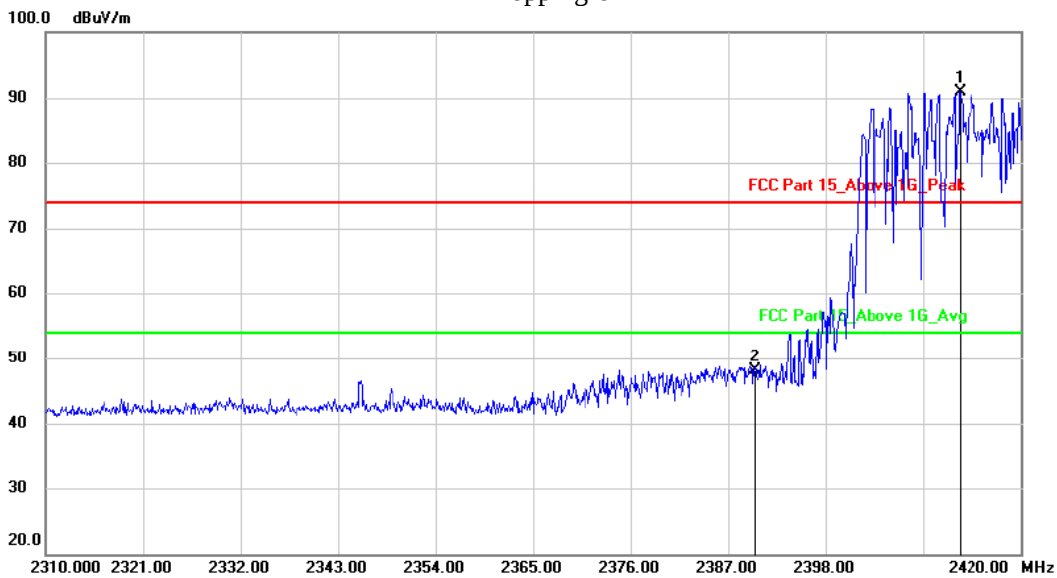


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2413.180	94.32	-3.41	90.91	74.00	16.91	peak		
2		2390.000	51.46	-3.40	48.06	74.00	-25.94	peak		

hopping-on

Polarization: Vertical


Test Mode:

GFSK-High

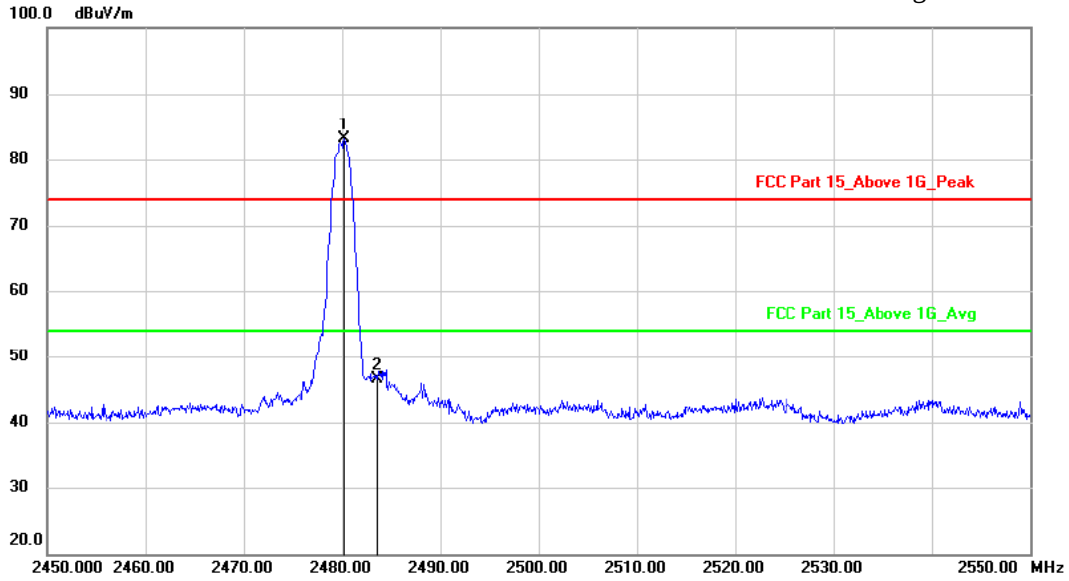

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.200	86.40	-3.38	83.02	74.00	9.02	peak		
2		2483.500	49.86	-3.38	46.48	74.00	-27.52	peak		

hopping-off

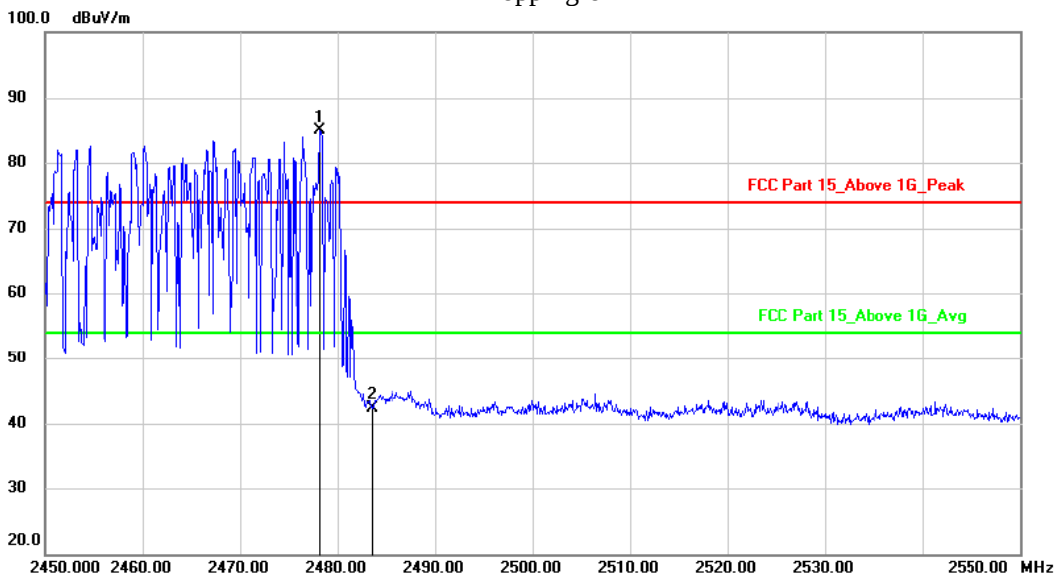


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2478.200	88.22	-3.39	84.83	74.00	10.83	peak		
2		2483.500	45.76	-3.38	42.38	74.00	-31.62	peak		

hopping-on

Polarization: Horizontal


Test Mode:

GFSK-High

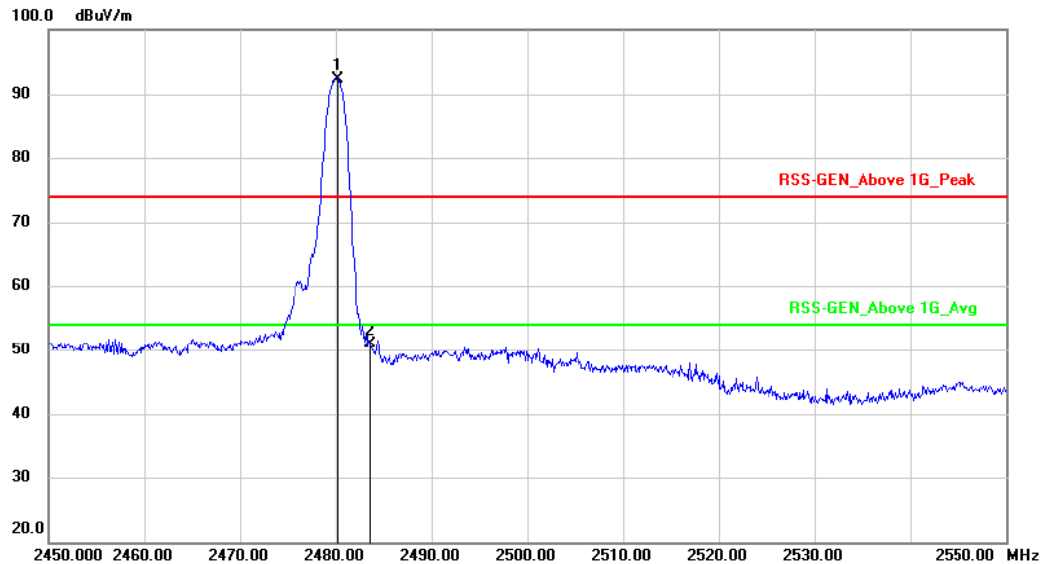

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2480.200	95.75	-3.38	92.37	74.00	18.37	peak		
2		2483.500	54.32	-3.38	50.94	74.00	-23.06	peak		

hopping-off

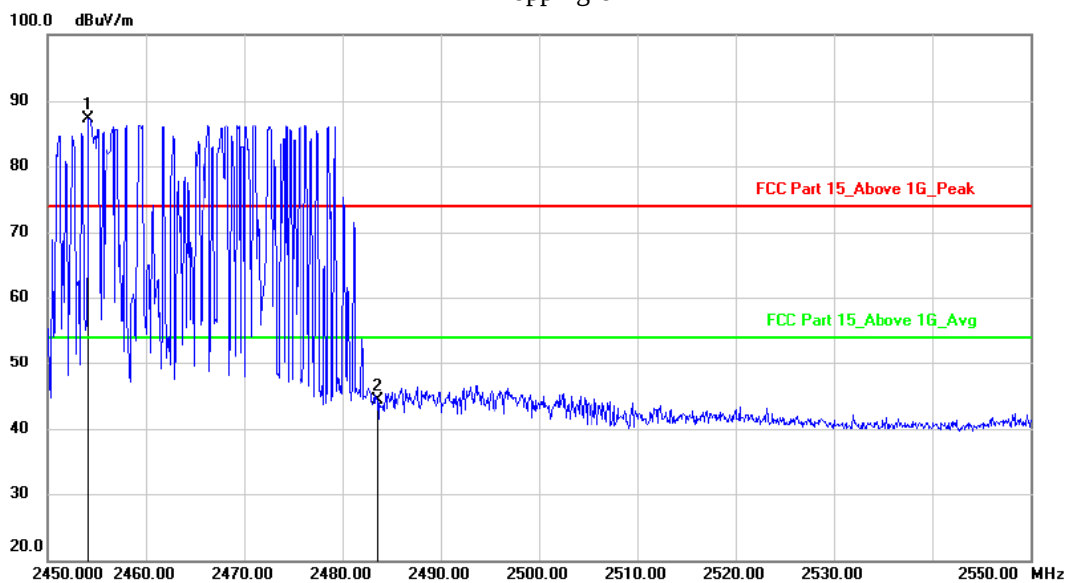


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2454.100	90.78	-3.39	87.39	74.00	13.39	peak		
2		2483.500	47.67	-3.38	44.29	74.00	-29.71	peak		

hopping-on


Polarization: Vertical

Test Mode:

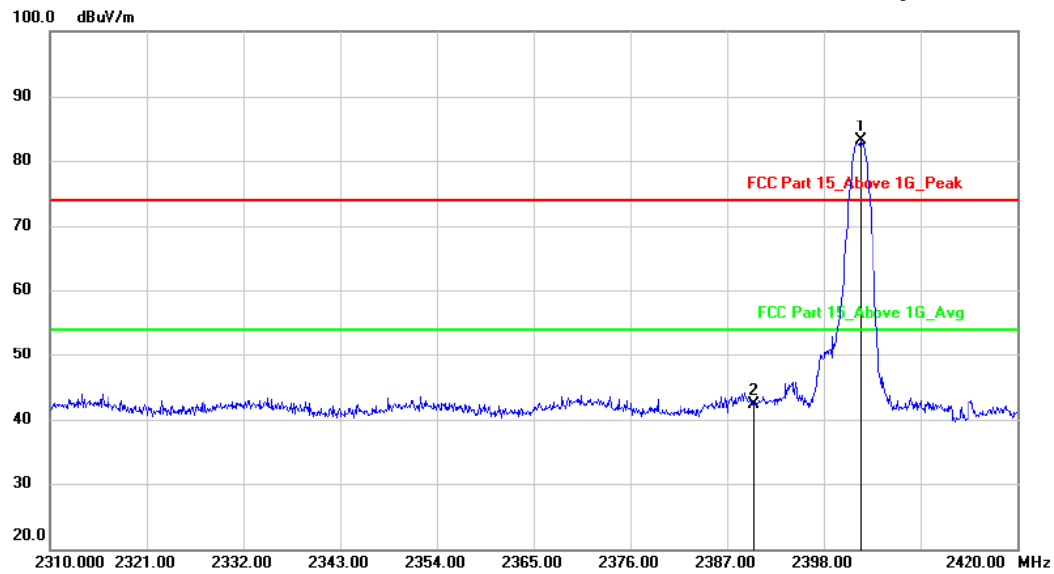 $\pi/4$ DQPSK-Low

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2402.180	86.50	-3.41	83.09	74.00	9.09	peak		
2		2390.000	45.61	-3.40	42.21	74.00	-31.79	peak		

hopping-off

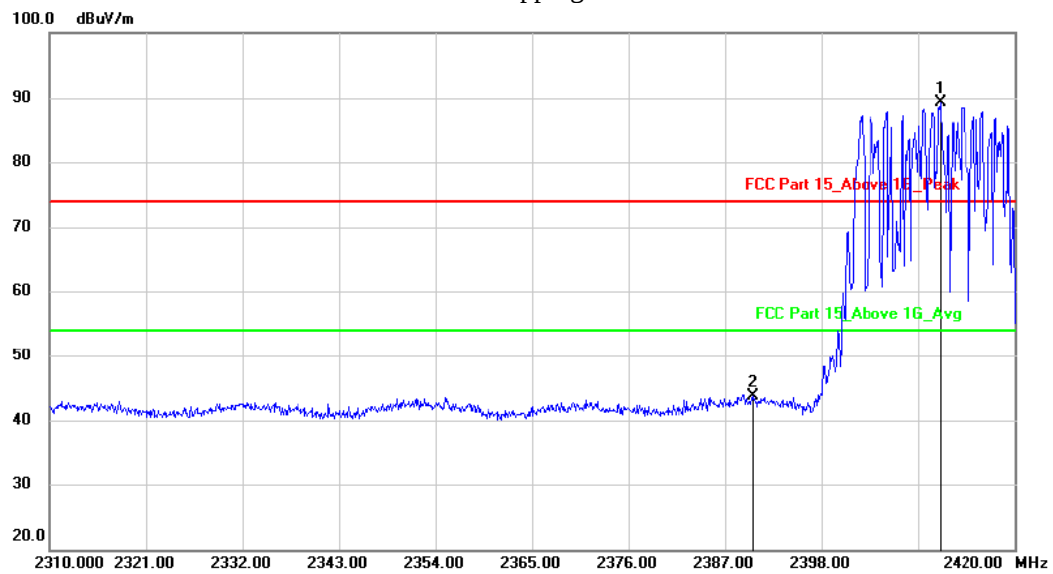


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2411.530	92.79	-3.40	89.39	74.00	15.39	peak		
2		2390.000	47.07	-3.40	43.67	74.00	-30.33	peak		

hopping-on


Polarization: Horizontal

Test Mode:

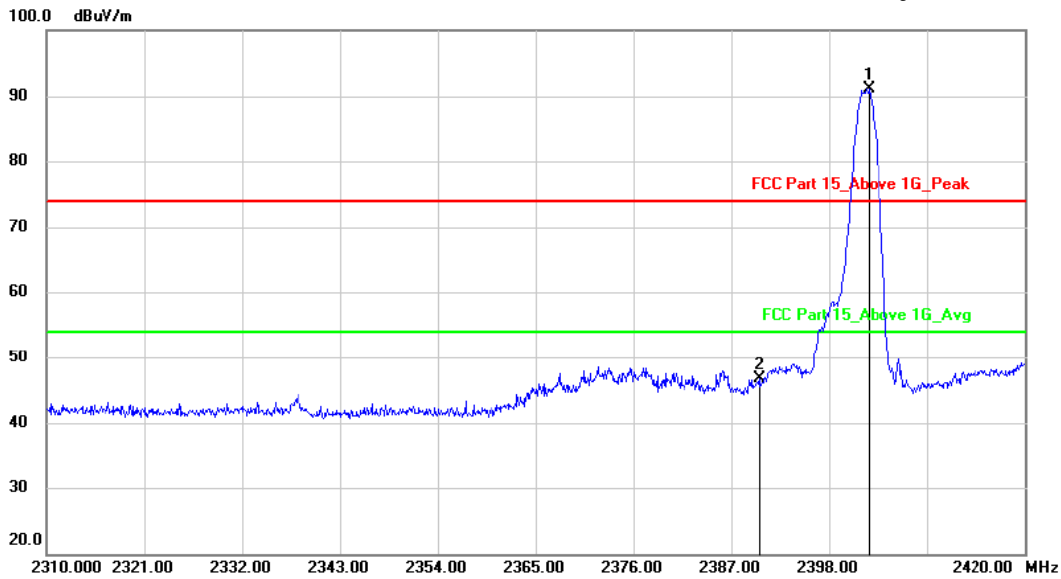 $\pi/4$ DQPSK-Low

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2402.510	94.48	-3.41	91.07	74.00	17.07	peak		
2		2390.000	50.18	-3.40	46.78	74.00	-27.22	peak		

hopping-off

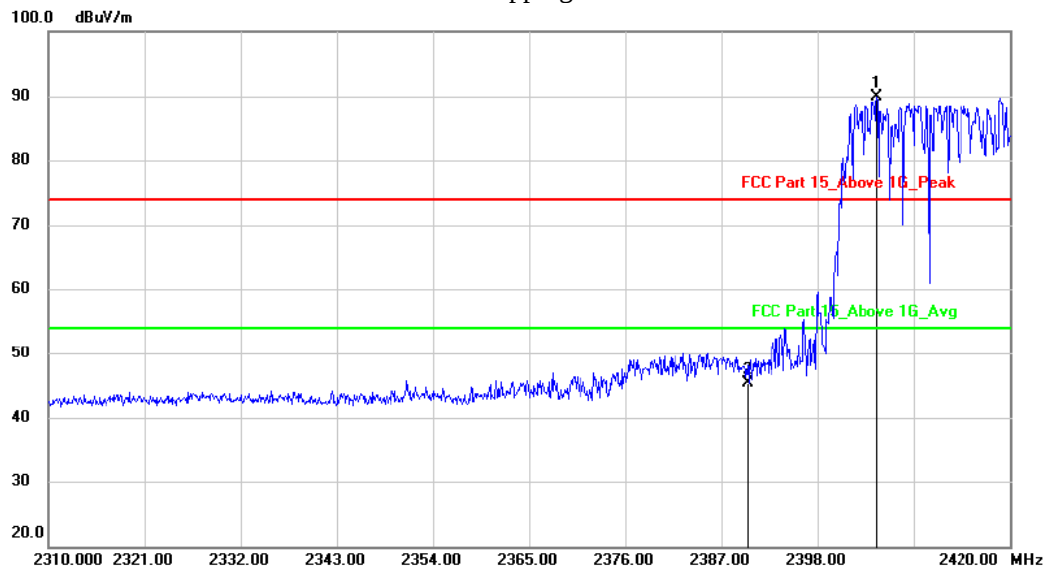


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2404.820	93.24	-3.41	89.83	74.00	15.83	peak		
2		2390.000	48.79	-3.40	45.39	74.00	-28.61	peak		

hopping-on


Polarization: Vertical

Test Mode:

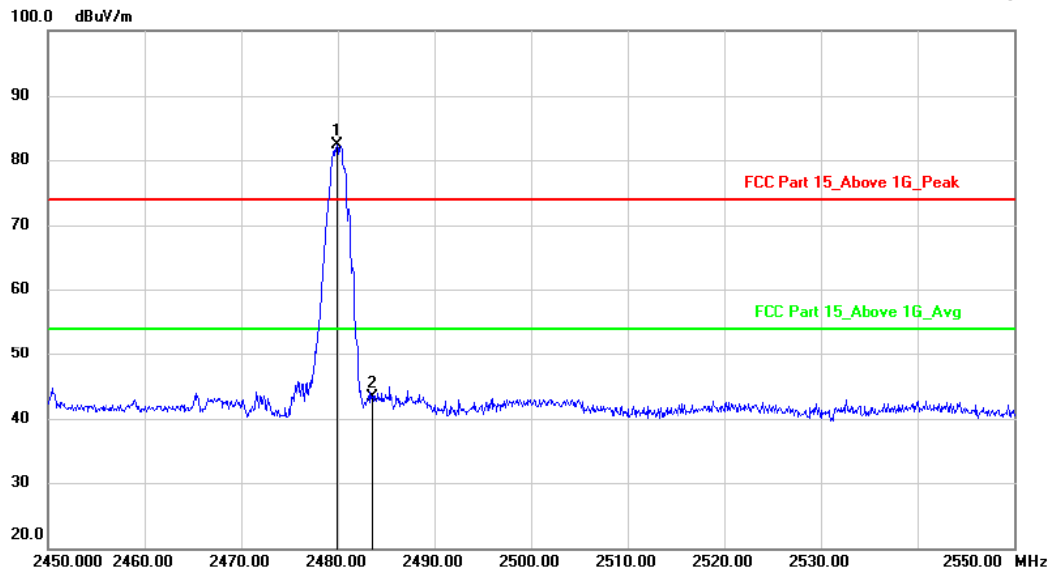 $\pi/4$ DQPSK-High

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2479.900	85.69	-3.38	82.31	74.00	8.31	peak		
2		2483.500	46.71	-3.38	43.33	74.00	-30.67	peak		

hopping-off

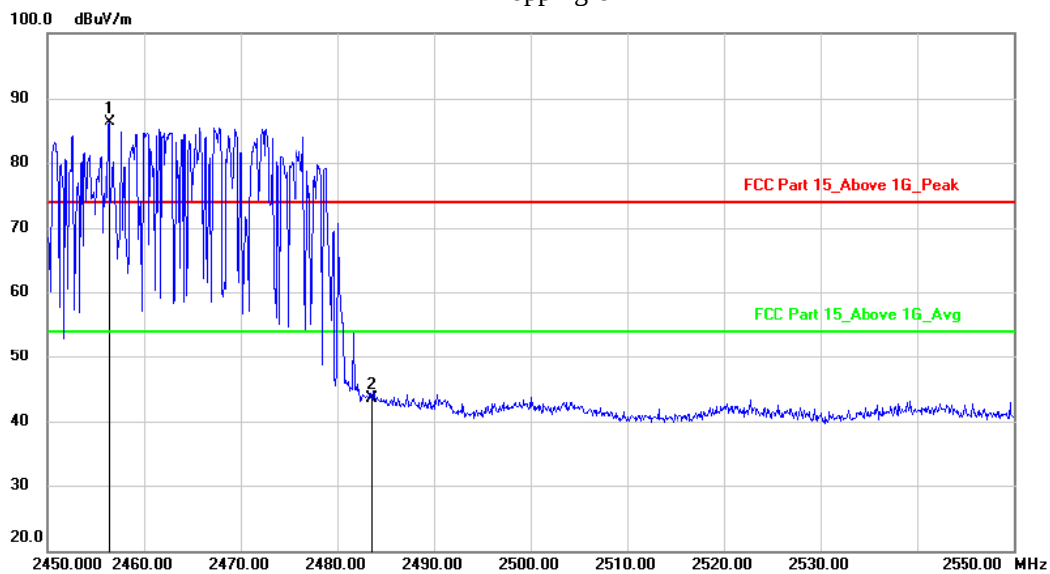


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2456.400	89.72	-3.39	86.33	74.00	12.33	peak		
2		2483.500	46.92	-3.38	43.54	74.00	-30.46	peak		

hopping-on


Polarization: Horizontal

Test Mode:

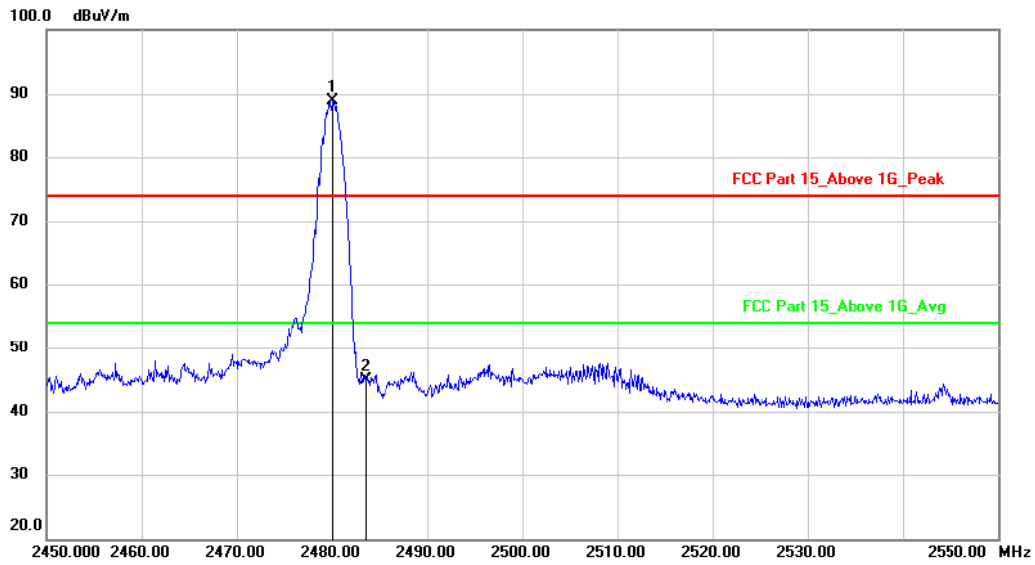 $\pi/4$ DQPSK-High

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.000	92.32	-3.38	88.94	74.00	14.94	peak		
2		2483.500	48.36	-3.38	44.98	74.00	-29.02	peak		

hopping-off

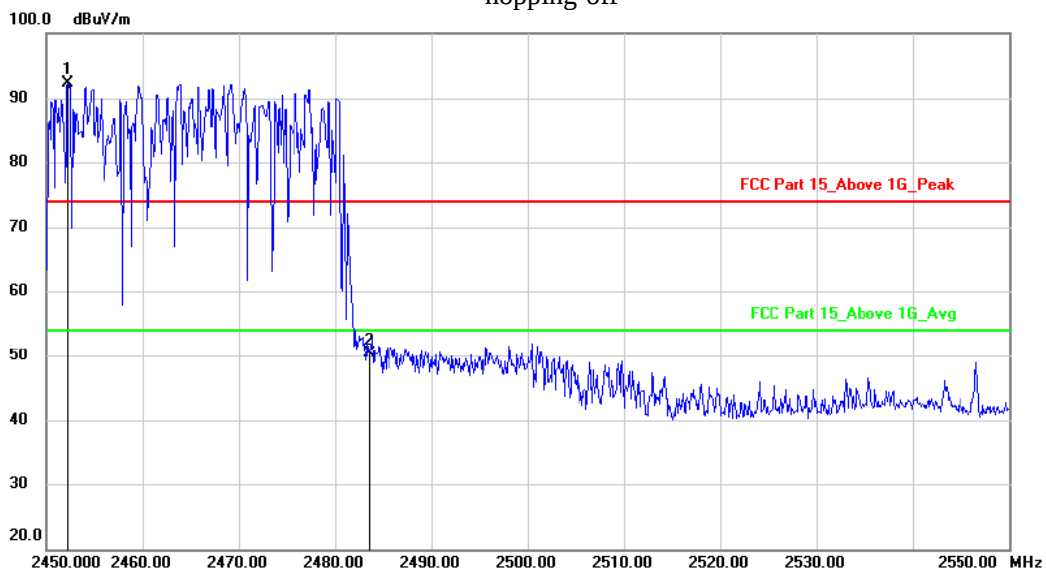

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2452.200	95.75	-3.39	92.36	74.00	18.36	peak		
2		2483.500	53.74	-3.38	50.36	74.00	-23.64	peak		

hopping-on

14. Antenna Port Emission

14.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL	Calibration interval
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-11-12	1 year
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2022-11-12	1 year
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2022-11-12	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

14.2 Measuring Instruments and Setting

The following table is the setting of spectrum analyzer.


Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

14.3 Test Procedures

The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05r02 .

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, Middle, and high channels, the limit was determined by attenuation 20dB of the RF peak power output.

14.4 Block Diagram of Test setup





14.5 Test Result

PASS.

Please refer to following pages.


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-30.29	-20	Pass
NVNT	1-DH5	2441	Ant1	-29.8	-20	Pass
NVNT	1-DH5	2480	Ant1	-26.03	-20	Pass
NVNT	2-DH5	2402	Ant1	-35.78	-20	Pass
NVNT	2-DH5	2441	Ant1	-30.49	-20	Pass
NVNT	2-DH5	2480	Ant1	-27.16	-20	Pass

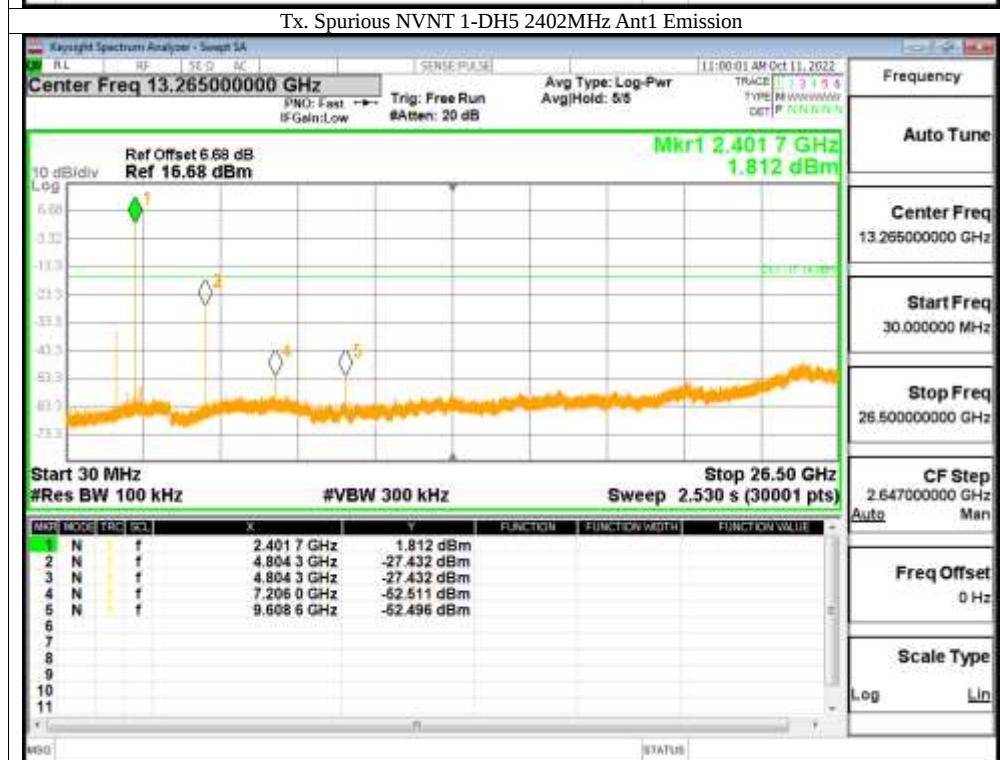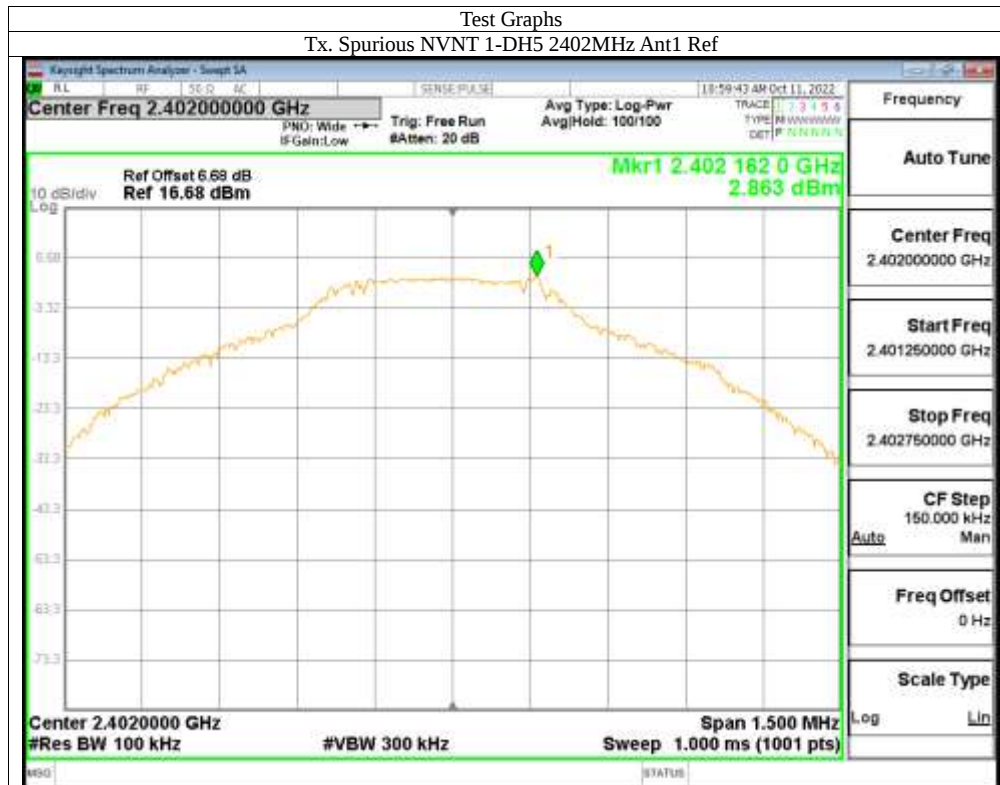


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

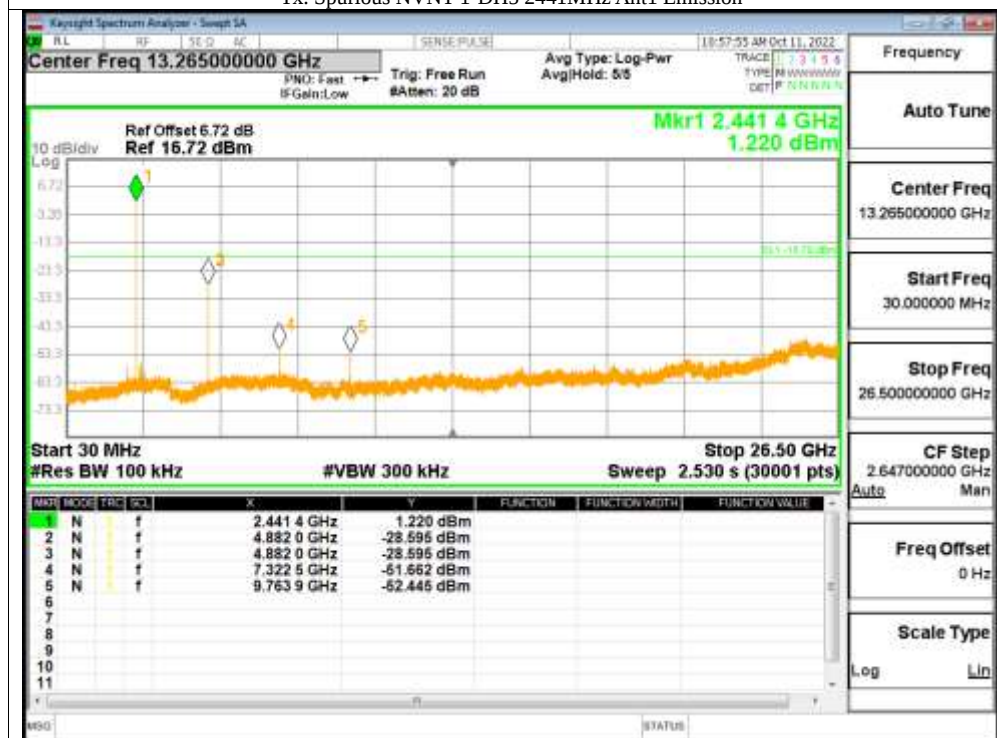

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

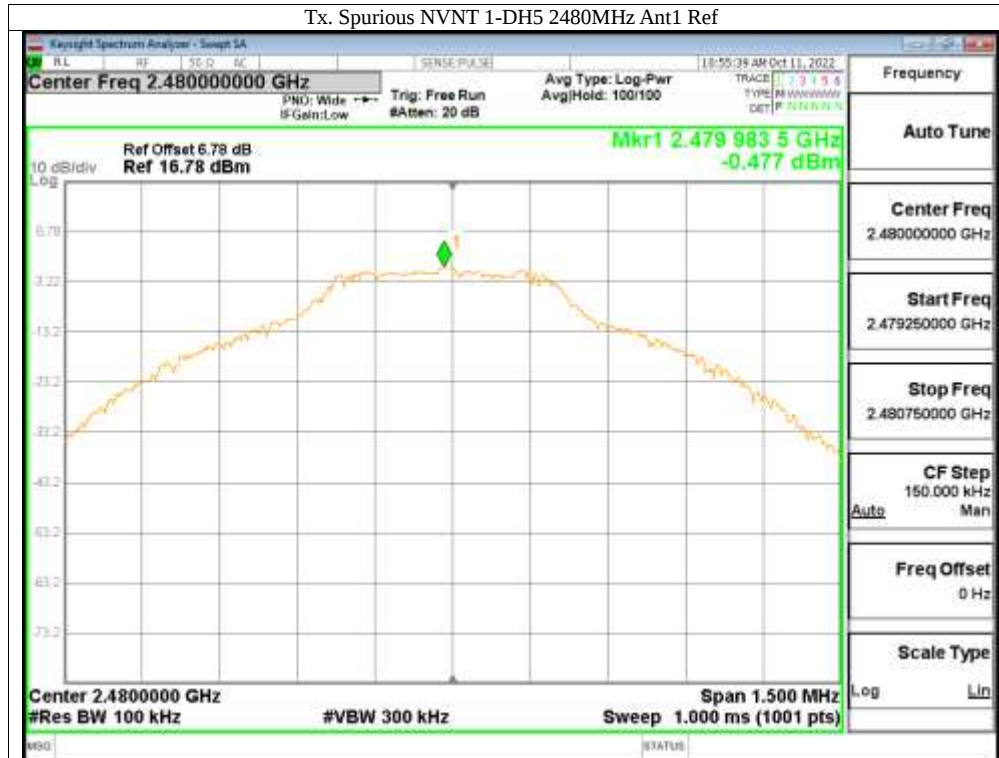


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

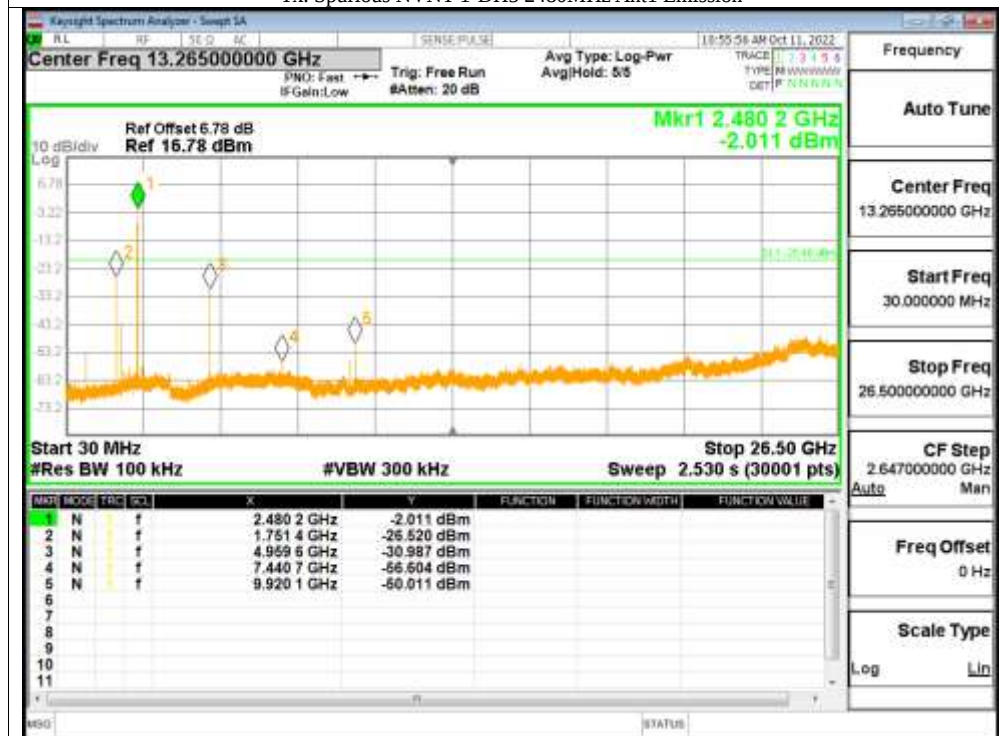

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

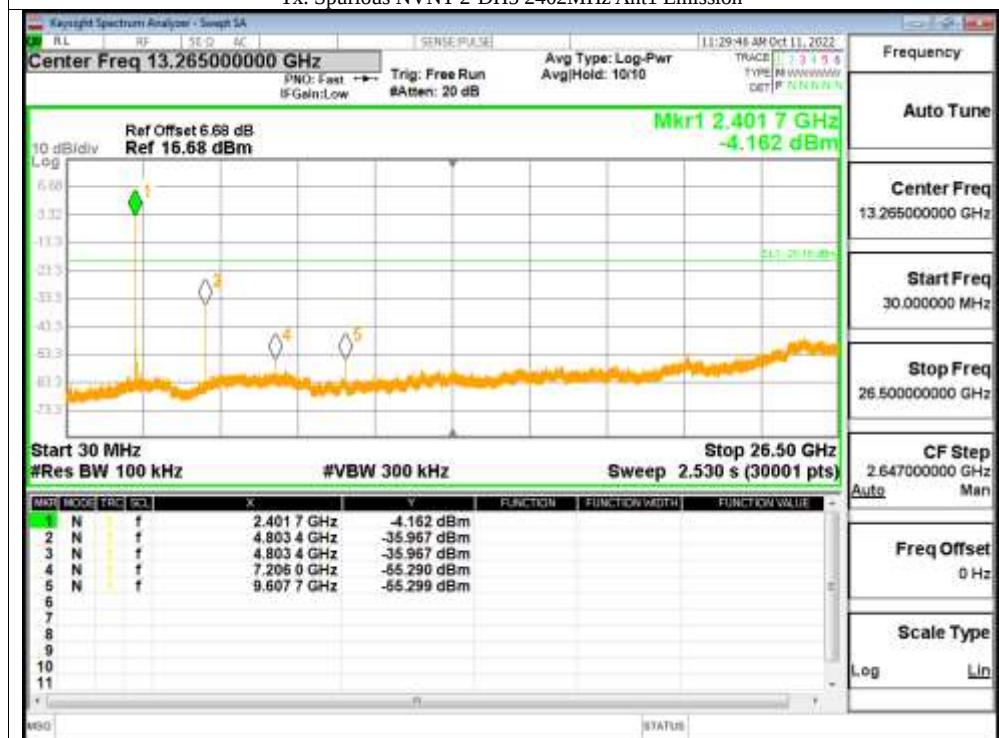

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

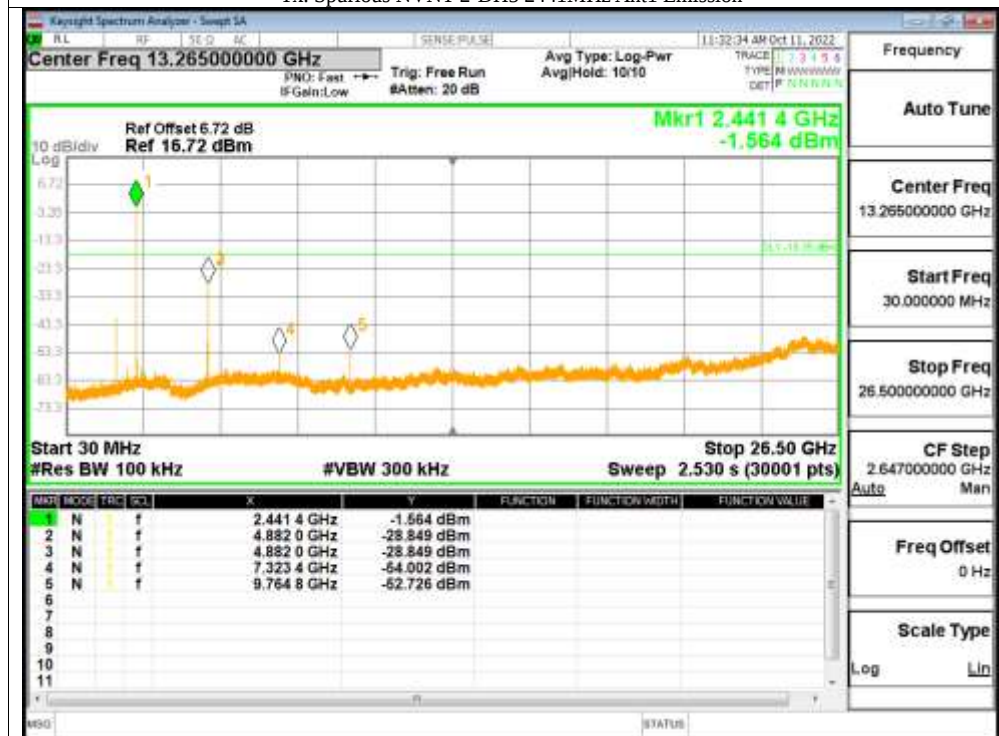

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

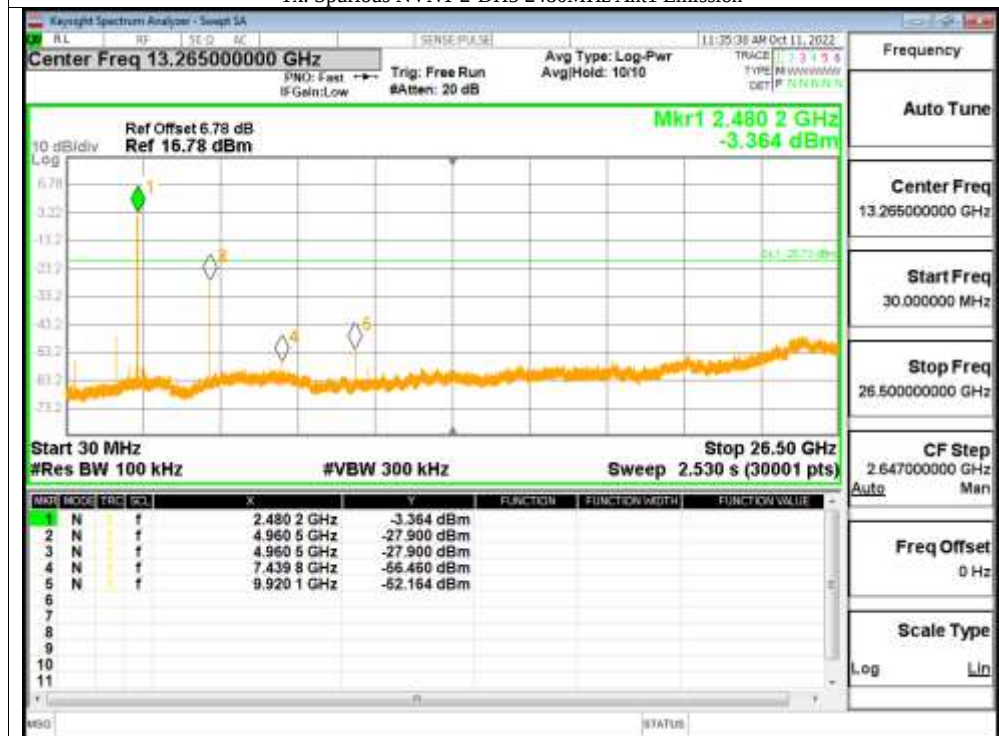

15. Antenna Application

15.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

15.2 Result

The EUT's antenna, permanent attached antenna, used a chip antenna and integrated on PCB, The antenna's gain is 1.24dBi and meets the requirement.


APPENDIX (Photos of EUT)











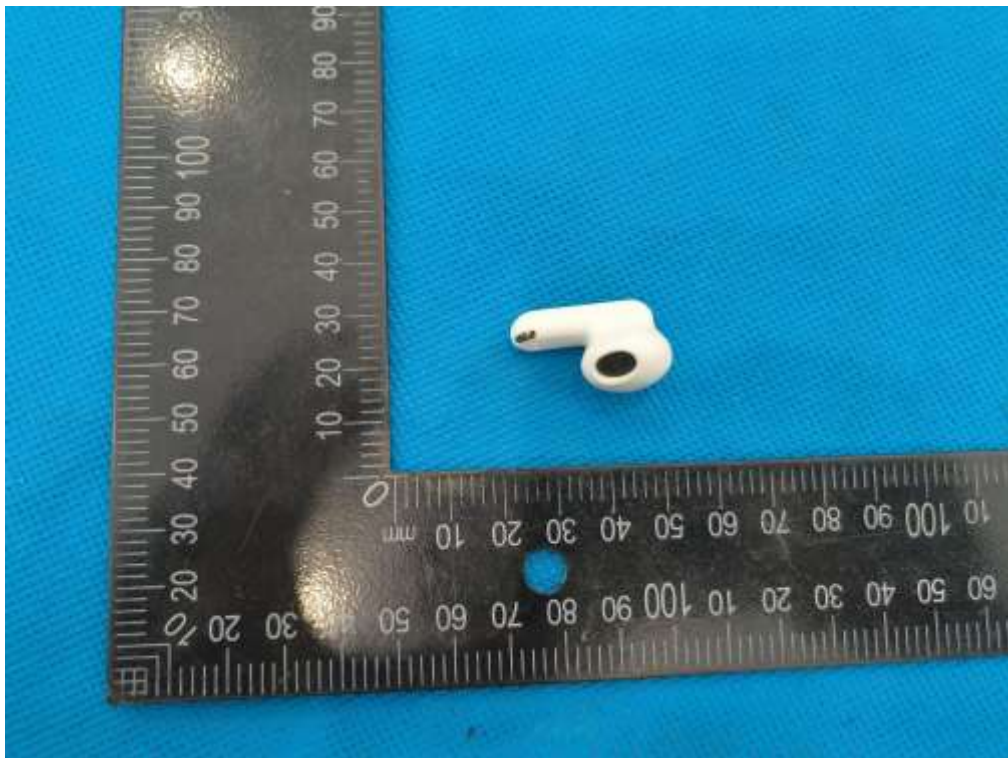



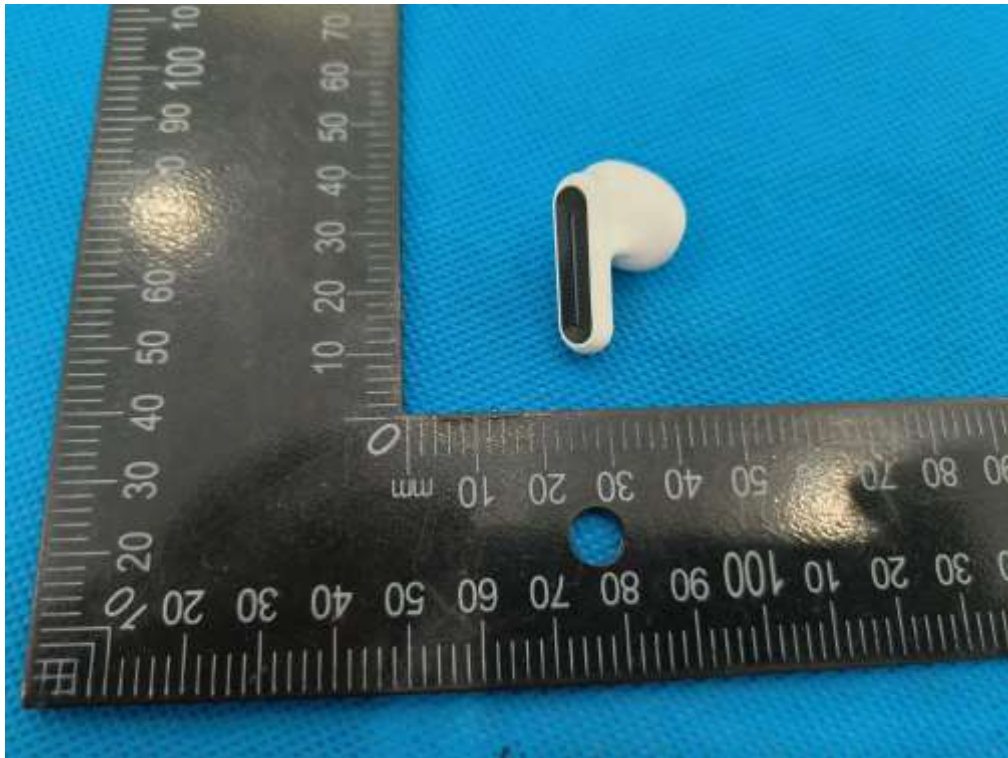



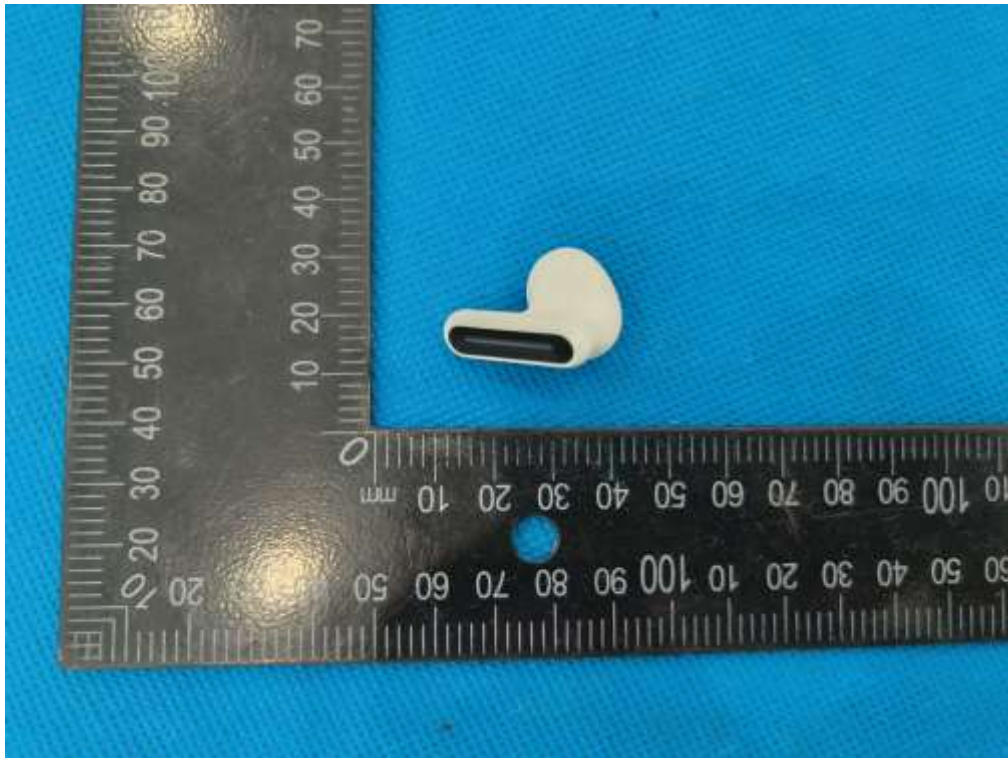













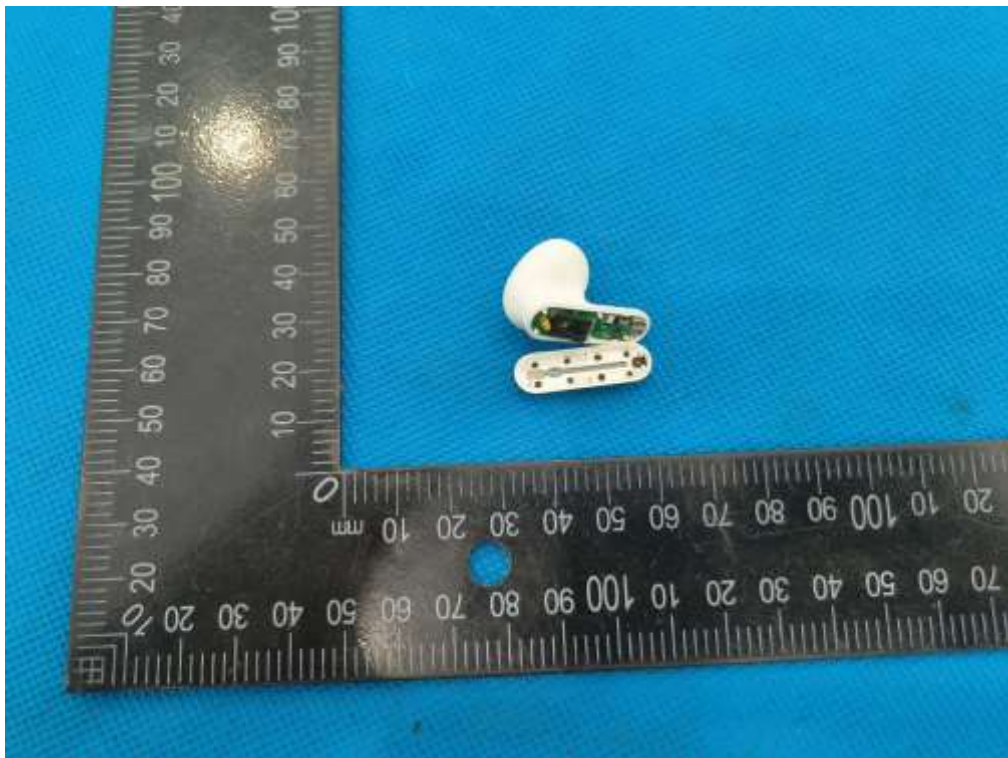

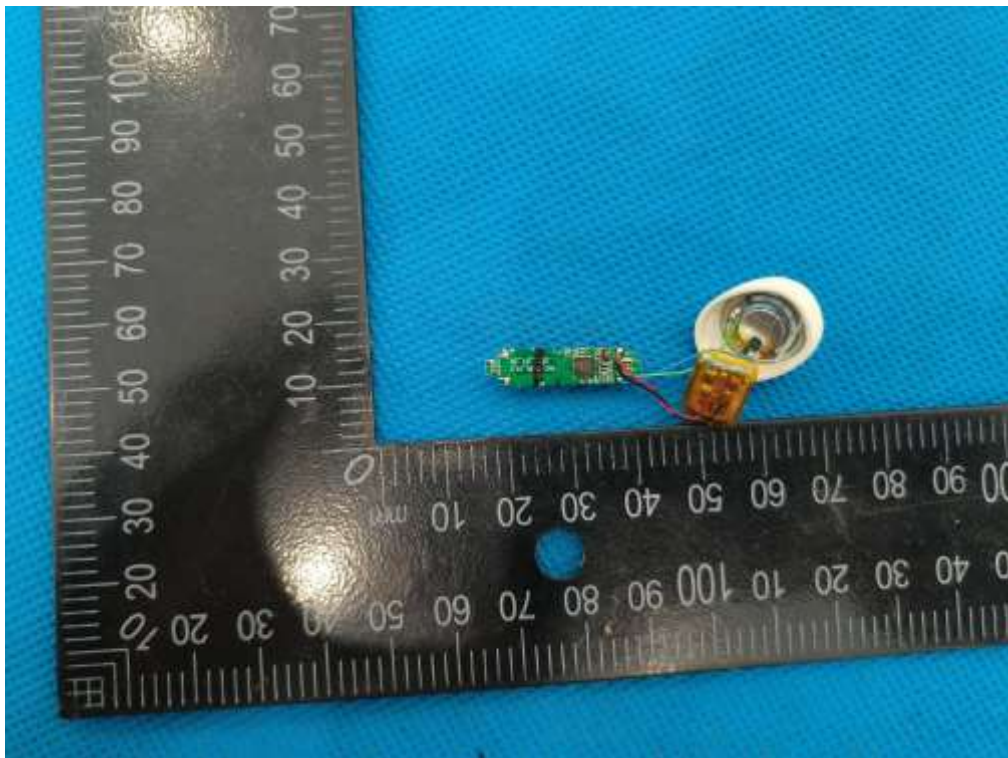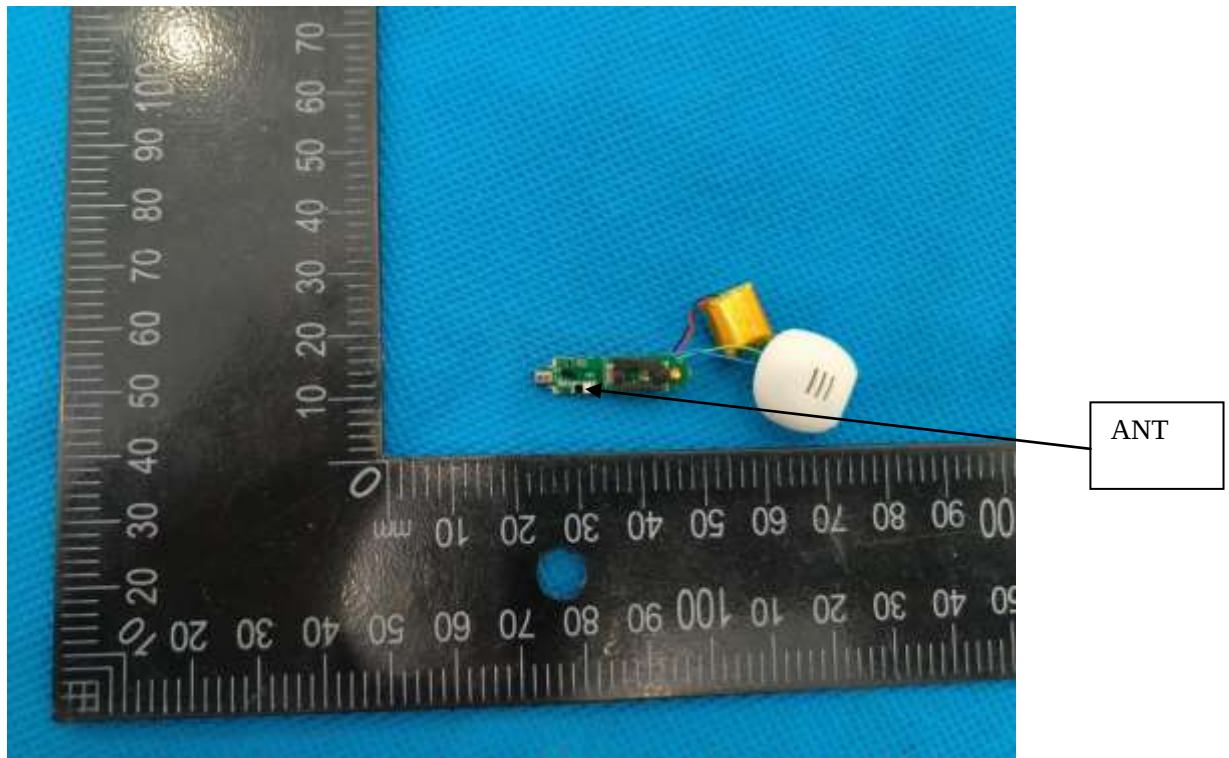


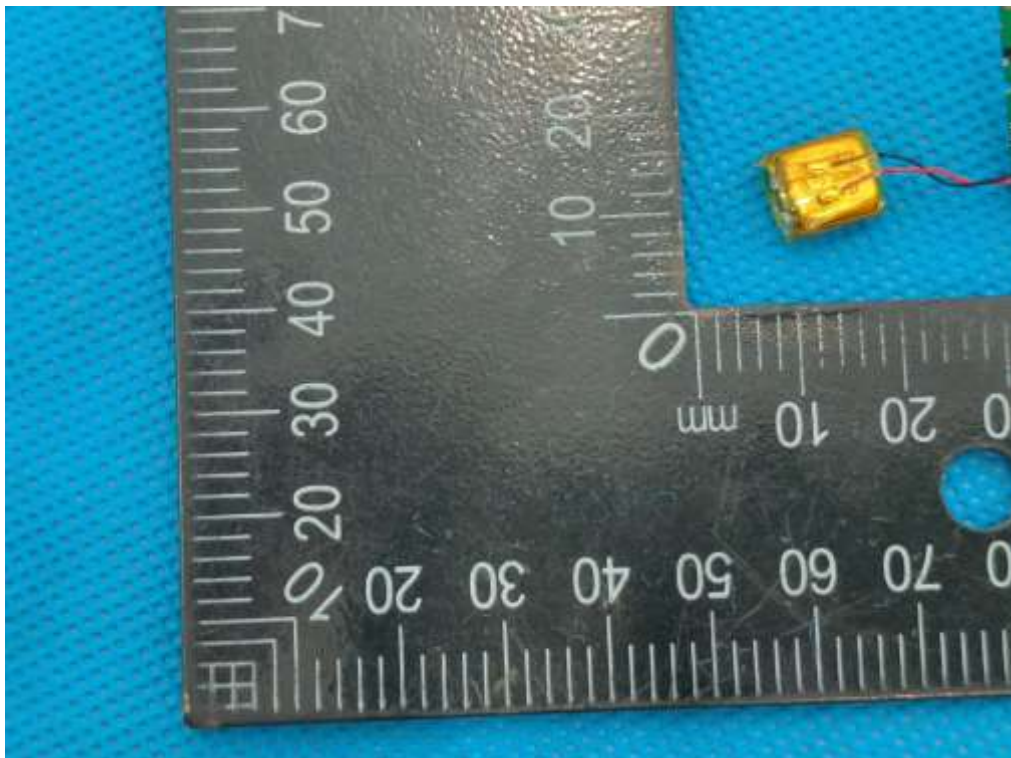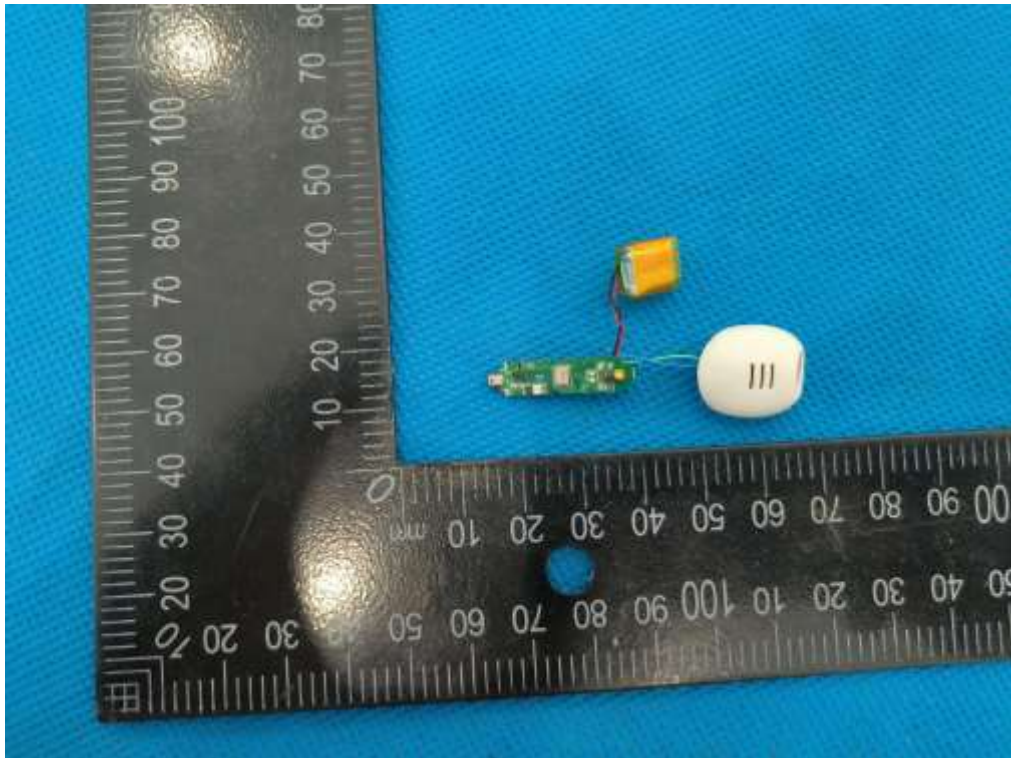

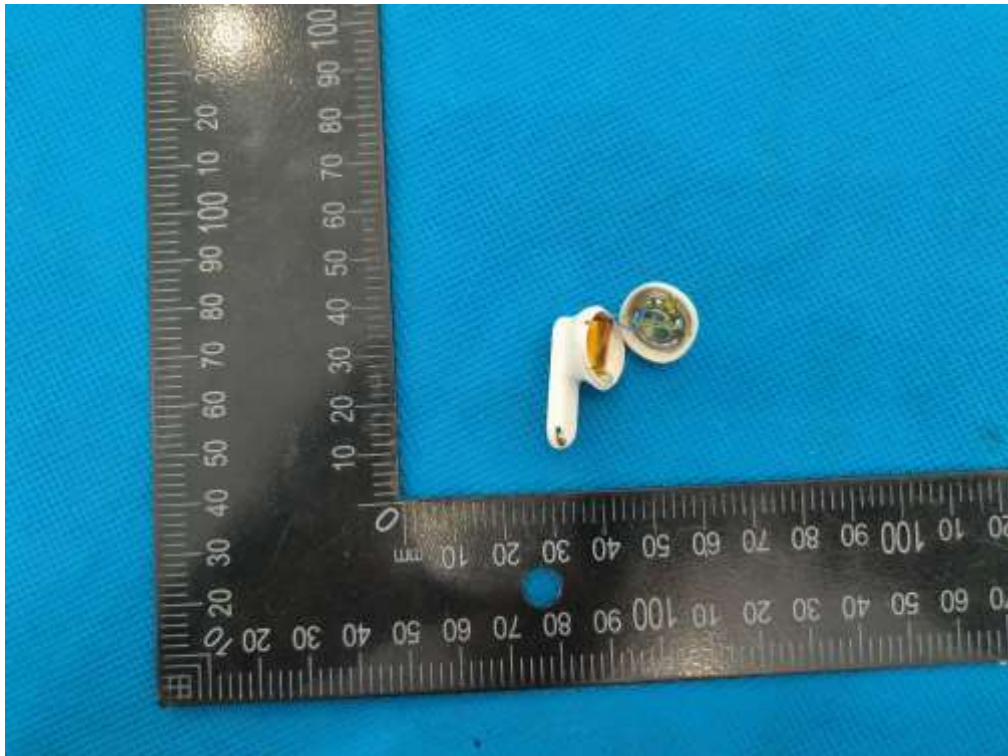


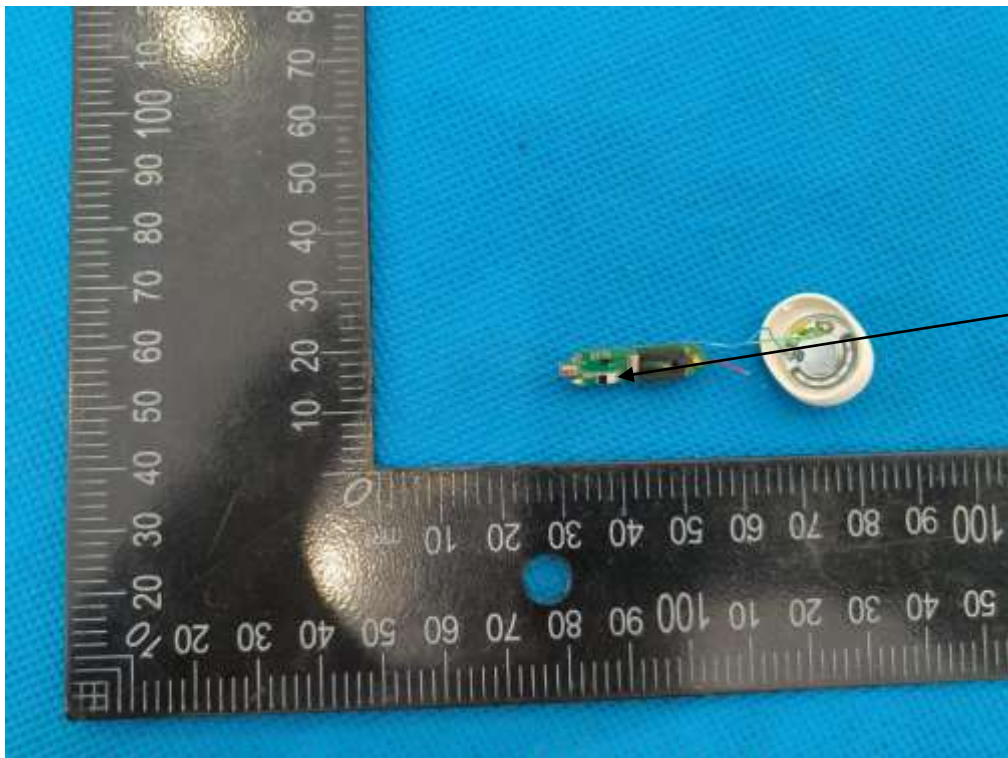
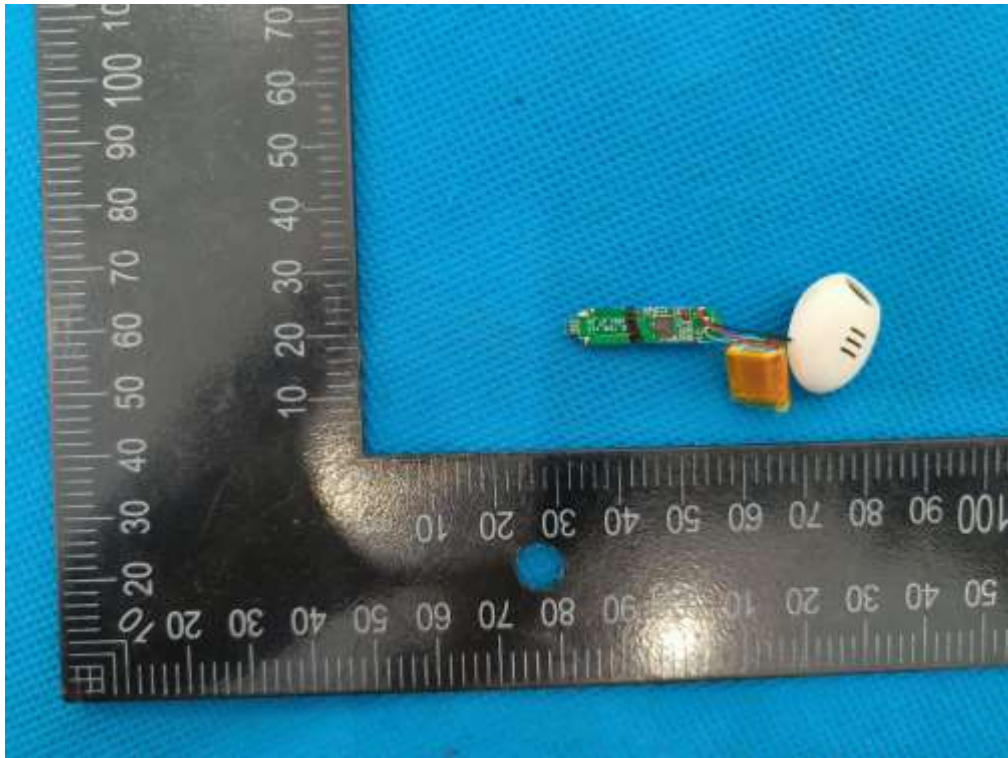



ANT

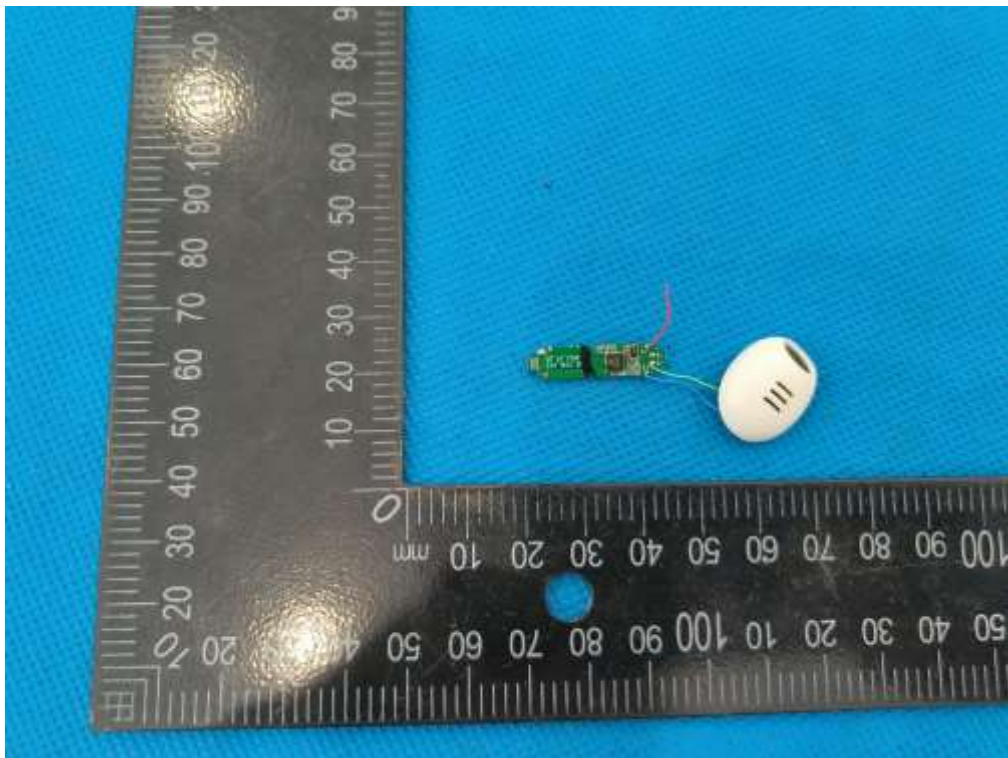



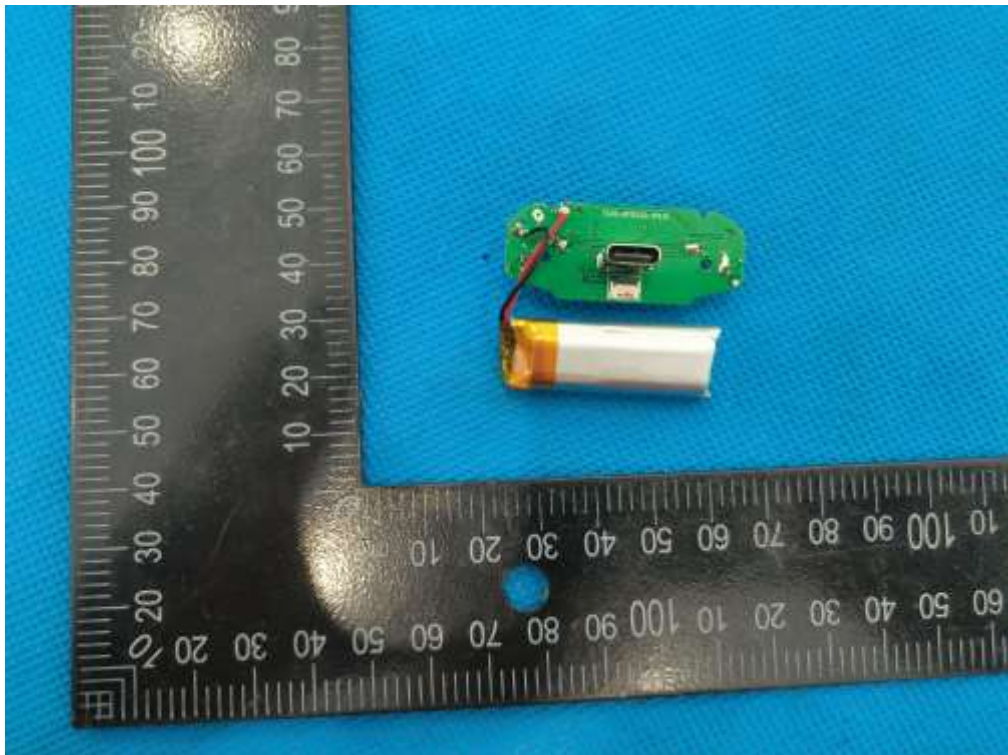

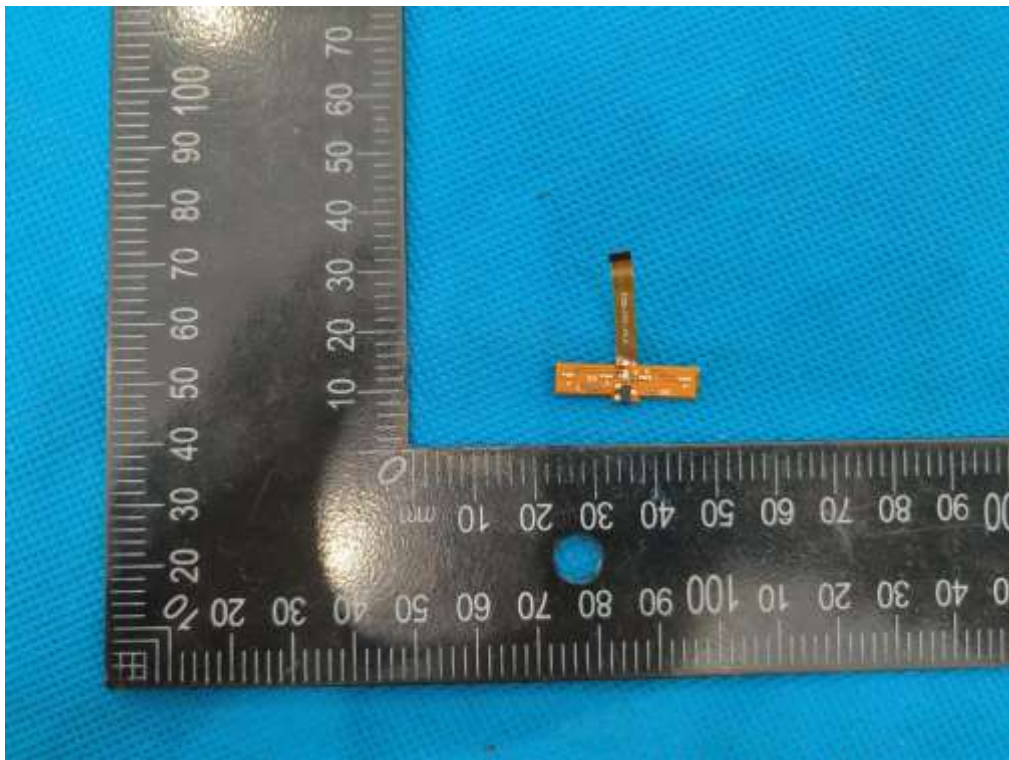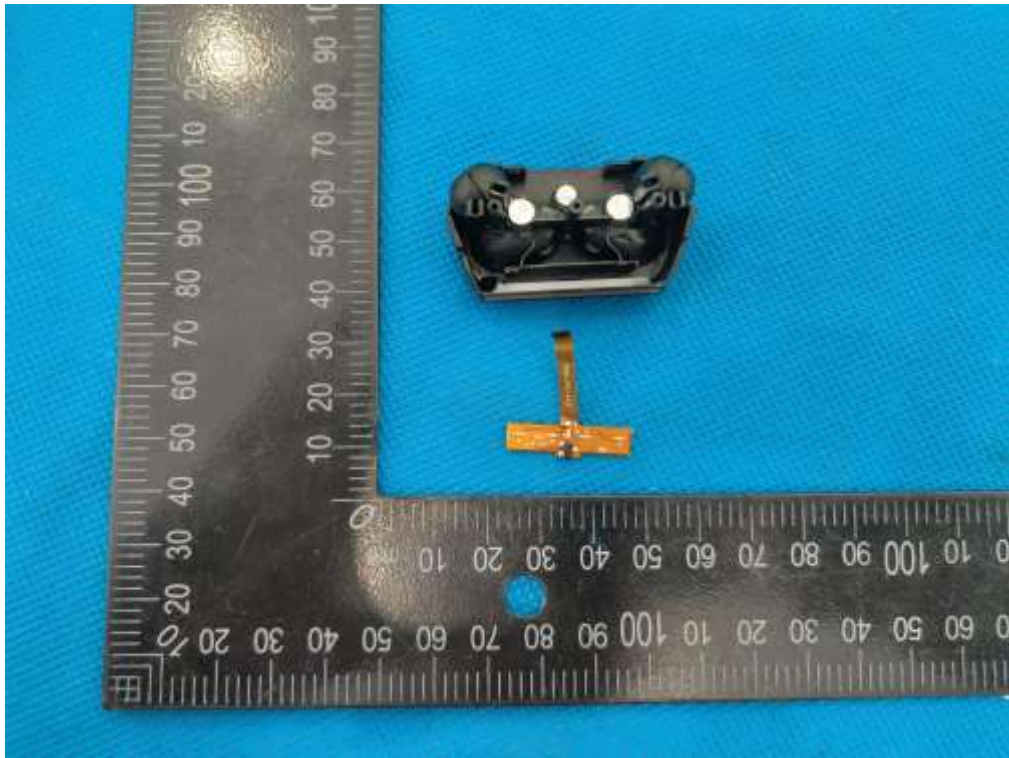

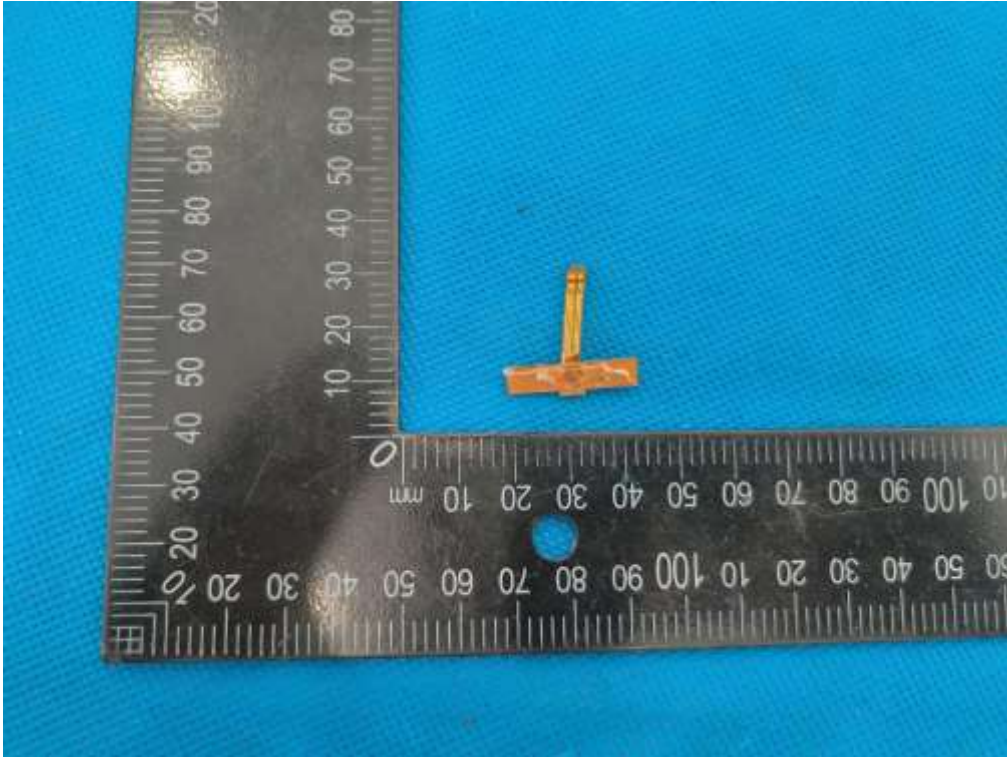

--- End of Report ---