# TEST REPORT

| | |
|---|---|
| **Application No.:** | SZCR2503000881WM |
| **Applicant:** | NOTHING TECHNOLOGY LIMITED |
| **Address of Applicant:** | Bedford House, 21A John Street, London, United Kingdom WC1N 2BF |
| **Manufacturer:** | NOTHING TECHNOLOGY LIMITED |
| **Address of Manufacturer:** | Bedford House, 21A John Street, London, United Kingdom WC1N 2BF |
| **Equipment Under Test (EUT):** | |
| **EUT Name:** | Smart Phone |
| **Model No.:** | A024 |
| **Trade Mark:** | NOTHING |
| **FCC ID:** | 2AZEQ-A024 |
| **Standard(s) :** | 47 CFR Part 15, Subpart C |
| **Date of Receipt:** | 2025-03-10 |
| **Date of Test:** | 2025-03-21 to 2025-04-23 |
| **Date of Issue:** | 2025-05-06 |
| **Test Result:** | **Pass*** |

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu
EMC Laboratory Manager


No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

| Revision Record | | | | |
|---|---|---|---|---|
| **Version** | **Chapter** | **Date** | **Modifier** | **Remark** |
| 01 | | 2025-05-06 | | Original |
| | | | | |
| | | | | |

| | | | | |
|---|---|---|---|---|
| **Authorized for issue by:** | | | | |
| | | Calvin Weng<br>**Calvin Weng/Project Engineer** | | |
| | | Eric Fu<br>**Eric Fu/Reviewer** | | |

# 2 Test Summary

| Radio Spectrum Technical Requirement | | | | |
|---|---|---|---|---|
| **Item** | **Standard** | **Method** | **Requirement** | **Result** |
| Antenna Requirement | 47 CFR Part 15, Subpart C | N/A | 47 CFR Part 15, Subpart C 15.203 | Pass |

| Radio Spectrum Matter Part | | | | |
|---|---|---|---|---|
| **Item** | **Standard** | **Method** | **Requirement** | **Result** |
| 20dB Bandwidth | 47 CFR Part 15, Subpart C | ANSI C63.10 (2013) Section 6.9.2 | 47 CFR Part 15, Subpart C 15.215 | Pass |
| Restricted Bands | | ANSI C63.10 (2013) Section 6.10.5 | 47 CFR Part 15, Subpart C 15.205 | Pass |
| Radiated Emissions (9kHz-30MHz) | | ANSI C63.10 (2013) Section 6.4 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |
| Radiated Emissions (30MHz-1GHz) | | ANSI C63.10 (2013) Section 6.5 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |

Remark: EUT not support wireless output and type C adapter input at the same time.

# 3 Contents

# 4 General Information

## 4.1 Details of E.U.T.

| | |
|---|---|
| Power supply: | DC3.86V by li-ion battery(5150mAh)<br>Battery M/N:NT05A<br>Battery Manufacturer: Shenzhen Sunwoda Intelligence Technology Co.,Ltd.<br>Recharged by AC/DC power adapter<br>Adapter M/N:C286<br>Adapter Manufacturer: NOTHING<br>Adapter Input:AC100-240V, 50/60Hz, 1.7A<br>Adapter Output:<br>USB C1/C2: DC5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A(65W max)<br>USB A:DC5V/3A, 9V/3A, 12V/3A<br>C1+C2:45W+20W<br>C1+A:45W+18W<br>C2+A:share 15W<br>C1+C2+A:45W+15W |
| Cable(s): | USB Type C to C cable: 1m shielded cable without ferrite core |
| Operation frequency: | 110kHz to 148kHz |
| Modulation type: | Load modulation |
| Antenna type: | Loop Antenna |
| Coil Turns: | 11 |
| Overall Dimensions | 48±0.5mm*48±0.5mm |
| Duty Cycle: | 100% |
| WPC output: | 5W |

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

## 4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|---|---|---|---|
| E-loading | SGS | N/A | REF. No.SEA42A00 |
| iPhone 15Pro | Apple | A3104 | REF. No.SEA16Q02 |

## 4.3 Measurement Uncertainty

| Test Item | Measurement Uncertainty |
|---|---|
| 20dB Bandwidth | ± 0.3% |
| Restricted Bands | ± 0.3% |
| Radiated Emissions (9kHz-30MHz) | ± 3.6dB |

| | |
|---|---|
| Radiated Emissions (30MHz-1GHz) | ± 6.0dB for 3m; ± 5.0dB for 10m |

## 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**• A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

**• VCCI (Member No. 1937)**

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

**• FCC –Designation Number: CN1336**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

**• Innovation, Science and Economic Development Canada**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

## 4.6 Deviation from Standards

None

## 4.7 Abnormalities from Standard Conditions

None

# 5 Equipment List

| 20dB Bandwidth | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Inventory No.** | **Cal Date** | **Cal Due Date** |
| DC Power Supply | Zhao Xin | PS-305D | SEM011-13 | 2024-08-14 | 2025-08-13 |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | SEM004-06 | 2024-09-14 | 2025-09-13 |
| Measurement Software | TST PASS | TST PASS V2.0 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM031-01 | 2024-07-06 | 2025-07-05 |
| Attenuator | Huber+Suhner | 6620_SMA-50-1 | SEM021-09 | 2025-03-03 | 2026-03-02 |

| Restricted Bands | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Inventory No.** | **Cal Date** | **Cal Due Date** |
| DC Power Supply | Zhao Xin | PS-305D | SEM011-13 | 2024-08-14 | 2025-08-13 |
| Spectrum Analyzer | Rohde & Schwarz | FSP30 | SEM004-06 | 2024-09-14 | 2025-09-13 |
| Measurement Software | TST PASS | TST PASS V2.0 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM031-01 | 2024-07-06 | 2025-07-05 |
| Attenuator | Huber+Suhner | 6620_SMA-50-1 | SEM021-09 | 2025-03-03 | 2026-03-02 |

| Radiated Emissions (9kHz-30MHz) | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Inventory No.** | **Cal Date** | **Cal Due Date** |
| 10m Semi-Anechoic Chamber | SAEMC | FSAC1018 | SEM001-03 | 2025-03-21 | 2026-03-20 |
| MXE EMI receiver | KEYSIGHT | N9038A | SEM004-16 | 2024-08-14 | 2025-08-13 |
| Trilog-Broadband Antenna | Schwarzbeck | VULB9168 | SEM003-18 | 2023-09-23 | 2025-09-22 |
| Pre-amplifier | Sonoma Instrument Co | 310N | SEM005-04 | 2025-03-04 | 2026-03-03 |
| Loop Antenna | ETS-Lindgren | 6502 | SEM003-08 | 2023-11-20 | 2025-11-19 |
| Measurement Software | AUDIX | e3 V8.2014-6-27 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM029-01 | 2024-07-06 | 2025-07-05 |

| Radiated Emissions (30MHz-1GHz) | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Inventory No.** | **Cal Date** | **Cal Due Date** |
| 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEM001-01 | 2023-06-19 | 2026-06-18 |
| MXE EMI Receiver | Agilent Technologies | N9038A | SEM004-15 | 2024-08-14 | 2025-08-13 |
| Pre-Amplifier | Agilent Technologies | 8447D | SEM005-01 | 2025-03-04 | 2026-03-03 |
| Measurement Software | AUDIX | e3 V8.2014-6-27 | N/A | N/A | N/A |
| Coaxial Cable | SGS | N/A | SEM025-01 | 2024-07-06 | 2025-07-05 |

| General used equipment | | | | | |
|---|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model No.** | **Inventory No.** | **Cal Date** | **Cal Due Date** |
| Humidity/ Temperature Indicator | deli | 8838 | SEM002-32 | 2024-07-24 | 2025-07-23 |
| Humidity/ Temperature Indicator | deli | 8838 | SEM002-33 | 2024-07-24 | 2025-07-23 |
| Barometer | Changchun Meteorological Industry Factory | DYM3 | SEM002-01 | 2025-03-03 | 2026-03-02 |

# 6 Radio Spectrum Technical Requirement

## 6.1 Antenna Requirement

### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

### 6.1.2 Conclusion

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is a Loop Antenna, and the connection port is integrated inside the product, and the antenna cannot be replaced.

Antenna location: Refer to Internal photos

# 7 Radio Spectrum Matter Test Results

## 7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9.2

Limit:
For report reference only

### 7.1.1 E.U.T. Operation

Operating Environment:
Temperature: 24.3 °C Humidity: 44.8 % RH Atmospheric Pressure: 1020 mbar

### 7.1.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|---|---|---|
| Final test | 15 | Wireless charge mode_Keep the EUT wireless charging other device(5W) |

### 7.1.3 Test Setup Diagram

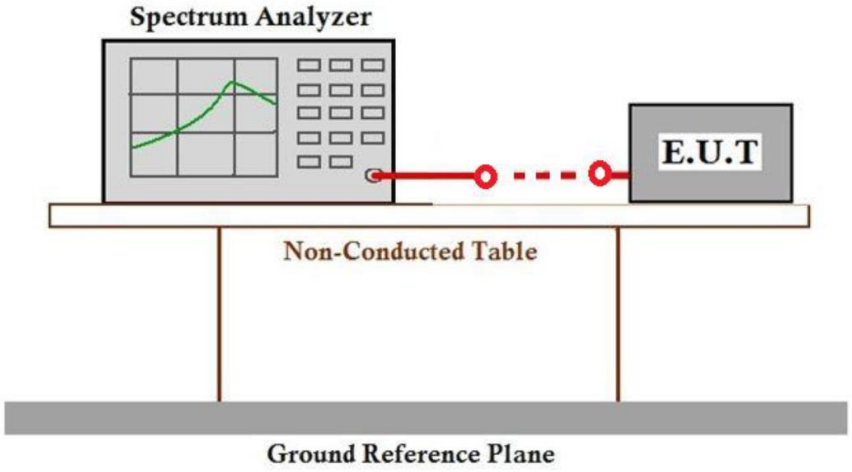


### 7.1.4 Measurement Procedure and Data

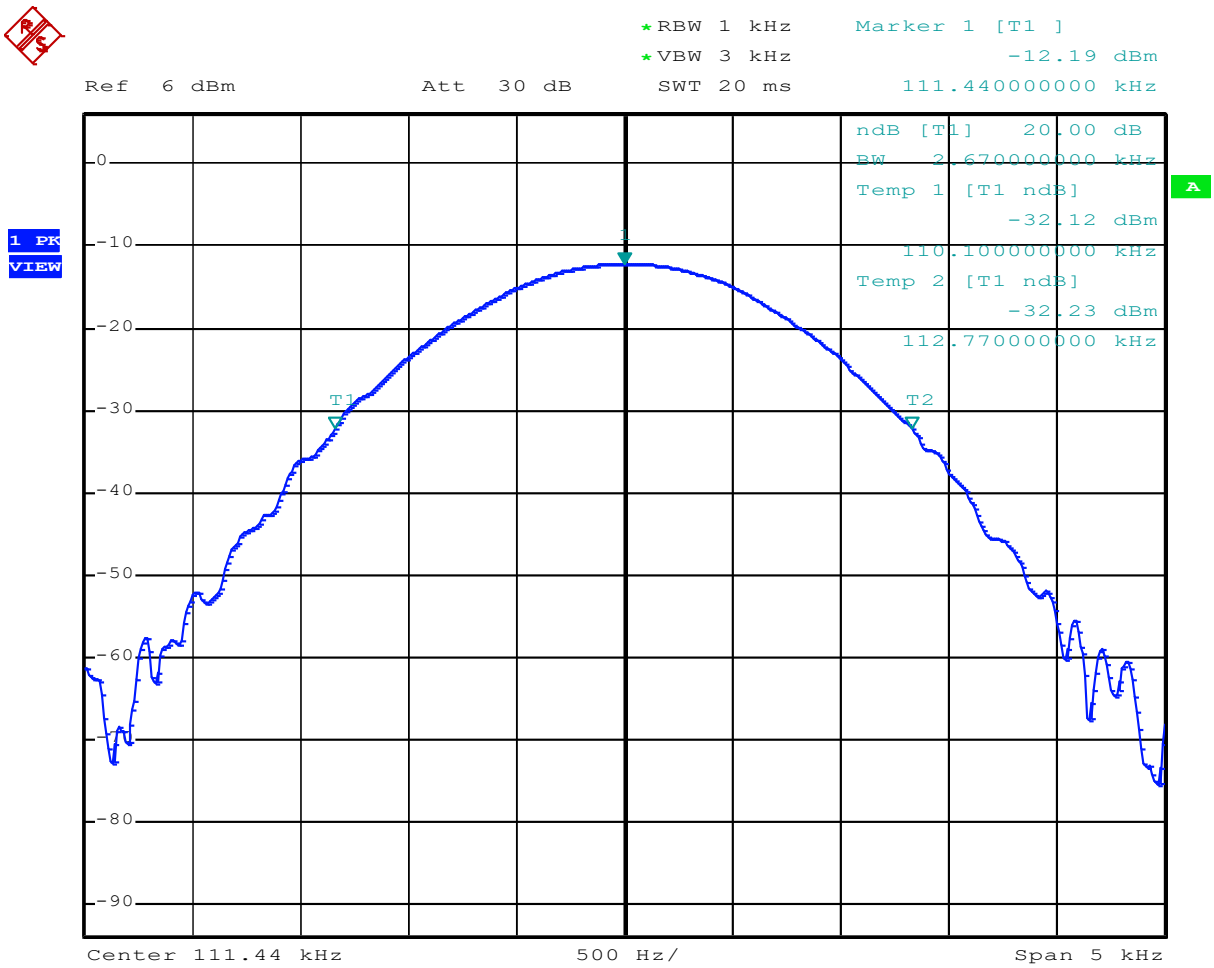

## 7.2 Restricted Bands

Test Requirement 47 CFR Part 15, Subpart C 15.205
Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:
The fundamental wave could not fall in the restricted band 90KHz-110KHz

### 7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 24.3 °C Humidity: 44.8 % RH Atmospheric Pressure: 1020 mbar

### 7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|---|---|---|
| Final test | 15 | Wireless charge mode_Keep the EUT wireless charging other device(5W) |

### 7.2.3 Test Setup Diagram

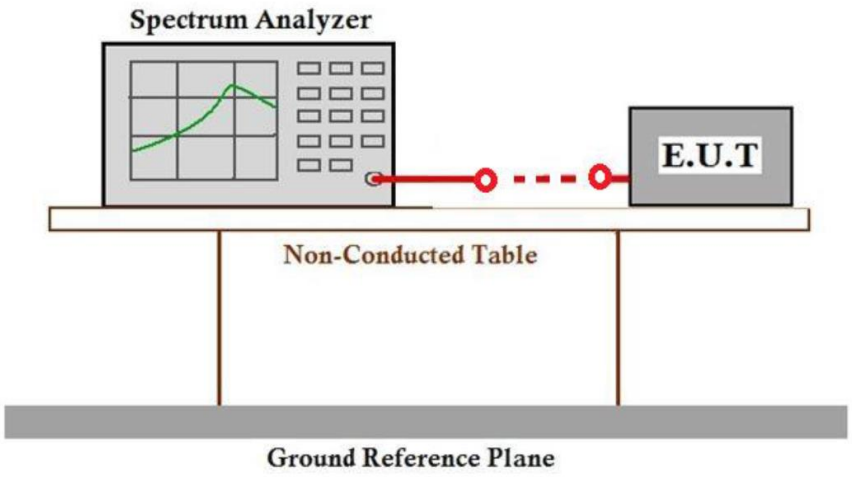


### 7.2.4 Measurement Procedure and Data

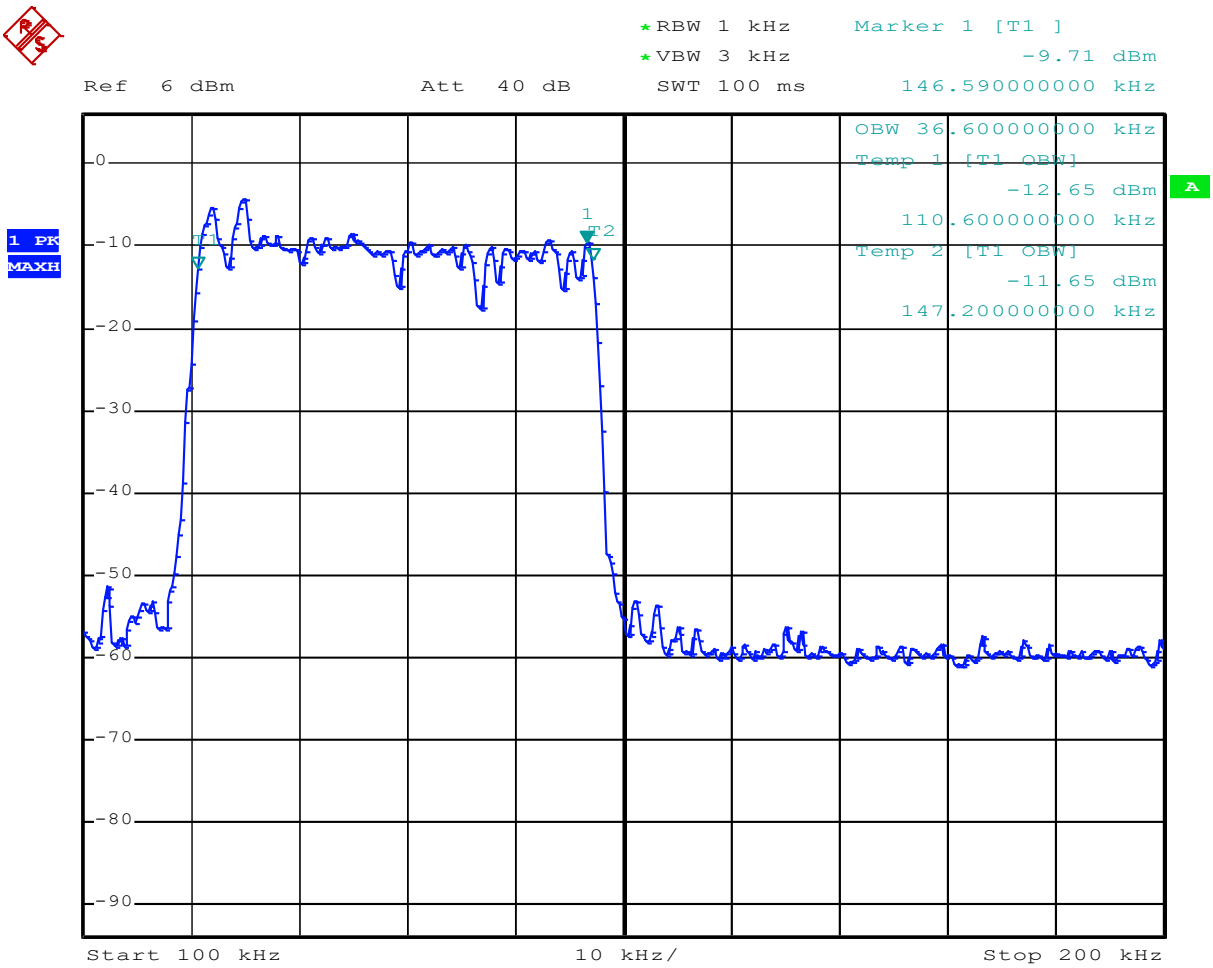

## 7.3 Radiated Emissions (9kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4
Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|---|---|---|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. | | |

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than λ/2π and the limit distance is greater than λ/2π, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the λ/2π distance, and at a 20 dB/decade of distance rate beyond λ/2π. This shall be accomplished using Equation (2):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(\text{near field})}/d_{(10m)}\} + 20\log\{d_{(30/300m)}/d_{(\text{near field})}\} \quad (2)$$

If the single point measured is at a distance greater than λ/2π, then extrapolation to the limit distance shall be calculated using Equation (3):

$$FS_{(10m)} = FS_{(30/300m)} + 20\log\{d_{(30/300m)}/d_{(10m)}\} \quad (3)$$

If both the single point and the limit distance are equal to or closer to the EUT than λ/2π, then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(30/300m)}/d_{(10m)}\} \quad (4)$$

Remark:

$$d_{\text{near field}} = 47.77 / f_{MHz}$$

where $f_{MHz}$ is the frequency of the emission being measured in MHz.

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.6 °C Humidity: 50.9 % RH Atmospheric Pressure: 1020 mbar

### 7.3.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|---|---|---|
| Final test | 15 | Wireless charge mode_Keep the EUT wireless charging other device(5W) |

### 7.3.3 Test Setup Diagram

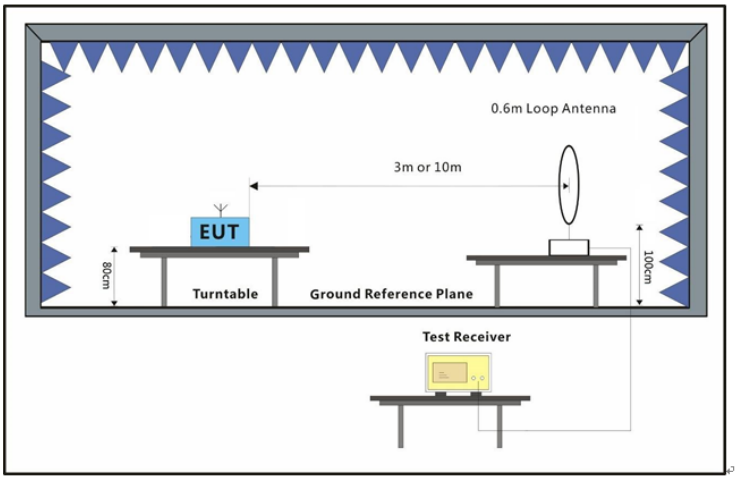


### 7.3.4 Measurement Procedure and Data

a. All radiated emission measurements in terms of magnetic field strength shall be performed with a shielded loop antenna.

b. For all radiated emission measurements in terms of magnetic field strength, the loop antenna were placed such that:

i. its centre shall be at 1.3 m height above the ground plane;

ii. the projection of its centre onto the ground plane shall be at the specified measurement distance from the projection on the ground plane of the closest point on the boundary of the equipment under test (EUT); and

iii. measurements shall be performed with the loop antenna placed vertically, in turn, in two polarizations (the measurement axis specified below is the line segment connecting the projections on the ground plane of the centre of the loop antenna and the centre of the EUT arrangement):

· coaxial (loop plane perpendicular to the ground plane and to the measurement axis); and

· coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis).

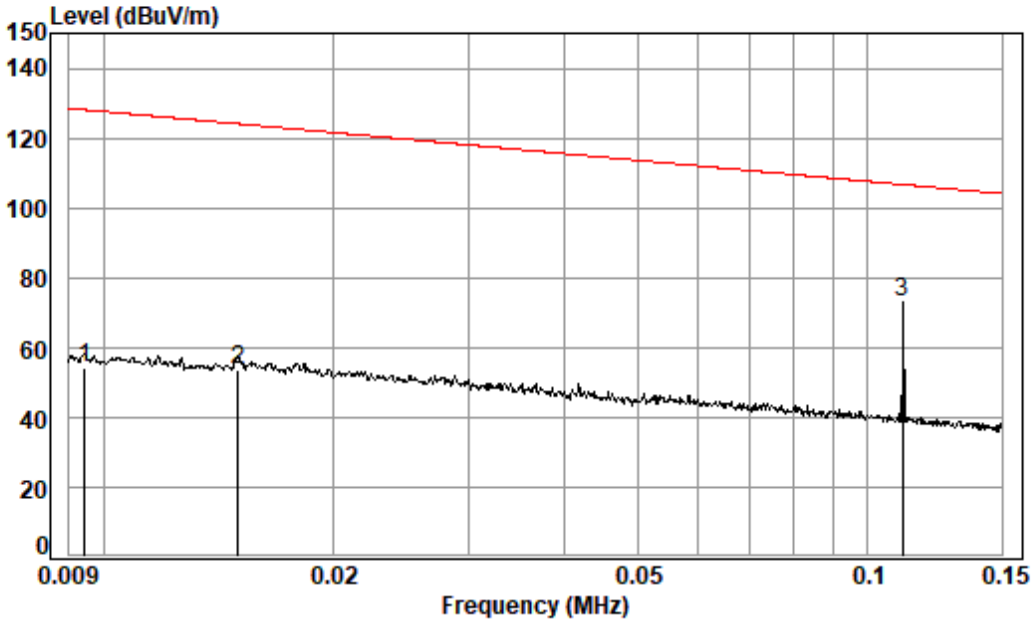


Condition: 3m
Job No. : 00881WM
Test Mode: 15

| | Freq | Read Level | Ant Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 0.009 | 66.30 | 18.70 | 0.34 | 31.02 | 54.32 | 128.08 | -73.76 | Average |
| 2 | 0.015 | 68.67 | 15.99 | 0.34 | 31.22 | 53.78 | 124.08 | -70.30 | Average |
| 3 pp | 0.111 | 94.82 | 10.56 | 0.32 | 32.68 | 73.02 | 106.67 | -33.65 | Average |

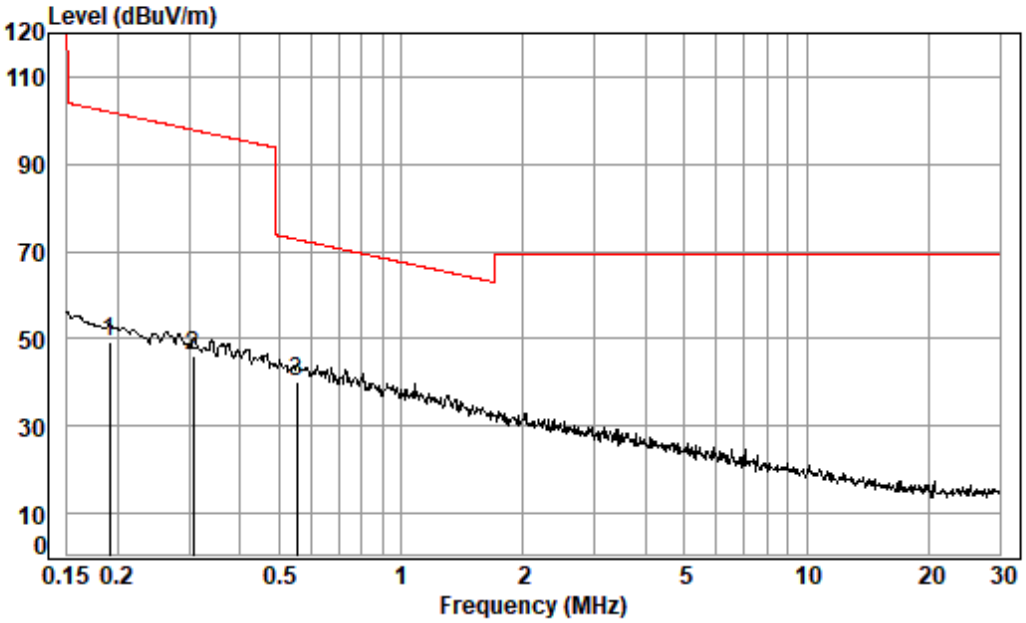


Condition: 3m
Job No. : 00881WM
Test Mode: 15

| | Freq | Read Level | Ant Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 0.191 | 71.23 | 10.47 | 0.33 | 32.56 | 49.47 | 101.96 | -52.49 | Average |
| 2 av | 0.307 | 67.58 | 10.40 | 0.35 | 32.41 | 45.92 | 97.87 | -51.95 | Average |
| 3 pp | 0.552 | 62.06 | 10.36 | 0.39 | 32.68 | 40.13 | 72.75 | -32.62 | QP |

## 7.4 Radiated Emissions (30MHz-1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.5
Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|---|---|---|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |
| Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector. | | |

### 7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 23.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1020 mbar

### 7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|---|---|---|
| Final test | 15 | Wireless charge mode_Keep the EUT wireless charging other device(5W) |

### 7.4.3 Test Setup Diagram

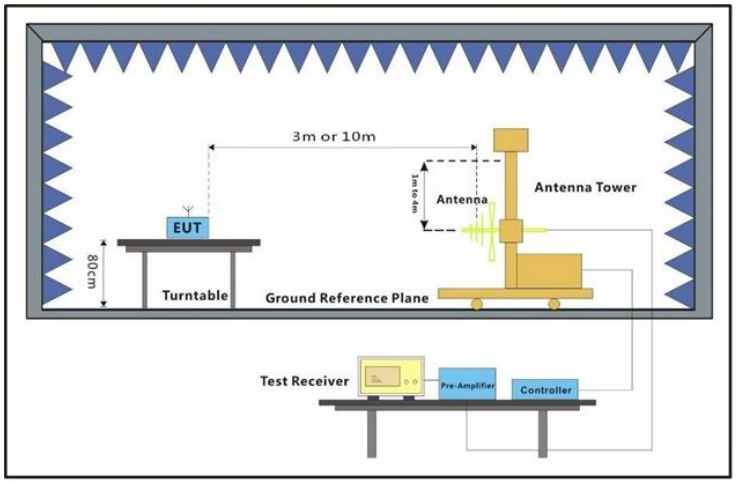

### 7.4.4 Measurement Procedure and Data

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel,the middle channel,the Highest channel

h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case.

i. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 15; Polarity: Horizontal

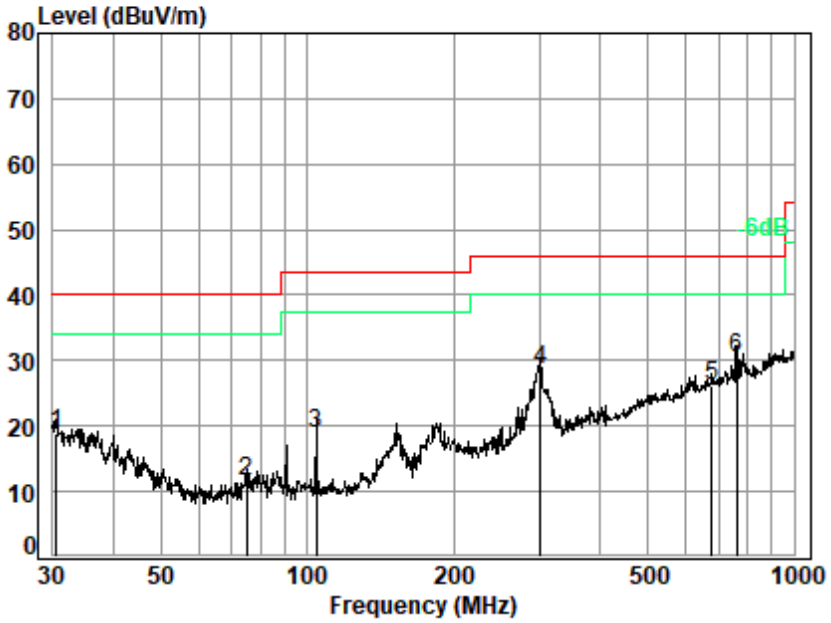


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 00881WM
Test Mode: 15

| | Freq | Ant Factor | Cable Loss | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---|---|---|---|---|---|---|---|---|
| | MHz | dB/m | dB | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 30.531 | 20.95 | 0.68 | 27.79 | 25.10 | 18.94 | 40.00 | -21.06 | QP |
| 2 | 74.919 | 10.38 | 1.06 | 27.66 | 27.66 | 11.44 | 40.00 | -28.56 | QP |
| 3 | 104.170 | 12.22 | 1.25 | 27.57 | 33.06 | 18.96 | 43.50 | -24.54 | QP |
| 4 | 301.422 | 18.13 | 2.21 | 26.76 | 34.98 | 28.56 | 46.00 | -17.44 | QP |
| 5 | 677.580 | 25.78 | 3.48 | 27.78 | 24.54 | 26.02 | 46.00 | -19.98 | QP |
| 6 q | 760.704 | 26.47 | 3.74 | 27.58 | 27.73 | 30.36 | 46.00 | -15.64 | QP |

Test Mode: 15; Polarity: Vertical

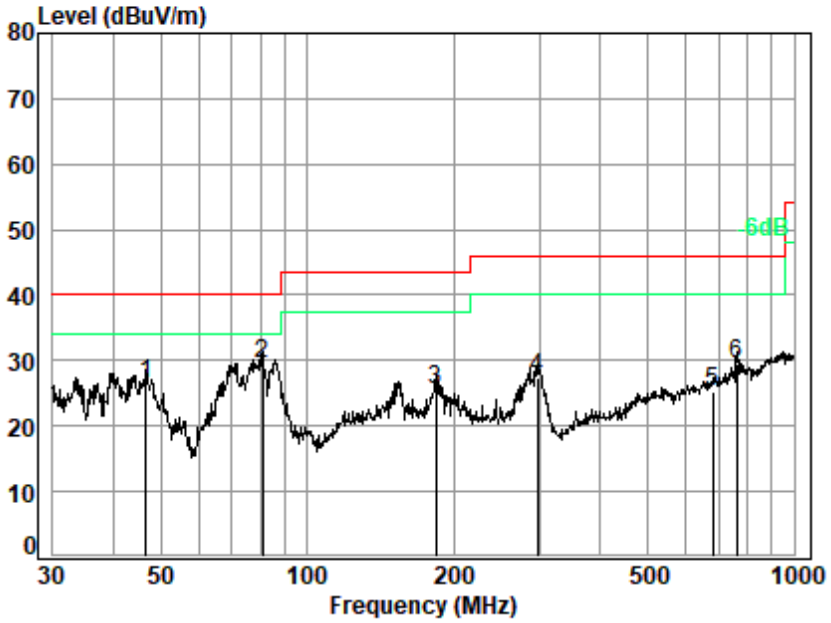


Site : chamber
Condition: 3m VERTICAL
Job No. : 00881WM
Test Mode: 15

| | Freq | Ant Factor | Cable Loss | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---|---|---|---|---|---|---|---|---|
| | MHz | dB/m | dB | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 46.666 | 13.74 | 0.84 | 27.74 | 39.73 | 26.57 | 40.00 | -13.43 | QP |
| 2 q | 80.927 | 10.52 | 1.10 | 27.65 | 45.51 | 29.48 | 40.00 | -10.52 | QP |
| 3 | 183.844 | 14.22 | 1.69 | 27.24 | 36.86 | 25.53 | 43.50 | -17.97 | QP |
| 4 | 297.224 | 17.69 | 2.19 | 26.76 | 34.29 | 27.41 | 46.00 | -18.59 | QP |
| 5 | 679.960 | 25.86 | 3.48 | 27.77 | 23.80 | 25.37 | 46.00 | -20.63 | QP |
| 6 | 760.704 | 26.47 | 3.74 | 27.58 | 26.76 | 29.39 | 46.00 | -16.61 | QP |

# 8 Test Setup Photo

Please refer to SZCR2503000881 Appendix_Setup Photo

# 9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for SZCR2503000881WM.

- End of the Report -