

SPECIFICATION



Daxian Communication Technology Limited

深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

豪恩 MH039 右耳蓝牙耳机

Horn MH039 Right Antenna

产品规格书

Product Specification

客户 connection	豪恩 Horn	频段 frequency range	2400 ~ 2500MHz
项目名称 entry name	MH039	版本 edition	V3.0
物料编号 Material No	2M-H039X-102	颜色 Color	黑色 Black
客户料号 Customer Item Number			
R F 设计 R F Design	胡鹏 Peng.Hu	结构设计 Structural Design	周锐斌 RuiBin.Zhou
品质经理 Quality Manager	杨进 Jin.Yang	技术总监 Technical Director	张磊 Lei.Zhang
日期 Date	2023-11-29		

客户确认:

Customer confirmation:

装配是否符合贵司要求: OK NGWhether the assembly meets your company's requirements: OK NG

深圳市大显科技有限公司

Shenzhen Topant Technology Co., Ltd.

深圳市龙岗区布吉镇吉华路 513 号上水径村(国防培训基地
对面) 达成工业园综合楼 7 楼

TEL:0755-28576002

FAX:0755-84276383

上海分部: 上海市张江高科技园区集成电路产业区龙东大道
3000 号 8 号楼 201 室

TEL:021-61630552

FAX:755-84276383

Buji Town, Longgang District, Shenzhen, China Jihua Road 513,
Shangshuijing Village (opposite the national defense
training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry
Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

索引

Indexes

一、项目说明 Project Description.....	4
二、B T 天线 antenna.....	4
1、规格 specifications.....	4
1.1 电气规格标准 Electrical specifications and standards.....	5
1.1.1 电性能指标 Electrical performance index.....	5
1.2 结构规格标准 Structural specifications and standards.....	5
1.2.1 天线组成 Antenna composition..	5
3.1 驻波(VSWR)的测试 Test of standing wave (VSWR).....	6
3.1.1 测试连接 Test connection.....	6
3.2 效率、功率 (TRP)、灵敏度 (TIS) 的测试 Testing of efficiency, power (TRP), sensitivity (TIS).....	6
3.2.1 测试的场地 Test site.....	6
3.2.2 测试的仪表 Tested Instruments.....	6
3.2.3 测试数据 test data.....	6-7
4、VSWR 参数图 Parameter diagram.....	7
5、无源场型图 Passive field pattern diagram.....	9-13
6、结论 conclusion.....	13
三、工程图 schedule drawing.....	14

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一 项目说明 Project Description


客户名: Customer Name:	豪恩 Haoen
整机类型: Type of complete machine:	蓝牙天线 Bluetooth antenna
天线频段: Antenna band:	2400 ~ 2500MHz
天线形式: Antenna form:	FPC 天线 FPC antenna
天线极性: Antenna polarity:	线性极化 Linear polarization
硬件版本: Hardware version:	主板: 右耳 Motherboard: Right ear
天线制造商: Antennamanufacturer:	深圳市大显科技有限公司 Shenzhen daxian technology co., ltd
测试实验室: Testing laboratory:	SATIMO 微波实验室 SATIMO microwave laboratory

二 B T 天线 组件 Antenna assembly

1 规格 specifications

本报告主要提供 MH039 项目天线的各项电气和结构性能参数的测试状况。下图为大显设计的天线图片。

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the MH039 project. The following image shows an antenna with a large display design.

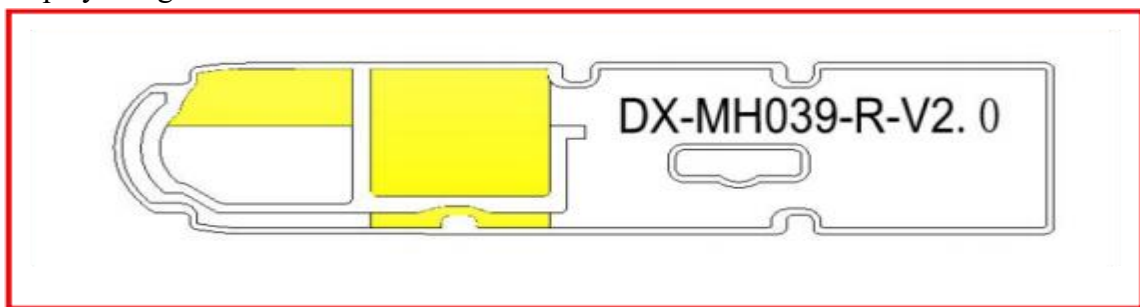

天线外观图

antenna appearing diagram

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.1 电气规格标准 Electrical specifications and standards

1.1.1 电性能指标 Electrical performance index

天线工作频段在 2400 ~ 2500 MHz。下表是大显设计和量产天线的电性能指标。

The operating frequency band of the antenna is between 2400 and 2500 MHz. The following table shows the electrical performance indicators of large display design and mass production antennas.

Frequency Range	Frequency (MHz)	VSWR
WIFI-0	2400 ~ 2500	≤ 2

2 结构规格标准 Structural specifications and standards

1.2.1 天线组成 Antenna composition

天线主要是由 FPC 组成。

The antenna is mainly composed of FPC sponge.

2、测试设备 The Equipment of Active Test

Satimo 3D Chamber 6×4×4(m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



图 2

Figure 2

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 测试 test

3.1 驻波(VSWR)的测试 Test of standing wave (VSWR)

3.1.1 测试连接: VSWR 测试装置依次的连接为: R&S ZVL 网络分析仪 → 测试线 → 测试治

Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → test fixture

实测(附图)Actual measurement (attached drawing)

3.2 增益及效率、功率 (TRP)、灵敏度 (TIS) 的测试

Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 测试的场地 Test site:

大显微波暗室。测试频率范围为 400MHz—6GHz, 静区范围为 50cm 圆周, 反射率小于-50 dB。

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than -50dB.

3.2.2 测试的仪表 Tested Instruments:

R&S ZVL 网络分析仪、Agilent8960 E5515C、标准喇叭天线、法国 SATIMO-SG24SYSTEM 系统、打印机等。

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 测试数据 : 在微波暗室中, 测试的功率和灵敏度相关的数值如下表

Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table bel

OTA 有源测试 OTA Active Test:

R (右耳) 自由空间			
BAND	CH	TRP	TIS
BT	0	7.91	-88.59
	39	7.72	-88.87
	78	7.6	-88.32

R (右耳) 头模			
BAND	CH	TRP	TIS
BT	0	4.43	-85.16
	39	4.56	-85.39
	78	4.41	-85.23


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

无源效率&增益 Passive efficiency&gain:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	24.29	-6.15	-4.93
2410	24.69	-6.08	-4.56
2420	24.84	-6.05	-4.38
2430	24.83	-6.05	-4.51
2440	23.33	-6.32	-4.72
2450	23.71	-6.25	-4.67
2460	24.96	-6.03	-4.61
2470	24.41	-6.12	-4.62
2480	24.97	-6.03	-4.61
2490	22.68	-6.44	-4.77
2500	24.87	-6.04	-4.87

4、VSWR 参数图 VSWR parameter diagram

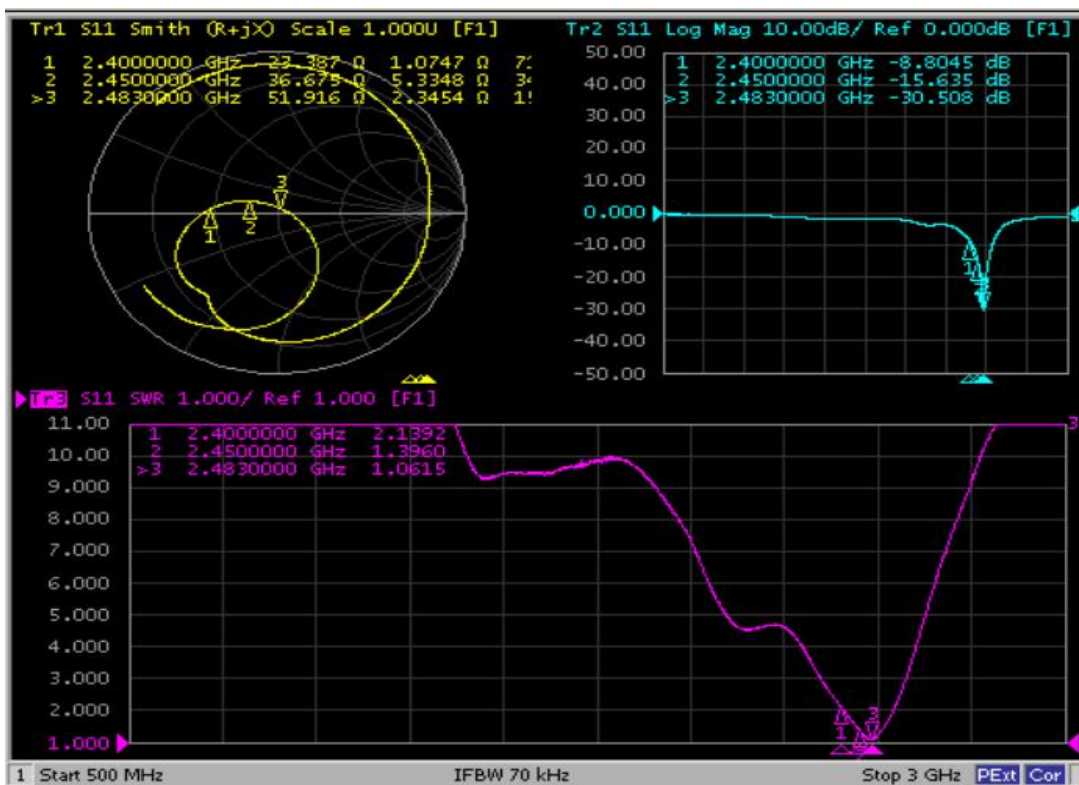


www.Topant.com.cn

Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

5、无源场型图 Passive Field Pattern Diagram

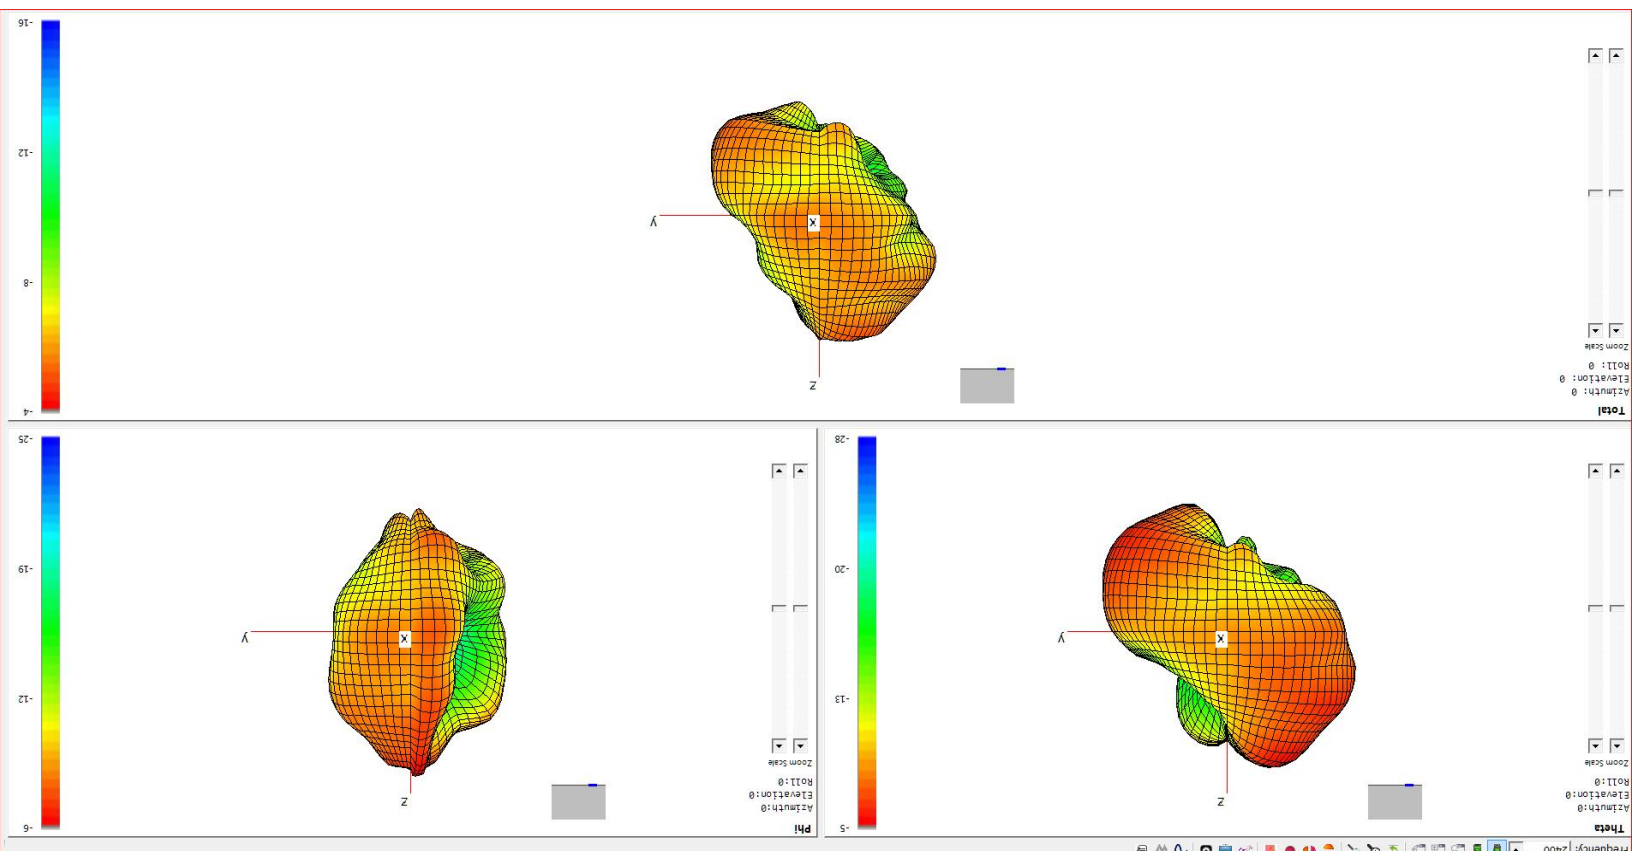


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

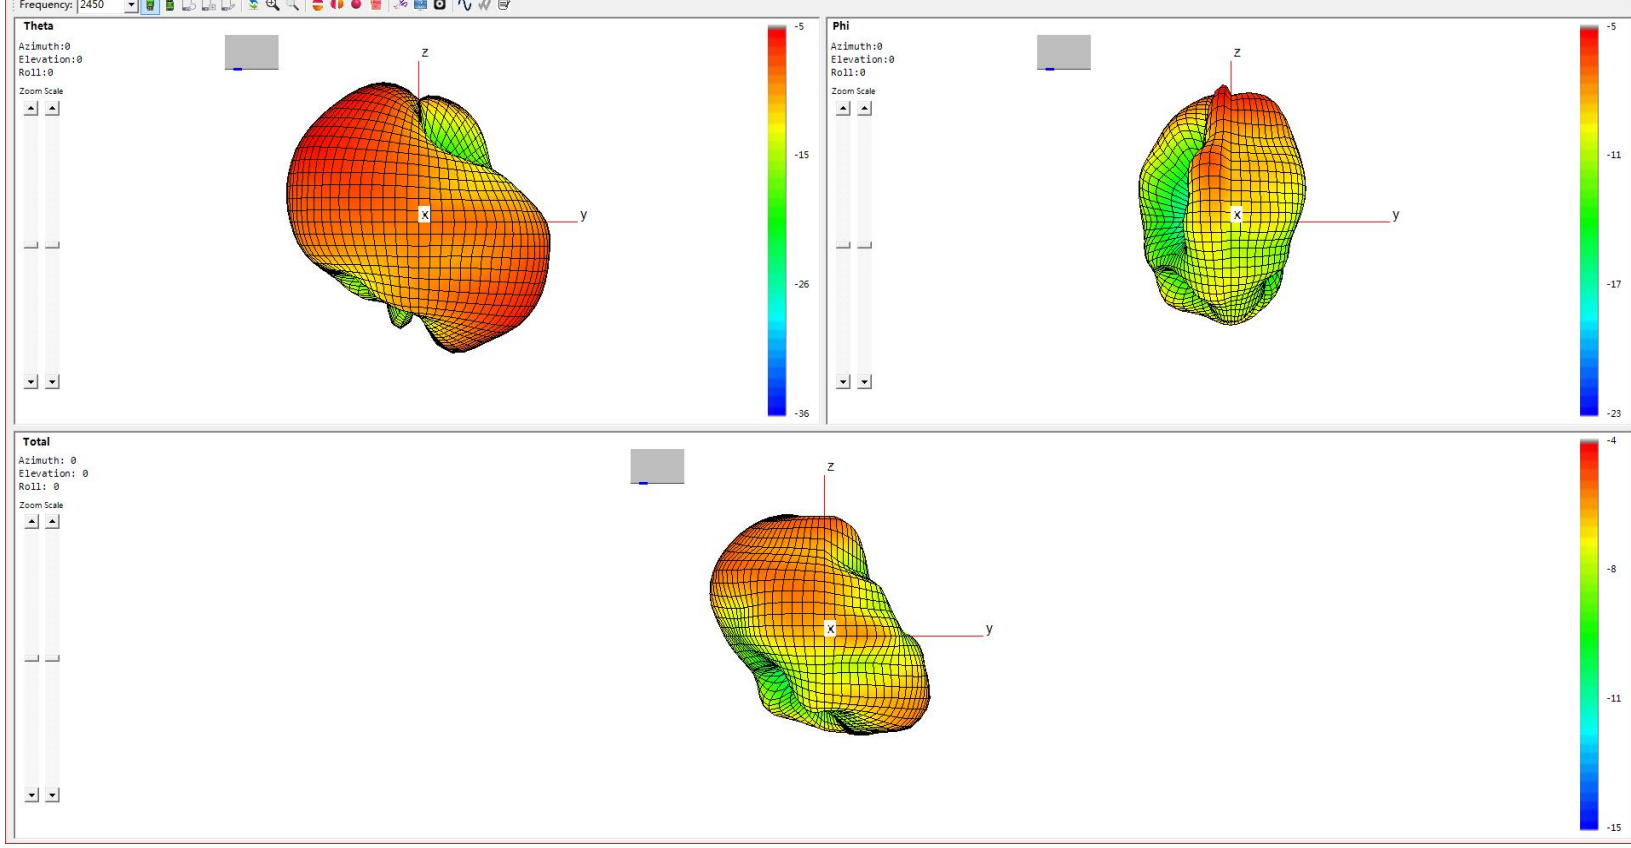


www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

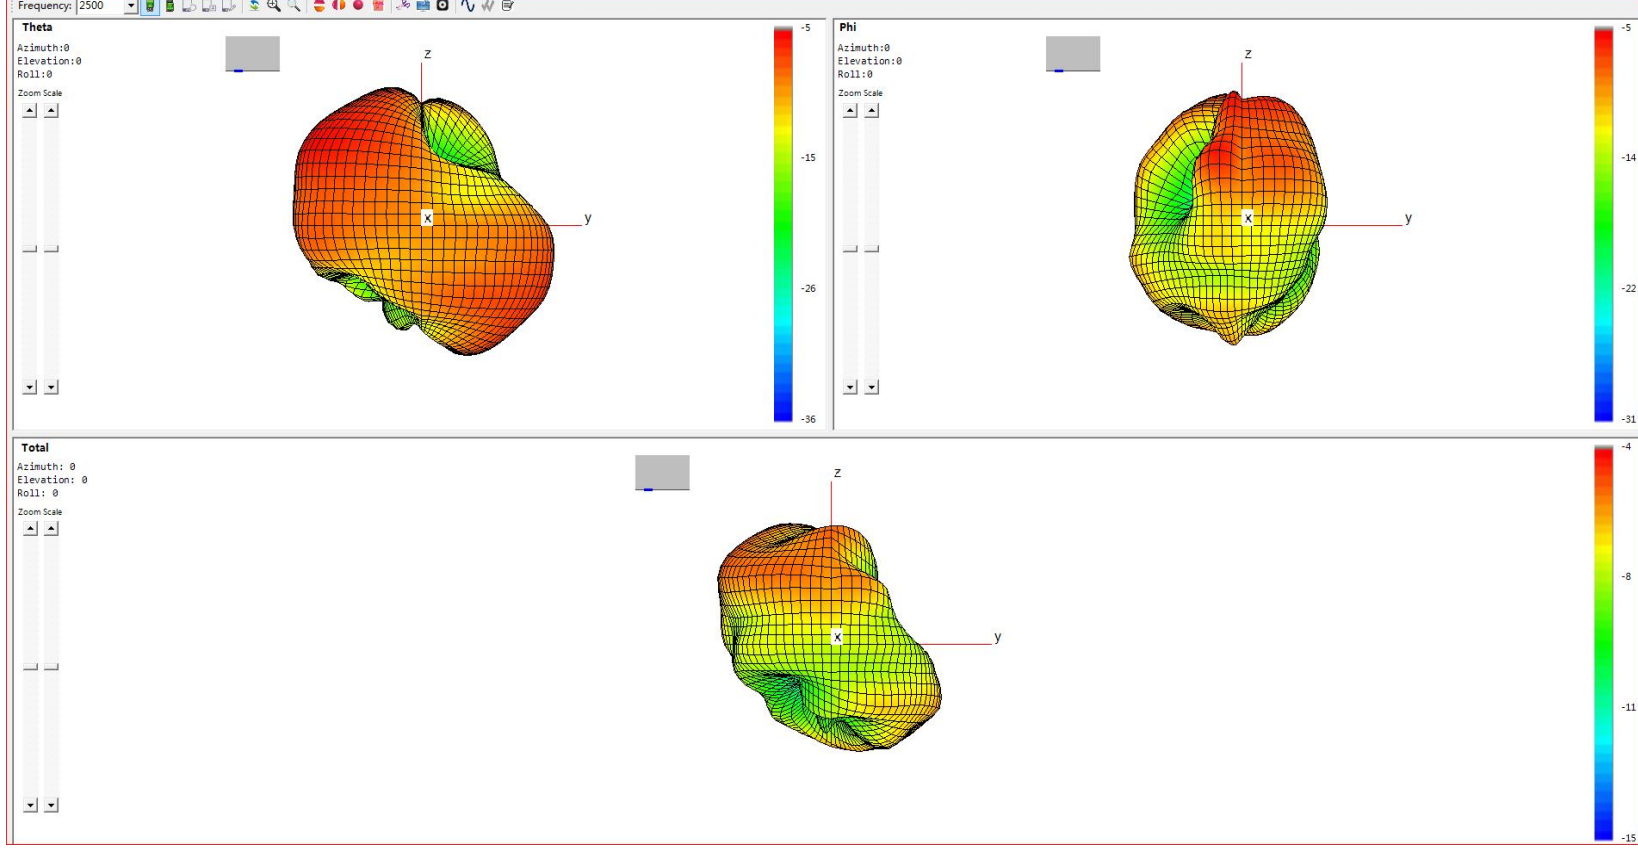

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

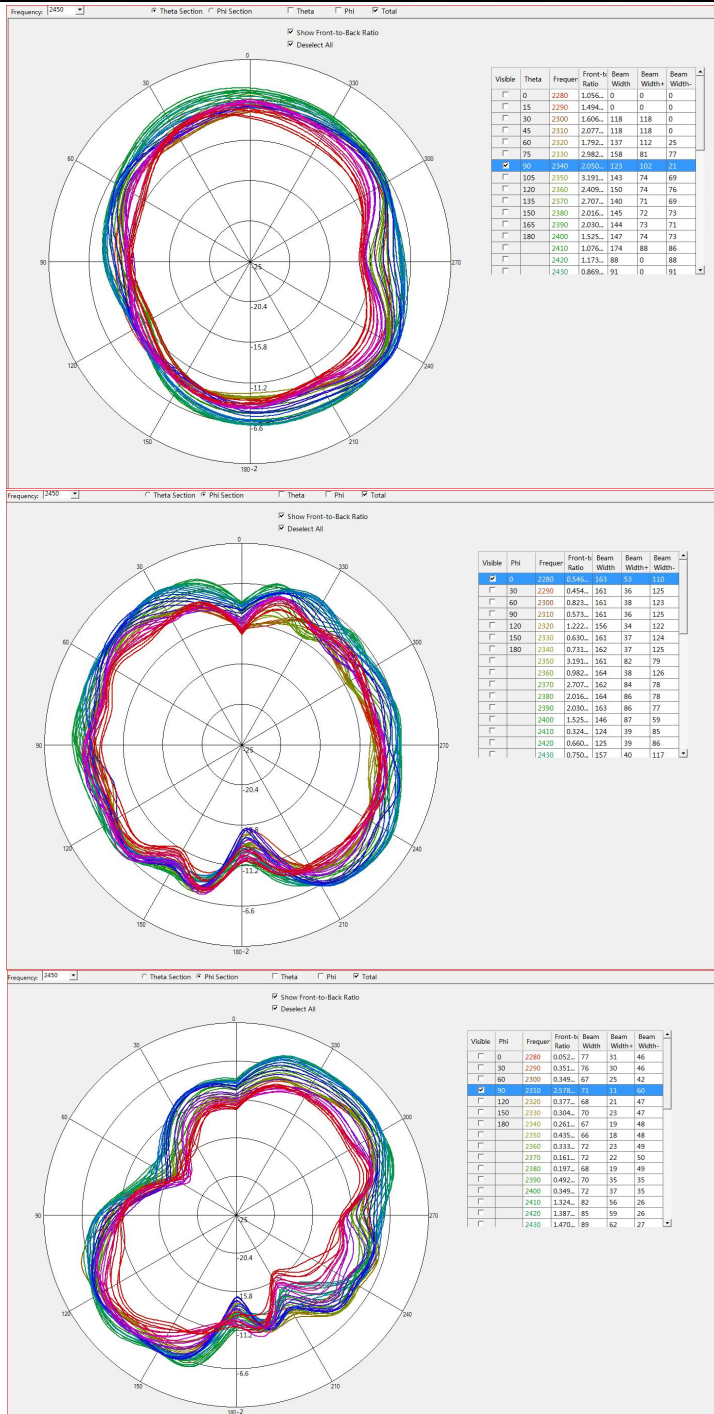





6、结论 conclusion

此天线是在客户提供样机基础上设计，电参数和结构性能已达到技术要求，请确认！

This antenna is designed based on the prototype provided by the customer. The electrical parameters and structural performance have met the technical requirements, please confirm!

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

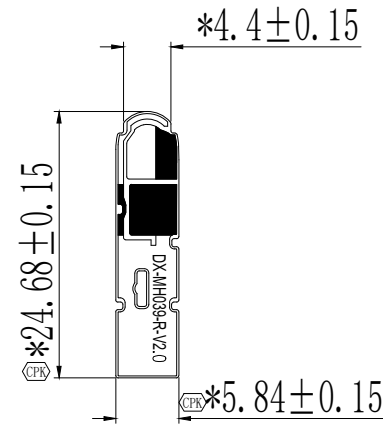1	2		3	4		5		6					
				0~10	10~30	30~50	50~	角度(Angle)	○	◎	⊥	▱	
				0.05	0.10	0.15	0.20	1°	0.02	0.02	0.03	0.05	
A													A
B	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>正面(TOP)</p> </div> <div style="text-align: center;">  <p>反面(BOT)</p> </div> </div>												B
C	<p>注: (Note:)</p> <ol style="list-style-type: none"> "*"为重点尺寸 ; (1. "*" for the key size;) FPC材料:电解铜,一对半 ; (2.FPC Material Science:A pair of half base copper foil) 反面背胶3M9471; (3. 3m300 series double-sided adhesive tape is pasted on the back of the product) 未标公差尺寸,模具冲出尺寸公差为±0.1; (4.No tolerance dimension is marked, and the tolerance of die stamping dimension is ± 0.1) 画 为镀金区,画 为铜箔区,画 的为背胶区. (5. Gold plated area, Copper foil area, Gum;) 												C
D	1M-H039X-102												D
	 深圳大显科技有限公司 Shenzhen Daxian Technology Co., Ltd.												
				机型(Machine model)	MH039	产品颜色(Product Color)		黑色(black)	日期(date)	2023/11/29			
				项目编码(Project Code)	CM-H039X-102	模面处理(Mold surface treatment)		NA	结构(MD)	RuibinZhou			
				零件名称(Part Name)	BT-R天线(BT-R antenna)	单位(unit)	mm	比例(scale)	1:1	射频(RF)	PengHU		
				零件编码(Part Number)	2M-H039X-102-1	第三视角 (Third perspective)			审核(check)	KangZhou			
				材质(material)	PI Electrolytic copper				批准(ratify)	LeiZhang			
				保存路径(Save Path)						当前版本(current version)	A		
	版本(edition)	描述(describe)	日期(date)	备注(Note)									
	1	2	3	4	5	6							