

TEST REPORT

Applicant: NOTHING TECHNOLOGY LIMITED
Address: Bedford House, 21A John Street, London, United Kingdom WC1N 2BF
Equipment Type: Smart Watch
Model Name: D399 (refer to section 2.3)
Brand Name: cmf by NOTHING
FCC ID: 2AZEQ-D399
47 CFR Part 15 Subpart B
Test Standard: ICES-003 (Issue 7, October 15, 2020)
ANSI C63.4-2014
Sample Arrival Date: Feb. 20, 2025
Test Date: Feb. 25, 2025 - Feb. 26, 2025
Date of Issue: Mar. 25, 2025

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Xiao Tangqi**Checked by:** Xiong Chong**Approved by:** Sunny Zou
(Technical Director)

Tang Qi. Xiao

Xiong Chong

Sunny Zou

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Mar. 25, 2025</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory	3
1.2	Test Location	3
2	PRODUCT INFORMATION	4
2.1	Applicant Information	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT)	4
2.4	Ancillary Equipment	4
2.5	Technical Information	4
3	SUMMARY OF TEST RESULTS	5
3.1	Test Standards	5
3.2	Verdict	5
3.3	Test Uncertainty	5
4	GENERAL TEST CONFIGURATIONS	6
4.1	Test Enclosure List	6
4.2	Test Configurations.....	6
4.3	Test Setups	7
5	TEST ITEMS	9
5.1	Emission Tests	9
ANNEX A	TEST RESULTS	14
A.1	Radiated Emission.....	14
A.2	Conducted Emission, AC Ports.....	23
ANNEX B	TEST SETUP PHOTOS	26
ANNEX C	EUT EXTERNAL PHOTOS.....	26
ANNEX D	EUT INTERNAL PHOTOS.....	26

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.2 Manufacturer Information

Manufacturer	NOTHING TECHNOLOGY LIMITED
Address	Bedford House, 21A John Street, London, United Kingdom WC1N 2BF

2.3 General Description for Equipment under Test (EUT)

EUT Name	Smart Watch
Model Name Under Test	D399
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	V1.2
Software Version	V1.0.1.23
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Ancillary Equipment

Ancillary Equipment 1	USB Cable	
	Length (Approx.)	0.6 m

2.5 Technical Information

Network and Wireless connectivity	Bluetooth
Classification of equipment	Class B
The highest internal frequency of EUT	2483.5 MHz

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ICES-003 (Issue 7, October 15, 2020)	Information Technology Equipment (Including Digital Apparatus)
3	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	ISED Rule	Test Verdict	Remark
1	Radiated Emission	15.109	ICES-003, 3.2.2	Pass	--
2	Conducted Emission, AC Ports	15.107	ICES-003, 3.2.1	Pass	--

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.2 dB
Radiated emissions (30 MHz-1 GHz)-10m	4.3 dB
Radiated emissions (1 GHz-18 GHz)-966#4	5.0 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Enclosure List

Description	Manufacturer	Model	Serial No.	Length	Description	Use
Mobile Phone	XIAOMI	M2003J15S C	N/A	N/A	N/A	☒
Adapter	OPPO	VC54GBCH	N/A	N/A	N/A	☒


4.2 Test Configurations

All test modes of EUT are listed in the table below.


Test Mode Configuration	Description
Mode 1	<u>The Working Test Mode</u> EUT + Adapter + USB Cable + BT Link + Mobile phone

4.3 Test Setups


Test Setup 1

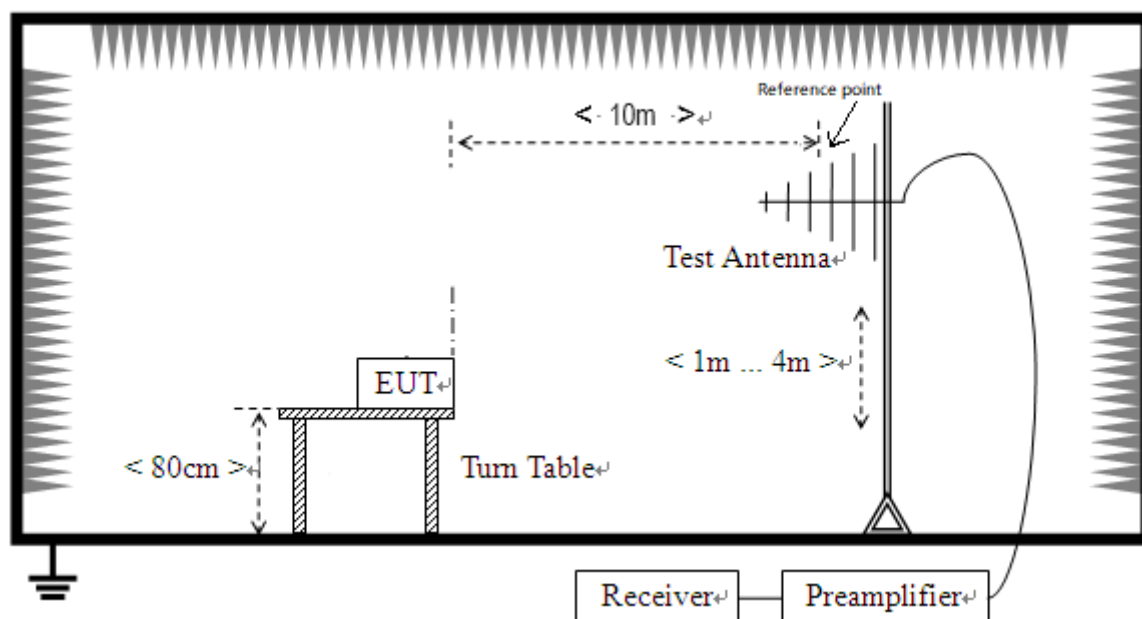

Radiated Emission (30 MHz-1 GHz)

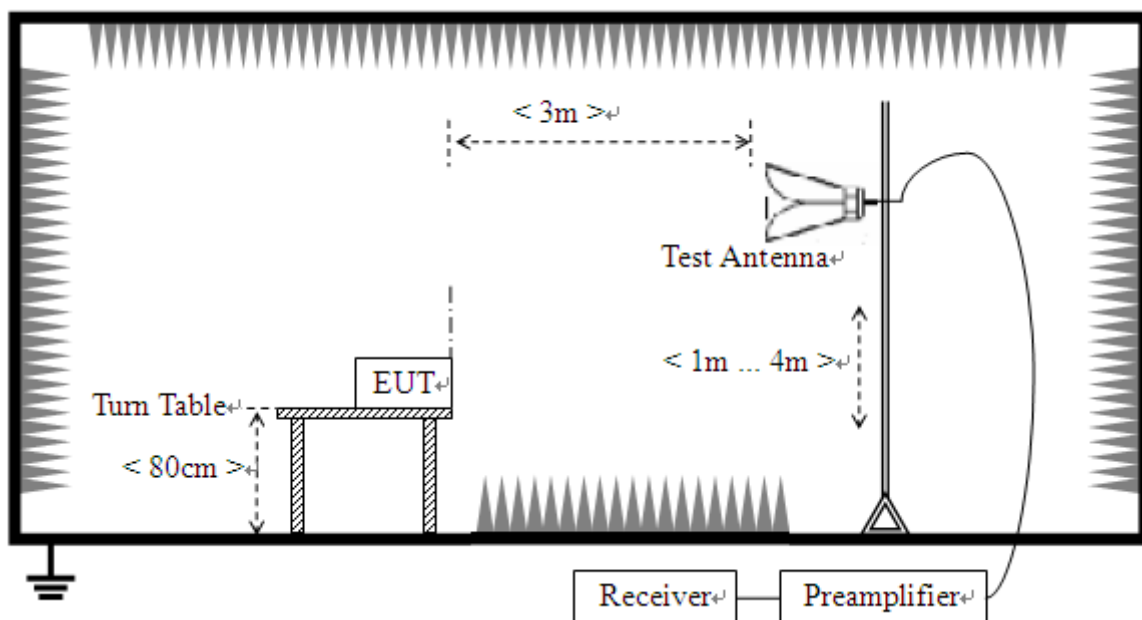

Radiated Emission (above 1 GHz)

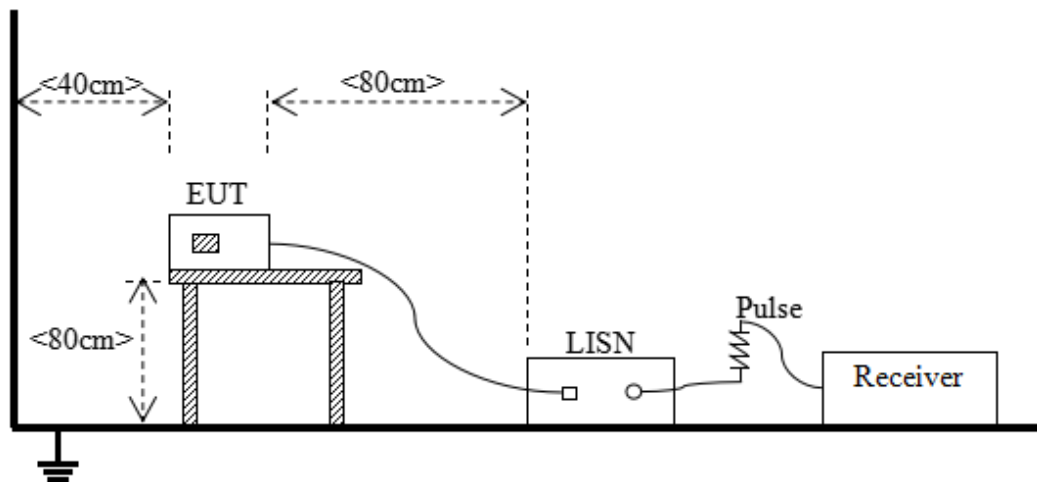Test Setup 2

Conducted Emissions, AC Ports

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

FCC:

Frequency range (MHz)	Class A (at 10 m)		Class B (at 10 m)
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	90	39	29.5
88 - 216	150	43.5	33
216 - 960	210	46.4	35.5
Above 960	300	49.5	43.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.
- 3) For 30 MHz to 1000 MHz, the CISPR quasi-peak is employed.

For above 1000 MHz, according to the requirements of FCC 15.35, unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

Frequency range (GHz)	Class B (at 3 m)			Class A (at 3 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)	Field Strength Average (dB $\mu\text{V/m}$)	Field Strength Peak (dB $\mu\text{V/m}$)
1 - F_M	500	54	74	60	80

Note 1: The highest measurement frequency, F_M , in GHz, shall be determined as next Table.

Note 2: Average Class A limit at 3m L_{3m} is determined by the following conversion formula:
 $L_{3m} = L_{10m} + 20 \cdot \log(d_{10m}/d_{3m})$
 Where:
 L_{3m} is Average Class A limit at 3m;
 L_{10m} is Average Class A limit at 10m;
 d_{10m} is Measurement distance in 10m;
 d_{3m} is Measurement distance in 3m.
 For this case: $L_{3m} = 49.5 + 20 \cdot \log(10/3) = 60$ (dB $\mu\text{V/m}$).

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1 GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2 GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5 GHz

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ or 40 GHz, whichever is lower.
Note: F_X is Highest frequency generated or used in the device or on which the device operates or tunes.	

IC:

Frequency range (MHz)	Class A (10 m)	Class B (10 m)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 - 88	40.0	30.0
88 - 216	43.5	33.1
216 - 230	46.4	35.6
230 - 960	47.0	37.0
960 - 1000	49.5	43.5
Note: The more stringent limit applies at transition frequencies.		

Frequency range (GHz)	Class A (3 m)		Class B (3 m)	
	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)
1 - F_M	60	80	54	74
Note: 1. The highest measurement frequency, F_M , in GHz, shall be determined as next Table. 2. The measurement bandwidth shall be 1 MHz or greater. 3. These limit levels apply for a measurement distance of 3 m. If using a different measurement distance, the measured levels shall be extrapolated to the 3 m limit distance using a factor of 20 dB per decade of distance. The measurement distance shall place the measurement antenna in the far field of the ITE or digital apparatus under test. 4. The test site shall have been validated at the distance used for radiated emission measurements on the ITE or digital apparatus under test.				

Highest internal frequency (F_X)	Highest measurement frequency (F_M)
$F_X \leq 108 \text{ MHz}$	1GHz
$108 \text{ MHz} \leq F_X \leq 500 \text{ MHz}$	2GHz
$500 \text{ MHz} \leq F_X \leq 1 \text{ GHz}$	5GHz
$F_X \geq 1 \text{ GHz}$	$5 * F_X$ up to a maximum of 40 GHz
Note: F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	

5.1.1.2 Test Setup

Refer to 4.3 section (test setup 1) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in ICES-003 Section 3(b) (ANSI C63.4) and ANSI C63.4;

All Radiated Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1$ GHz, peak & RMS Average for $f \geq 1$ GHz

Trace = max hold

5.1.1.4 Test Result and Test Equipment List

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Margin = Limit – Results

5.1.2 Conducted Emission, AC Ports

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.
- 3) The limit using ANSI C63.4.

5.1.2.2 Test Setup

Refer to 4.3 section test (test setup 2) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The test employing the methods of measurement described in the publication referenced in Section 3(b) (ANSI C63.4);

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function =peak & Average

Trace = max hold

5.1.2.4 Test Result and Test Equipment List

Please refer to ANNEX A.2.

NOTE:

1. Results (dB μ V) = Reading (dB μ V) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Margin = Limit – Results

ANNEX A TEST RESULTS

A.1 Radiated Emission


Note 1: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 2: In order to achieve the normal operation function of the EUT, it is necessary to connect with the auxiliary phone via Bluetooth. So the marked spikes near 2400 MHz with circle should be ignored because they are Bluetooth carrier frequencies.

Sample No.	S09+A51	Temperature	24.6℃
Humidity	52%RH	Pressure	101kPa
Test Engineer	Liao Ziyang	Test Date	2025.2.25


Test Mode 1

1) Test Antenna Vertical, 30 MHz – 1 GHz (FCC)

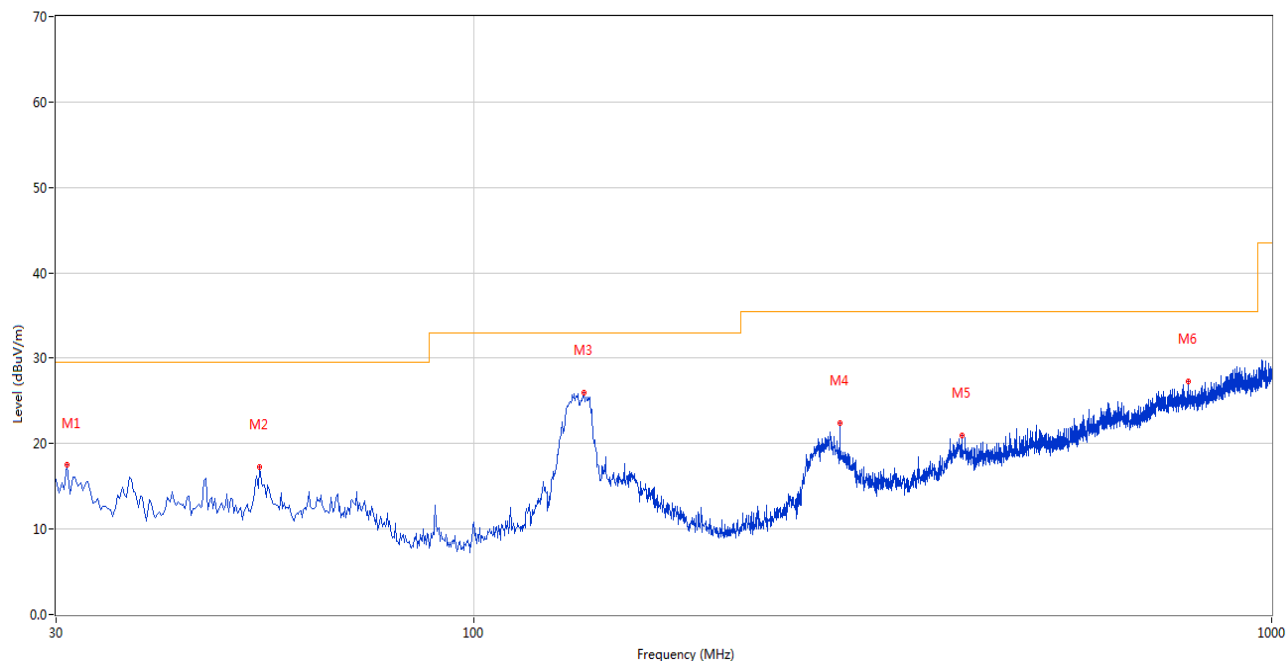


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.970	17.49	-27.70	29.5	12.01	Peak	0.00	200	Vertical	Pass
2	54.002	17.29	-26.08	29.5	12.21	Peak	0.00	200	Vertical	Pass
3	137.401	25.96	-26.44	33.0	7.04	Peak	50.00	200	Vertical	Pass
4	287.956	22.42	-25.18	35.5	13.08	Peak	176.00	100	Vertical	Pass
5	409.660	20.98	-22.16	35.5	14.52	Peak	105.00	100	Vertical	Pass
6	785.926	27.27	-12.86	35.5	8.23	Peak	0.00	200	Vertical	Pass

2) Test Antenna Horizontal, 30 MHz – 1 GHz (FCC)

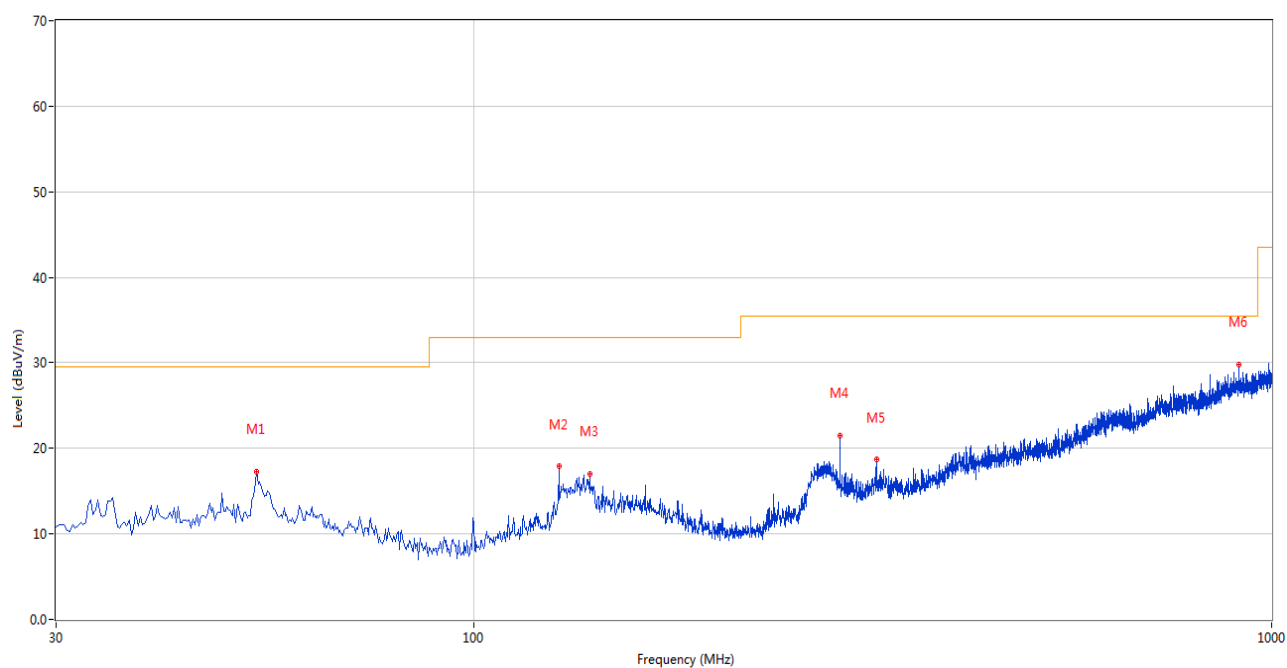


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	53.517	17.24	-26.07	29.5	12.26	Peak	0.00	100	Horizontal	Pass
2	127.946	17.87	-27.27	33.0	15.13	Peak	0.00	200	Horizontal	Pass
3	139.825	17.01	-26.19	33.0	15.99	Peak	44.00	200	Horizontal	Pass
4	287.956	21.45	-25.18	35.5	14.05	Peak	341.00	200	Horizontal	Pass
5	319.715	18.66	-24.39	35.5	16.84	Peak	283.00	200	Horizontal	Pass
6	908.843	29.81	-10.74	35.5	5.69	Peak	183.00	100	Horizontal	Pass

3) Test Antenna Vertical, 30 MHz – 1 GHz (IC)

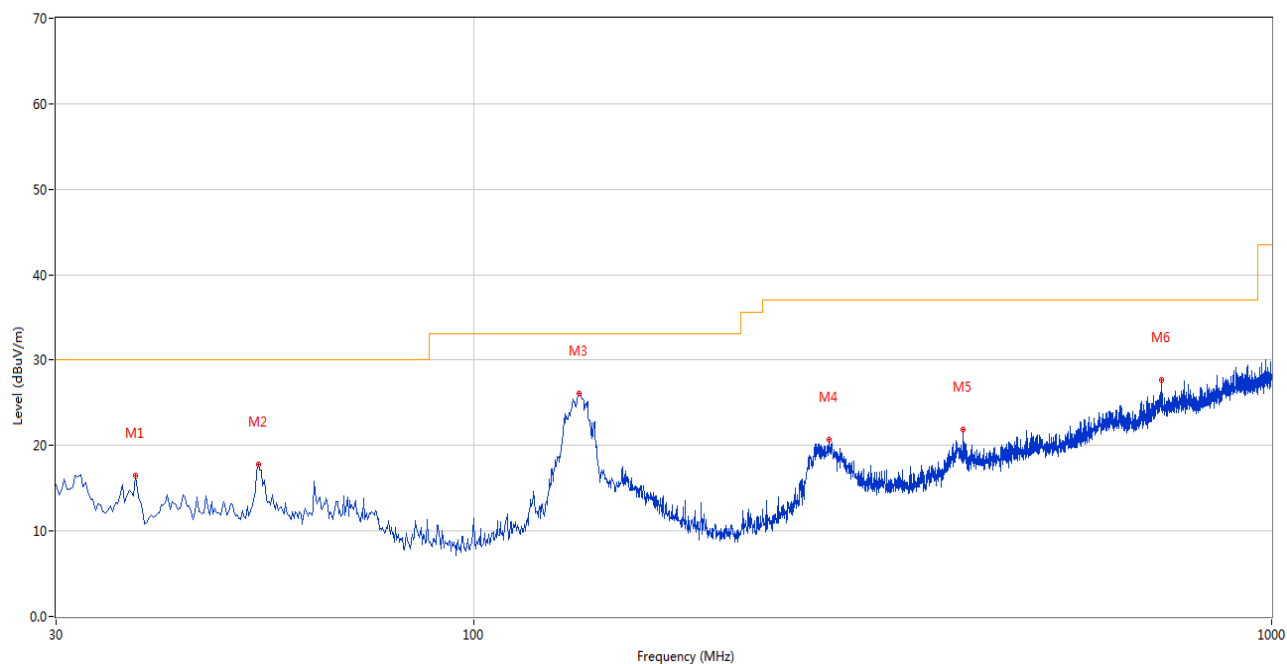

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	37.758	16.49	-27.04	30.0	13.51	Peak	71.00	100	Vertical	Pass
2	53.759	17.82	-26.08	30.0	12.18	Peak	122.00	200	Vertical	Pass
3	135.704	26.13	-26.55	33.1	6.97	Peak	75.00	200	Vertical	Pass
4	278.985	20.66	-25.41	37.0	16.34	Peak	130.00	100	Vertical	Pass
5	411.115	21.86	-22.09	37.0	15.14	Peak	86.00	100	Vertical	Pass
6	728.710	27.68	-13.90	37.0	9.32	Peak	229.00	100	Vertical	Pass


4) Test Antenna Horizontal, 30 MHz – 1 GHz (IC)

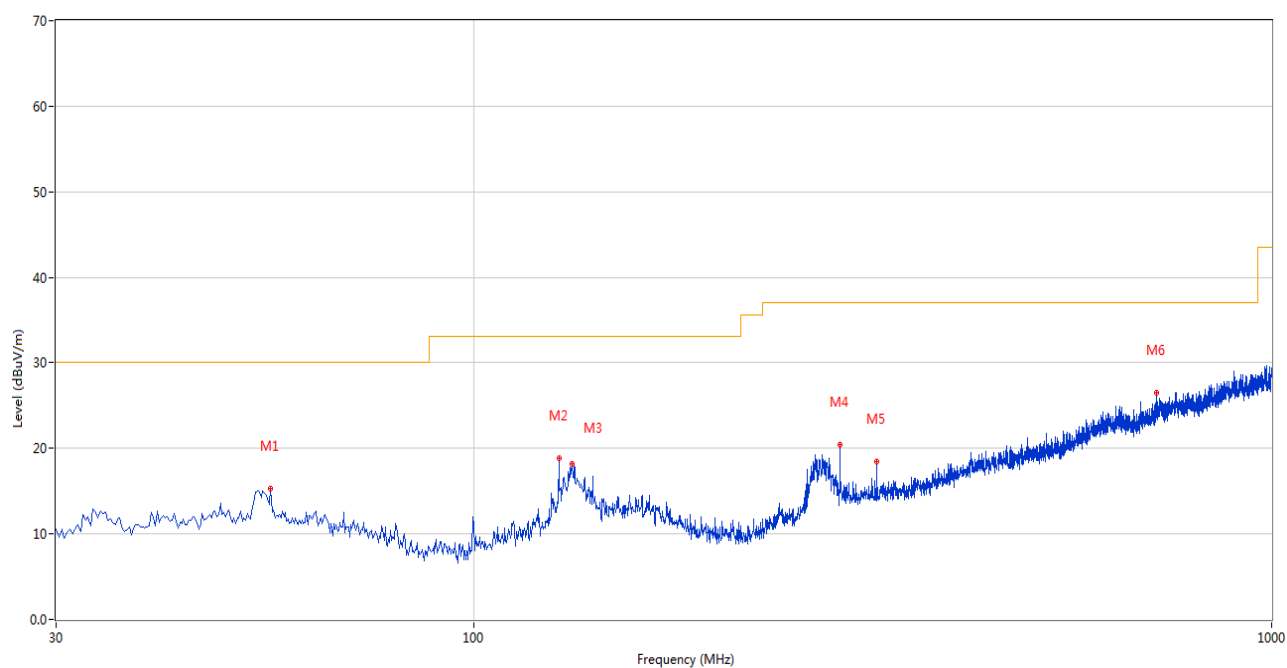

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.699	15.31	-26.18	30.0	14.69	Peak	294.00	100	Horizontal	Pass
2	127.946	18.84	-27.27	33.1	14.26	Peak	173.00	100	Horizontal	Pass
3	132.794	18.18	-26.86	33.1	14.92	Peak	223.00	100	Horizontal	Pass
4	287.956	20.42	-25.18	37.0	16.58	Peak	187.00	200	Horizontal	Pass
5	319.958	18.48	-24.36	37.0	18.52	Peak	0.00	200	Horizontal	Pass
6	716.588	26.48	-14.22	37.0	10.52	Peak	72.00	200	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Below 1 GHz						
EMI Receiver	ROHDE&SC HWAZ	ESRP	101036	2024.08.01	2025.07.31	☒
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2018054558	2024.11.28	2025.11.27	☒
Test Antenna- Bi-Log	SCHWARZB ECK	VULB 9168	9168-01162	2024.08.04	2027.08.03	☒
Anechoic Chamber (10m)	EMC Electronic Co., Ltd	20.10*11.60*7 .35m	130	2024.07.13	2027.07.12	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

5) Test Antenna Vertical, 1 GHz – 18 GHz

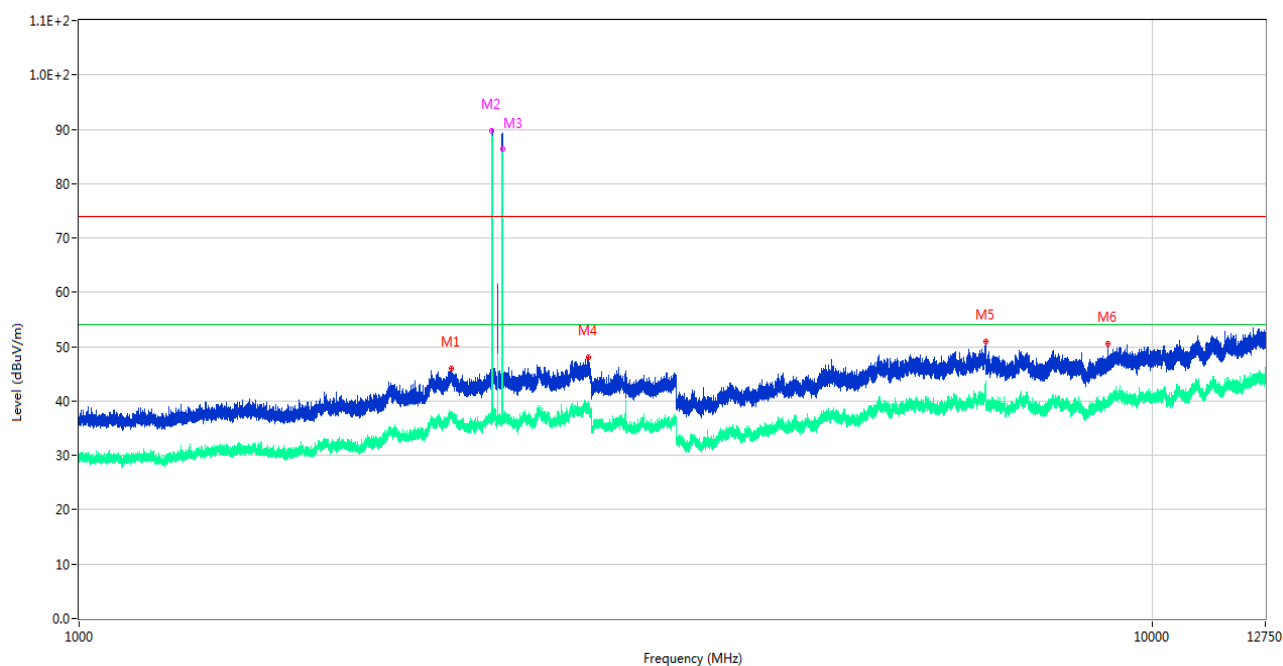

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2222.100	46.02	-8.25	74.0	27.98	Peak	286.10	100	Vertical	Pass
1**	2222.100	37.47	-8.25	54.0	16.53	AV	286.10	100	Vertical	Pass
2	2426.100	90.17	-9.29	74.0	-16.17	Peak	147.50	100	Vertical	N/A
2**	2426.100	89.75	-9.29	54.0	-35.75	AV	147.50	100	Vertical	N/A
3	2479.500	89.20	-9.43	74.0	-15.20	Peak	147.50	100	Vertical	N/A
3**	2479.500	86.37	-9.43	54.0	-32.37	AV	147.50	100	Vertical	N/A
4	2984.800	48.04	-5.68	74.0	25.96	Peak	316.00	200	Vertical	Pass
4**	2984.800	39.06	-5.68	54.0	14.94	AV	316.00	200	Vertical	Pass
5	6997.200	50.97	0.42	74.0	23.03	Peak	360.00	100	Vertical	Pass
5**	6997.200	43.21	0.42	54.0	10.79	AV	360.00	100	Vertical	Pass
6	9102.775	50.60	17.72	74.0	23.40	Peak	281.20	100	Vertical	Pass
6**	9102.775	39.60	17.72	54.0	14.40	AV	281.20	100	Vertical	Pass

6) Test Antenna Horizontal, 1 GHz – 18 GHz

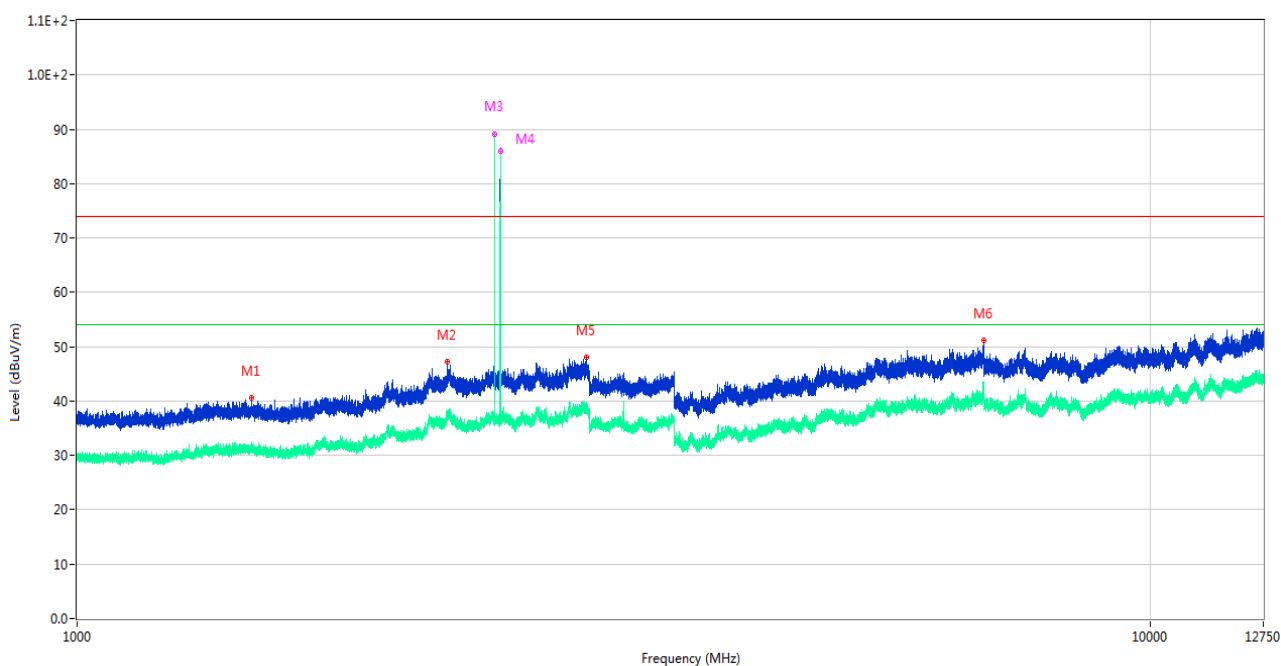

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1453.600	40.50	-14.96	74.0	33.50	Peak	269.20	200	Horizontal	Pass
1**	1453.600	30.76	-14.96	54.0	23.24	AV	269.20	200	Horizontal	Pass
2	2214.800	47.14	-8.79	74.0	26.86	Peak	359.50	100	Horizontal	Pass
2**	2214.800	36.93	-8.79	54.0	17.07	AV	359.50	100	Horizontal	Pass
3	2452.000	89.45	-9.66	74.0	-15.45	Peak	46.40	100	Horizontal	N/A
3**	2452.000	89.16	-9.66	54.0	-35.16	AV	46.40	100	Horizontal	N/A
4	2480.000	86.43	-9.39	74.0	-12.43	Peak	192.70	100	Horizontal	N/A
4**	2480.000	86.05	-9.39	54.0	-32.05	AV	192.70	100	Horizontal	N/A
5	2985.600	48.01	-5.78	74.0	25.99	Peak	183.80	100	Horizontal	Pass
5**	2985.600	38.46	-5.78	54.0	15.54	AV	183.80	100	Horizontal	Pass
6	6997.000	51.21	0.42	74.0	22.79	Peak	209.90	100	Horizontal	Pass
6**	6997.000	42.14	0.42	54.0	11.86	AV	209.90	100	Horizontal	Pass


Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
Frequency Above 1 GHz						
EMI Receiver	Keysight	N9038A	MY53220118	2024.08.01	2025.07.31	☒
Amplifier (1-12GHz)	COM-MV	DLNAB-1000- 12000-002	18080279	2024.11.28	2025.11.27	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2024.11.28	2025.11.27	☒
Test Antenna- Horn	SCHWARZB ECK	BBHA 9120D	1148	2022.04.12	2025.04.11	☒
Anechoic Chamber (#4)	ChangNing	9m*6m*6m	101	2023.03.04	2026.03.03	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

A.2 Conducted Emission, AC Ports

Sample No.	S09+A51	Temperature	16.8℃
Humidity	54%RH	Pressure	101kPa
Test Engineer	Liao Ziyang	Test Date	2025.2.26


Test Mode 1

1) AC Ports - L Phase

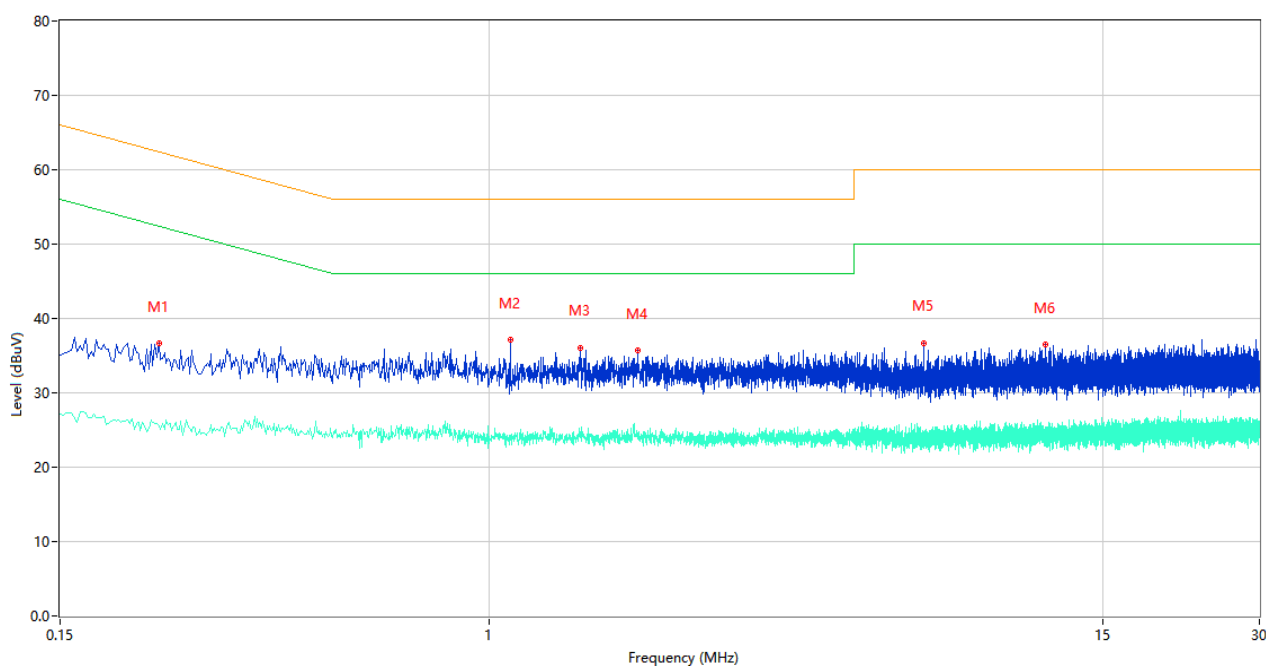

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.232	36.59	9.77	62.38	25.79	Peak	L	Pass
1**	0.232	25.56	9.77	52.38	26.82	AV	L	Pass
2	1.096	37.12	10.01	56.00	18.88	Peak	L	Pass
2**	1.096	24.06	10.01	46.00	21.94	AV	L	Pass
3	1.496	36.03	10.26	56.00	19.97	Peak	L	Pass
3**	1.496	24.20	10.26	46.00	21.80	AV	L	Pass
4	1.924	35.70	10.45	56.00	20.30	Peak	L	Pass
4**	1.924	23.97	10.45	46.00	22.03	AV	L	Pass
5	6.810	36.72	10.15	60.00	23.28	Peak	L	Pass
5**	6.810	24.49	10.15	50.00	25.51	AV	L	Pass
6	11.636	36.48	10.40	60.00	23.52	Peak	L	Pass
6**	11.636	25.02	10.40	50.00	24.98	AV	L	Pass

2) AC Ports - N Phase

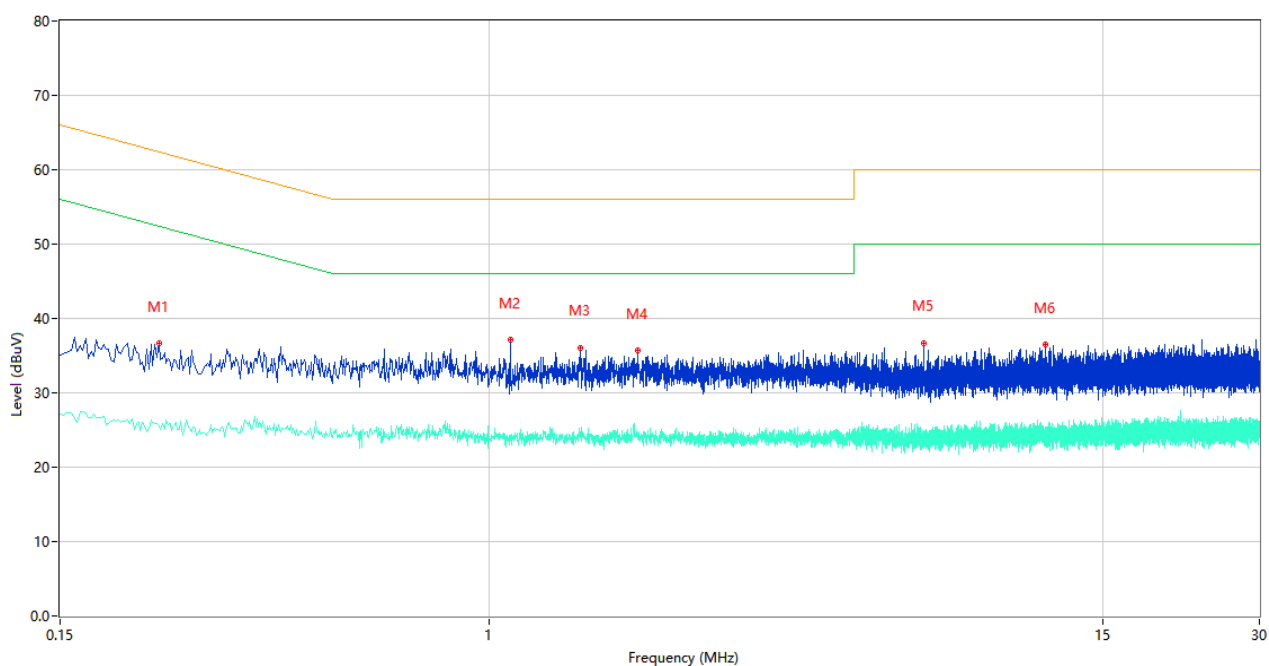

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.232	36.59	9.77	62.38	25.79	Peak	L	Pass
1**	0.232	25.56	9.77	52.38	26.82	AV	L	Pass
2	1.096	37.12	10.01	56.00	18.88	Peak	L	Pass
2**	1.096	24.06	10.01	46.00	21.94	AV	L	Pass
3	1.496	36.03	10.26	56.00	19.97	Peak	L	Pass
3**	1.496	24.20	10.26	46.00	21.80	AV	L	Pass
4	1.924	35.70	10.45	56.00	20.30	Peak	L	Pass
4**	1.924	23.97	10.45	46.00	22.03	AV	L	Pass
5	6.810	36.72	10.15	60.00	23.28	Peak	L	Pass
5**	6.810	24.49	10.15	50.00	25.51	AV	L	Pass
6	11.636	36.48	10.40	60.00	23.52	Peak	L	Pass
6**	11.636	25.02	10.40	50.00	24.98	AV	L	Pass

Equipment Information						
Equipment Name	Supplier	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2024.08.01	2025.07.31	☒
LISN	SCHWARZB ECK	NSLK 8127	8127-687	2024.05.09	2025.05.08	☒
Shielded Room	YiHeng Electronic Co., Ltd	3.5m*3.1m*2. 8m	112	2025.02.18	2026.02.17	☒
Description	Supplier	Name	Version	/		Use
Test Software	BALUN	BL410-E	V22.930	/		☒

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2520452-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2520452-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2520452-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--