



FCC TEST REPORT

FCC ID: 2AZFE-ONO3PRO

On Behalf of

Shenzhen Shadow Crown Technology Co.,Ltd.

LED Projector

Model No.: ONO3Pro, YG381, YG381M, YG391, YG371, YG561,
YG211, L61Pro

Prepared for : Shenzhen Shadow Crown Technology Co.,Ltd.
Address : A9 East 5th floor, Industrial Building, Longwang Miao, Fuyong street,
Baoan district , Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2404121-C01-R02
Date of Receipt : April 29, 2024
Date of Test : April 29, 2024 - May 30, 2024
Date of Report : May 30, 2024
Version Number : V0
Test Result : Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008300895 Website: <http://www.a-lab.cn/certificate>

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	10
2.7. Test Facility	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup	13
3.4. Test Result	13
4. Bandwidth	14
4.1. Limit	14
4.2. Test Procedure	14
4.3. Test Result	14
5. Carrier Frequency Separation	25
5.1. Limit	25
5.2. Test Procedure	25
5.3. Test Result	25
6. Number Of Hopping Channel	27
6.1. Limit	27
6.2. Test Procedure	27
6.3. Test Result	27
7. Dwell Time	29
7.1. Test limit	29
7.2. Test Procedure	29
7.3. Test Result	29
8. Radiated emissions	39
8.1. Limit	39
8.2. Block Diagram of Test setup	42
8.3. Test Procedure	43
8.4. Test Result	43
9. Band Edge Compliance	54
9.1. Block Diagram of Test Setup	54

9.2. Limit	54
9.3. Test Procedure	54
9.4. Test Result.....	54
10. Power Line Conducted Emissions.....	61
10.1. Block Diagram of Test Setup	61
10.2. Limit	61
10.3. Test Procedure	61
10.4. Test Result.....	61
11. Antenna Requirements.....	64
11.1. Limit.....	64
11.2. Result	64
12. Test setup photo	65
12.1. Photo of Radiated Emission test	65
12.2. Photo of Conducted Emission test	66

TEST REPORT DECLARATION

Applicant : Shenzhen Shadow Crown Technology Co.,Ltd.

Address : A9 East 5th floor, Industrial Building,Longwang Miao, Fuyong street, Baoan district , Shenzhen

Manufacturer : Shenzhen Shadow Crown Technology Co.,Ltd.

Address : A9 East 5th floor, Industrial Building,Longwang Miao, Fuyong street, Baoan district , Shenzhen

EUT Description : LED Projector

(A) Model No. : ONO3Pro, YG381, YG381M, YG391,YG371, YG561, YG211, L61Pro

(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer 

Approved by (name + signature).....: Jack Xu
Project Manager 

Date of issue.....: May 30, 2024

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 30, 2024	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	: LED Projector
Model Number	: ONO3Pro, YG381, YG381M, YG391, YG371, YG561, YG211, L61Pro
Diff	: There is no difference between the models except the appearance color. So all the test were performed on the model ONO3Pro.
Power supply	: AC 120V/60Hz
Radio Technology	: Bluetooth EDR/BDR
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Channel spacing	: 1MHz
Modulation type	: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type	: Internal antenna, Maximum Gain is 4.73dBi (Antenna information is provided by applicant.)
Software version	: V1.0
Hardware version	: V1.0
Connector cable loss	: N/A
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : Remote control
 Manufacturer : Shenzhen Shadow Crown Technology Co.,Ltd.
 Model : /
 INPUT : /
 OUTPUT : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	Thinkpad E14	--	--

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK- hopping on	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK- hopping on	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK- hopping on	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
GFSK-hopping off	/	/
$\pi/4$ DQPSK –hopping off	/	/
8DPSK –hopping off	/	/

Channel list

CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
1	2402	18	2419	35	2436	52	2453	69	2470
2	2403	19	2420	36	2437	53	2454	70	2471
3	2404	20	2421	37	2438	54	2455	71	2472
4	2405	21	2422	38	2439	55	2456	72	2473
5	2406	22	2423	39	2440	56	2457	73	2474
6	2407	23	2424	40	2441	57	2458	74	2475
7	2408	24	2425	41	2442	58	2459	75	2476
8	2409	25	2426	42	2443	59	2460	76	2477
9	2410	26	2427	43	2444	60	2461	77	2478
10	2411	27	2428	44	2445	61	2462	78	2479
11	2412	28	2429	45	2446	62	2463	79	2480
12	2413	29	2430	46	2447	63	2464	/	/
13	2414	30	2431	47	2448	64	2465	/	/
14	2415	31	2432	48	2449	65	2466	/	/
15	2416	32	2433	49	2450	66	2467	/	/
16	2417	33	2434	50	2451	67	2468	/	/
17	2418	34	2435	51	2452	68	2469	/	/

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2023.08.16	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2023.08.16	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2023.08.16	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2023.08.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	1Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	1Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	1Year
RF Cable	Resenberger	Cable 1	/	RE1	2023.08.16	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2023.08.16	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2023.08.16	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2023.08.16	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2023.08.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2023.08.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2023.08.16	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	1Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2023.08.16	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2023.08.16	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2023.08.16	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2023.08.16	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247 & RSS-247

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted power(dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	2.552	21	Pass
NVNT	1-DH1	2441	Ant1	3.34	21	Pass
NVNT	1-DH1	2480	Ant1	4.485	21	Pass
NVNT	1-DH3	2441	Ant1	3.418	21	Pass
NVNT	1-DH5	2441	Ant1	3.327	21	Pass
NVNT	2-DH1	2402	Ant1	1.895	21	Pass
NVNT	2-DH1	2441	Ant1	2.812	21	Pass
NVNT	2-DH1	2480	Ant1	3.666	21	Pass
NVNT	2-DH3	2441	Ant1	2.794	21	Pass
NVNT	2-DH5	2441	Ant1	2.823	21	Pass
NVNT	3-DH1	2402	Ant1	2.164	21	Pass
NVNT	3-DH1	2441	Ant1	2.954	21	Pass
NVNT	3-DH1	2480	Ant1	3.959	21	Pass
NVNT	3-DH3	2441	Ant1	2.868	21	Pass
NVNT	3-DH5	2441	Ant1	2.879	21	Pass

4. BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated..


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result

-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.768	/	Pass
NVNT	1-DH1	2441	Ant1	0.852	/	Pass
NVNT	1-DH1	2480	Ant1	0.81	/	Pass
NVNT	2-DH1	2402	Ant1	1.242	/	Pass
NVNT	2-DH1	2441	Ant1	1.22	/	Pass
NVNT	2-DH1	2480	Ant1	1.21	/	Pass
NVNT	3-DH1	2402	Ant1	1.244	/	Pass
NVNT	3-DH1	2441	Ant1	1.216	/	Pass
NVNT	3-DH1	2480	Ant1	1.212	/	Pass

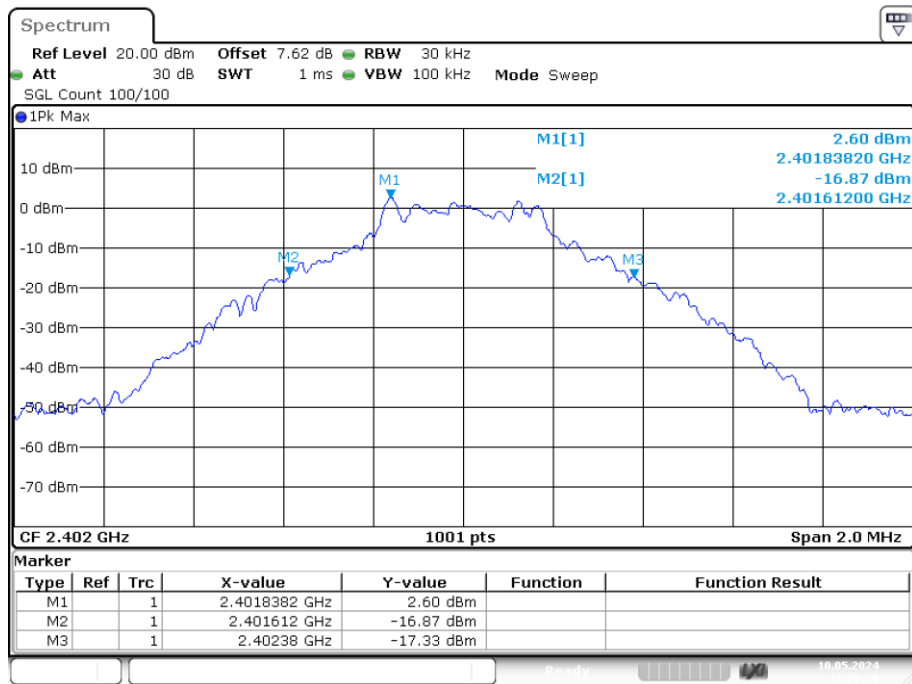-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1


Date: 10.MAY.2024 12:20:35

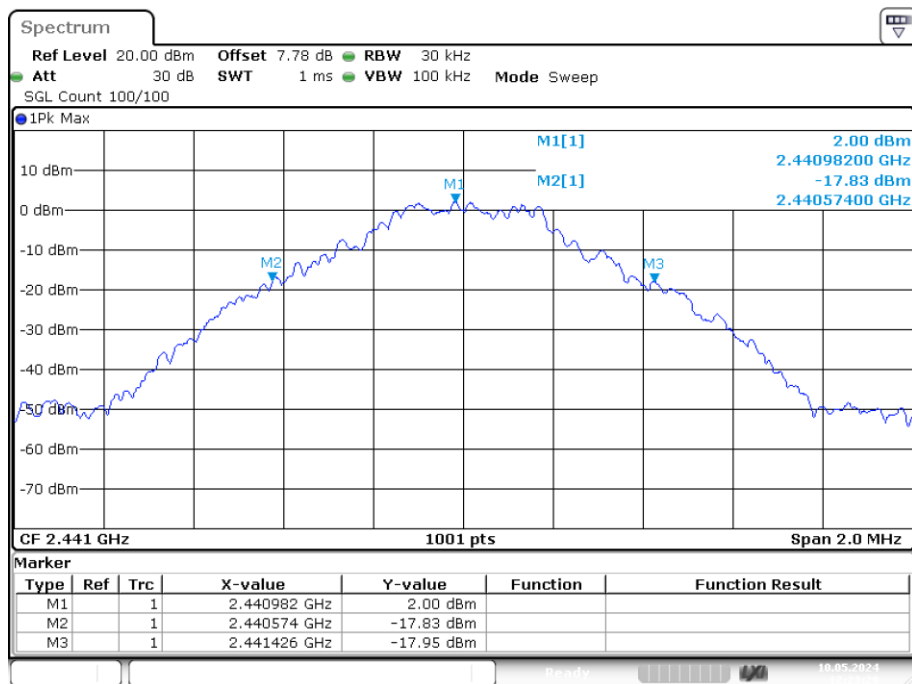-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

Date: 10.MAY.2024 12:23:29

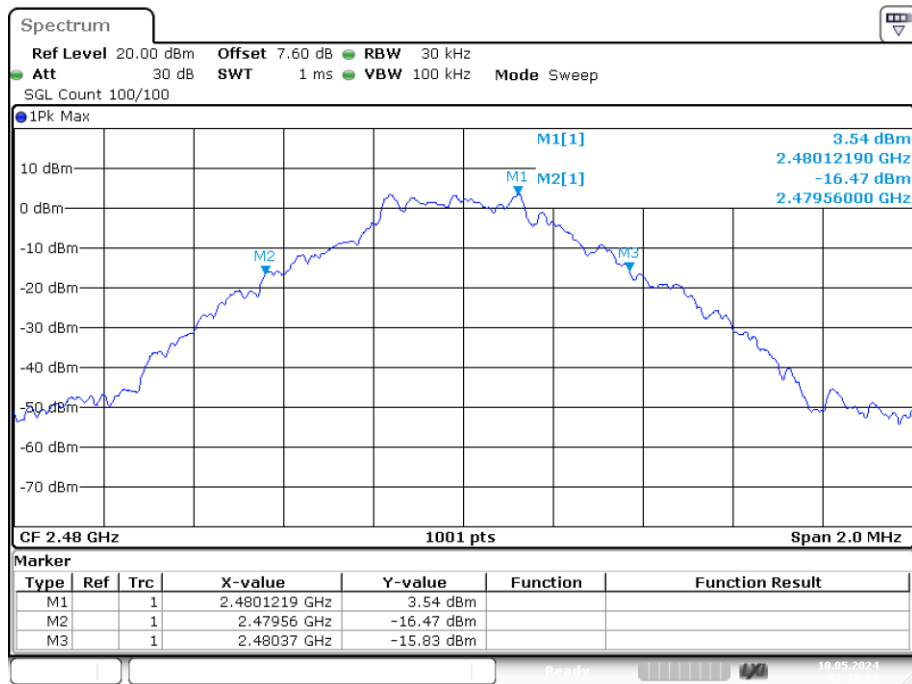
-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

Date: 10.MAY.2024 12:25:22

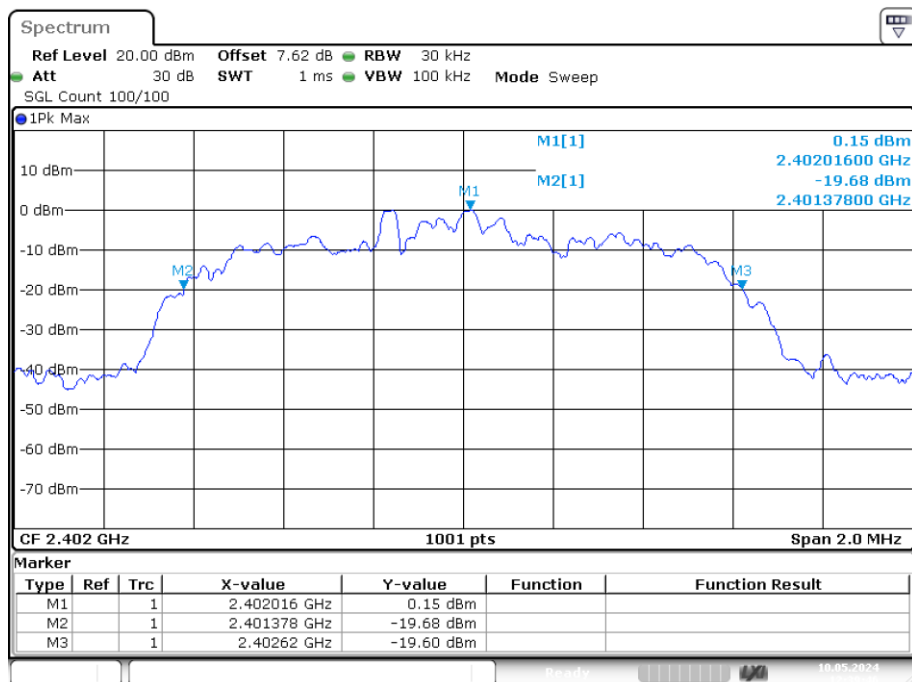-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1


Date: 10.MAY.2024 12:39:46

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

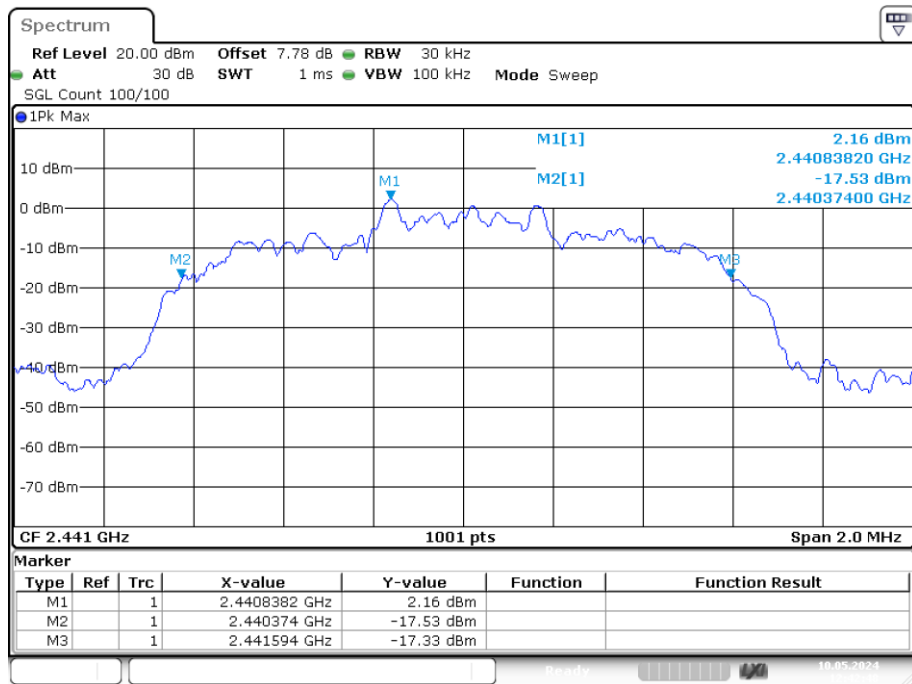


Date: 10.MAY.2024 12:42:48


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

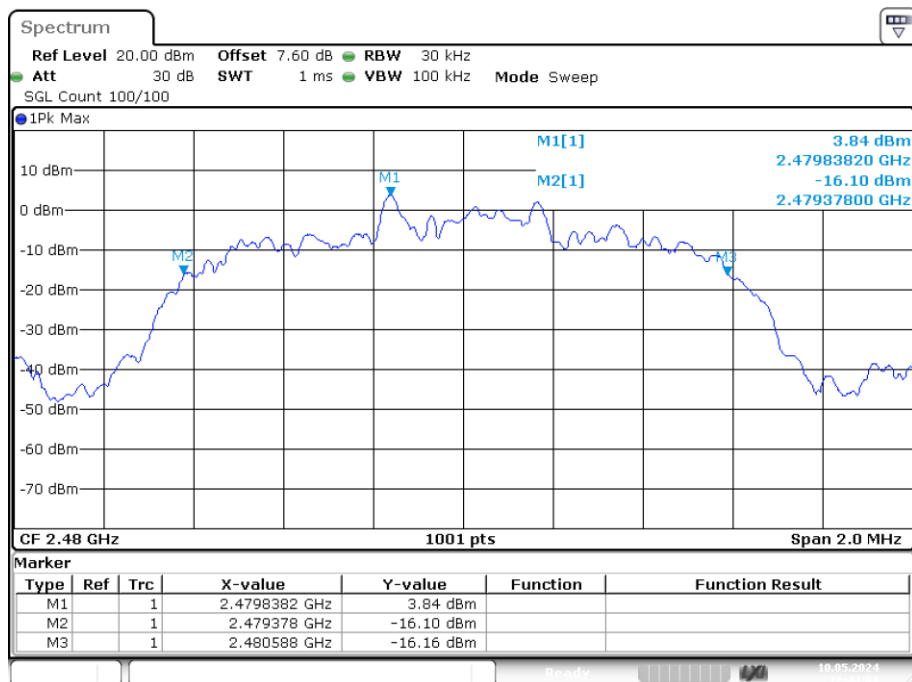

Date: 10.MAY.2024 12:44:04

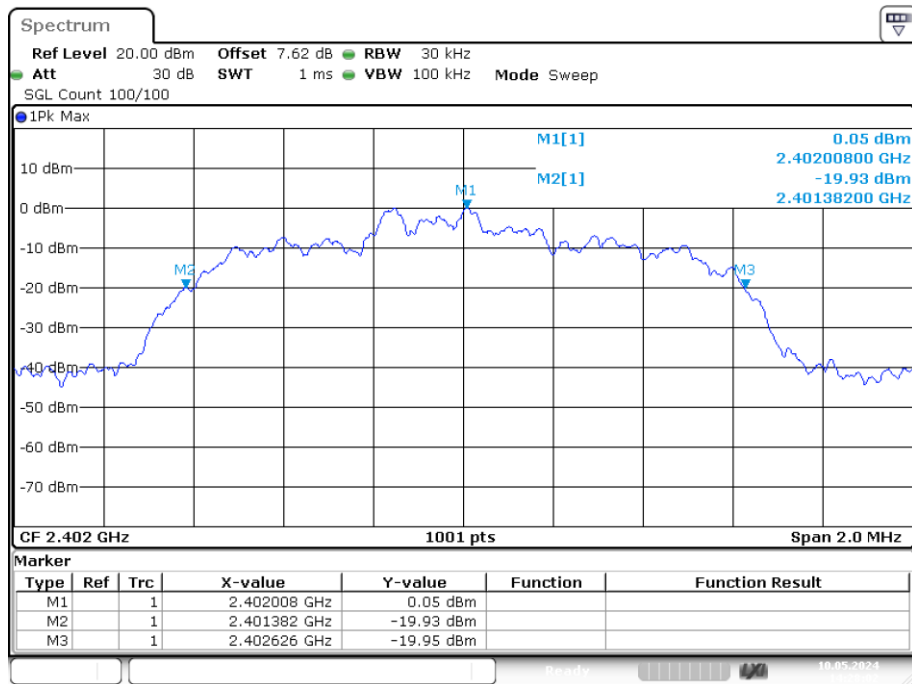
-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

Date: 10.MAY.2024 14:28:01

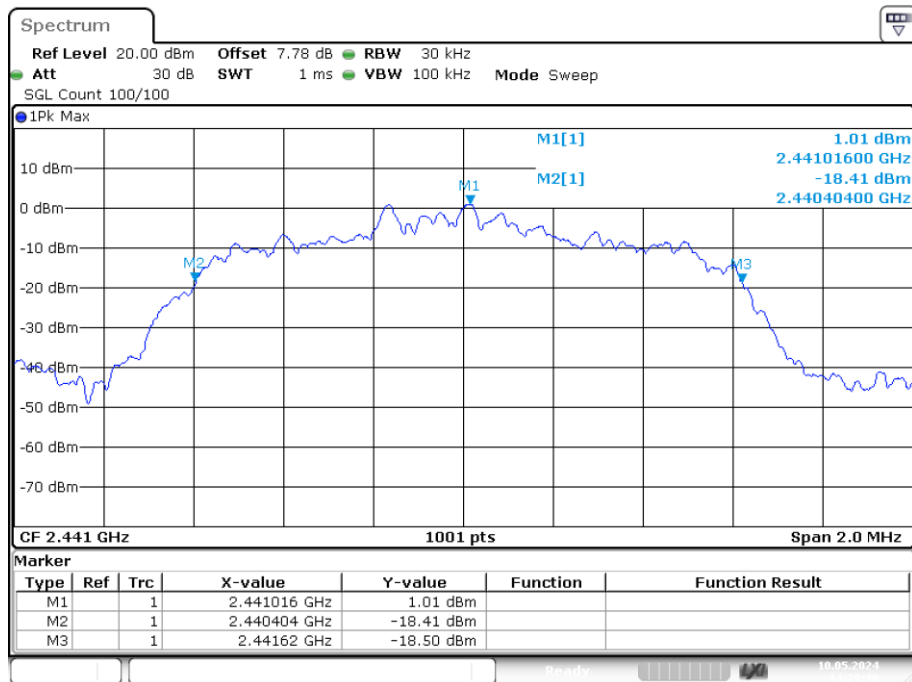-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

Date: 10.MAY.2024 14:29:30

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

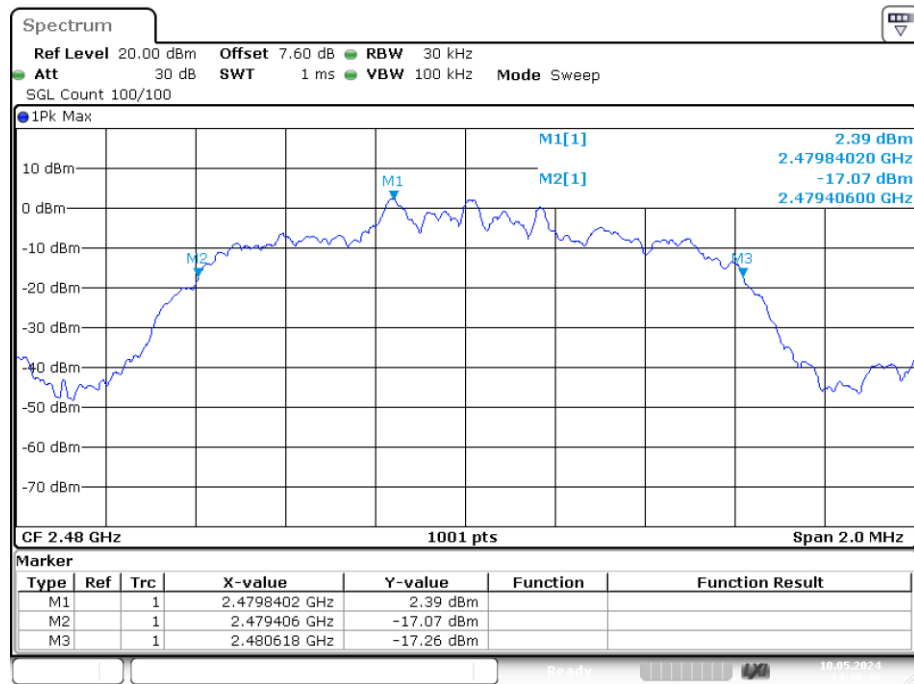


Date: 10.MAY.2024 14:30:41

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.725
NVNT	1-DH1	2441	Ant1	0.727
NVNT	1-DH1	2480	Ant1	0.737
NVNT	2-DH1	2402	Ant1	1.143
NVNT	2-DH1	2441	Ant1	1.119
NVNT	2-DH1	2480	Ant1	1.149
NVNT	3-DH1	2402	Ant1	1.131
NVNT	3-DH1	2441	Ant1	1.129
NVNT	3-DH1	2480	Ant1	1.133

OBW NVNT 1-DH1 2402MHz Ant1

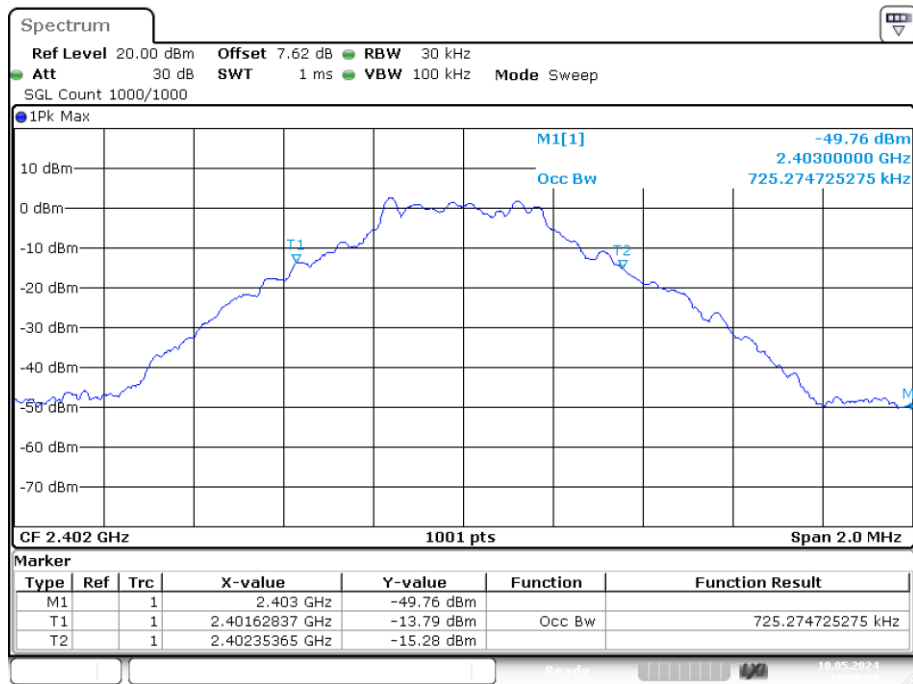


Date: 10.MAY.2024 12:20:27

OBW NVNT 1-DH1 2441MHz Ant1

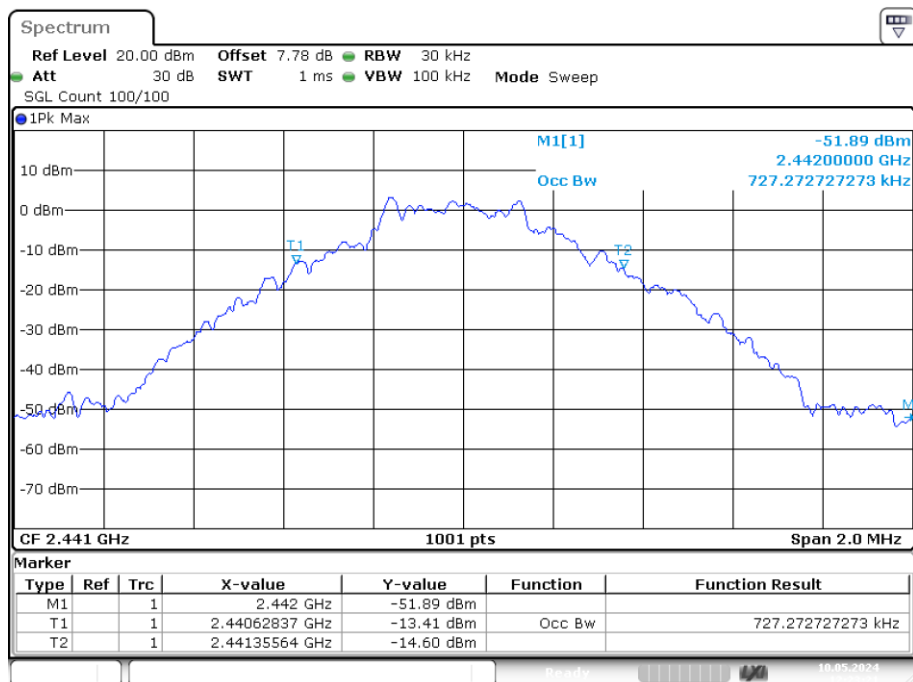


Date: 10.MAY.2024 12:23:20

OBW NVNT 1-DH1 2480MHz Ant1

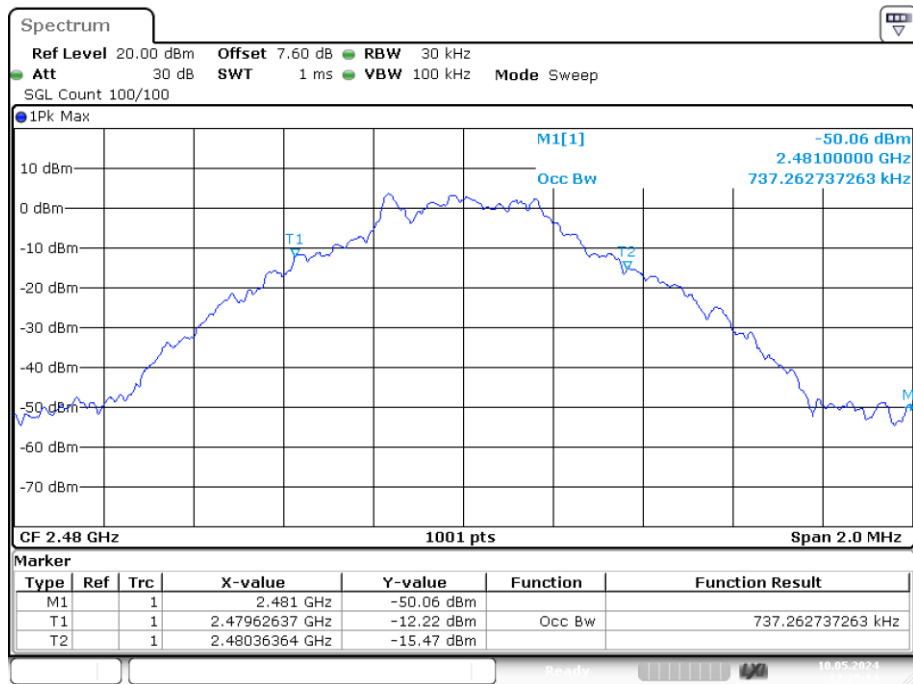


Date: 10.MAY.2024 12:25:14

OBW NVNT 2-DH1 2402MHz Ant1

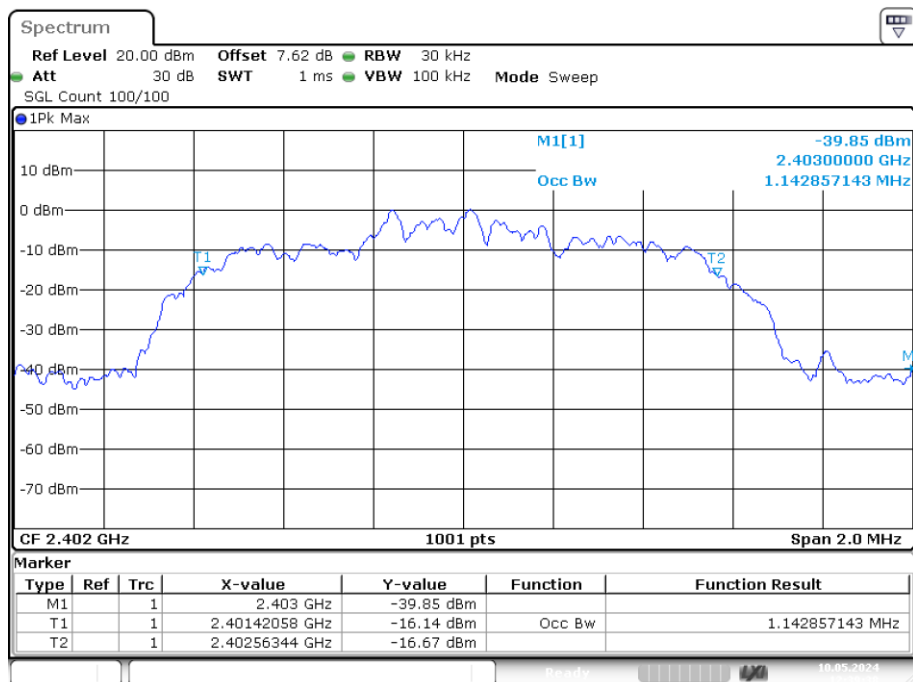


Date: 10.MAY.2024 12:39:38

OBW NVNT 2-DH1 2441MHz Ant1

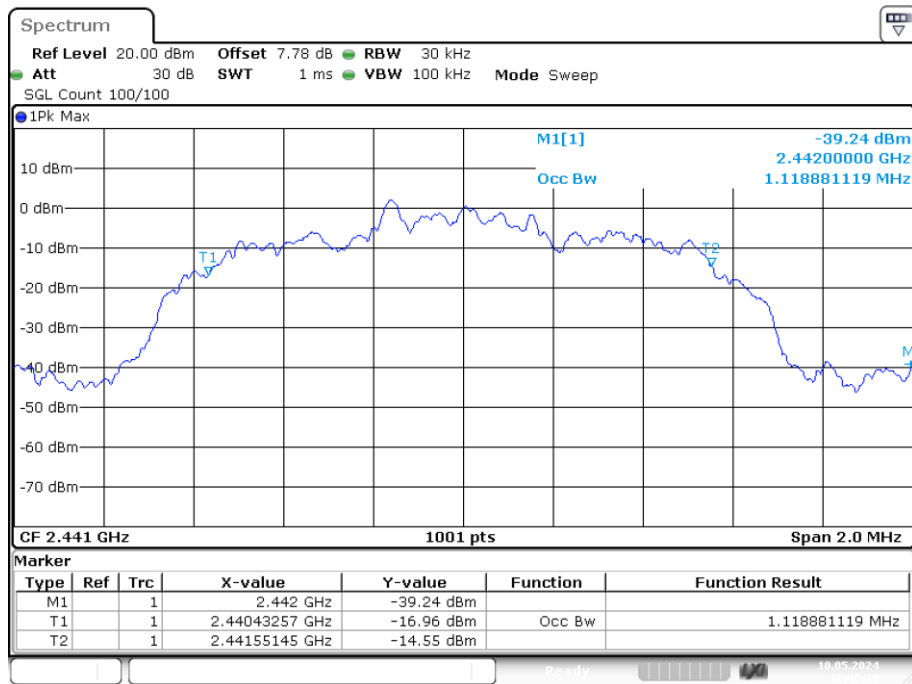


Date: 10.MAY.2024 12:42:40

OBW NVNT 2-DH1 2480MHz Ant1

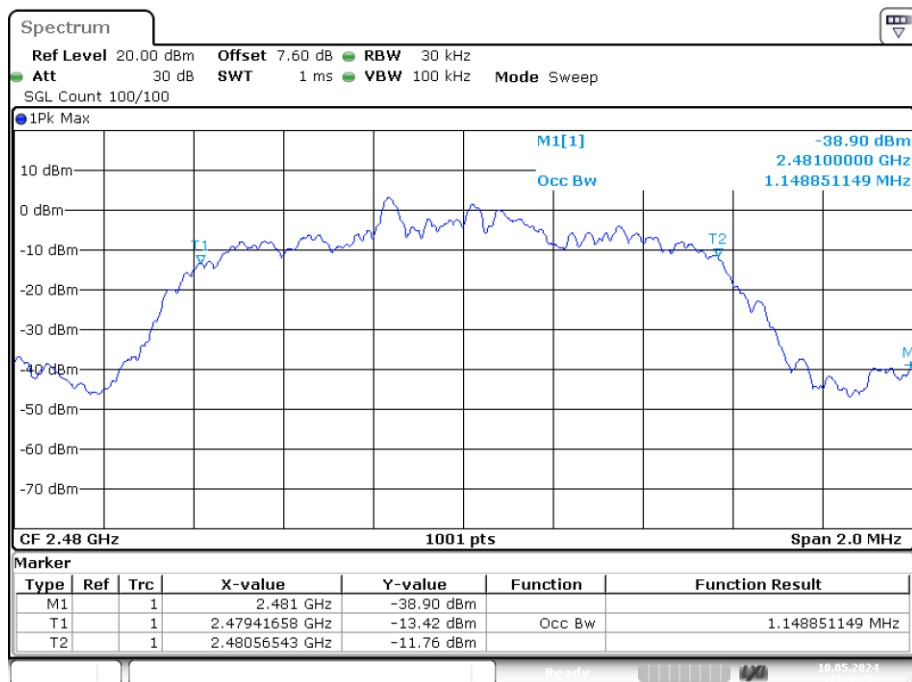


Date: 10.MAY.2024 12:43:56

OBW NVNT 3-DH1 2402MHz Ant1

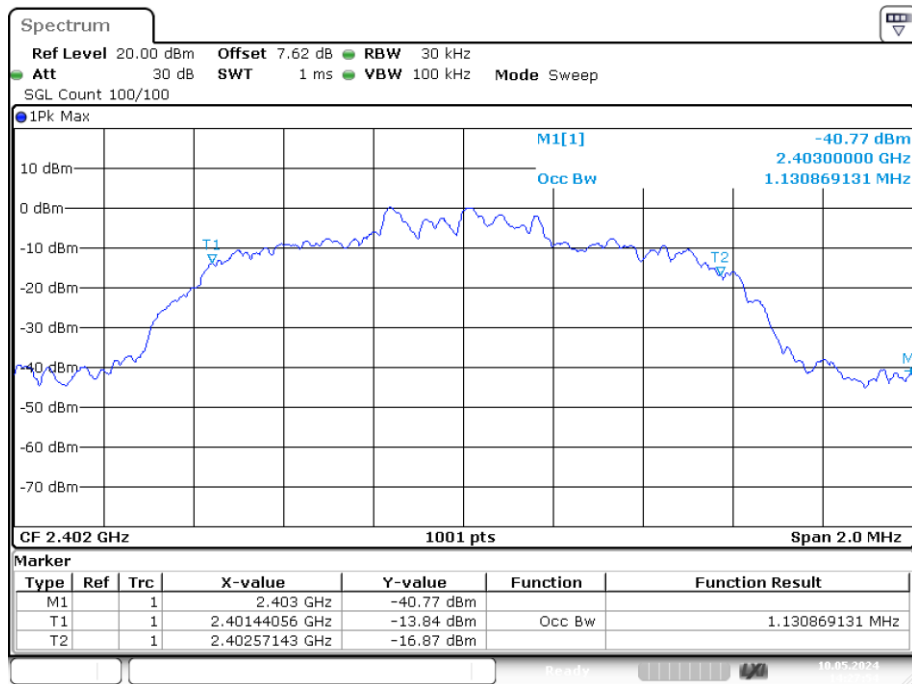


Date: 10.MAY.2024 14:27:53

OBW NVNT 3-DH1 2441MHz Ant1

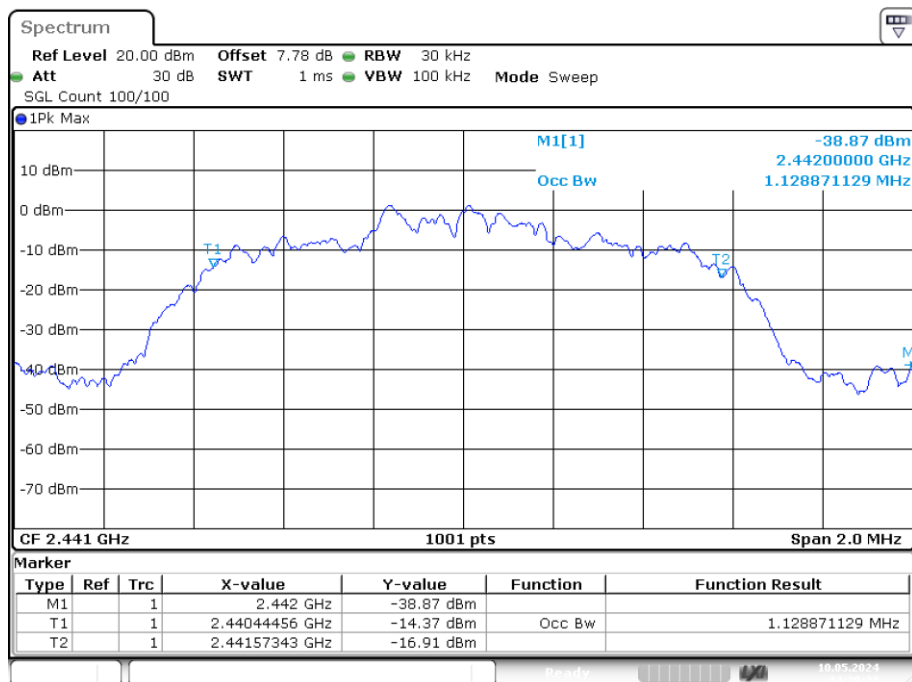

Date: 10.MAY.2024 14:29:22

OBW NVNT 3-DH1 2480MHz Ant1

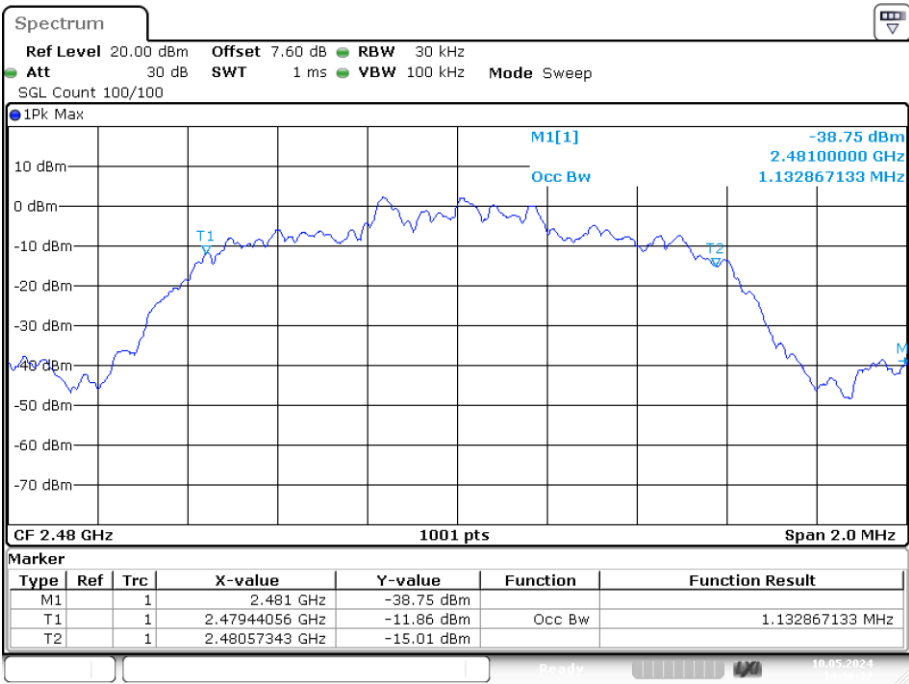

Date: 10.MAY.2024 14:30:33

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2440.834	2441.978	1.144	0.568	Pass
NVNT	2-DH1	Ant1	2440.838	2441.838	1	0.828	Pass
NVNT	3-DH1	Ant1	2440.834	2441.836	1.002	0.829	Pass

CFS NVNT 1-DH1 2441MHz Ant1

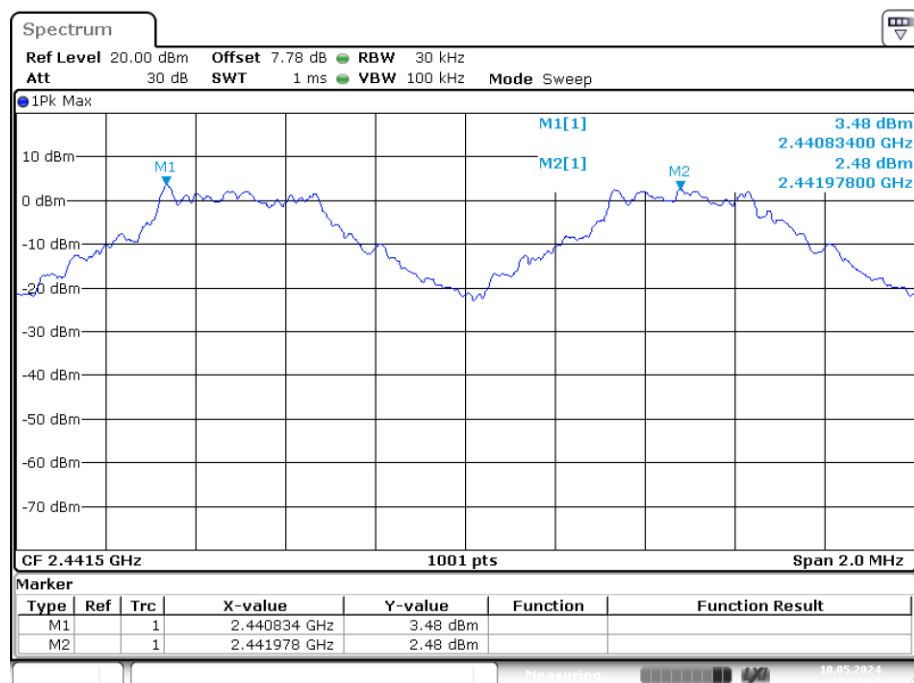


Date: 10.MAY.2024 12:28:31

CFS NVNT 2-DH1 2441MHz Ant1

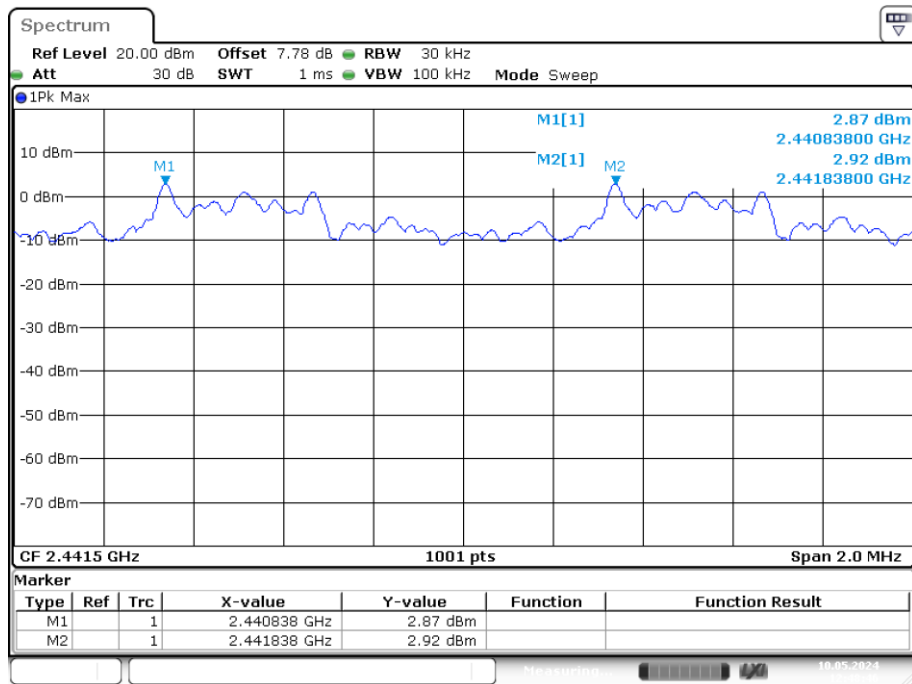

Date: 10.MAY.2024 12:48:46

CFS NVNT 3-DH1 2441MHz Ant1

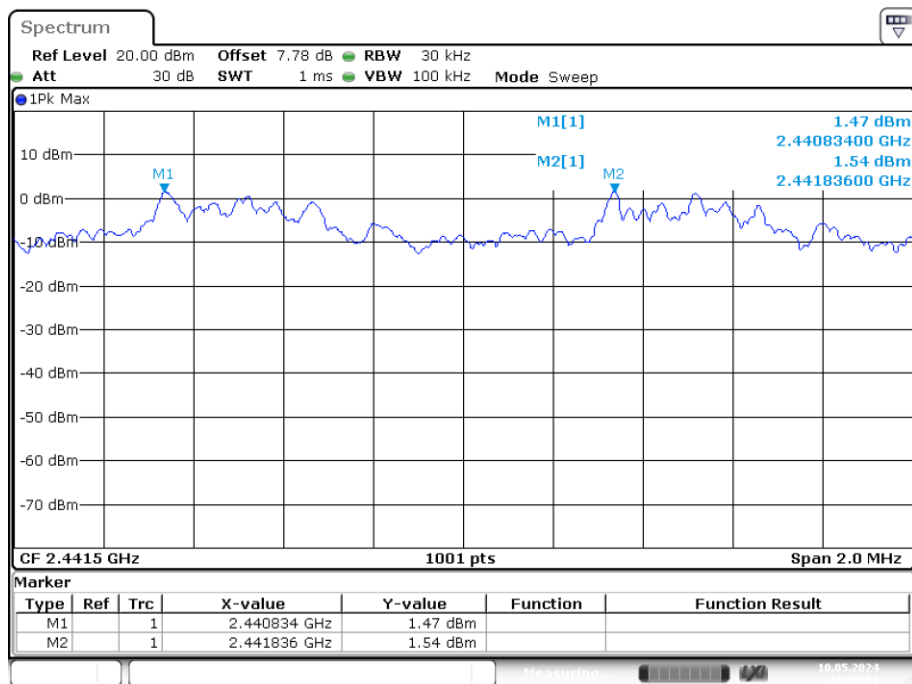

Date: 10.MAY.2024 14:39:51

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass

Hopping No. NVNT 1-DH1 2441MHz Ant1

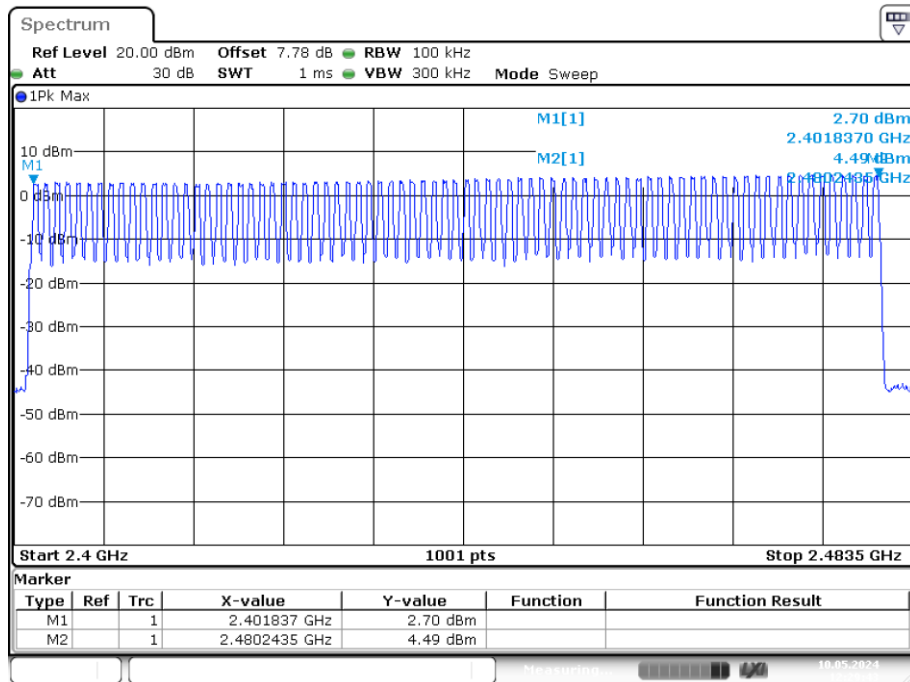


Date: 10.MAY.2024 12:29:43

Hopping No. NVNT 2-DH1 2441MHz Ant1

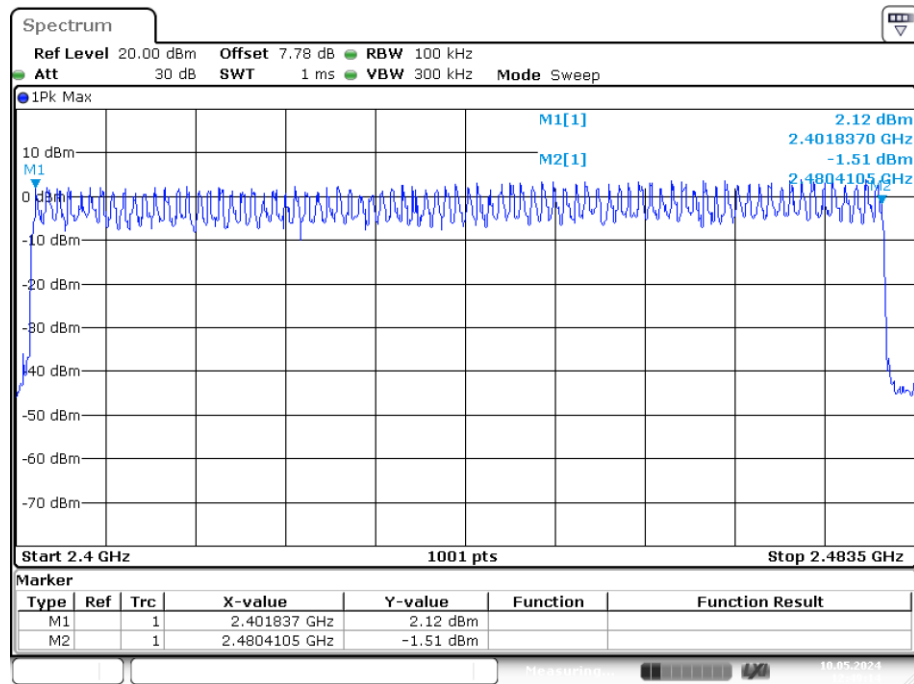

Date: 10.MAY.2024 12:49:14

Hopping No. NVNT 3-DH1 2441MHz Ant1

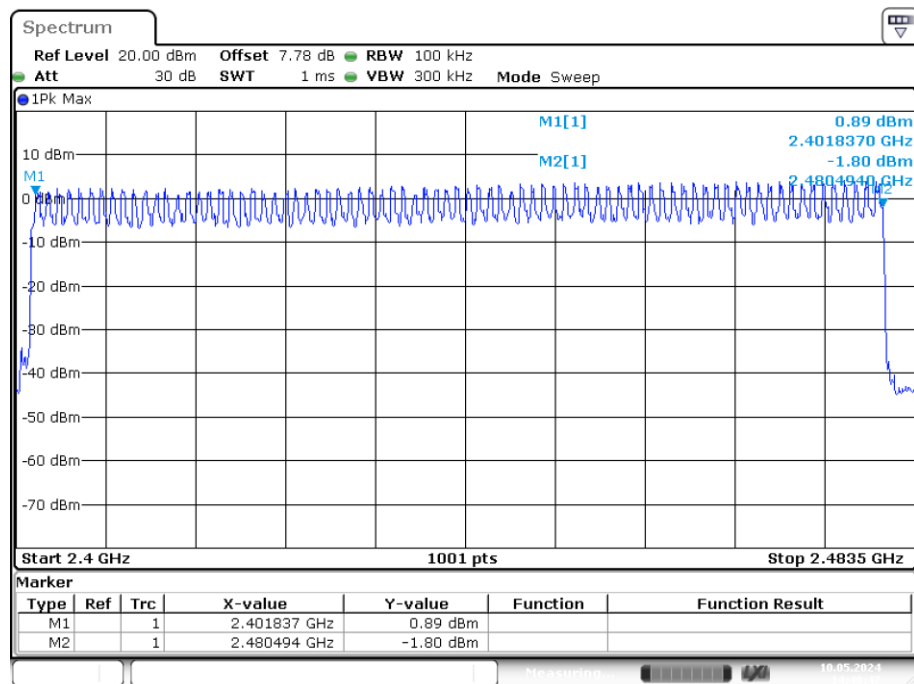

Date: 10.MAY.2024 14:40:46

7. DWELL TIME

7.1. Test limit

Please refer section 15.247 & RSS-247.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.


7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.378	120.960	315	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.632	261.120	164	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.881	307.307	106	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.385	123.200	314	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.636	261.760	159	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.879	307.093	114	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.384	122.880	317	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.635	261.600	159	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.885	307.733	106	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

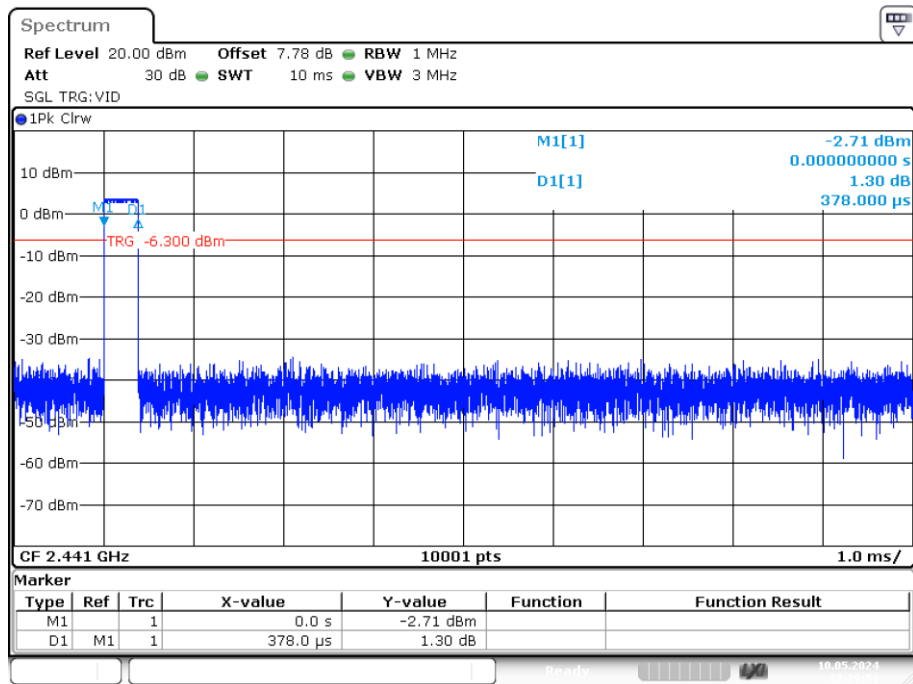


Date: 10.MAY.2024 12:29:50

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

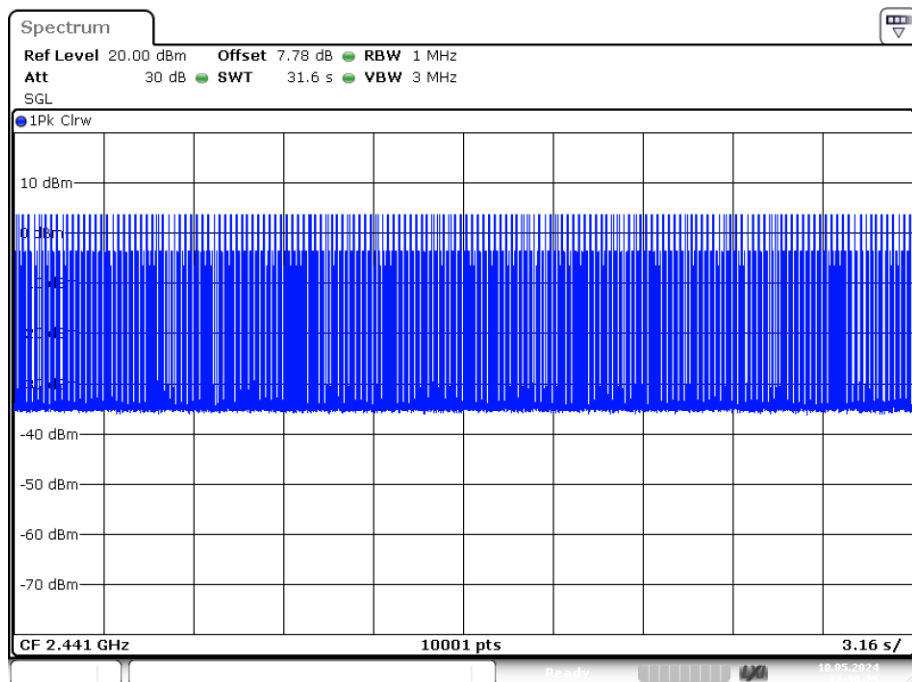


Date: 10.MAY.2024 12:30:25

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

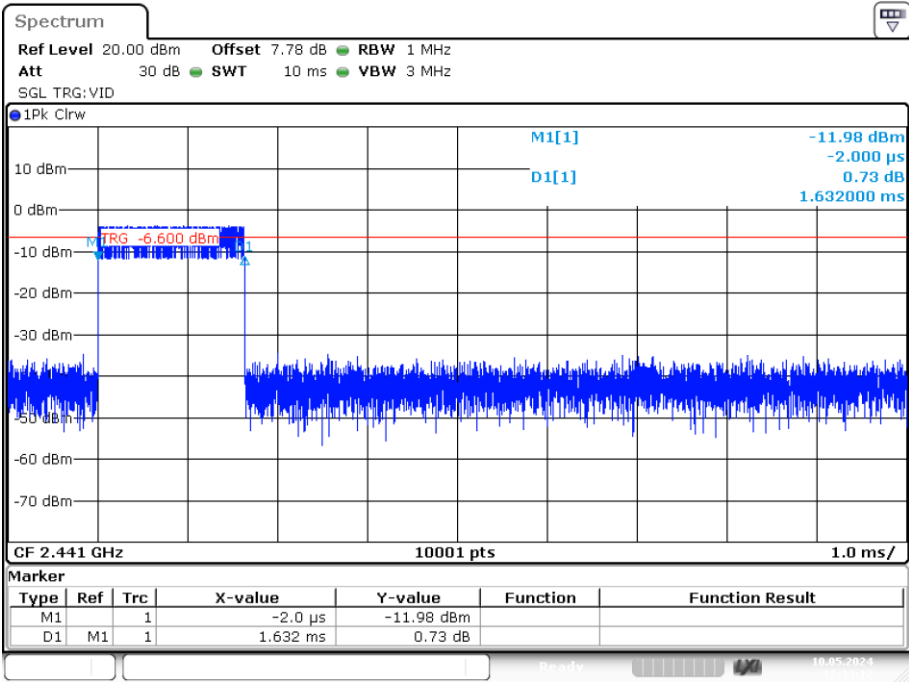


Date: 10.MAY.2024 12:34:12

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

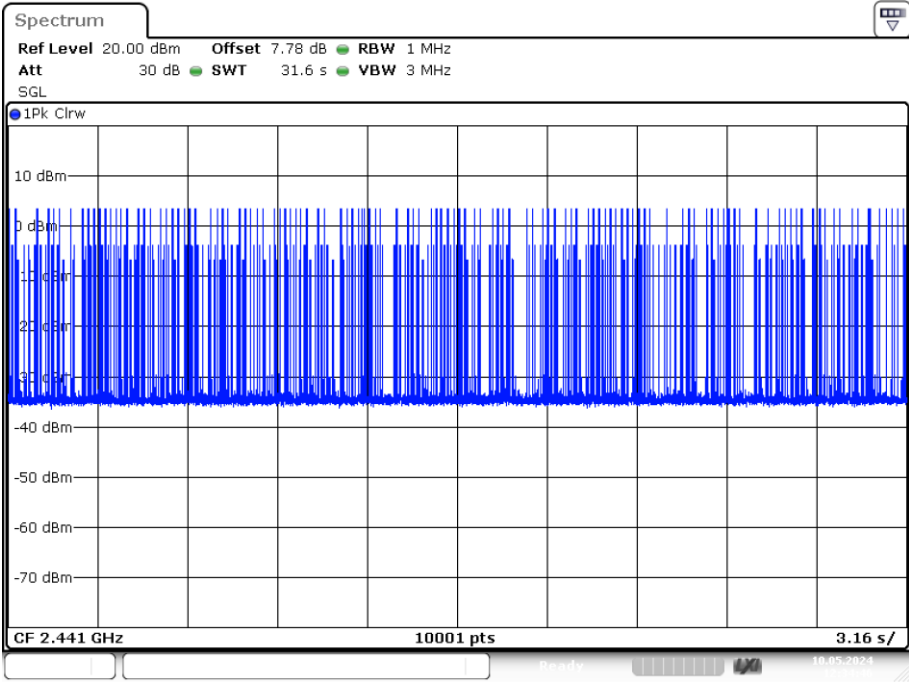


Date: 10.MAY.2024 12:34:46

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

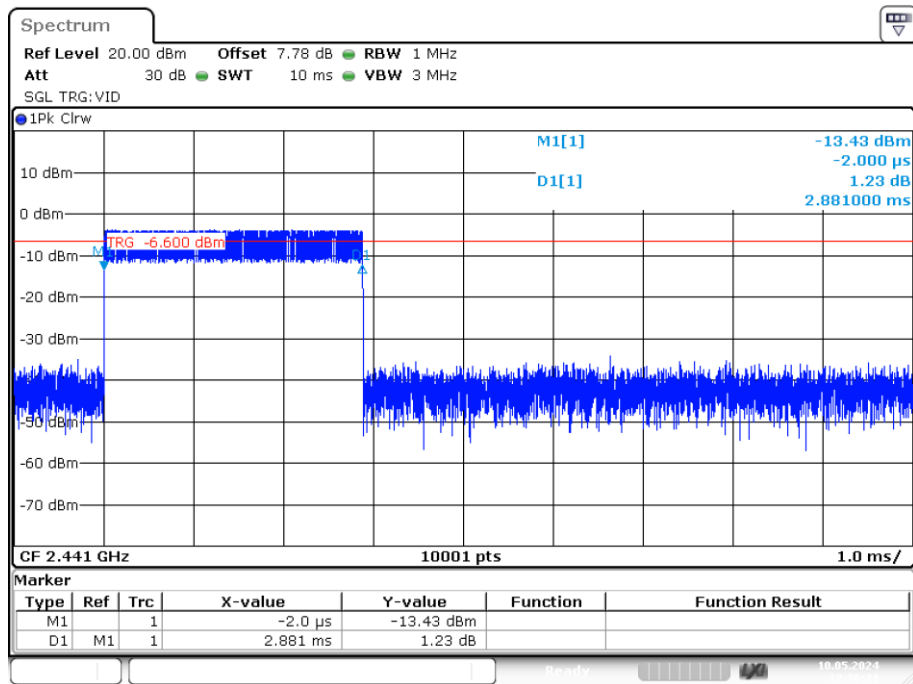


Date: 10.MAY.2024 12:36:21

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

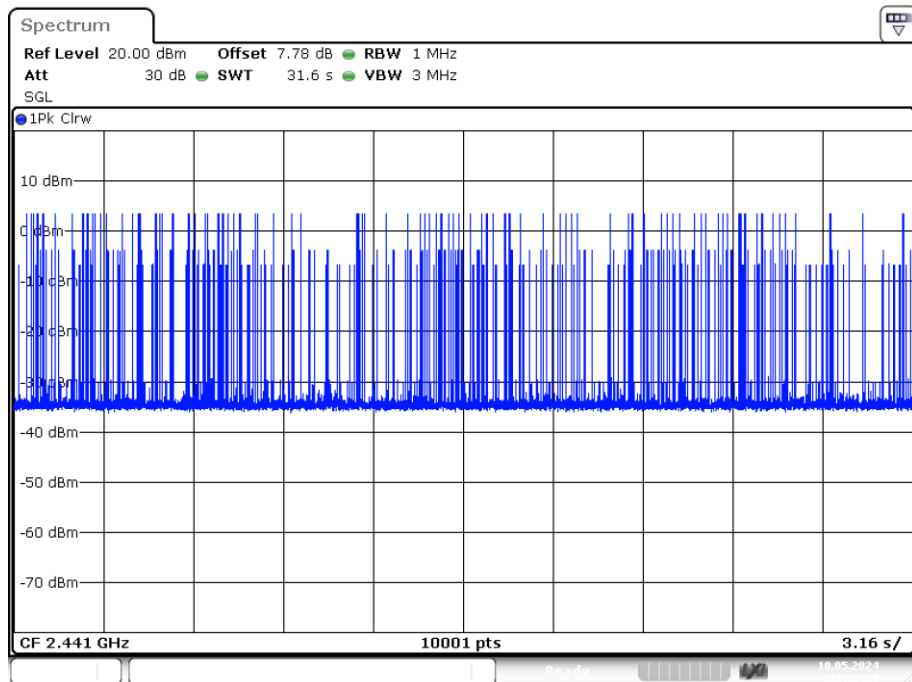


Date: 10.MAY.2024 12:36:56

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

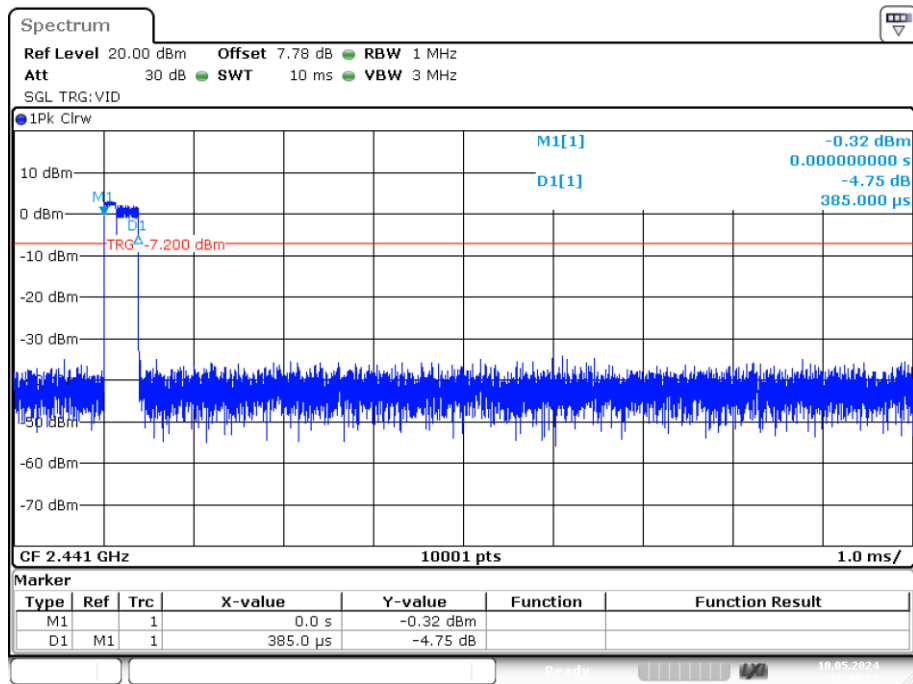


Date: 10.MAY.2024 12:49:21

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

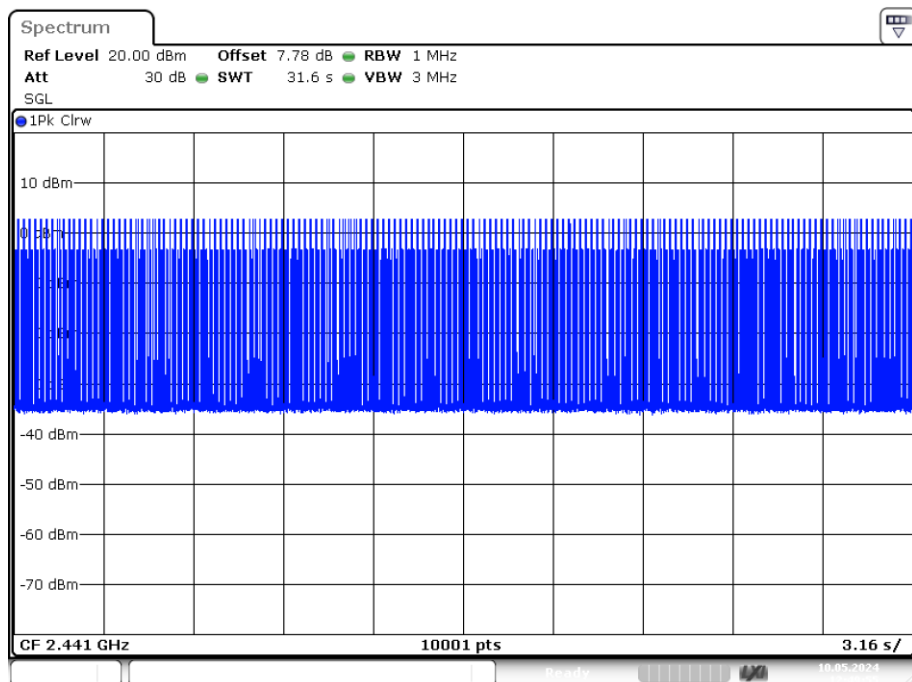


Date: 10.MAY.2024 12:49:56

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

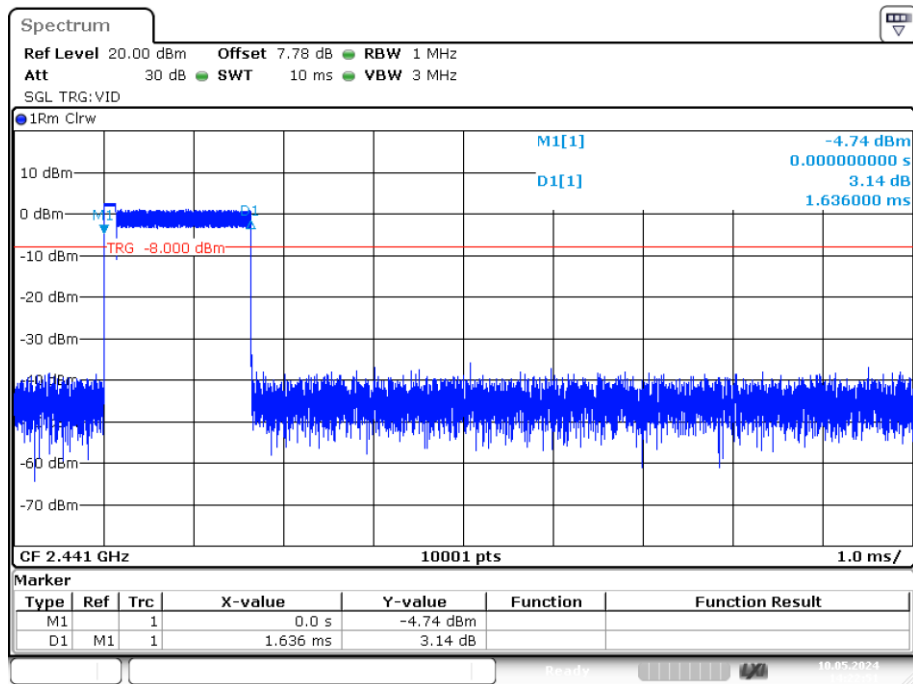


Date: 10.MAY.2024 14:22:51

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

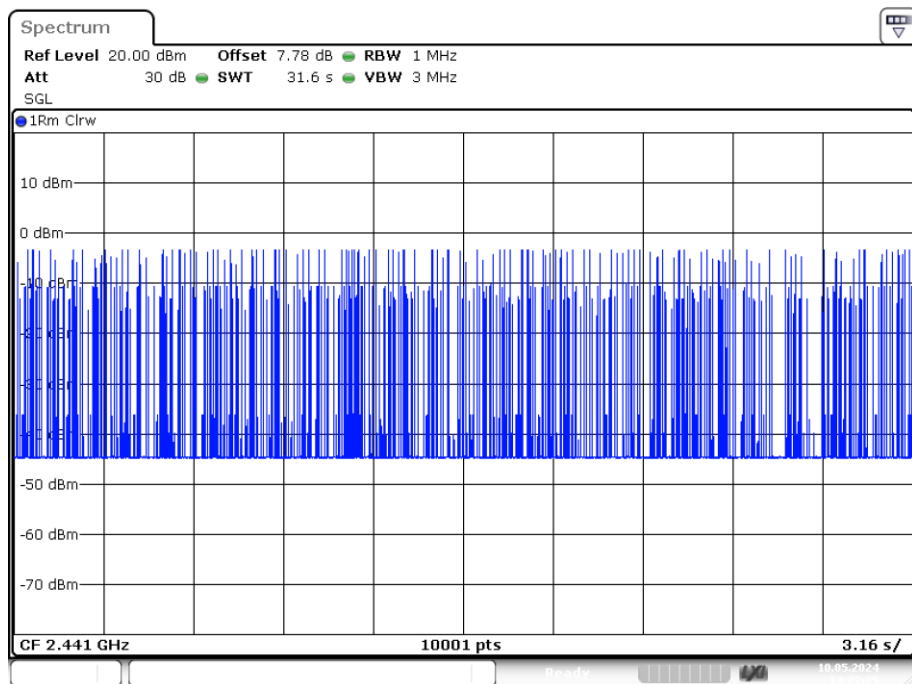


Date: 10.MAY.2024 14:23:25

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

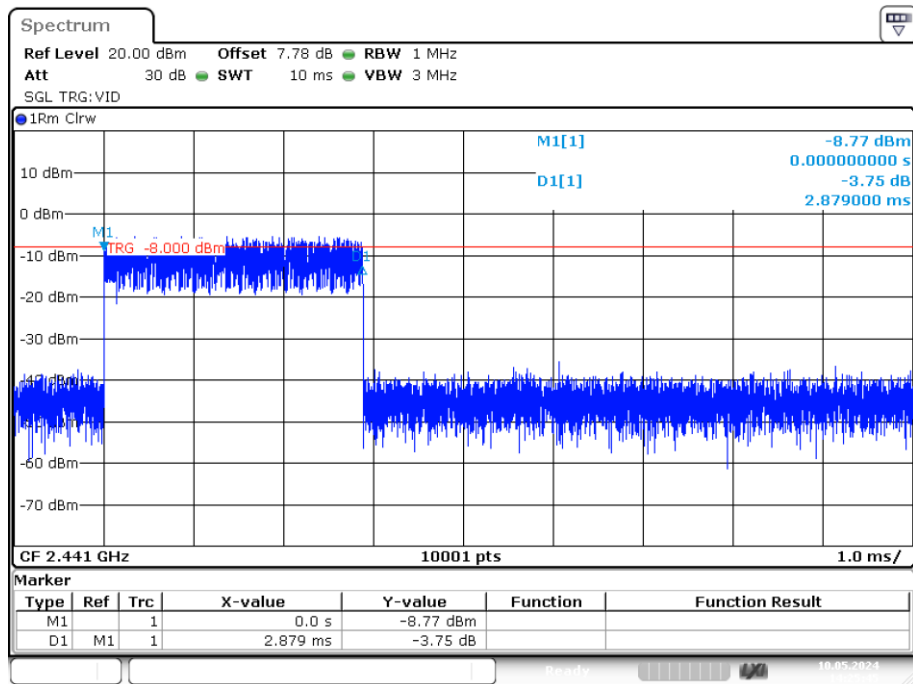


Date: 10.MAY.2024 14:25:44

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

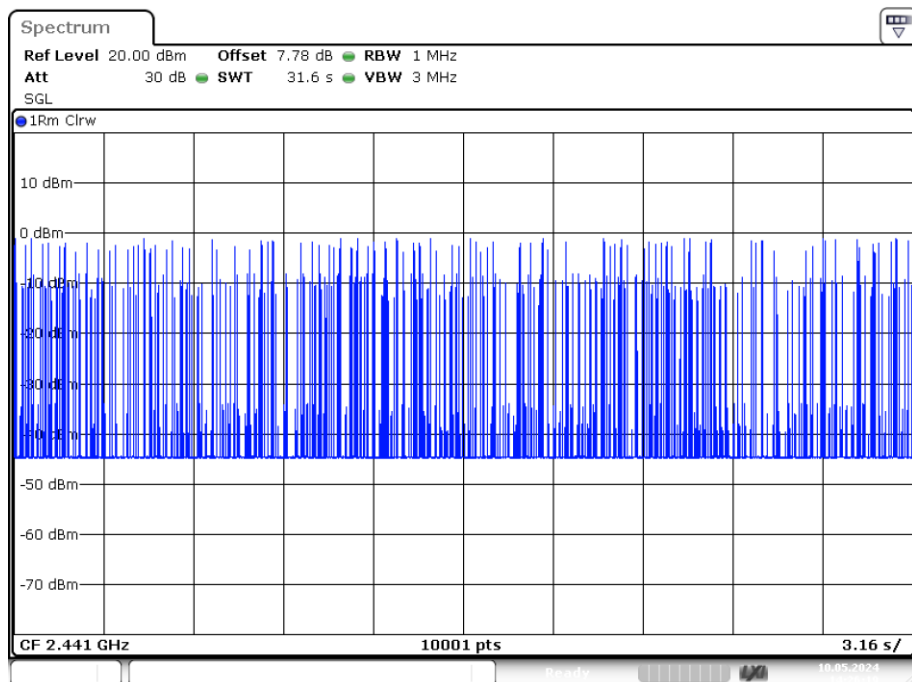


Date: 10.MAY.2024 14:26:19

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

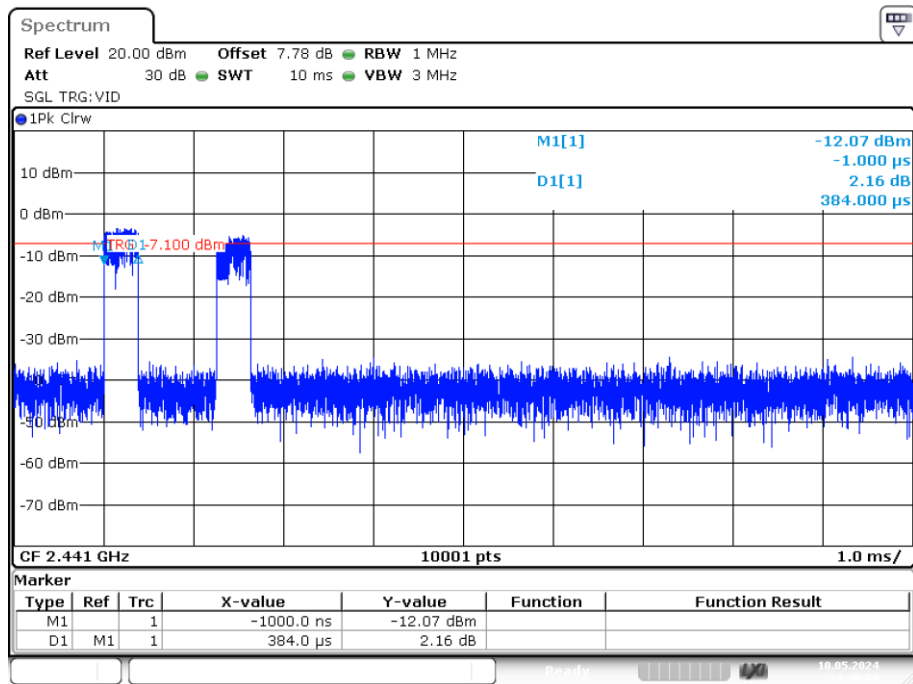


Date: 10.MAY.2024 14:40:53

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

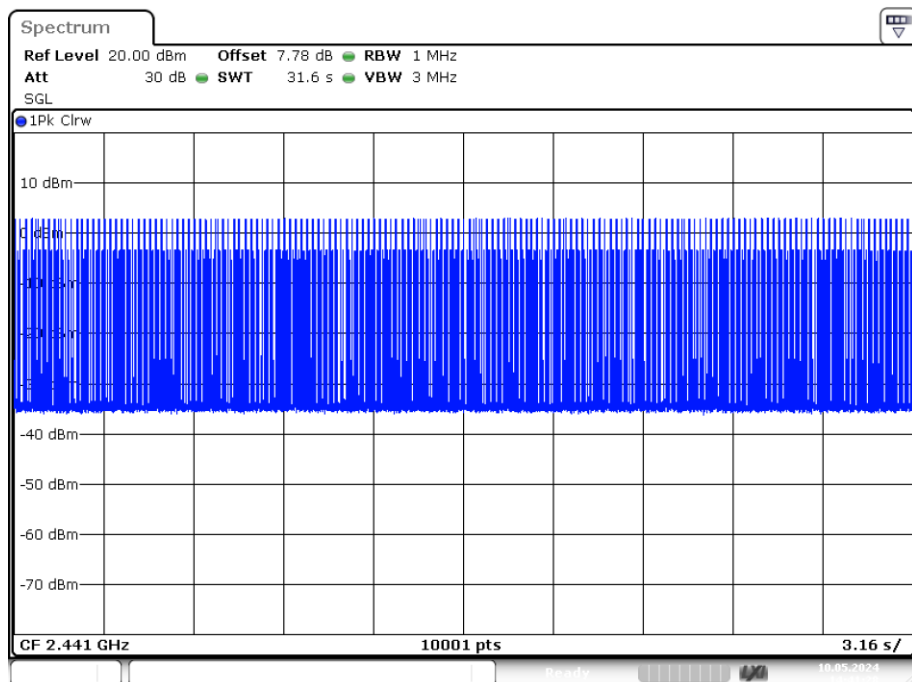


Date: 10.MAY.2024 14:41:28

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

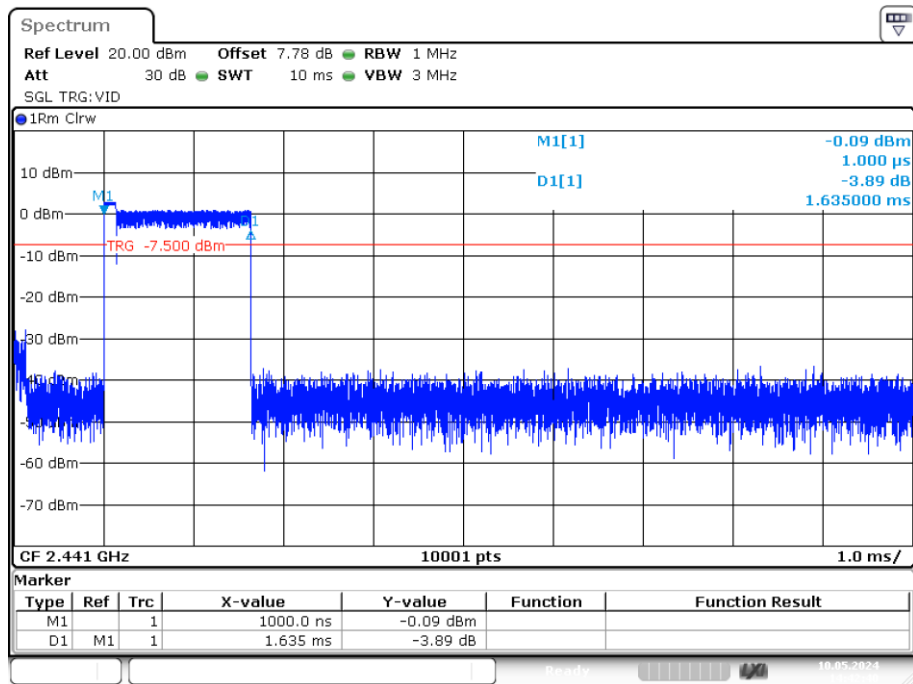

Date: 10.MAY.2024 14:42:41

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

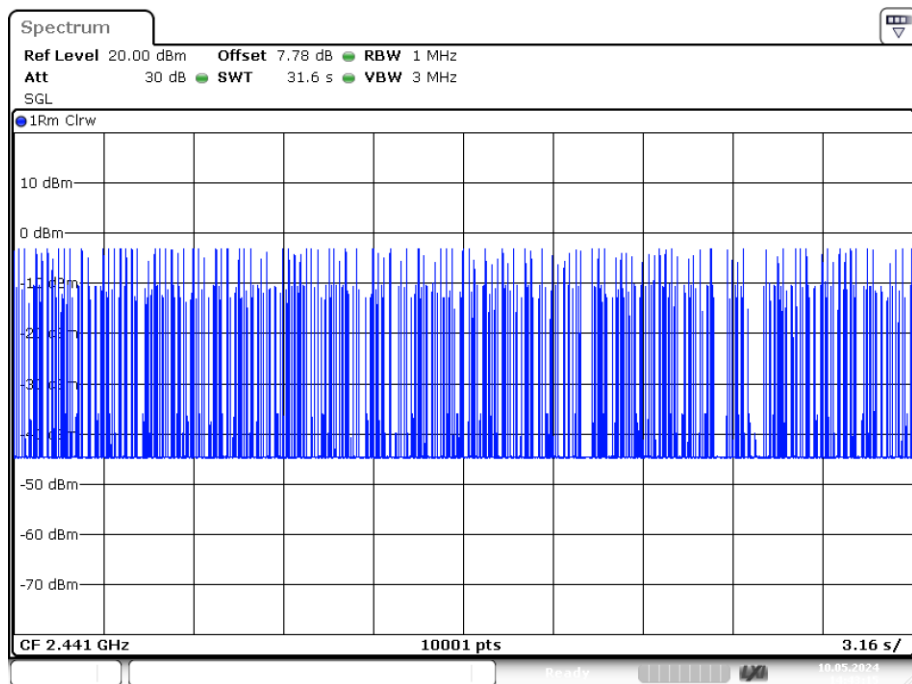

Date: 10.MAY.2024 14:43:15