

Report No.: SEWM2302000040RG01

Rev.: 01 Page: 1 of 37

TEST REPORT

SEWM2302000040RG **Application No.:**

Applicant: Ningbo Sunvot Technology Co., Ltd

Address of Applicant: Building 3,NO 55 Longtan Shan Road, Beilun Daqi, Ningbo, Zhejiang

Manufacturer: Ningbo Sunvot Technology Co., Ltd

Address of Manufacturer: Building 3,NO 55 Longtan Shan Road, Beilun Daqi, Ningbo, Zhejiang

EUT Description: 5G CPE

Model No.: GC600/GC600C/GC600T/GC600A/GC600B

Trade Mark: Sunvot

FCC ID: 2AZGN-GC600-202303

Standards: 47 CFR Part 2

> 47 CFR Part 22 47 CFR Part 24 47 CFR Part 27

Date of Receipt: 2023/02/20

Date of Test: 2023/02/20 to 2023/03/10

Date of Issue: 2023/03/10

Test Result: PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn



Report No.: SEWM2302000040RG01

Rev.: 01 2 of 37 Page:

Version

		Revision Record		
Version	Chapter	Date	Modifier	Remark
01		2023/03/10		Original

Prepared By	weller lin
	(Weller Liu) / Test Engineer
Checked By	men mei,
	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 3 of 37

Contents

1	Versi	on	2
2	Test S	Summary	5
	2.1	UMTS Band 5/LTE Band 5	5
	2.2	UMTS Band 2 /LTE Band 2/CA_2C	6
	2.3	UMTS Band 4 /LTE Band 4 /66	7
	2.4	LTE Band 7/CA_7C	8
3	Gene	ral Information	9
	3.1	Details of Client	9
	3.2	Test Location	9
	3.3	Test Facility	9
	3.4	General Description of EUT	10
	3.5	Test Mode	11
	3.6	Test Environment	11
	3.7	Description of Support Units	11
	3.8	Technical Specification	12
	3.9	Test Frequencies	16
4	Desci	ription of Tests	22
	4.1	Conducted Output Power	22
	4.2	Effective (Isotropic) Radiated Power of Transmitter	23
	4.3	Occupied Bandwidth	24
	4.4	Band Edge at Antenna Terminals	25
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	26
	4.6	Peak-Average Ratio	27
	4.7	Field Strength of Spurious Radiation	28
	4.8	Frequency Stability / Temperature Variation	29
	4.9	Test Setups	30
	4	4.9.1 Test Setup 1	30
	4	4.9.2 Test Setup 2	30
	4	4.9.3 Test Setup 3	31
	4.10	Test Conditions	32



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040R0	eport No.:	//W2302000040RG0
------------------------------	------------	------------------

Rev.:	01
Page:	4 of 37

5	Main Test Instruments	34
6	Measurement Uncertainty	36
	Appendixes	



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 5 of 37

2 Test Summary

2.1 UMTS Band 5/LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	ERP≤7W	Section 1 of Appendix B.1&B.4	Pass
Peak-Average Ratio	§22.913(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.4	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.4	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.4	Pass
Band Edges Compliance	§2.1051, §22.917(a)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.4	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.4	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B.1&B.4	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §22.355	≤ ±2.5ppm.	Section 8 of Appendix B.1&B.4	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 6 of 37 Page:

2.2 UMTS Band 2/LTE Band 2/CA_2C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP ≤ 2 W	Section 1 of Appendix B.1&B.2&B.7	Pass
Peak-Average Ratio	§24.232(d)	Limit≤13 dB	Section 2 of Appendix B.1&B.2&B.7	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.2&B.7	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.2&B.7	Pass
Band Edges Compliance	§2.1051, §24.238(a)	≤-13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.2&B.7	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.2&B.7	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&B.2&B.7	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §24.235	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1&B.2&B.7	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 7 of 37 Page:

2.3 UMTS Band 4 /LTE Band 4 /66

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP≤1W	Section 1 of Appendix B.1&B.3&B.6	Pass
Peak-Average Ratio	§27.50(d)(5)	Limit≤13 dB	Section 2 of Appendix B.1&B.3&B.6	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.1&B.3&B.6	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.1&B.3&B.6	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B.1&B.3&B.6	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13 dBm/1 MHz, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B.1&B.3&B.6	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B.1&B.3&B.6	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.1&B.3&B.6	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 8 of 37

2.4 LTE Band 7/CA_7C

Tost Itom	ECC Bula Na	Paguiromente	Test Result	Verdict
Test Item Effective	FCC Rule No.	Requirements	rest Result	verdict
(Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.5&B.8	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.5&B.8	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.5&B.8	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.5&B.8	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.5&B.8	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25 dBm/ 1 MHz 1	Section 6 of Appendix B.5&B.8	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz X MHz 10th harmonics X=Max {6MHz, EBW}	Section 7 of Appendix B.5&B.8	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.5&B.8	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 9 of 37

3 General Information

3.1 Details of Client

Applicant:	Ningbo Sunvot Technology Co., Ltd
Address of Applicant:	Building 3,NO 55 Longtan Shan Road, Beilun Daqi,Ningbo,Zhejiang
Manufacturer:	Ningbo Sunvot Technology Co., Ltd
Address of Manufacturer:	Building 3,NO 55 Longtan Shan Road, Beilun Daqi,Ningbo,Zhejiang

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the full listed extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 鄉編: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 10 of 37

3.4 General Description of EUT

FUT Decembrish	CC CDE						
EUT Description:	5G CPE						
Model No.:	GC600/GC600C/GC	600T/	GC600A/GC6	00B			
Trade Mark:	Sunvot						
Hardware Version:	GC600-Main-V1.1	GC600-Main-V1.1					
Software Version:	600.102.1.507	600.102.1.507					
IMEI:	RF Conducted	RF Conducted 867626050019094					
IIVIEI:	RSE 862600060000357						
Antenna Type:	☐External, ⊠Integra	□External, ☑Integrated					
	WCDMA Band II:	WCDMA Band II: 1.94dBi (Ant0)		WCDMA Bar	nd IV:	0.91dBi (Ant0)	
	WCDMA Band V: -1.22dBi (Ant0)						
	LTE Band 2:	1.94dBi (Ant0)		LTE Band 4:		0.91dBi (Ant0)	
	LTE Band 5:	-1.22dBi (Ant0)		LTE Band 7:		3.43dBi (Ant0)	
Antenna Gain:	LTE Band 66:	0.91d	Bi (Ant0)				
	LTE CA_2C:	1.94d	Bi (Ant0)	LTE CA_7C:		3.43dBi (Ant0)	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.					provided by the	
DE Calla	0.8dB (Below 1GHz)		1.0dB (1.0~2	2.4GHz)	1.2dB	(2.4~3.4GHz)	
RF Cable:	1.5dB (Above 3.4GH	z)					
Remark:							

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T

South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 鄉編: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 11 of 37 Page:

3.5 Test Mode

Test Mode	Test Modes Description		
UMTS/TM1	UMTS system, WCDMA, QPSK modulation		
LTE/TM1	LTE system, QPSK modulation		
LTE/TM2	LTE system, 16QAM modulation		
LTE/TM3 LTE system, 64QAM modulation			
Remark: The test mode(s) are selected according to relevant radio technology specifications.			

3.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests			
Relative Humidity		44-46 % RH Ambient			
Value		Temperature(°C)	Voltage(V)		
NTNV		22~23	12.0		
LTLV		-30	10.5		
LTHV		-30	13.5		
HTLV		50	10.5		
HTHV		50	13.5		
Remark:					
NV: Normal Voltage LV: Low		/ Extreme Test Voltage	HV: High Extreme Test Voltage		
NT: Normal Temperature	LT: Low	Extreme Test Temperature	HT: High Extreme Test Temperature		

3.7 Description of Support Units

The EUT has been tested as an independent unit.





Report No.: SEWM2302000040RG01

Rev.: 01 12 of 37 Page:

3.8 Technical Specification

Characteristics	Description						
Radio System Type	⊠ UMTS	□ LTE					
	Band		TX		RX	RX	
	UMTS Band II		1850 to 19	10 MHz	1930 to ²	1930 to 1990 MHz	
	UMTS Band IV		1710 to 17	55 MHz	2110 to 2	2155 MHz	
	UMTS Band V	,	824 to 849	MHz	869 to 89	94 MHz	
	LTE Band 2		1850 to 19	10 MHz	1930 to 1	1990 MHz	
	LTE Band 4		1710 to 17	55 MHz	2110 to 2	2155 MHz	
Supported Frequency Range	LTE Band 5		824 to 849	MHz	869 to 89	94 MHz	
	LTE Band 7		2500 to 25	70 MHz	2620 to 2	2690 MHz	
	LTE Band 66		1710 to 178	80 MHz	2110 to 2	2200 MHz	
	LTE CA:						
	LTE CA_2C; LTE CA_7C;						
	LTE CA_2A-4A; LTE CA_2A-7A; LTE CA_4A-5A; LTE CA_4A-7A;						
	LTE CA_5A-7A; LTE CA_5A-66A; LTE CA_7A-7A; LTE CA_66A-66A;						
	UMTS system: ⊠5 MHz						
	LTE Band 2		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
			⊠15 MHz	⊠20 MHz			
	LTE Band 4		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
			⊠15 MHz	⊠20 MHz			
	LTE Band 5		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
	LTE Band 7		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
	LTE Band66		⊠1.4 MHz	⊠3 MHz	⊠5 MHz	⊠10 MHz	
Supported Channel Bandwidth	LTL Bandoo		⊠15MHz	⊠20MHz			
			⊠10MHz+1	15MHz	⊠10MHz+	20MHz	
			⊠15MHz+1	10MHz	⊠15MHz+	15MHz	
	LTE Band CA	_2C	⊠15MHz+2	20MHz	⊠20MHz+	10MHz	
			⊠20MHz+15MHz		⊠20MHz+	20MHz	
			⊠20MHz+5MHz		⊠5MHz+2	0MHz	
			⊠10MHz+2	20MHz	⊠15MHz+	10MHz	
	LTE Band CA_	_7C	⊠15MHz+1	15MHz	⊠15MHz+	20MHz	
			⊠20MHz+1	10MHz	⊠20MHz+	15MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 13 of 37 Page:

	Page: 13 of 37				
		⊠20MF	Hz+20MHz		
	• • • • • • • • • • • • • • • • • • • •			SDPA,HSPA+, but only the	
	worst case was tested	and the data	displayed in t	his report.	
Characteristics	Description				
	UMTS:	QPSK			
	Band II	4M17F9W			
	Band IV	4M15F9W			
	Band V	4M16F9W			
	E-UTRA:	QPSK	16QAM	64QAM	
		1M09G7D	1M11W7D	1M11W7D	
		2M70G7D	2M70W7D	2M70W7D	
	LTE Band 2	4M48G7D	4M47W7D	4M48W7D	
	LIE Ballu Z	8M94G7D	8M93W7D	8M95W7D	
		13M5G7D	13M5W7D	13M5W7D	
		17M9G7D	17M9W7D	17M9W7D	
	LTE Band 4	1M09G7D	1M10W7D	1M11W7D	
		2M70G7D	2M70W7D	2M70W7D	
Designation of Emissions (Remark: the necessary		4M47G7D	4M47W7D	4M48W7D	
bandwidth of which is the		8M95G7D	8M93W7D	8M95W7D	
worst value from the measured occupied		13M5G7D	13M5W7D	13M5W7D	
bandwidths for each type of		17M9G7D	17M9W7D	17M9W7D	
channel bandwidth configuration.)		1M09G7D	1M10W7D	1M11W7D	
oomigaration.,		2M70G7D	2M71W7D	2M70W7D	
	LTE Band 5	4M47G7D	4M47W7D	4M48W7D	
		8M96G7D	8M94W7D	8M96W7D	
		4M47G7D	4M47W7D	4M48W7D	
		8M95G7D	8M92W7D	8M95W7D	
	LTE Band 7	13M5G7D	13M5W7D	13M5W7D	
		17M9G7D	17M9W7D	17M9W7D	
		1M09G7D	1M11W7D	1M11W7D	
		2M70G7D	2M70W7D	2M70W7D	
	LTE Band 66	4M47G7D	4M47W7D	4M49W7D	
		8M94G7D	8M92W7D	8M95W7D	
		13M5G7D	13M5W7D	13M5W7D	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions.frems-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its internation only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government to expend a suppearance of his document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or emil: CAD Doccheck@ss.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 14 of 37

		rage. 14 01 37		
		17M9G7D 17M9W7D 17M9W7D		
		50RB+75RB:		
		23M2G7D 23M2W7D 23M2W7D		
		50RB+100RB:		
		27M8G7D 27M7W7D 27M8W7D		
		75RB+50RB:		
		23M2G7D 23M2W7D 23M3W7D		
		75RB+75RB:		
		28M4G7D 28M4W7D 28M3W7D		
		75RB+100RB:		
	LTE Band CA 2C	32M7G7D 32M6W7D 32M6W7D		
	LTE Band CA_2C	100RB+50RB:		
		27M9G7D 27M8W7D 27M7W7D		
		100RB+75RB:		
		32M7G7D 32M7W7D 32M6W7D		
		100RB+100RB:		
		37M8G7D 37M8W7D 37M7W7D		
		100RB+25RB:		
		23M0G7D 23M0W7D 22M9W7D		
		25RB+100RB:		
		23M0G7D 22M9W7D 22M9W7D		
		50RB+100RB:		
		27M8G7D 27M7W7D 27M7W7D		
		75RB+50RB:		
		23M2G7D 23M2W7D 23M2W7D		
		75RB+75RB:		
		28M4G7D 28M3W7D 28M3W7D		
	LTE Band CA_7C	75RB+100RB:		
		32M6G7D 32M6W7D 32M6W7D		
		100RB+50RB:		
		27M8G7D 27M7W7D 27M7W7D		
		100RB+75RB:		
		32M7G7D 32M6W7D 32M6W7D		
		100RB+100RB:		
	l			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND Doccheck@sas.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 15 of 37

37M8G7D 37M6W7D 37M7W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 16 of 37

3.9 Test Frequencies

Test Mode	TX / RX RF Channel				
Test Wode TA/RA		Low (L)	Middle (M)	High (H)	
WCDMA Band II	TX RX	Channel 9262	Channel 9400	Channel 9538	
		1852.4 MHz	1880.0 MHz	1907.6 MHz	
		Channel 9662	Channel 9800	Channel 9938	
		1932.4 MHz	1960.0 MHz	1987.6 MHz	

Test Mode	TX / RX RF Channel			
1 est Mode	Test wode 17/17		Middle (M)	High (H)
		Channel 1312	Channel 1413	Channel 1513
WCDMA Band IV	TX	1712.4MHz	1732.6 MHz	1752.6 MHz
VVCDIVIA BATIC TV	DV	Channel 1537	Channel 1638	Channel 1738
	RX	2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TY / DY	TX / RX RF Channel				
1 est Mode	1 est Mode 1 / NA		Middle (M)	High (H)		
WCDMA Band V	TX	Channel 4132	Channel 4182	Channel 4233		
		826.4MHz	836.4 MHz	846.6 MHz		
	DV	Channel 4357	Channel 4407	Channel 4458		
	RX	871.4 MHz	881.4 MHz	891.6 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 17 of 37 Page:

Tank Marak	Dan alveidable	TV / DV		RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 18607	Channel 18900	Channel 19193
		TX	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4MHz	RX	Channel 607	Channel 900	Channel 1193
		NA.	1930.7 MHz	1960 MHz	1989.3 MHz
			Channel 18615	Channel 18900	Channel 19185
		TX	1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		NA.	1931.5 MHz	1960 MHz	1988.5 MHz
	5MHz		Channel 18625	Channel 18900	Channel 19175
		TX	1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LTL Danu Z	10MHz	TX	Channel 18650	Channel 18900	Channel 19150
			1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
			Channel 18675	Channel 18900	Channel 19125
		TX	1857.5 MHz	1880 MHz	1902.5 MHz
	15MHz	RX	Channel 675	Channel 900	Channel 1125
		IXX	1937.5 MHz	1960 MHz	1982.5 MHz
	· · · · · · · · · · · · · · · · · · ·	>.	Channel 18700	Channel 18900	Channel 19100
	001411	TX	1860 MHz	1880 MHz	1900 MHz
	20MHz	RX	Channel 700	Channel 900	Channel 1100
		IVA	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 18 of 37 Page:

		RF Channel			
Test Mode	Bandwidth	TX / RX	1 (1)	_	
		,	Low (L)	Middle (M)	High (H)
		- >.	Channel 19957	Channel 20175	Channel 20393
		TX	1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		IXX	2112.5 MHz	2132.5MHz	2152.5 MHz
			Channel 19965	Channel 20175	Channel 20385
		TX	1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	DV	Channel 2000	Channel 2175	Channel 2350
_		RX	2115 MHz	2132.5MHz	2150 MHz
	5MHz		Channel 19975	Channel 20175	Channel 20375
		TX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Daniel 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LTE Band 4	10MHz	TX	Channel 20000	Channel 20175	Channel 20350
			1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
			Channel 20025	Channel 20175	Channel 20325
		TX	1717.5 MHz	1732.5 MHz	1747.5 MHz
	15MHz	RX	Channel 2025	Channel 2175	Channel 2325
_		100	2117.5 MHz	2132.5MHz	2147.5 MHz
			Channel 20050	Channel 20175	Channel 20300
		TX	1720 MHz	1732.5 MHz	1745 MHz
	20MHz	DV	Channel 2050	Channel 2175	Channel 2300
		RX		2132.5MHz	2145 MHz

Test Mode	Bandwidth	TV / DV	RF Channel			
rest Mode	Dandwidth	TX / RX	Low (L)	Middle (M)	High (H)	
			Channel 20407	Channel 20525	Channel 20643	
		TX	824.7 MHz	836.5 MHz	848.3 MHz	
	1.4MHz	RX	Channel 2407	Channel 2525	Channel 2643	
		INA	869.7 MHz	881.5 MHz	893.3 MHz	
			Channel 20415	Channel 20525	Channel 20635	
		TX	825.5 MHz	836.5 MHz	847.5 MHz	
	3MHz	RX	Channel 2415	Channel 2525	Channel 2635	
LTC Daniel C			870.5 MHz	881.5 MHz	892.5 MHz	
LTE Band 5			Channel 20425	Channel 20525	Channel 20625	
		TX	826.5 MHz	836.5 MHz	846.5 MHz	
	5MHz	RX	Channel 2425	Channel 2525	Channel 2625	
			871.5 MHz	881.5 MHz	891.5 MHz	
			Channel 20450	Channel 20525	Channel 20600	
		TX	829 MHz	836.5 MHz	844 MHz	
	10MHz	RX	Channel 2450	Channel 2525	Channel 2600	
		IXA	874 MHz	881.5 MHz	889 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 19 of 37 Page:

Toot Mode	Dondwidth	TV / DV	_	RF Channel	
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		INA	2622.5 MHz	2655 MHz	2687.5 MHz
			Channel 20800	Channel 21100	Channel 21400
	10MHz 15MHz	TX	2505 MHz	2535 MHz	2565 MHz
		RX	Channel 2800	Channel 3100	Channel 3400
LTC Daniel 7			2625 MHz	2655 MHz	2685 MHz
LTE Band 7		TX	Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
		RX	Channel 2825	Channel 3100	Channel 3375
			2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	RX	Channel 2850	Channel 3100	Channel 3350
		INA.	2630 MHz	2655 MHz	2680 MHz

Toot Made	D and about altib	TV / DV	RF Channel				
Test Mode	Bandwidth	TX / RX	Low (L)	Middle (M)	High (H)		
			Channel 131979	Channel 132322	Channel 132665		
		TX	1710.7 MHz	1745 MHz	1779.3 MHz		
	1.4MHz	RX	Channel 66443	Channel 66786	Channel 67329		
		I KA	2110.7 MHz	2145MHz	2199.3 MHz		
			Channel 131987	Channel 132322	Channel 132657		
		TX	1711.5 MHz	1745 MHz	1778.5MHz		
	3MHz	RX	Channel 66451	Channel 66786	Channel 67321		
		KA.	2111.5 MHz	2145MHz	2198.5MHz		
			Channel 131997	Channel 132322	Channel 132647		
	5MHz	TX	1712.5 MHz	1745 MHz	1777.5 MHz		
		RX	Channel 66461	Channel 66786	Channel 67311		
LTC DanielCC			2112.5 MHz	2145MHz	2197.5 MHz		
LTE Band66	10MHz		Channel 132022	Channel 132322	Channel 132622		
		TX	1715 MHz	1745 MHz	1775 MHz		
		RX	Channel 66486	Channel 66786	Channel 67286		
			2115 MHz	2145MHz	2195 MHz		
		TX	Channel 132047	Channel 132322	Channel 132597		
			1717.5 MHz	1745 MHz	1772.5 MHz		
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261		
_		100	2117.5 MHz	2145MHz	2192.5 MHz		
			Channel 132072	Channel 132322	Channel 132572		
		TX	1720 MHz	1745 MHz	1770 MHz		
	20MHz	DV	Channel 66536	Channel 66786	Channel 67236		
		RX	2120 MHz	2145MHz	2190 MHz		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01

Page: 20 of 37

Table 4.3.1.1.2A-2: Test frequencies for CA_2C

Danuar	CC-Combo /			CC1					CC2		
Range	[RB]	BW [RB]	NuL	Note1 f _{UL} [MHz]	NDL	f _{DL}	BW [RB]	NuL	Note1 f _{UL} [MHz]	NDL	f _{DL}
Low	25+100	25	18633	1853.3	633	1933.3	100	18750	1865	750	1945
		100	18700	1860	700	1940	25	18817	1871.7	817	1951.7
	50+75	50	18653	1855.3	653	1935.3	75	18773	1867.3	773	1947.3
		75	18675	1857.5	675	1937.5	50	18795	1869.5	795	1949.5
	50+100	50	18655	1855.5	655	1935.5	100	18799	1869.9	799	1949.9
		100	18700	1860	700	1940	50	18844	1874.4	844	1954.4
	75+75	75	18675	1857.5	675	1937.5	75	18825	1872.5	825	1952.5
	75+100	75	18678	1857.8	678	1937.8	100	18849	1874.9	849	1954.9
		100	18700	1860	700	1940	75	18871	1877.1	871	1957.1
	100+100	100	18700	1860	700	1940	100	18898	1879.8	898	1959.8
Mid	25+100	25	18808	1870.8	808	1950.8	100	18925	1882.5	925	1962.5
		100	18875	1877.5	875	1957.5	25	18992	1889.2	992	1969.2
	50+75	50	18829	1872.9	829	1952.9	75	18949	1884.9	949	1964.9
		75	18851	1875.1	851	1955.1	50	18971	1887.1	971	1967.1
	50+100	50	18806	1870.6	806	1950.6	100	18950	1885	950	1965
		100	18851	1875.1	851	1955.1	50	18995	1889.5	995	1969.5
	75+75	75	18825	1872.5	825	1952.5	75	18975	1887.5	975	1967.5
	75+100	75	18803	1870.3	803	1950.3	100	18974	1887.4	974	1967.4
		100	18826	1872.6	826	1952.6	75	18997	1889.7	997	1969.7
	100+100	100	18801	1870.1	801	1950.1	100	18999	1889.9	999	1969.9
High	25+100	25	18983	1888.3	983	1968.3	100	19100	1900	1100	1980
		100	19050	1895	1050	1975	25	19167	1906.7	1167	1986.7
	50+75	50	19005	1890.5	1005	1970.5	75	19125	1902.5	1125	1982.5
		75	19027	1892.7	1027	1972.7	50	19147	1904.7	1147	1984.7
	50+100	50	18956	1885.6	956	1965.6	100	19100	1900	1100	1980
		100	19001	1890.1	1001	1970.1	50	19145	1904.5	1145	1984.5
	75+75	75	18975	1887.5	975	1967.5	75	19125	1902.5	1125	1982.5
	75+100	75	18929	1882.9	929	1962.9	100	19100	1900	1100	1980
		100	18951	1885.1	951	1965.1	75	19122	1902.2	1122	1982.2
	100+100	100	18902	1880.2	902	1960.2	100	19100	1900	1100	1980
Note 1:	Carriers in inc	reasing f	requency	order.							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/T

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

15000 t (86–512) 62992980 15000 t (86–512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 21 of 37 Page:

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB_agg} [RB]			CC1 Note1					CC2 Note1		
		BW		fuL		f _{DL}	BW		fuL		f _{DL}
		[RB]	NuL	[MHz]	N _{DL}	[MHz]	[RB]	NuL	[MHz]	NDL	[MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1:	Carriers in inc	reasing f	requency	order.							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01

22 of 37 Page:

Description of Tests 4

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1





Report No.: SEWM2302000040RG01

Rev.: 01 Page: 23 of 37

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions-Terms-and-Cond



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 24 of 37

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- 5. Trace mode = max hold
- Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents as http://www.sgs.com/en/Terms-and-Conditions.formate-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this lest report refer only to the sample(s) tested and such sample(s) are retained for 50 days only.



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 25 of 37

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize





Report No.: SEWM2302000040RG01

Rev.: 01 Page: 26 of 37

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-and-Conditions/Terms-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any, The Company's sole responsibility is to its Client and this document does not exonerate parties to it transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgety or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fulliast extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained by 30 days only.



Report No.: SEWM2302000040RG01

Rev.: 01 27 of 37 Page:

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power





Report No.: SEWM2302000040RG01

Rev.: 01 28 of 37 Page:

4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel, the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dBμV/m) = Measured amplitude level (dBμV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBμV/m) + 20 log D - 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20*LOG(3/1) = 9.54 dB.

Remark: Reference test setup 2

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, such as a fair this of the state of the state

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000 t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01 29 of 37 Page:

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2302000040RG01


Rev.: 01 Page: 30 of 37

4.9 Test Setups

4.9.1 Test Setup 1

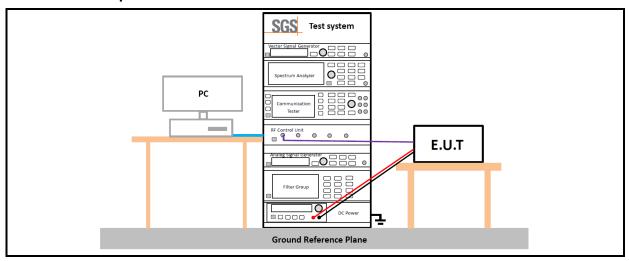

4.9.2 Test Setup 2

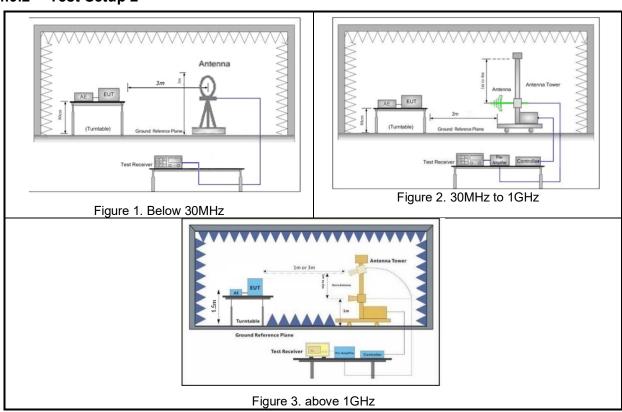



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone; 88-759 8307 1443.


South of No. 6 Plant, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 鄉編: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 31 of 37

4.9.3 Test Setup 3

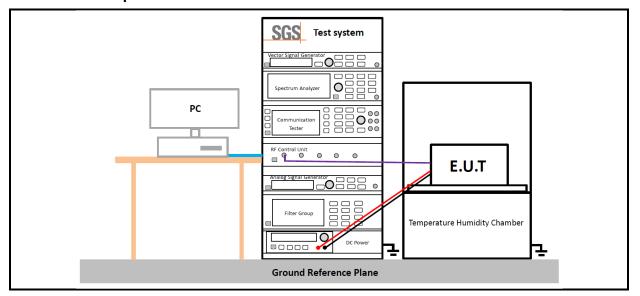



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 32 of 37 Page:

4.10 Test Conditions

	artions — — — — — — — — — — — — — — — — — — —					
	Transmit Output Power Data - Average Power, Total					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3					
	Peak-to-Average Ratio					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3					
	Modulation Characteristics					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	M (M= middle channel)					
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3					
	Bandwidth - Occupied Bandwidth					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3					
	Bandwidth - Emission Bandwidth					
Test Case	Test Conditions					
Test Environment	Ambient Climate & Rated Voltage					
Test Setup	Test Setup 1					
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)					
Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2;LTE/TM3					
	Band Edges Compliance					
Test Case	Test Conditions					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 33 of 37

	1 age. 66 61 67
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, H (L= low channel, H= high channel)
Test Mode	UMTS/TM1;LTE/TM1
	Spurious Emission at Antenna Terminals
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	UMTS/TM1;LTE/TM1
	Field Strength of Spurious Radiation
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 2
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	UMTS/TM1;LTE/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	Frequency Stability
Test Case	Test Conditions
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage
TOST ETIVILORITION	(2) VL, VN and VH of Rated Voltage at Ambient Climate.
Test Setup	Test Setup 3
RF Channels (TX)	M (M= middle channel)
Test Mode	UMTS/TM1;LTE/TM1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 Page: 34 of 37

5 Main Test Instruments

	RF conducted test							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05			
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16			
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR			
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22			
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05			
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05			
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05			
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15			
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/ent/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/ent/Terms-and-Conditions.Ferms-bocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CND_Doccheck@sps.com

South of No. Florit, No. 1, Runsherg Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Pikol Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

idane 215000 t (86-512) 62992980 邮编: 215000 t (86-512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG01

Rev.: 01 35 of 37 Page:

		RSE Test Sy	/stem		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter*	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 8307 1443, or email: CND Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980



Report No.: SEWM2302000040RG01

Rev.: 01

Page: 36 of 37

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in

accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Dedicted Emission	± 4.88dB (30M -1GHz)
7	Radiated Emission	± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{cispr/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWM2302000040RG01

Rev.: 01 Page: 37 of 37

7 Appendixes

• •	
Appendix A.3	WWAN Setup Photos
Appendix B.1	WCDMA Band II & IV & V
Appendix B.2	LTE Band 2
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 7
Appendix B.6	LTE Band 66
Appendix B.7	LTE CA_2C
Appendix B.8	LTE CA_7C

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio