Report No.: SEWM2302000040RG02

Rev.: 01

Page: 1 of 33

## **TEST REPORT**

**Application No.:** SEWM2302000040RG

Applicant: Ningbo Sunvot Technology Co., Ltd

Building 3,NO 55 Longtan Shan Road, Beilun Daqi,Ningbo,Zhejiang Address of Applicant:

Manufacturer: Ningbo Sunvot Technology Co., Ltd

Address of Manufacturer: Building 3,NO 55 Longtan Shan Road, Beilun Daqi, Ningbo, Zhejiang

**EUT Description:** 5G CPE

GC600/GC600C/GC600T/GC600A/GC600B Model No.:

**Trade Mark:** Sunvot

FCC ID: 2AZGN-GC600-202303

Standards: 47 CFR Part 2

47 CFR Part 27

Date of Receipt: 2023/02/20

Date of Test: 2023/02/20 to 2023/03/16

Date of Issue: 2023/03/16

PASS \* **Test Result:** 

Authorized Signature:

Panta Sun Wireless Laboratory Manager



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000

t (86-512) 62992980

<sup>\*</sup> In the configuration tested, the EUT detailed in this report complied with the standards specified above.



Report No.: SEWM2302000040RG02

Rev.: 01 Page: 2 of 33

## 1 Version

Revision Record					
Version	Version Chapter Date Modifier Remark				
01		2023/03/16		Original	

Prepared By	weller liu
	(Weller Liu) / Test Engineer
Checked By	well wei
	(Well Wei) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.: Page: 3 of 33

### Content

1	Ve	ersion	2
2		est Summary	
	2.1	NR Band n7(ENDC DC 2A n7A / DC 66A n7A)	
	2.2	NR Band n77/NR Band n78 (ENDC DC_2A_n78A/ DC_4A_n78A / DC_7	
	/ DC	C 66A n78A)	
3	Ge	eneral Information	7
	3.1	Client Information	7
	3.2	Test Location	7
	3.3	Test Facility	7
	3.4	General Description of EUT	8
	3.5	Test Mode	10
	3.6	Test Environment	10
	3.7	Description of Support Units	10
	3.8	Technical Specification	11
	3.9	Test Frequencies	13
	3.9	9.1 Reference test frequencies for NR operating band n7	13
		9.2 Reference test frequencies for NR operating band n77	
		9.3 Reference test frequencies for NR operating band n78	
4	De	escription of Tests	
	4.1	Conducted Output Power	
	4.2	Effective (Isotropic) Radiated Power of Transmitter	
	4.3	Occupied Bandwidth	
	4.4	Band Edge at Antenna Terminals	
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	
	4.6	Peak-Average Ratio	
	4.7	Field Strength of Spurious Radiation	
	4.8	Frequency Stability / Temperature Variation	
	4.9	Test Setups	
		9.1 Test Setup 1	
		9.2 Test Setup 2	
		9.3 Test Setup 3	
_	4.10		
5		ain Test Instruments	
6		easurement Uncertainty	
7	Ar	ppendixes	33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2302000040RG02

Rev.: 01 Page: 4 of 33

## 2 Test Summary

## 2.1 NR Band n7(ENDC DC\_2A\_n7A / DC\_66A\_n7A)

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.9	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.9	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.9	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.9	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as de ned in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 5 of Appendix B.9	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1 MHz 1 MHz 9 kHz 95 MHz x MHz 10th harmonics X=Max {OMHz, EBW}	Section 6 of Appendix B.9	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge  -25dBm/ 1 MHz 1	Section 7 of Appendix B.9	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.9	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at <a href="https://www.sgs.com/er/Terms-and-Conditions.ard,">https://www.sgs.com/er/Terms-and-Conditions.ard,</a> of relectronic format document subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/er/Terms-and-Conditions/Terms-e-Document.asgs.">https://www.sgs.com/er/Terms-and-Conditions/Terms-e-Document.asgs.</a>
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company. Any unauthorized alteration, forgor or fallification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the samples) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.: 01 Page: 5 of 33

# 2.2 NR Band n77/NR Band n78 (ENDC DC\_2A\_n78A/ DC\_4A\_n78A / DC\_7A\_n78A / DC\_66A\_n78A)

#### 3700-3980MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(j)(3)	EIRP ≤ 1W	Section 1 of Appendix B.11&B.13	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.11&B.13	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B.11&B.13	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.11&B.13	Pass
Band Edges Compliance	§2.1051, §27.53(I)(2)	(2) For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed - 13 dBm/MHz. Compliance with this paragraph (I)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.	Section 5 of Appendix B.11&B.13	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(I)(2)	not exceed -13 dBm/MHz.	Section 6 of Appendix B.11&B.13	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(I)(2)	not exceed -13 dBm/MHz	Section 7 of Appendix B.11&B.13	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B.11&B.13	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://mww.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sgx.Attention">https://mww.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sgx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgor falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.: Page: 6 of 33

#### 3450-3550MHz:

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(k)(3)	EIRP ≤ 30dBm	Section 1 of Appendix B.10&B.12	Pass
Peak- Average Ratio	§27.50(k)(4)	FCC: Limit≤13 dB	Section 2 of Appendix B.10&B.12	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B.10&B.12	Pass
Band Edges Compliance	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 5 of Appendix B.10&B.12	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 6 of Appendix B.10&B.12	Pass
Field Strength of Spurious Radiation	§2.1053, §27.50(n)(2)	For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.	Section 7 of Appendix B.10&B.12	Pass
Frequency Stability	§2.1055(a)(1)(b) §2.1055(d)(1) §27.54	Within authorized bands of operation/ frequency block.	Section 8 of Appendix B.10&B.12	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2302000040RG02

Rev.: Page: 7 of 33

### **General Information**

### 3.1 Client Information

Applicant:	Ningbo Sunvot Technology Co., Ltd
Address of Applicant:	Building 3,NO 55 Longtan Shan Road, Beilun Daqi,Ningbo,Zhejiang
Manufacturer:	Ningbo Sunvot Technology Co., Ltd
Address of Manufacturer:	Building 3,NO 55 Longtan Shan Road, Beilun Daqi,Ningbo,Zhejiang

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Weller Liu, Tizzy Song

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

#### Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

### • FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory. Designation Number: CN1312.

Test Firm Registration Number: 717327





Report No.: SEWM2302000040RG02

Rev.: 01 Page: 8 of 33

### 3.4 General Description of EUT

EUT Description:	5G CPE	5G CPE			
Model No.:	GC600/GC600C/G	C600T	/GC600A/GC60	00B	
Trade Mark:	Sunvot				
Hardware Version:	GC600-Main-V1.1				
Software Version:	600.102.1.507				
INACI.	RF Conducted	8676	26050019094		
IMEI:	RSE	8626	00060000357		
Feature:	UL 2*2 MIMO: NR I	UL 2*2 MIMO: NR Band n77; NR Band n78			
HPUE Power Class:	NR Band n77; NR I	NR Band n77; NR Band n78			
Antenna Type:	□External, ⊠Inte	grated			
	NR Band n7:	1.8dBi (Ant5)			
	NR Band n77:	2.0dBi (Ant3) 2.0dBi (Ant5)			Ant5)
Antenna Gain:	NR Band n78:	2.0dE	Bi (Ant3)	2.0dBi (/	Ant5)
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.				
DE Calla	0.8dB (Below 1GHz	<u>z</u> )	1.0dB (1.0~2.	4GHz)	1.2dB (2.4~3.4GHz)
RF Cable:	1.5dB (Above 3.4G	GHz)			,
Remark: As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Pfart, No. 1, Runsteing Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编:215000

15000 t (86–512) 62992980 15000 t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.: 01 Page: 9 of 33

#### **MIMO Model:**

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

• For power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \le 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N<sub>ANT</sub>;

Array Gain =  $5 \log(N_{ANT}/N_{SS}=1)$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \ge 5$ .

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi

• If transmit signals are correlated, then

Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2 / N_{ANT}]$  dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

• If all transmit signals are completely uncorrelated, then Directional gain =  $10 \log[(10^{G1/10} + 10^{G2/10} + ... + 10^{GN/10})/N_{ANT}] dBi$ 

Band ANT Gain3 (dBi)		ANT Gain5 (dBi)	Directional gain (dBi)
NR Band n77:	2.0	2.0	2.0
NR Band n78:	2.0	2.0	2.0



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printee overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 3 days only.



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 10 of 33

### 3.5 Test Mode

Test Mode	Test Modes Description	
NR/TM1	NR system, DFT-s-Pi/2-BPSK modulation	
NR/TM2	NR system, DFT-s-QPSK modulation	
NR/TM3	NR system, DFT-s-16QAM modulation	
NR/TM4	NR system, DFT-s-64QAM modulation	
NR/TM5	NR system, DFT-s-256QAM modulation	
NR/TM6	NR system, CP-QPSK modulation	
NR/TM7	NR system, CP-16QAM modulation	
NR/TM8	NR system, CP-64QAM modulation	
NR/TM9	NR system, CP-256QAM modulation	
Remark: The test mode(s)	are selected according to relevant radio technology specifications.	

### 3.6 Test Environment

Environment Parameter		101.0 kPa Selected Values During Tests		
Relative Humidity		44-46 % RH Ambient		
Value		Temperature(°C)	Voltage(V)	
NTNV		22~23	12.0	
LTLV		-30	10.5	
LTHV		-30	13.5	
HTLV		50	10.5	
HTHV		50	13.5	
Remark:				
NV: Normal Voltage LV: Low		Extreme Test Voltage	HV: High Extreme Test Voltage	
NT: Normal Temperature LT: Low		Extreme Test Temperature	HT: High Extreme Test Temperature	

## 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.attention">https://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 3d days only.



Report No.: SEWM2302000040RG02

Rev.:

Page: 11 of 33

## 3.8 Technical Specification

Characteristics	Description					
Radio System Type	⊠ SA ⊠ NSA					
	Band	TX		RX		
	NR Band n7	2500 to 2570	2500 to 2570 MHz		MHz	
	ND D I 77*	3700 to 3980	MHz	3700 to 3980	MHz	
	NR Band n77*	3450 to 3550	MHz	3450 to 3550	MHz	
	NR Band n78*	3700 to 3800	MHz	3700 to 3800	MHz	
	NR band n/o	3450 to 3550	MHz	3450 to 3550	MHz	
Supported Frequency	ENDC:					
Range	DC_2A_n7A; DC_6	6A_n7A;				
	DC_2A_n78A; DC_	4A_n78A; DC_	7A_n78A; DC_	_66A_n78A		
	Remark: all the ENI	DC are tested,	and only the wo	orst data is pre	sented.	
	Note*:					
	Both NR Band n77				•	
		and NR Band n78 was fully tested, NR Band n77 only test				
	the items of Power.					
	NR Band n7	SCS 15kHz:	N 40 M	N/45 MII	M00 M411	
		⊠5 MHz	⊠10 MHz	⊠15 MHz	⊠20 MHz	
		SCS 30kHz	NAC MALL	∑/00 MII-	∇7.40 MU-	
	NR Band n77	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠40 MHz	
Supported Channel Bandwidth		⊠50 MHz	⊠60 MHz	⊠80 MHz	⊠90 MHz	
Dandwidth		⊠100 MHz				
		SCS 30kHz:	N45.441	Mag. 1411	N 40 MI	
	NR Band n78	⊠10 MHz	⊠15 MHz	⊠20 MHz	⊠40 MHz	
		⊠50 MHz	⊠60 MHz	⊠80 MHz	⊠90 MHz	
		⊠100 MHz DFT-s-Pi/2-				
Designation of		BPSK	CP-16QAM			
Emissions (Remark: the necessary		SCS 15kHz:				
bandwidth of which is	NR Band n7	4M49G7D	4M50W7D			
the worst value from		8M93G7D	9M35W7D			
the measured occupied bandwidths for each		13M4G7D	14M1W7D			
type of channel		17M9G7D	18M9W7D			
bandwidth	NR Band n77	SCS 30kHz:				



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.:

12 of 33 Page:

(3700-3980)   8M61G7D 8M64W7D   12M9G7D 13M7W7D   17M9G7D 18M3W7D   36M9G7D 37M8W7D   45M8G7D 47M4W7D   57M7G7D 57M7W7D   77M1G7D 77M5W7D   86M0G7D 87M6W7D   96M2G7D 97M3W7D   12M9G7D 13M6W7D   12M9G7D 13M6W7D   12M9G7D 13M6W7D   12M9G7D 13M6W7D   17M9G7D 18M2W7D   12M9G7D 13M6W7D   17M9G7D 18M2W7D   17M9G7D 18M2W7D   17M9G7D 17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 17M9G7D   17M9G7D 17M9G7D 12M9G7D 13M7W7D   12M9G7D 13M7W7D   17M9G7D 13M7W7D   17M9G7D 13M7W7D   17M9G7D 18M2W7D   17M9G7D 17M4W7D   17M9G7D 17M9W7D   17M9G7D 1 M9G7D 1 M9G7D 1 M9G7D 1				Page:	12 of 33	
17M9G7D 18M3W7D 35M9G7D 37M8W7D 45M8G7D 47M4W7D 57M7G7D 57M7W7D 77M1G7D 77M5W7D 86M0G7D 87M6W7D 96M2G7D 97M3W7D  CS 30kHz: 8M65G7D 8M65W7D 12M9G7D 13M6W7D 17M9G7D 18M2W7D 17M9G7D 18M2W7D 35M8G7D 37M9W7D 45M7G7D 47M3W7D 57M8G7D 57M8W7D 77M5G7D 77M6W7D 86M0G7D 87M8W7D 96M3G7D 97M6W7D  CS 30kHz: 8M63G7D 8M63W7D 12M9G7D 13M7W7D 17M5G7D 13M7W7D 17M5G7D 13M7W7D 17M5G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 45M7G7D 47M4W7D 57M7G7D 57M6W7D	configuration.)	(3700-3980)	8M61G7D	8M64W7D		
35M9G7D 37M8W7D  45M8G7D 47M4W7D  57M7G7D 57M7W7D  77M1G7D 77M5W7D  86M0G7D 87M6W7D  96M2G7D 97M3W7D  SCS 30kHz:  8M65G7D 8M65W7D  12M9G7D 13M6W7D  17M9G7D 18M2W7D  35M8G7D 37M9W7D  45M7G7D 47M3W7D  57M8G7D 57M8W7D  77M5G7D 77M6W7D  86M0G7D 87M6W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			12M9G7D	13M7W7D		
45M8G7D 47M4W7D			17M9G7D	18M3W7D		
57M7G7D 57M7W7D 77M1G7D 77M5W7D 86M0G7D 87M6W7D 96M2G7D 97M3W7D 96M2G7D 97M3W7D SCS 30kHz: 8M65G7D 8M65W7D 12M9G7D 13M6W7D 17M9G7D 18M2W7D 35M8G7D 37M9W7D 57M8G7D 47M3W7D 57M8G7D 47M3W7D 77M5G7D 77M6W7D 86M0G7D 87M8W7D 96M3G7D 97M6W7D SCS 30kHz: 8M63G7D 8M63W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 17M8G7D 13M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 17M8G7D 18M2W7D 57M7G7D 57M6W7D			35M9G7D	37M8W7D		
77M1G7D 77M5W7D  86M0G7D 87M6W7D  96M2G7D 97M3W7D  SCS 30kHz:  8M65G7D 8M65W7D  12M9G7D 13M6W7D  17M9G7D 18M2W7D  35M8G7D 37M9W7D  45M7G7D 47M3W7D  57M8G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M5G7D 17M6W7D  86M0G7D 87M8W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			45M8G7D	47M4W7D		
86M0G7D 87M6W7D 96M2G7D 97M3W7D SCS 30kHz: 8M65G7D 8M65W7D 12M9G7D 13M6W7D 17M9G7D 18M2W7D 35M8G7D 37M9W7D 45M7G7D 47M3W7D 57M8G7D 57M8W7D 77M5G7D 77M6W7D 86M0G7D 87M8W7D 96M3G7D 97M6W7D SCS 30kHz: 8M63G7D 8M63W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 12M9G7D 13M7W7D 17M8G7D 13M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 45M7G7D 47M4W7D 57M7G7D 47M4W7D 57M7G7D 57M6W7D			57M7G7D	57M7W7D		
96M2G7D 97M3W7D  SCS 30kHz:  8M65G7D 8M65W7D  12M9G7D 13M6W7D  17M9G7D 18M2W7D  35M8G7D 37M9W7D  45M7G7D 47M3W7D  57M8G7D 57M8W7D  77M5G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 18M2W7D  57M7G7D 57M6W7D			77M1G7D	77M5W7D		
SCS 30kHz:  8M65G7D 8M65W7D  12M9G7D 13M6W7D  17M9G7D 18M2W7D  35M8G7D 37M9W7D  45M7G7D 47M3W7D  57M8G7D 57M8W7D  77M5G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  17M8G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			86M0G7D	87M6W7D		
8M65G7D 8M65W7D  12M9G7D 13M6W7D  17M9G7D 18M2W7D  35M8G7D 37M9W7D  45M7G7D 47M3W7D  57M8G7D 57M8W7D  77M5G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			96M2G7D	97M3W7D		
12M9G7D			SCS 30kHz:			
NR Band n78 (3450-3550)  NR Band n78 (3450-3550)  17M9G7D			8M65G7D	8M65W7D		
NR Band n78 (3450-3550)    35M8G7D			12M9G7D	13M6W7D		
(3450-3550)  45M7G7D 47M3W7D  57M8G7D 57M8W7D  77M5G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  NR Band n78 (3700-3800)  45M7G7D 47M4W7D  57M7G7D 57M6W7D			17M9G7D	18M2W7D		
STMSGTD		NR Band n78	35M8G7D	37M9W7D		
77M5G7D 77M6W7D  86M0G7D 87M8W7D  96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D		(3450-3550)	45M7G7D	47M3W7D		
86M0G7D 87M8W7D 96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D 12M9G7D 13M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 45M7G7D 47M4W7D 57M7G7D 57M6W7D			57M8G7D	57M8W7D		
96M3G7D 97M6W7D  SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			77M5G7D	77M6W7D		
SCS 30kHz:  8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			86M0G7D	87M8W7D		
8M63G7D 8M63W7D  12M9G7D 13M7W7D  17M8G7D 18M2W7D  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			96M3G7D	97M6W7D		
12M9G7D 13M7W7D 17M8G7D 18M2W7D 35M8G7D 37M7W7D 45M7G7D 47M4W7D 57M7G7D 57M6W7D			SCS 30kHz:			
17M8G7D 18M2W7D  NR Band n78 (3700-3800)  35M8G7D 37M7W7D  45M7G7D 47M4W7D  57M7G7D 57M6W7D			8M63G7D	8M63W7D		
NR Band n78 (3700-3800) 35M8G7D 37M7W7D 45M7G7D 47M4W7D 57M7G7D 57M6W7D			12M9G7D	13M7W7D		
(3700-3800) 45M7G7D 47M4W7D 57M7G7D 57M6W7D			17M8G7D	18M2W7D		
57M7G7D 57M6W7D			35M8G7D	37M7W7D		
		(3700-3800)	45M7G7D	47M4W7D		
77M1G7D 77M4W7D			57M7G7D	57M6W7D		
			77M1G7D	77M4W7D		
85M8G7D 87M8W7D			85M8G7D	87M8W7D		
96M4G7D 97M4W7D			96M4G7D	97M4W7D		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 13 of 33

### 3.9 Test Frequencies

### 3.9.1 Reference test frequencies for NR operating band n7

3.9.1.1 Test frequencies for NR operating band n7 and SCS 15 kHz

Bandwidth [MHz]	Range	е	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
		Low	2622.5	524500		
	Downlink	Mid	2655	531000	15	
5		High	2687.5	537500		
5		Low	2502.5	500500		
	Uplink	Mid	2535	507000		
		High	2567.5	513500		
		Low	2625	525000		
	Downlink	Mid	2655	531000	15	
10		High	2685	537000		
10		Low	2505	501000		
	Uplink	Mid	2535	507000	-	
		High	2565	513000		
		Low	2627.5	525500		
	Downlink	Mid	2655	531000	15	
15		High	2682.5	536500		
15		Low	2507.5	501500		
	Uplink	Mid	2535	507000		
		High	2562.5	512500		
		Low	2630	526000		
	Downlink	Mid	2655	531000	15	
20		High	2680	536000		
		Low	2510	502000		
	Uplink	Mid	2535	507000	<b></b>	
	· 	High	2560	512000		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

部 邮编: 215000

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.: Page: 14 of 33

### Reference test frequencies for NR operating band n77 3.9.2.1 Test frequencies for NR operating band n77 and SCS 30 kHz

#### 3700-3980:

CBW [MHz]	Range	e	Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3840	656000	30
	Uplink	High	3975	665000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3840	656000	30
	Uplink	High	3972.48	664832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3840	656000	30
	Uplink	High	3969.99	664666	
	Downlink	Low	3720	648000	
40	&	Mid	3840	656000	30
	Uplink	High	3960	664000	1
	Downlink	Low	3725.01	648334	30
50	&	Mid	3840	656000	
	Uplink	High	3954.99	663666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3840	656000	30
	Uplink	High	3949.98	663332	
	Downlink	Low	3740.01	649334	
80	&	Mid	3840	656000	30
	Uplink	High	3939.99	662666	
	Downlink	Low	3745.02	649668	30
90	&	Mid	3840	656000	
	Uplink	High	3934.98	662332	
	Downlink	Low	3750	650000	
100	&	Mid	3840	656000	30
	Uplink	High	3930	662000	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.:

Page: 15 of 33

#### 3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3455.01	630334	
10	&	Mid	3500.01	633334	30
	Uplink	High	3545.01	636334	
	Downlink	Low	3457.5	630500	
15	&	Mid	3500.01	633334	30
	Uplink	High	3542.49	636166	
	Downlink	Low	3460.02	630668	
20	&	Mid	3500.01	633334	30
	Uplink	High	3540	636000	
	Downlink	Low	3470.01	631334	
40	&	Mid	3500.01	633334	30
	Uplink	High	3530.01	635334	1
	Downlink	Low	3475.02	631668	30
50	&	Mid	3500.01	633334	
	Uplink	High	3525	635000	
	Downlink	Low	3480	632000	
60	&	Mid	3500.01	633334	30
	Uplink	High	3519.99	634666	
	Downlink	Low	3490.02	632668	
80	&	Mid	3500.01	633334	30
	Uplink	High	3510	634000	1
	Downlink	Low	3495	633000	30
90	&	Mid	3500.01	633334	
	Uplink	High	3504.99	633666	
	Downlink	Low	1	\	
100	&	Mid	3500.01	633334	30
	Uplink	High	\	\	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.: 01 Page: 16 of 33

3.9.3 Reference test frequencies for NR operating band n78

3.9.3.1 Test frequencies for NR operating band n78 and SCS 30 kHz

#### 3700-3800:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]
	Downlink	Low	3705	647000	
10	&	Mid	3750	650000	30
	Uplink	High	3795	653000	
	Downlink	Low	3707.52	647168	
15	&	Mid	3750	650000	30
	Uplink	High	3792.48	652832	
	Downlink	Low	3710.01	647334	
20	&	Mid	3750	650000	30
	Uplink	High	3789.99	652666	
	Downlink	Low	3720	648000	
40	&	Mid	3750	650000	30
	Uplink	High	3780	652000	
	Downlink	Low	3725.01	648334	30
50	&	Mid	3750	650000	
	Uplink	High	3774.99	651666	
	Downlink	Low	3730.02	648668	
60	&	Mid	3750	650000	30
	Uplink	High	3769.98	651332	
	Downlink	Low	3740.01	649334	
80	&	Mid	3750	650000	30
	Uplink	High	3759.99	650666	1
	Downlink	Low	3745.02	649668	30
90	&	Mid	3750	650000	
	Uplink	High	3754.98	650332	
	Downlink	Low	1	1	
100	&	Mid	3750	650000	30
	Uplink	High	1	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

t (86–512) 62992980 t (86–512) 62992980

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.:

Page: 17 of 33

#### 3450-3550:

CBW [MHz]	Range		Carrier centre [MHz]	Carrier centre [ARFCN]	SS block SCS [kHz]	
	Downlink	Low	3455.01	630334		
10	&	Mid	3500.01	633334	30	
	Uplink	High	3545.01	636334		
	Downlink	Low	3457.5	630500		
15	&	Mid	3500.01	633334	30	
	Uplink	High	3542.49	636166		
	Downlink	Low	3460.02	630668		
20	&	Mid	3500.01	633334	30	
	Uplink	High	3540	636000		
	Downlink	Low	3470.01	631334		
40	&	Mid	3500.01	633334	30	
	Uplink	High	3530.01	635334		
	Downlink	Low	3475.02	631668	30	
50	&	Mid	3500.01	633334		
	Uplink	High	3525	635000		
	Downlink	Low	3480	632000		
60	&	Mid	3500.01	633334	30	
	Uplink	High	3519.99	634666		
	Downlink	Low	3490.02	632668		
80	&	Mid	3500.01	633334	30	
	Uplink	High	3510	634000		
	Downlink	Low	3495	633000	30	
90	&	Mid	3500.01	633334		
	Uplink	High	3504.99	633666		
	Downlink	Low	1	\		
100	&	Mid	3500.01	633334	30	
	Uplink	High	\	\		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 18 of 33

## 4 Description of Tests

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1



Inless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printer overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents witherton is drawn to the limitation of liability, indemnification and jurisdiction issues defined them. Any holder of this document is divised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of liability. The Company's sole responsibility is to its Client and this document does not exonerate parties to ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced to the company and the produced of the company. Any unauthorized alteration, forgor of falsification of the content oppearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the sults shown in this test report refer only to the sample(s) tested and such sample(s) are retained 50 days only.



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 19 of 33

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4

Calculate power in dBm by the following formula:

ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)

EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi)

EIRP=ERP+2.15dB



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

01 Rev.:

Page: 20 of 33

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- RBW = 1 5% of the expected OBW
- VBW ≥ 3 x RBW
- Detector = Peak
- Trace mode = max hold
- Sweep = auto couple
- The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Decument.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-an



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 21 of 33

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- Detector = RMS
- Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- Sweep time = auto couple
- 9. The trace was allowed to stabilize



www.sgsgroup.com.cn



Report No.: SEWM2302000040RG02

Rev.:

Page: 22 of 33

### 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

#### **Test Settings**

- 1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings





Report No.: SEWM2302000040RG02

Rev.:

Page: 23 of 33

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span

#### Remark: Reference test setup 1

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Telectronic Documents at <a href="http://www.sgs.com/en/Terms-and-coliditions/Terms-and-en-Document.aspx">http://www.sgs.com/en/Terms-and-coliditions/Terms-and-coliditi



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 24 of 33

### 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete.

E (dB $\mu$ V/m) = Measured amplitude level ( $\mu$ V/m) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

E (dB $\mu$ V/m) = Measured amplitude level (dB $\mu$ V) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dB $\mu$ V/m) + 20 log D – 104.8; where D is the measurement distance in meters

- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit - Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Shore to decide except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contactus at telephone: (86-759) 83071443,

| South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, Chima (Jiangsu) Pitot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州上区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 t (86–512) 62992980

www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 25 of 33

### 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01 Section 9

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 3






Report No.: SEWM2302000040RG02

Rev.: 01


Page: 26 of 33

## 4.9 Test Setups

### 4.9.1 Test Setup 1

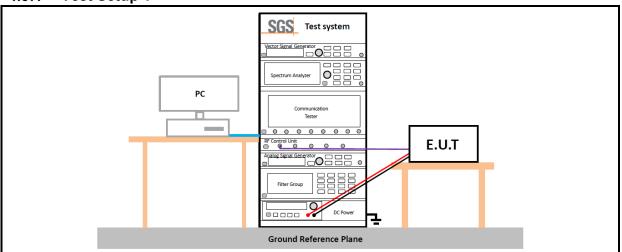

4.9.2 Test Setup 2

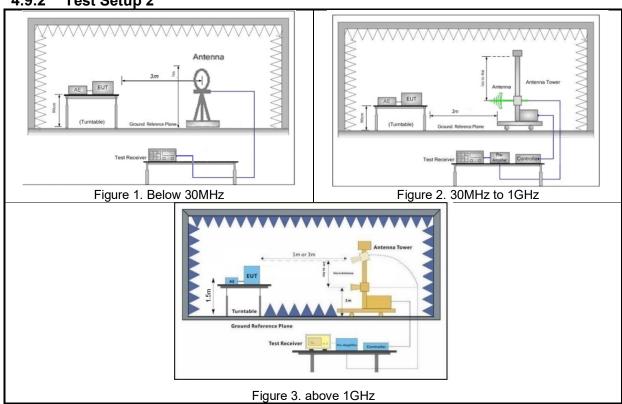



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Ferms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and-C

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路(号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com




Report No.: SEWM2302000040RG02

Rev.: 01

Page: 27 of 33

### 4.9.3 Test Setup 3

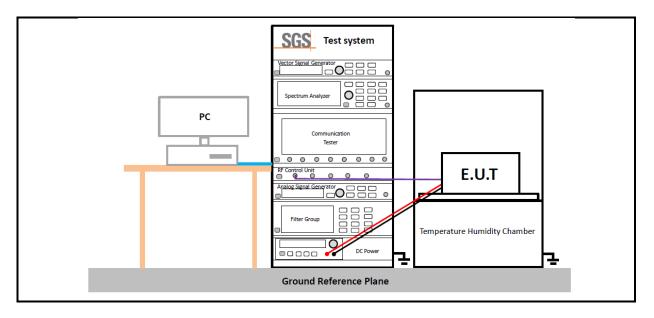



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980 t (86-512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.:

Page: 28 of 33

### 4.10 Test Conditions

	Transmit Output Power Data - Average Power, Total
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Peak-to-Average Ratio
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM5; NR/TM9
	Modulation Characteristics
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	M (M= middle channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Bandwidth - Occupied Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Bandwidth - Emission Bandwidth
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1; NR/TM2; NR/TM3; NR/TM4; NR/TM5; NR/TM6; NR/TM7; NR/TM8; NR/TM9
	Band Edges Compliance
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Fleetornic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervition only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. Government of the company, any unauthorized alteration, forgery or fatsification of the content or results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CMD.Doccheck@sas.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 29 of 33

Toot Cotum	Test Catus 1
Test Setup	Test Setup 1
RF Channels (TX)	L, H (L= low channel, H= high channel)
Test Mode	NR/TM1
	Spurious Emission at Antenna Terminals
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 1
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1
	Field Strength of Spurious Radiation
Test Case	Test Conditions
Test Environment	Ambient Climate & Rated Voltage
Test Setup	Test Setup 2
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)
Test Mode	NR/TM1 Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	Frequency Stability
Test Case	Test Conditions
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage
1620 Elivironinieni	(2) VL, VN and VH of Rated Voltage at Ambient Climate.
Test Setup	Test Setup 3
RF Channels (TX)	M (M= middle channel)
Test Mode	NR/TM1; NR/TM6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Pilot Fee Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

000 t (86–512) 6299298

t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com



Report No.: SEWM2302000040RG02

Rev.:

Page: 30 of 33

#### **Main Test Instruments** 5

RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)	
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07	
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05	
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2022/05/17	2023/05/16	
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR	
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22	
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05	
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05	
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05	
Wideband Radio Communication Test Ststion	Anritsu	MT8000A	SUWI-01-34-02	2022/09/16	2023/09/15	
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditio

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn



Report No.: SEWM2302000040RG02

Rev.:

Page: 31 of 33

		RSE Test Sy	/stem		
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter*	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2022/05/28	2023/05/27
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9163	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2021/05/14	2023/05/13
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2021/06/10	2023/06/09
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	SUWI-01-04-01	2023/02/06	2024/02/05
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sps.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Felectronic Documents at http://www.sps.com/en/Terms-and-Conditions/Terms-b-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document sadvised that information contained hereon reflects the Company's findings at the time of its intermiton only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. For one of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the Attention. To check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755) 83071443, or email: CND Doccheck@sps.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86-512) 62992980 www.sgsgroup.com.cn t (86-512) 62992980



Report No.: SEWM2302000040RG02

Rev.: 01

Page: 32 of 33

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Radiated Emission	± 4.88dB (30M -1GHz)
,	Radiated Effission	± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)

#### Remark:

The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>cispr/ETSI</sub> (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.





Report No.: SEWM2302000040RG02

Rev.: 01

Page: 33 of 33

## 7 Appendixes

Appendix A.3	WWAN Setup Photos
Appendix B.9	NR Band n7
Appendix B.10	NR Band n77(3450-3550)
Appendix B.11	NR Band n77(3700-3980)
Appendix B.12	NR Band n78(3450-3550)
Appendix B.13	NR Band n78(3700-3800)

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printee overleaf, available on request or accessible at <a href="https://mww.sgs.com/en/Terms-and-Conditions.aspx.and">https://mww.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forey or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained of 3 days only.