



RF EXPOSURE REPORT

Applicant	:	NIMBLE FOR GOOD, PBC.
Address of Applicant	:	1008 Brioso Drive Costa Mesa, CA 92627
Manufacturer	:	NIMBLE FOR GOOD, PBC.
Address of Manufacturer	:	1008 Brioso Drive Costa Mesa, CA 92627
Equipment under Test	:	PODIUM 2-IN-1 WIRELESS
Model No.	:	NB-WP-2N1TRY
FCC ID	:	2AZIO-PODIUM2N1
Test Standard(s)	:	FCC CFR 47 part1, 1.1307(b), 1.1310; KDB680106 D01v04
Report No.	:	DDT-RE25071422-1E02
Issue Date	:	2025/09/12
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

REPORT

Table of Contents

1.	General Test Information.....	5
1.1.	Description of EUT	5
1.2.	Accessories of EUT	5
1.3.	Test laboratory	5
2.	RF Exposure evaluation for FCC	6
2.1.	Test equipment.....	6
2.2.	Block diagram of test setup	6
2.3.	Limits	6
2.4.	Assistant equipment used for test	7
2.5.	Test procedure	7
2.6.	Test result.....	8
2.7.	Test Setup Photograph	10

Test Report Declare

Applicant	:	NIMBLE FOR GOOD, PBC.
Address of Applicant	:	1008 Briosso Drive Costa Mesa, CA 92627
Equipment under Test	:	PODIUM 2-IN-1 WIRELESS
Model No.	:	NB-WP-2N1TRY
Manufacturer	:	NIMBLE FOR GOOD, PBC.
Address of Manufacturer	:	1008 Briosso Drive Costa Mesa, CA 92627

Test Standard Used:
FCC CFR 47 part1, 1.1307(b), 1.1310; KDB680106 D01v04

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE25071422-1E02		
Date of Receipt:	2025/07/25	Date of Test:	2025/07/25~2025/08/30

Created: Johnson Huang	Reviewed: Tiger Mo	Approved: Ella Gong
		
2025/08/30	2025/09/12	2025/09/12

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2025/09/12	Ella Gong

1. General Test Information

1.1. Description of EUT

EUT Name	: PODIUM 2-IN-1 WIRELESS
Model Number	: NB-WP-2N1TRY
Difference of model number	: /
EUT Function Description	: Please reference user manual of this device
Power Supply	: 5V=3A, 9V=3A, 12V=3A, 15V=3A from USB cable
Wireless charging Operation frequency	: 111-147 kHz, 360 kHz
Antenna Type	: Inductive loop coil antenna

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual.

1.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

1.3. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048


VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2. RF Exposure evaluation for FCC

2.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
/	/	/	/	/

2.2. Block diagram of test setup

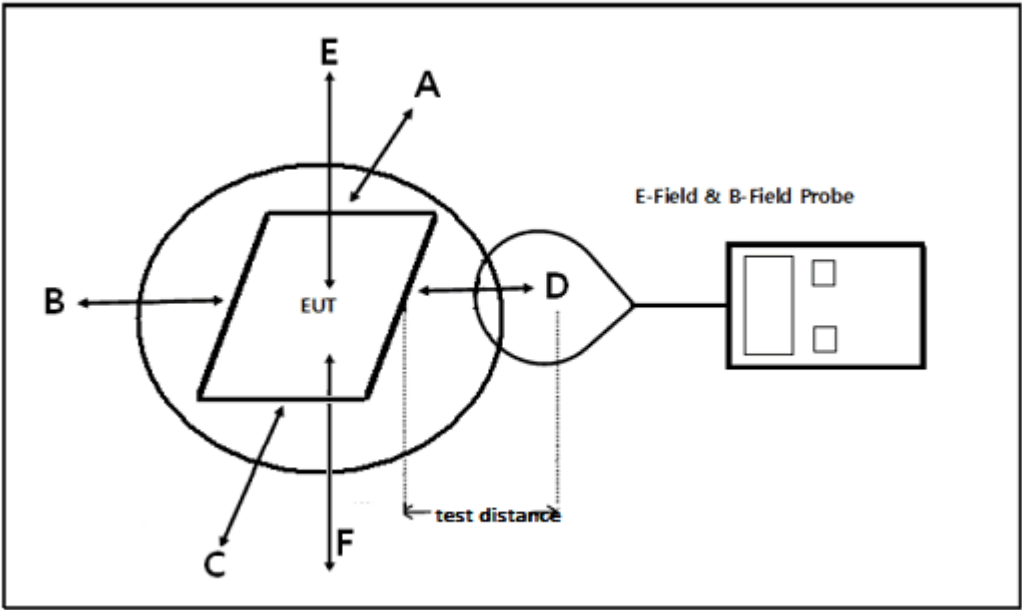

2.3. Limits

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

According KDB 680106 D01: RF Exposure Wireless Charging Apps v04.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

2.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

2.5. Test procedure

- The RF exposure test was performed in shielded chamber.
- The measurement probe was placed at test distance 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit.
- The measurement probe used to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points(A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106 D01 RF Exposure Wireless Charging App v04.

2.6. Test result

Test mode for wireless charger:

For mode 1: Tx mode 111-147kHz (5W load, 7.5W load, 10W load)

For mode 2: Tx mode 111-147kHz, 360kHz (5W load, 7.5W load, 10W load, 25W load)

All test modes were pre-tested, but we only recorded the worst case in this report.

E-Filed Strength at 20 cm from the edges surrounding the EUT (V/m)

For mode 1:

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	5W	7.5W	10W	
A	0.6266	1.5757	2.6563	614
B	0.9536	1.0226	1.9984	614
C	0.4324	0.5335	0.4953	614
D	0.5222	0.8719	1.2857	614
E	1.4847	2.0494	4.1611	614

H-Filed Strength at 20 cm from the edges surrounding the EUT and 20 cm Above the top surface (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	5W	7.5W	10W	
A	0.0949	0.2428	0.2241	1.63
B	0.0725	0.0806	0.1746	1.63
C	0.0756	0.1029	0.1131	1.63
D	0.0563	0.1005	0.2874	1.63
E	0.3254	0.4194	0.7865	1.63

For mode 2:

Test Position	Probe Measure Result(V/m)				Limits Test (V/m)
	5W	7.5W	10W	25W	
A	0.3384	0.5498	0.4502	0.4914	614
B	0.4383	0.3607	0.6271	0.6360	614
C	0.3981	0.5480	0.7225	0.9857	614
D	0.4032	1.0394	0.6167	0.4520	614
E	0.5097	1.0223	1.1314	0.7405	614

H-Filed Strength at 20 cm from the edges surrounding the EUT and 20 cm Above the top surface (A/m)

Test Position	Probe Measure Result(A/m)				Limits Test (A/m)
	5W	7.5W	10W	25W	
A	0.0563	0.0547	0.0547	0.0562	1.63
B	0.0543	0.0839	0.0547	0.0563	1.63
C	0.0597	0.0575	0.1148	0.0548	1.63
D	0.0580	0.0578	0.0837	0.0548	1.63
E	0.0651	0.0580	0.0983	0.0547	1.63

For the worst case mode 1+ mode 2:

Test Position	Probe Measure Result(V/m)			Limits Test (V/m)
	5W	7.5W	10W	
A	0.965	2.0259	3.1477	614
B	1.3919	1.6497	2.6344	614
C	0.8305	1.256	1.481	614
D	0.9254	1.4886	1.7377	614
E	1.9944	3.1808	4.9016	614

H-Filed Strength at 20 cm from the edges surrounding the EUT and 20 cm Above the top surface (A/m)

Test Position	Probe Measure Result(A/m)			Limits Test (A/m)
	5W	7.5W	10W	
A	0.1512	0.2975	0.2788	1.63
B	0.1268	0.1645	0.2293	1.63
C	0.1353	0.1604	0.2279	1.63
D	0.1143	0.1583	0.3711	1.63
E	0.3905	0.4774	0.8848	1.63