



TEST REPORT

Report Number: C21T00027-SAR01-V02

Applicant	Cipia Vision Ltd
Product Name	Cipia-FS10
Model Name	FS10-LOC / FS10-LOC-ADS
Brand Name	Cipia
FCC ID	2AZIQFS10L
IC	27633-FS10L

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC 47 CFR Part 2 2.1091, RSS 102.

Prepared by

Reviewed by

Approved by

Issue Date

2021-10-19

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.
11. After confirmation with the customer, the Max power and antenna gain information provided by the customer may affect the validity of the measurement results in this report, and the customer shall bear the impact and consequences.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 68866880

Revision Version

Report Number	Revision	Date	Memo
C21T00027-SAR01-V00	00	2021-08-30	Initial creation of test report
C21T00027-SAR01-V01	01	2021-09-30	Update IC No.
C21T00027-SAR01-V02	02	2021-10-19	Add simultaneous SAR evaluation

CONTENTS

1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT INFORMATION	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4. REFERENCE DOCUMENTS FOR FCC	9
4.1. REFERENCE DOCUMENTS FOR EVALUATION.....	9
4.2. CRITERIA	9
4.3. CALCULATION METHOD.....	10
5. EVALUATION SUMMARY FOR FCC	11
5.1. RF POWER OUTPUT	11
5.2. SUMMARY OF EVALUATION RESULTS.....	11
5.3. SIMULTANEOUS SAR EVALUATION	12
6. REFERENCE DOCUMENTS FOR IC	13
6.1. REFERENCE DOCUMENTS FOR EVALUATION.....	13
6.2. CRITERIA	13
6.3. CALCULATION METHOD.....	13
7. EVALUATION SUMMARY FOR IC	14



7.1.	RF POWER OUTPUT	14
7.2.	SUMMARY OF EVALUATION RESULTS	14
7.3.	SIMULTANEOUS SAR EVALUATION	15
7.4.	STATEMENTS	15
ANNEX A: EUT PHOTOS.....		16

1. Test Laboratory

1.1. Testing Location

Primary Lab:

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	958356
FCC Designation No.	CN1177
IC Designation No.	10766A

1.2. Testing Environment

Normal Temperature	18°C~25°C
Relative Humidity	25%RH~75%RH

1.3. Project Information

Project Leader	Chen Minfei
----------------	-------------

2. Client Information

2.1. Applicant Information

Company Name	Cipia Vision Ltd
Address	Maskit 8 th st. Hertzelia, Israel
Telephone	+972-77-5047760

2.2. Manufacturer Information

Company Name	Cipia Vision Ltd
Address	Maskit 8 th st. Hertzelia, Israel
Telephone	+972-77-5047760

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Cipia-FS10
Model name	FS10-LOC / FS10-LOC-ADS
Supported Radio Technology and Bands	WLAN 802.11a/b/g/n/ac BT5.0
Hardware Version	Revision D
Software Version	0.0.0.19B

Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N/A	N/A	N/A	N/A	N/A

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
N/A	N/A	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

4. Reference Documents For FCC

4.1. Reference Documents for evaluation

The following documents listed in this section are referred for evaluation.

Reference	Title
FCC 47 CFR Part 2 2.1091	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS. Section 2.1091 Radiofrequency radiation exposure evaluation: mobile devices

4.2. Criteria

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure. In accordance with the reference this device has been defined as a mobile device whereby a distance of 0.2m normally can be maintained between the user and the device.

Limits for Occupational / Controlled Exposure				
Frequency (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3 – 3.0	614	1.63	(100)*	6
3.0 – 30	1824/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1	6
300 – 1500	--	--	F/300	6
1500 - 100000	--	--	5	6
Limits for General Population / Uncontrolled Exposure				
Frequency (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Times E ² , H ² or S (minutes)
0.3 – 1.34	614	1.63	(100)*	30
1.34 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	--	--	F/1500	30
1500 - 100000	--	--	1	30
Note: f = frequency in MHz; * Plane-wave equivalent power density. For the DUT, the limits for General Population / Uncontrolled Exposure are applicable.				

4.3. Calculation Method

For conservative evaluation consideration, only maximum power of each frequency band based on the tighter limits respectively are used to calculate the boundary power density.

Based on the FCC KDB 447498 D01 and 47 CFR §2.1091, the DUT is evaluated as a mobile device.

$$S = \frac{P \times G}{4\pi d^2}$$

Where:

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

5. Evaluation Summary For FCC

5.1. RF Power Output

Band	Max power(dBm)	Highest Output Power (dBm)	Antenna Gain(dBi)
BT 5.0	7	7	1.82
BLE	7	7	1.82
WI-FI2.4G 802.11b	17	17	1.82
WI-FI2.4G 802.11g	16	16	1.82
WI-FI2.4G 802.11n	13	13	1.82
WI-FI5G U-NII-1 802.11a	7.5	7.5	-2.98
WI-FI5G U-NII-1 802.11n	8.5	8.5	-2.98
WI-FI5G U-NII-1 802.11ac	8.5	8.5	-2.98
WI-FI5G U-NII-3 802.11a	6	6	0.54
WI-FI5G U-NII-3 802.11n	6.5	6.5	0.54
WI-FI5G U-NII-3 802.11ac	11.5	11.5	0.54

5.2. Summary of Evaluation Results

Band	Frequency	Highest Output Power (dBm)	Highest Output Power (mW)	Antenna Gain(dBi)	Numeric antenna gain	Power density at 20cm (mW/cm ²)	Limit (mW/cm ²)
BT5.0	2402	7	5.01	1.82	1.521	0.002	1.000
BLE	2402	7	5.01	1.82	1.521	0.002	1.000
WI-FI2.4G 802.11b	2412	17	50.12	1.82	1.521	0.015	1.000
WI-FI2.4G 802.11g	2412	16	39.81	1.82	1.521	0.012	1.000
WI-FI2.4G 802.11n	2412	13	19.95	1.82	1.521	0.006	1.000
WI-FI5G U-NII-1 802.11a	5180	7.5	5.62	-2.98	0.504	0.001	1.000
WI-FI5G U-NII-1 802.11n	5180	8.5	7.08	-2.98	0.504	0.001	1.000
WI-FI5G U-NII-1 802.11ac	5180	8.5	7.08	-2.98	0.504	0.001	1.000
WI-FI5G U-NII-3 802.11a	5745	6	3.98	0.54	1.132	0.001	1.000
WI-FI5G U-NII-3 802.11n	5745	6.5	4.47	0.54	1.132	0.001	1.000
WI-FI5G U-NII-3 802.11ac	5745	11.5	14.13	0.54	1.132	0.003	1.000

The product is under the MPE limits. All is pass.

5.3. Simultaneous SAR Evaluation

Power density /Limit		Σ (Power density /Limit) of
1	2	
Wi-Fi	BT	1+2
0.015	0.002	0.017

Note:

1. Σ (Power density /Limit) : This is a summation of [(Power density for each transmitter/antenna included in the simultaneous transmission)/ (corresponding MPE limit)], for Wi-Fi+BT.
2. Considering the BT collocation with the Wi-Fi transmitter of the Highest output power performance listed in the table above, the aggregated (Power density /Limit) is smaller than 1, and MPE collocated transmitters is compliant.

6. Reference Documents For IC

6.1. Reference Documents for evaluation

The following documents listed in this section are referred for evaluation.

Reference	Title	Version
RSS 102	Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)	2015

6.2. Criteria

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

Frequency (MHz)	Base	Maximum e.i.r.p (w)
< 20	Source	1
20 – 48	Source	$22.48/f^{0.5}$
48 – 300	Source	0.6
300 – 6000	Source	$1.31 \times 10^{-2} \times f^{0.6834}$
> 6000	Source	5

Note:
f = frequency in MHz;
The result should be adjusted for tune-up tolerance.

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

6.3. Calculation Method

At or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz.

7. Evaluation Summary For IC

7.1. RF Power Output

Band	Max power(dBm)	Highest Output Power (dBm)	Antenna Gain(dBi)
BT 5.0	7	7	1.82
BLE	7	7	1.82
WI-FI2.4G 802.11b	17	17	1.82
WI-FI2.4G 802.11g	16	16	1.82
WI-FI2.4G 802.11n	13	13	1.82
WI-FI5G U-NII-1 802.11a	7.5	7.5	-2.98
WI-FI5G U-NII-1 802.11n	8.5	8.5	-2.98
WI-FI5G U-NII-1 802.11ac	8.5	8.5	-2.98
WI-FI5G U-NII-3 802.11a	6	6	0.54
WI-FI5G U-NII-3 802.11n	6.5	6.5	0.54
WI-FI5G U-NII-3 802.11ac	11.5	11.5	0.54

7.2. Summary of Evaluation Results

Band	Frequency	Highest Output Power (dBm)	Highest Output Power (mW)	Antenna Gain (dBi)	Numeric antenna gain	e.i.r.p (W)	Limit (W)
BT 5.0	2402	7	5.01	1.82	1.521	0.007	2.676
BLE	2402	7	5.01	1.82	1.521	0.007	2.676
WI-FI2.4G 802.11b	2412	17	50.12	1.82	1.521	0.052	2.684
WI-FI2.4G 802.11g	2412	16	39.81	1.82	1.521	0.041	2.684
WI-FI2.4G 802.11n	2412	13	19.95	1.82	1.521	0.021	2.684
WI-FI5G U-NII-1 802.11a	5180	7.5	5.62	-2.98	0.504	0.006	4.525
WI-FI5G U-NII-1 802.11n	5180	8.5	7.08	-2.98	0.504	0.008	4.525
WI-FI5G U-NII-1 802.11ac	5180	8.5	7.08	-2.98	0.504	0.008	4.525
WI-FI5G U-NII-3 802.11a	5745	6	3.98	0.54	1.132	0.005	4.857
WI-FI5G U-NII-3 802.11n	5745	6.5	4.47	0.54	1.132	0.006	4.857
WI-FI5G U-NII-3 802.11ac	5745	11.5	14.13	0.54	1.132	0.015	4.857

The product is under the MPE limits. All is pass.

7.3. Simultaneous SAR Evaluation

e.i.r.p /Limit		Σ (e.i.r.p /Limit) of
1	2	
Wi-Fi	BT	1+2
0.019	0.002	0.021

Note:

1. Σ (Power density /Limit) : This is a summation of [(Power density for each transmitter/antenna included in the simultaneous transmission)/ (corresponding MPE limit)], for Wi-Fi+BT.
2. Considering the BT collocation with the Wi-Fi transmitter of the Highest output power performance listed in the table above, the aggregated (Power density /Limit) is smaller than 1, and MPE collocated transmitters is compliant.

7.4. Statements

The FS10-LOC / FS10-LOC-ADS, manufactured by Cipia Vision Ltd. is a new product for evaluation.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 6 of this test report.

Annex A: EUT Photos



Figure A-1: Front view photo



Figure A-2: Rear view photo

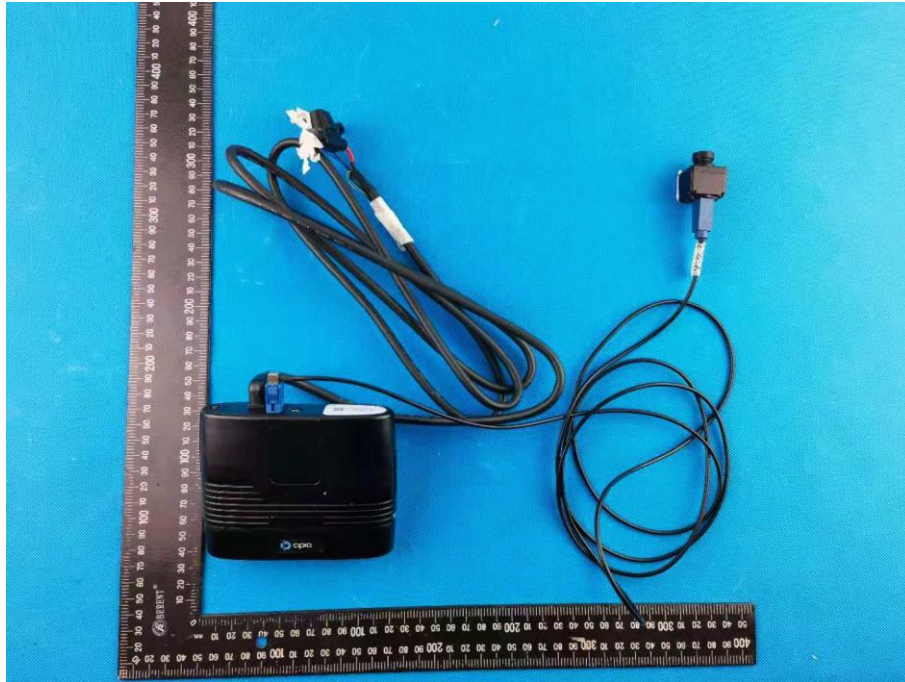


Figure A-3: Front view photo for FS10-LOC-ADS

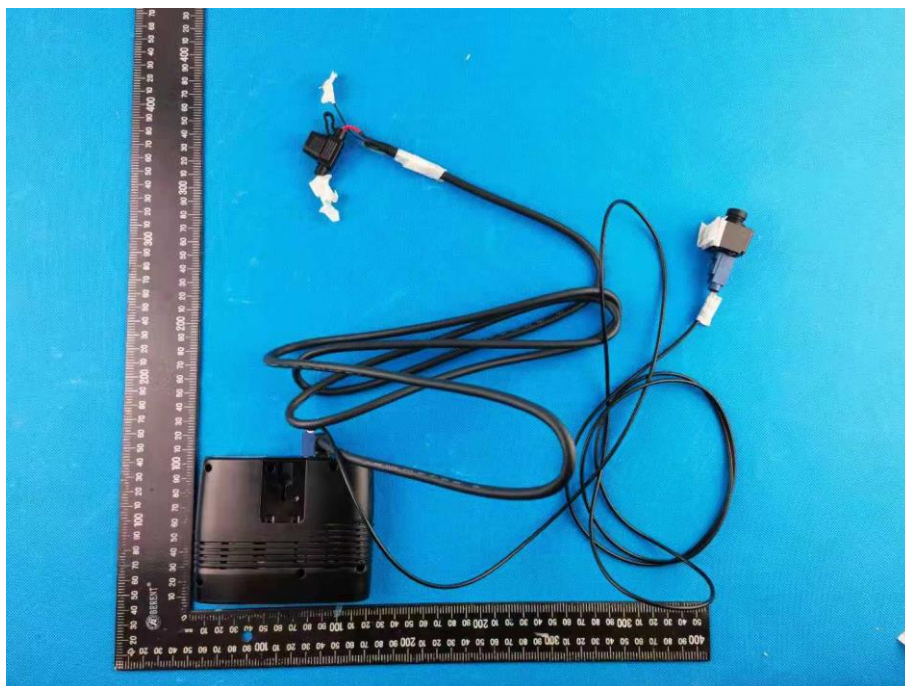


Figure A-4: Rear view photo for FS10-LOC-ADS

*****END OF REPORT*****