



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

47 CFR Part 15, Subpart C

Report Reference No.: **CTL2507181011-WF**

Compiled by
(position+printed name+signature)

Happy Guo
(File administrators)

Supervised by
(position+printed name+signature)

Lydia Ou
(Test Engineer)

Approved by
(position+printed name+signature)

Ivan Xie
(Manager)

Happy Guo
華
Shenzhen CTL Testing Technology Co., Ltd.
Lydia Ou
華
approved
Walt Mac

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name: **Yuwei Technology (Dongguan) Co., Ltd.**

Address: Room 301, No.15 Longjing Road, Guanjingtou, Fenggang Town, Dongguan City, Guangdong Province, China

Test specification:

Standard: 47 CFR Part 15, Subpart C

Master TRF: Dated 2011-01

Test item description: Power Bank

FCC ID: **2AZK8-C22PWX**

Trade Mark: N/A

Model/Type reference: C22PWX

Antenna type: loop coil Antenna

Date of receipt of test item: Jul. 30, 2025

Date of Test Date: Jul. 30, 2025–Sep. 13, 2025

Date of Issue: Sep. 14, 2025

Result: **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2507181011-WF	Sep. 14, 2025
		Date of issue

Equipment under Test : Power Bank

Type / Model(s) : C22PWX

Applicant : Yuwei Technology (Dongguan) Co., Ltd.

Address : Room 301, No.15 Longjing Road, Guanjingtou, Fenggang Town, Dongguan City, Guangdong Province, China

Manufacturer : Yuwei Technology (Dongguan) Co., Ltd.

Address : Room 301, No.15 Longjing Road, Guanjingtou, Fenggang Town, Dongguan City, Guangdong Province, China

Test result	Pass *
-------------	--------

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2025-09-14	CTL2507181011-WF	Tracy Qi

Contents

1. TEST STANDARDS	5
2. SUMMARY	6
2.1. General Remarks.....	6
2.2. Equipment Under Test.....	6
2.3. Short description of the Equipment under Test (EUT).....	6
2.4. EUT operation mode.....	6
2.5. Related Submittal(s) / Grant (s).....	7
2.6. Modifications.....	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory.....	8
3.2. Test Facility.....	8
3.3. Environmental conditions.....	8
3.4. Statement of the measurement uncertainty.....	9
3.5. Equipments Used during the Test.....	9
4. TEST CONDITIONS AND RESULTS	10
4.1. AC Power Conducted Emission.....	10
4.2. Radiated Emission.....	12
4.3. 20dB Bandwidth/99% Bandwidth.....	18
5. TEST SETUP PHOTOS OF THE EUT	19
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	22

1. TEST STANDARDS

The tests were performed according to following standards:

[**47 CFR Part 15, Subpart C 15.207,15.209, 15.215\(c\)**](#)

[**ANSI C63.10-2013**](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul. 30, 2025
Testing commenced on	:	Jul. 30, 2025
Testing concluded on	:	Sep. 13, 2025

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	Input USB-C Port: 5V==3A 9V==2A 12V==1.5A USB-C Cable: 5V==3A 9V==2A 12V==1.5A Output USB-A: 5V==3A 9V==2A 12V==1.5A USB-C Port: 5V==3A 9V==2.22A 12V==1.67A USB-C Cable: 5V==3A 9V==2.22A 12V==1.67A Earphone output: 3W(Max) iWatch output: 2.5W(Max) Wireless Charging: 15W(Max) Battery Capacity: 3.85V 10000mAh/38.5Wh
----------------------	---	---

2.3. Short description of the Equipment under Test (EUT)

A Power Bank work frequency range 111.36KHz.

Modulation type: CW (Continuous Wave)

Antenna type: loop coil Antenna

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

2.4. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing.

Test Mode 1	AC Charging+Wireless output(15W MAX) full load
Test Mode 2	AC Charging+Wireless output(15W MAX) half load
Test Mode 3	AC Charging+Wireless output(15W MAX) no load
Test Mode 4	Wireless output(15W MAX) full load
Test Mode 5	Wireless output(15W MAX) half load
Test Mode 6	Wireless output(15W MAX) no load
Test Mode 7	AC Charging+Wireless output(3W MAX) full load
Test Mode 8	AC Charging+Wireless output(3W MAX) half load
Test Mode 9	AC Charging+Wireless output(3W MAX) no load
Test Mode 10	Wireless output(3W MAX) full load
Test Mode 11	Wireless output(3W MAX) half load
Test Mode 12	Wireless output(3W MAX) no load
Test Mode 13	AC Charging+Wireless output(2.5W MAX) full load
Test Mode 14	AC Charging+Wireless output(2.5W MAX) half load
Test Mode 15	AC Charging+Wireless output(2.5W MAX) no load
Test Mode 16	Wireless output(2.5W MAX) full load
Test Mode 17	Wireless output(2.5W MAX) half load
Test Mode 18	Wireless output(2.5W MAX) no load

Note: All modes have been tested, and the report only records the worst test modes, namely Test Mode 1 and Test Mode 4.

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AZK8-HI-C22PWX** fileing to comply with FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9518B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9518B.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	4.10dB	(1)
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.


3.5. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2025/04/29	2026/04/28
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
EMI Test Receiver	R&S	ESCI	1166.5950.03	2025/04/29	2026/04/28
Spectrum Analyzer	Keysight	N9020A	MY53420874	2025/04/29	2026/04/28
Active Loop Antenna	Da Ze	ZN30900A	/	2025/04/29	2026/04/28
Spectrum Analyzer	RS	FSP	1164.4391.38	2025/04/29	2026/04/28

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

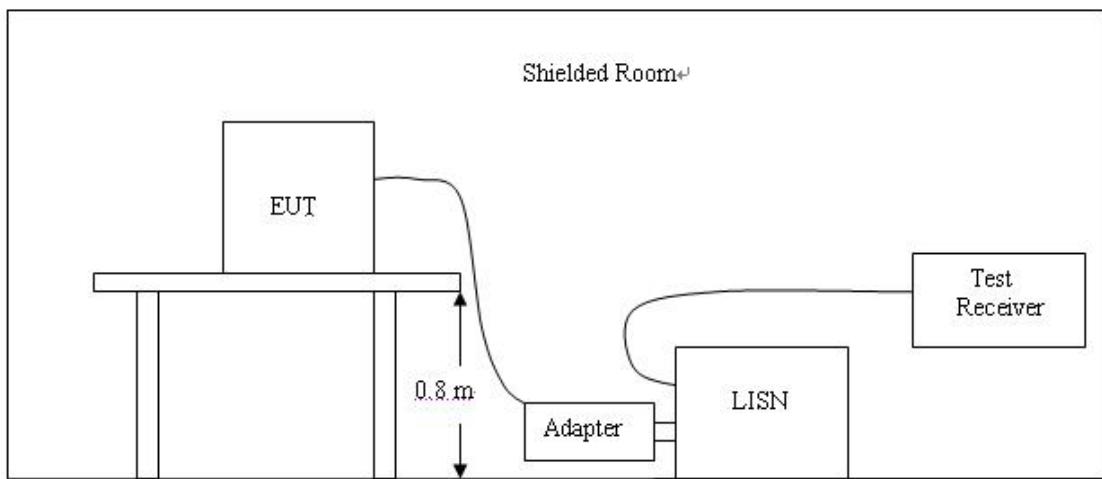

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

Test Mode 1

L

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

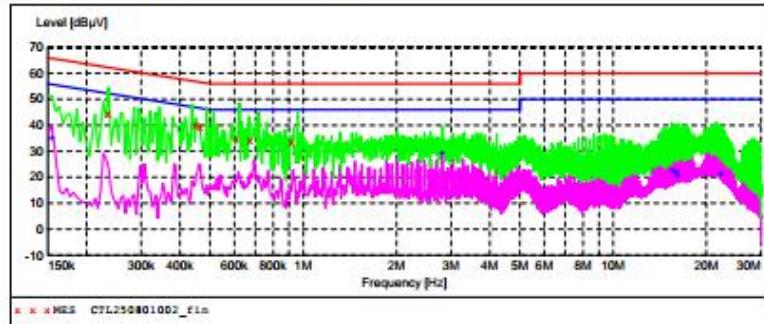

MEASUREMENT RESULT: "CTL250801002_fin"

8/1/2025 9:02AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.235500	44.20	10.0	62	18.1	QP	L1	GND
	0.451500	40.40	10.0	57	16.4	QP	L1	GND
	0.465000	39.70	10.0	57	16.9	QP	L1	GND
	0.609000	35.10	10.0	56	20.9	QP	L1	GND
	0.676500	34.20	10.0	56	21.8	QP	L1	GND
	0.919500	33.20	10.1	56	22.8	QP	L1	GND


MEASUREMENT RESULT: "CTL250801002_fin2"

8/1/2025 9:02AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.154500	35.30	10.0	56	20.5	AV	L1	GND
	2.809500	28.90	10.1	46	17.1	AV	L1	GND
	15.445500	22.20	11.2	50	27.8	AV	L1	GND
	15.913500	22.00	11.2	50	28.0	AV	L1	GND
	16.143000	20.10	11.2	50	29.9	AV	L1	GND
	22.227000	20.90	10.9	50	29.1	AV	L1	GND

Test Mode 1

N

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

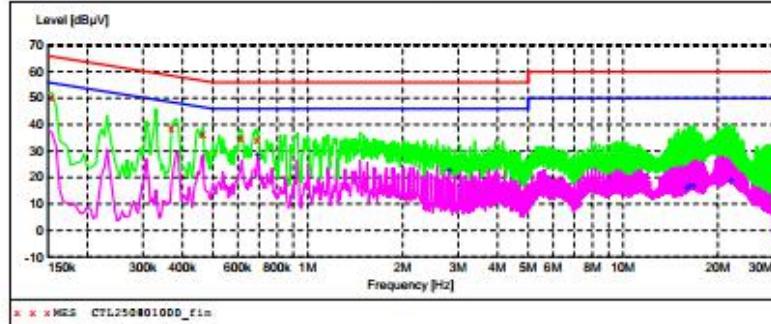

MEASUREMENT RESULT: "CTL250801000_fin"

8/1/2025 8:59AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.154500	50.30	10.0	66	15.5	QP	N	GND
	0.370500	38.40	10.0	59	20.1	QP	N	GND
	0.465000	36.70	10.0	57	19.9	QP	N	GND
	0.613500	35.30	10.0	56	20.7	QP	N	GND
	0.690000	34.50	10.0	56	21.5	QP	N	GND


MEASUREMENT RESULT: "CTL250801000_fin2"

8/1/2025 8:59AM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.694500	28.70	10.0	46	17.3	AV	N	GND
	2.814000	22.60	10.1	46	23.4	AV	N	GND
	15.949500	16.20	11.2	50	33.8	AV	N	GND
	16.188000	16.40	11.2	50	33.6	AV	N	GND
	16.660500	16.80	11.2	50	33.2	AV	N	GND
	22.047000	19.10	10.9	50	30.9	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up
Frequency range 9KHz – 30MHz

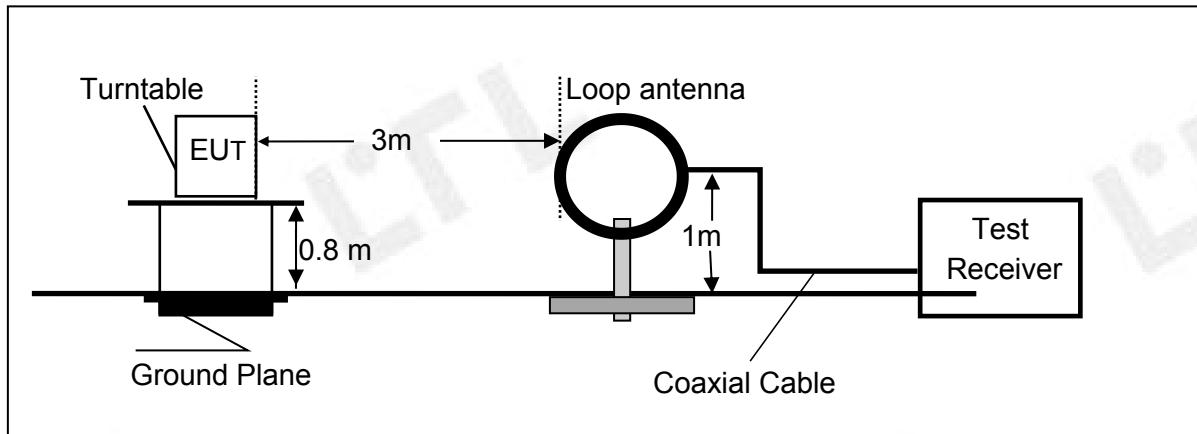

Frequency range 30MHz – 1000MHz

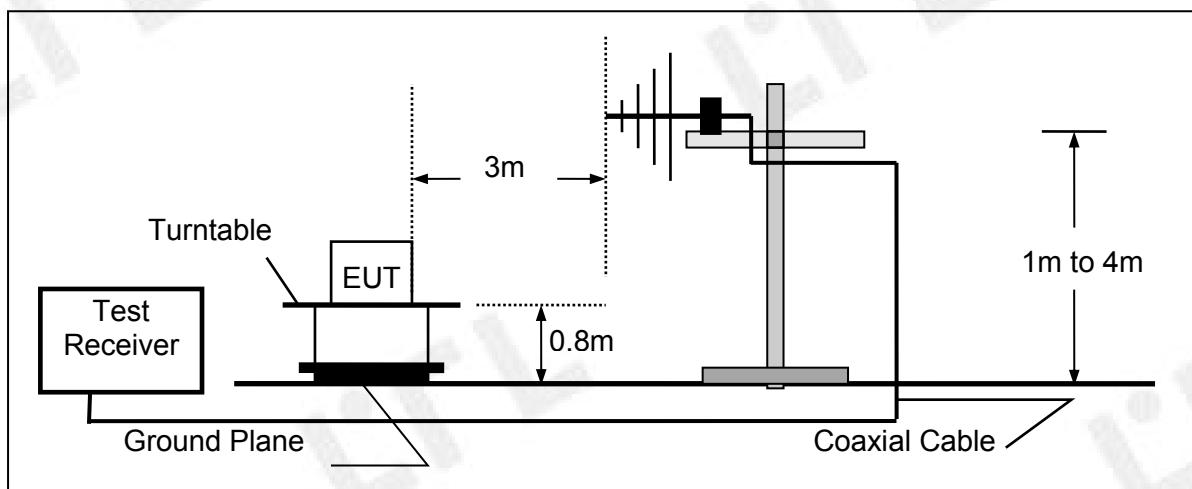

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB μ V/m)	RA (dB μ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	36.8	58.1	12.2	1.7	31.90	-18.0

$$Transd = AF + CL - AG$$

RADIATION LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

9k~30MHz:

Frequency Range (MHz)	E-field Strength Limit @ 30m (mV/m)	E-field Strength Limit @ 3m (dB μ V/m)
0.009-0.490	2400/F(kHz)	129-94
0.490-1.705	24000/F(kHz)	74-63
1.705-30	30	70

Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula:

$$\text{Extrapolation(dB)} = 40\log_{10}(\text{Measurement Distance}/\text{Specification Distance})$$

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dB μ V/m = 20*log(uV/m)

30M~1GHz:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Note:


- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

TEST RESULTS**WORST-CASE RADIATED EMISSION BELOW 30 MHz**

Test Mode 1




Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

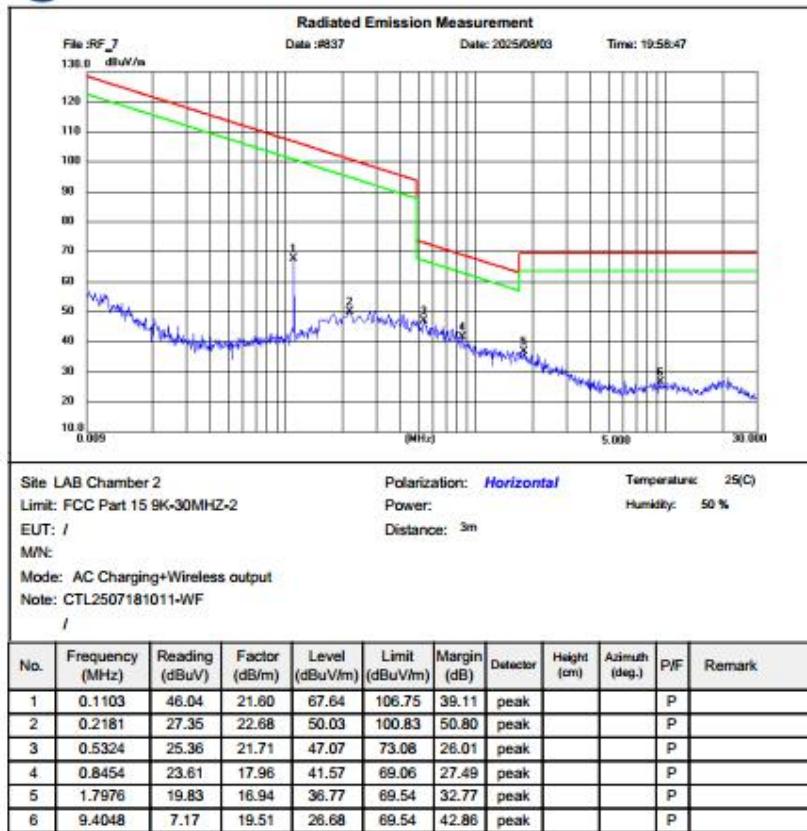



Test Mode 4





Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

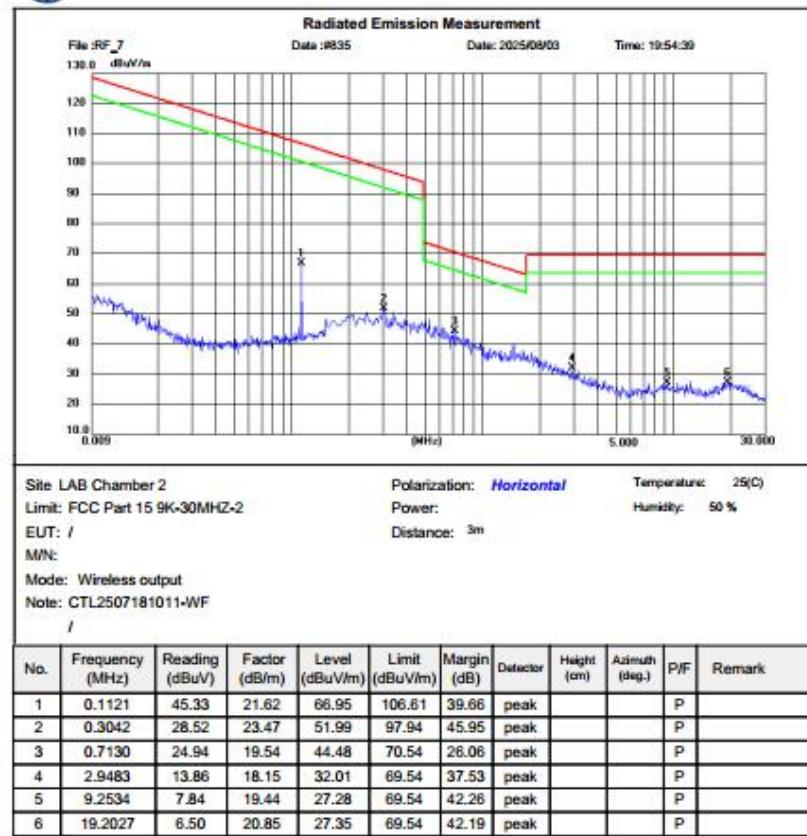

Radiated Emission Test Data 30-1000MHz:

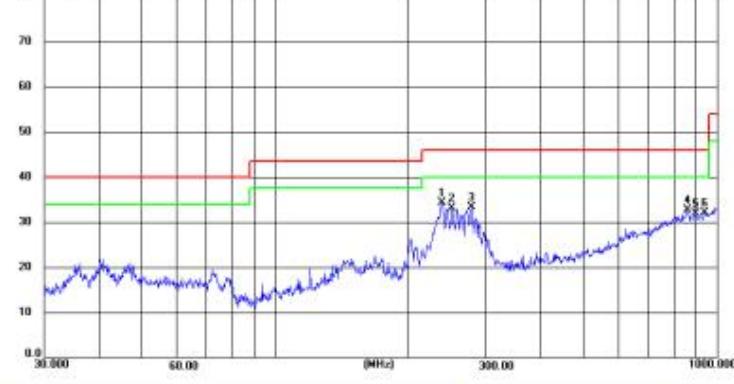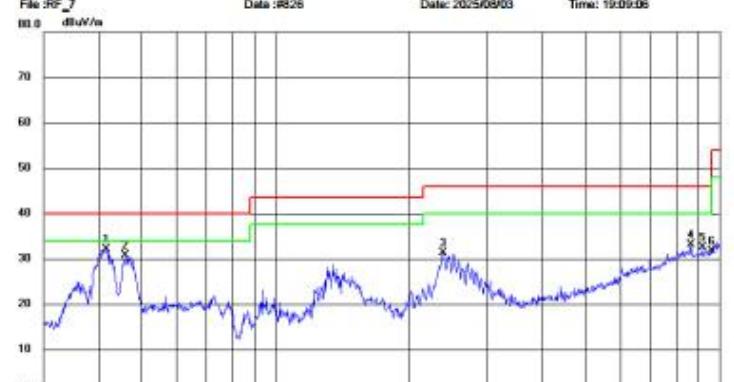Test Mode 1				Horizontal																																																																																																												
 <p>Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194</p>																																																																																																																
<p>Radiated Emission Measurement</p> <p>File:RF_7 Data:#825 Date: 2025/08/03 Time: 19:08:16</p>  <table border="1"> <tr> <td>Site: LAB Chamber 2</td> <td>Polarization: Horizontal</td> <td>Temperature: 25(C)</td> </tr> <tr> <td>Limit: FCC Part15 RE-Class C_30-1000MHz</td> <td>Power:</td> <td>Humidity: 50 %</td> </tr> <tr> <td>EUT: /</td> <td>Distance: 3m</td> <td></td> </tr> <tr> <td>M/N:</td> <td></td> <td></td> </tr> <tr> <td>Mode: AC Charging+Wireless output</td> <td></td> <td></td> </tr> <tr> <td>Note: CTL2507181011-WF</td> <td></td> <td></td> </tr> <tr> <td>/</td> <td></td> <td></td> </tr> </table> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>Height (cm)</th> <th>Azimuth (deg.)</th> <th>P/F</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>238.6237</td> <td>21.15</td> <td>13.19</td> <td>34.34</td> <td>46.00</td> <td>11.66</td> <td>peak</td> <td>100</td> <td>254</td> <td>P</td> <td></td> </tr> <tr> <td>2</td> <td>251.7315</td> <td>20.05</td> <td>13.13</td> <td>33.18</td> <td>46.00</td> <td>12.82</td> <td>peak</td> <td>100</td> <td>254</td> <td>P</td> <td></td> </tr> <tr> <td>3</td> <td>278.7991</td> <td>19.28</td> <td>13.94</td> <td>33.22</td> <td>46.00</td> <td>12.78</td> <td>peak</td> <td>100</td> <td>53</td> <td>P</td> <td></td> </tr> <tr> <td>4</td> <td>857.0246</td> <td>6.33</td> <td>26.34</td> <td>32.67</td> <td>46.00</td> <td>13.33</td> <td>peak</td> <td>100</td> <td>326</td> <td>P</td> <td></td> </tr> <tr> <td>5</td> <td>896.2105</td> <td>5.40</td> <td>26.46</td> <td>31.88</td> <td>46.00</td> <td>14.14</td> <td>peak</td> <td>100</td> <td>298</td> <td>P</td> <td></td> </tr> <tr> <td>6</td> <td>939.2442</td> <td>5.11</td> <td>27.09</td> <td>32.20</td> <td>46.00</td> <td>13.80</td> <td>peak</td> <td>100</td> <td>24</td> <td>P</td> <td></td> </tr> </tbody> </table>								Site: LAB Chamber 2	Polarization: Horizontal	Temperature: 25(C)	Limit: FCC Part15 RE-Class C_30-1000MHz	Power:	Humidity: 50 %	EUT: /	Distance: 3m		M/N:			Mode: AC Charging+Wireless output			Note: CTL2507181011-WF			/			No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark	1	238.6237	21.15	13.19	34.34	46.00	11.66	peak	100	254	P		2	251.7315	20.05	13.13	33.18	46.00	12.82	peak	100	254	P		3	278.7991	19.28	13.94	33.22	46.00	12.78	peak	100	53	P		4	857.0246	6.33	26.34	32.67	46.00	13.33	peak	100	326	P		5	896.2105	5.40	26.46	31.88	46.00	14.14	peak	100	298	P		6	939.2442	5.11	27.09	32.20	46.00	13.80	peak	100	24	P	
Site: LAB Chamber 2	Polarization: Horizontal	Temperature: 25(C)																																																																																																														
Limit: FCC Part15 RE-Class C_30-1000MHz	Power:	Humidity: 50 %																																																																																																														
EUT: /	Distance: 3m																																																																																																															
M/N:																																																																																																																
Mode: AC Charging+Wireless output																																																																																																																
Note: CTL2507181011-WF																																																																																																																
/																																																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark																																																																																																					
1	238.6237	21.15	13.19	34.34	46.00	11.66	peak	100	254	P																																																																																																						
2	251.7315	20.05	13.13	33.18	46.00	12.82	peak	100	254	P																																																																																																						
3	278.7991	19.28	13.94	33.22	46.00	12.78	peak	100	53	P																																																																																																						
4	857.0246	6.33	26.34	32.67	46.00	13.33	peak	100	326	P																																																																																																						
5	896.2105	5.40	26.46	31.88	46.00	14.14	peak	100	298	P																																																																																																						
6	939.2442	5.11	27.09	32.20	46.00	13.80	peak	100	24	P																																																																																																						
Test Mode 1				Vertical																																																																																																												
 <p>Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194</p>																																																																																																																
<p>Radiated Emission Measurement</p> <p>File:RF_7 Data:#826 Date: 2025/08/03 Time: 19:09:06</p>  <table border="1"> <tr> <td>Site: LAB Chamber 2</td> <td>Polarization: Vertical</td> <td>Temperature: 25(C)</td> </tr> <tr> <td>Limit: FCC Part15 RE-Class C_30-1000MHz</td> <td>Power:</td> <td>Humidity: 50 %</td> </tr> <tr> <td>EUT: /</td> <td>Distance: 3m</td> <td></td> </tr> <tr> <td>M/N:</td> <td></td> <td></td> </tr> <tr> <td>Mode: AC Charging+Wireless output</td> <td></td> <td></td> </tr> <tr> <td>Note: CTL2507181011-WF</td> <td></td> <td></td> </tr> <tr> <td>/</td> <td></td> <td></td> </tr> </table> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency (MHz)</th> <th>Reading (dBuV)</th> <th>Factor (dB/m)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Detector</th> <th>Height (cm)</th> <th>Azimuth (deg.)</th> <th>P/F</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>41.5306</td> <td>17.79</td> <td>14.29</td> <td>32.08</td> <td>40.00</td> <td>7.92</td> <td>peak</td> <td>100</td> <td>350</td> <td>P</td> <td></td> </tr> <tr> <td>2</td> <td>45.8151</td> <td>16.31</td> <td>14.39</td> <td>30.70</td> <td>40.00</td> <td>9.30</td> <td>peak</td> <td>100</td> <td>279</td> <td>P</td> <td></td> </tr> <tr> <td>3</td> <td>238.9377</td> <td>18.17</td> <td>13.20</td> <td>31.37</td> <td>46.00</td> <td>14.63</td> <td>peak</td> <td>100</td> <td>151</td> <td>P</td> <td></td> </tr> <tr> <td>4</td> <td>863.8132</td> <td>6.66</td> <td>26.43</td> <td>33.09</td> <td>46.00</td> <td>12.91</td> <td>peak</td> <td>100</td> <td>179</td> <td>P</td> <td></td> </tr> <tr> <td>5</td> <td>918.4810</td> <td>5.66</td> <td>26.75</td> <td>32.41</td> <td>46.00</td> <td>13.59</td> <td>peak</td> <td>100</td> <td>0</td> <td>P</td> <td></td> </tr> <tr> <td>6</td> <td>960.8979</td> <td>4.45</td> <td>27.23</td> <td>31.68</td> <td>54.00</td> <td>22.32</td> <td>peak</td> <td>100</td> <td>51</td> <td>P</td> <td></td> </tr> </tbody> </table>								Site: LAB Chamber 2	Polarization: Vertical	Temperature: 25(C)	Limit: FCC Part15 RE-Class C_30-1000MHz	Power:	Humidity: 50 %	EUT: /	Distance: 3m		M/N:			Mode: AC Charging+Wireless output			Note: CTL2507181011-WF			/			No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark	1	41.5306	17.79	14.29	32.08	40.00	7.92	peak	100	350	P		2	45.8151	16.31	14.39	30.70	40.00	9.30	peak	100	279	P		3	238.9377	18.17	13.20	31.37	46.00	14.63	peak	100	151	P		4	863.8132	6.66	26.43	33.09	46.00	12.91	peak	100	179	P		5	918.4810	5.66	26.75	32.41	46.00	13.59	peak	100	0	P		6	960.8979	4.45	27.23	31.68	54.00	22.32	peak	100	51	P	
Site: LAB Chamber 2	Polarization: Vertical	Temperature: 25(C)																																																																																																														
Limit: FCC Part15 RE-Class C_30-1000MHz	Power:	Humidity: 50 %																																																																																																														
EUT: /	Distance: 3m																																																																																																															
M/N:																																																																																																																
Mode: AC Charging+Wireless output																																																																																																																
Note: CTL2507181011-WF																																																																																																																
/																																																																																																																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark																																																																																																					
1	41.5306	17.79	14.29	32.08	40.00	7.92	peak	100	350	P																																																																																																						
2	45.8151	16.31	14.39	30.70	40.00	9.30	peak	100	279	P																																																																																																						
3	238.9377	18.17	13.20	31.37	46.00	14.63	peak	100	151	P																																																																																																						
4	863.8132	6.66	26.43	33.09	46.00	12.91	peak	100	179	P																																																																																																						
5	918.4810	5.66	26.75	32.41	46.00	13.59	peak	100	0	P																																																																																																						
6	960.8979	4.45	27.23	31.68	54.00	22.32	peak	100	51	P																																																																																																						

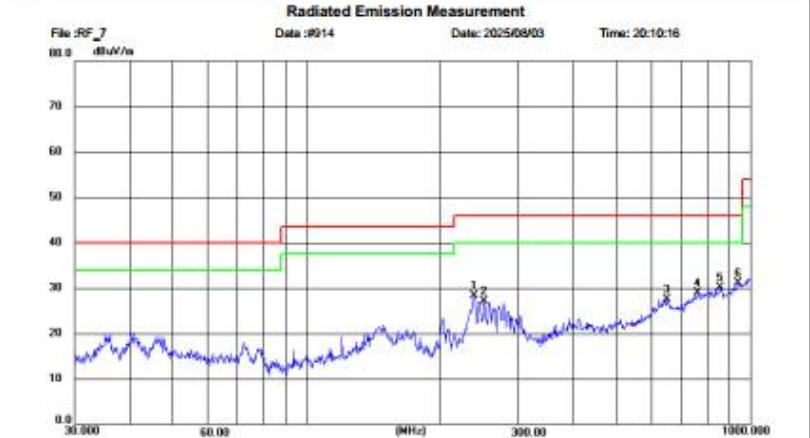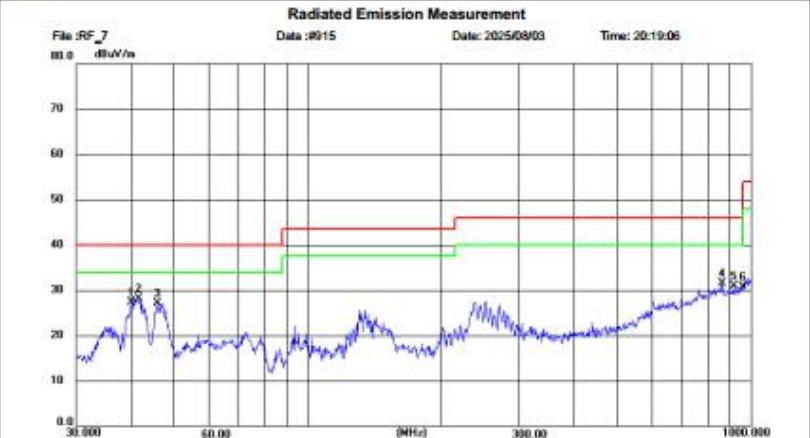Test Mode 4		Horizontal																																																																																					
 Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194																																																																																							
																																																																																							
Site: LAB Chamber 2 Limit: FCC Part15 RE-Class C_30-1000MHz EUT: / MN: Mode: Wireless output Note: CTL2507181011-WF /		Polarization: Horizontal Power: _____ Distance: 3m Temperature: 25(C) Humidity: 50 %																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th><th>Height (cm)</th><th>Azimuth (deg.)</th><th>P/F</th><th>Remark</th></tr> </thead> <tbody> <tr><td>1</td><td>238.6237</td><td>15.15</td><td>13.19</td><td>28.34</td><td>46.00</td><td>17.66</td><td>peak</td><td>100</td><td>258</td><td>P</td><td></td></tr> <tr><td>2</td><td>251.7315</td><td>14.05</td><td>13.13</td><td>27.18</td><td>46.00</td><td>18.82</td><td>peak</td><td>100</td><td>196</td><td>P</td><td></td></tr> <tr><td>3</td><td>649.6594</td><td>4.96</td><td>22.57</td><td>27.53</td><td>46.00</td><td>18.47</td><td>peak</td><td>100</td><td>56</td><td>P</td><td></td></tr> <tr><td>4</td><td>762.7065</td><td>3.99</td><td>24.82</td><td>28.81</td><td>46.00</td><td>17.19</td><td>peak</td><td>100</td><td>48</td><td>P</td><td></td></tr> <tr><td>5</td><td>857.0244</td><td>3.83</td><td>26.34</td><td>30.17</td><td>46.00</td><td>15.83</td><td>peak</td><td>100</td><td>146</td><td>P</td><td></td></tr> <tr><td>6</td><td>939.2441</td><td>4.11</td><td>27.09</td><td>31.20</td><td>46.00</td><td>14.80</td><td>peak</td><td>100</td><td>79</td><td>P</td><td></td></tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark	1	238.6237	15.15	13.19	28.34	46.00	17.66	peak	100	258	P		2	251.7315	14.05	13.13	27.18	46.00	18.82	peak	100	196	P		3	649.6594	4.96	22.57	27.53	46.00	18.47	peak	100	56	P		4	762.7065	3.99	24.82	28.81	46.00	17.19	peak	100	48	P		5	857.0244	3.83	26.34	30.17	46.00	15.83	peak	100	146	P		6	939.2441	4.11	27.09	31.20	46.00	14.80	peak	100	79	P			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark																																																																												
1	238.6237	15.15	13.19	28.34	46.00	17.66	peak	100	258	P																																																																													
2	251.7315	14.05	13.13	27.18	46.00	18.82	peak	100	196	P																																																																													
3	649.6594	4.96	22.57	27.53	46.00	18.47	peak	100	56	P																																																																													
4	762.7065	3.99	24.82	28.81	46.00	17.19	peak	100	48	P																																																																													
5	857.0244	3.83	26.34	30.17	46.00	15.83	peak	100	146	P																																																																													
6	939.2441	4.11	27.09	31.20	46.00	14.80	peak	100	79	P																																																																													
Test Mode 4		Vertical																																																																																					
 Shenzhen CTL Testing Technology Co., Ltd Tel: +86-755-89486194																																																																																							
																																																																																							
Site: LAB Chamber 2 Limit: FCC Part15 RE-Class C_30-1000MHz EUT: / MN: Mode: Wireless output Note: CTL2507181011-WF /		Polarization: Vertical Power: _____ Distance: 3m Temperature: 25(C) Humidity: 50 %																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th><th>Height (cm)</th><th>Azimuth (deg.)</th><th>P/F</th><th>Remark</th></tr> </thead> <tbody> <tr><td>1</td><td>40.0644</td><td>13.02</td><td>14.32</td><td>27.34</td><td>40.00</td><td>12.66</td><td>peak</td><td>100</td><td>4</td><td>P</td><td></td></tr> <tr><td>2</td><td>41.5306</td><td>13.79</td><td>14.29</td><td>28.08</td><td>40.00</td><td>11.92</td><td>peak</td><td>100</td><td>59</td><td>P</td><td></td></tr> <tr><td>3</td><td>45.8151</td><td>12.81</td><td>14.39</td><td>27.20</td><td>40.00</td><td>12.80</td><td>peak</td><td>100</td><td>56</td><td>P</td><td></td></tr> <tr><td>4</td><td>863.8131</td><td>5.16</td><td>26.43</td><td>31.59</td><td>46.00</td><td>14.41</td><td>peak</td><td>100</td><td>137</td><td>P</td><td></td></tr> <tr><td>5</td><td>918.4810</td><td>4.16</td><td>26.75</td><td>30.91</td><td>46.00</td><td>15.09</td><td>peak</td><td>100</td><td>256</td><td>P</td><td></td></tr> <tr><td>6</td><td>960.8980</td><td>3.45</td><td>27.23</td><td>30.68</td><td>54.00</td><td>23.32</td><td>peak</td><td>100</td><td>339</td><td>P</td><td></td></tr> </tbody> </table>		No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark	1	40.0644	13.02	14.32	27.34	40.00	12.66	peak	100	4	P		2	41.5306	13.79	14.29	28.08	40.00	11.92	peak	100	59	P		3	45.8151	12.81	14.39	27.20	40.00	12.80	peak	100	56	P		4	863.8131	5.16	26.43	31.59	46.00	14.41	peak	100	137	P		5	918.4810	4.16	26.75	30.91	46.00	15.09	peak	100	256	P		6	960.8980	3.45	27.23	30.68	54.00	23.32	peak	100	339	P			
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark																																																																												
1	40.0644	13.02	14.32	27.34	40.00	12.66	peak	100	4	P																																																																													
2	41.5306	13.79	14.29	28.08	40.00	11.92	peak	100	59	P																																																																													
3	45.8151	12.81	14.39	27.20	40.00	12.80	peak	100	56	P																																																																													
4	863.8131	5.16	26.43	31.59	46.00	14.41	peak	100	137	P																																																																													
5	918.4810	4.16	26.75	30.91	46.00	15.09	peak	100	256	P																																																																													
6	960.8980	3.45	27.23	30.68	54.00	23.32	peak	100	339	P																																																																													

4.3. 20dB Bandwidth/99% Bandwidth

TEST CONFIGURATION




TEST PROCEDURE

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1KHz RBW and 3KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

LIMIT



N/A


TEST RESULTS

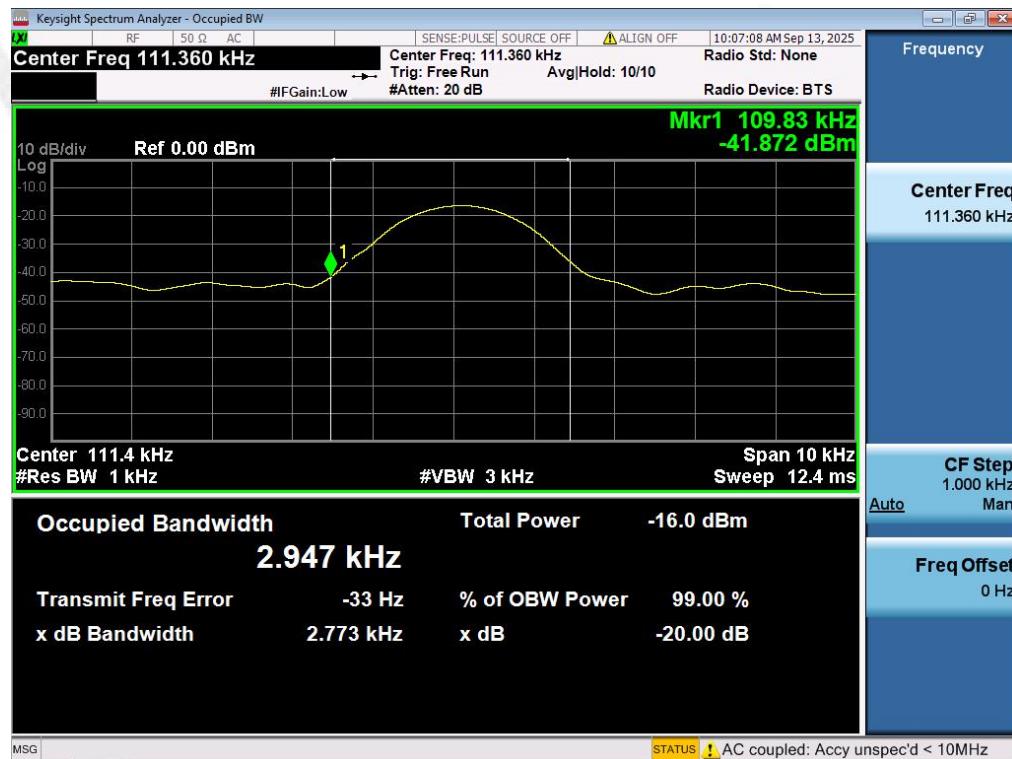


Frequency (kHz)	20dB Bandwidth (kHz)	Limit(kHz)	Verdict
111.36	2.773	/	PASS

5. Test Setup Photos of the EUT

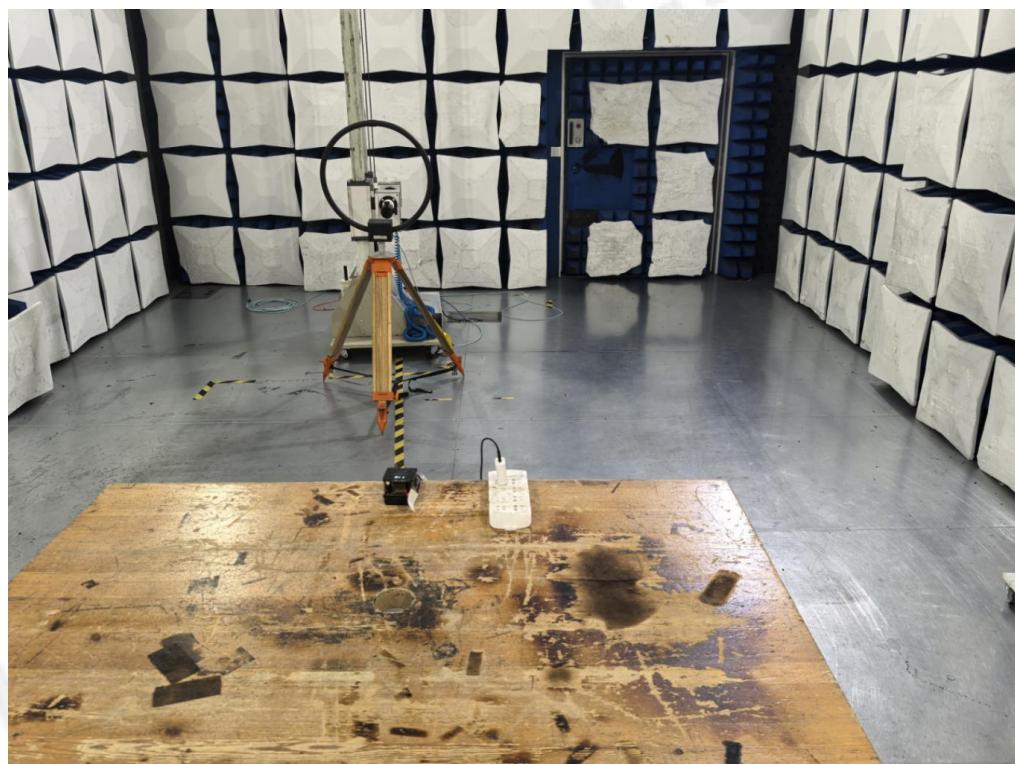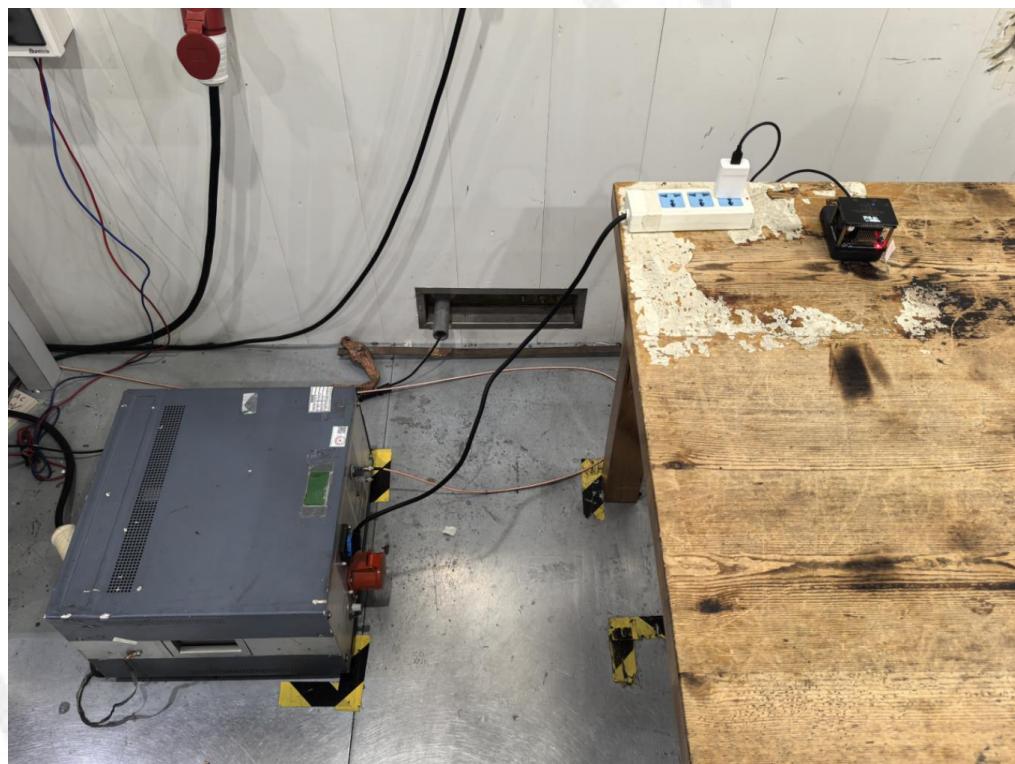

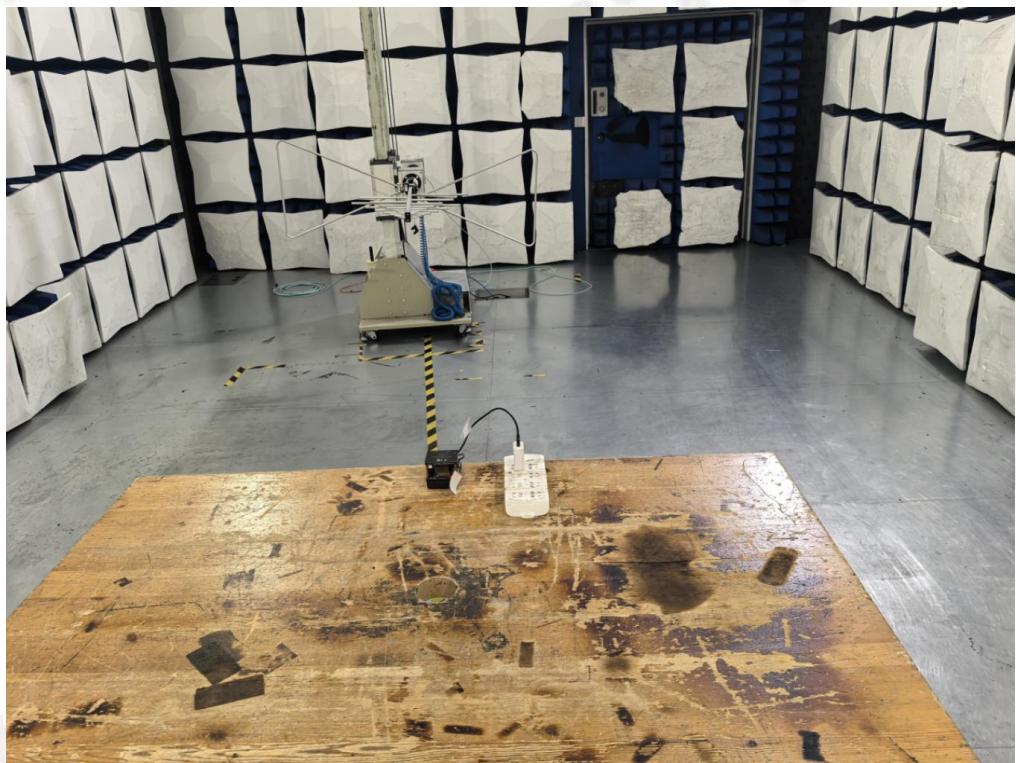

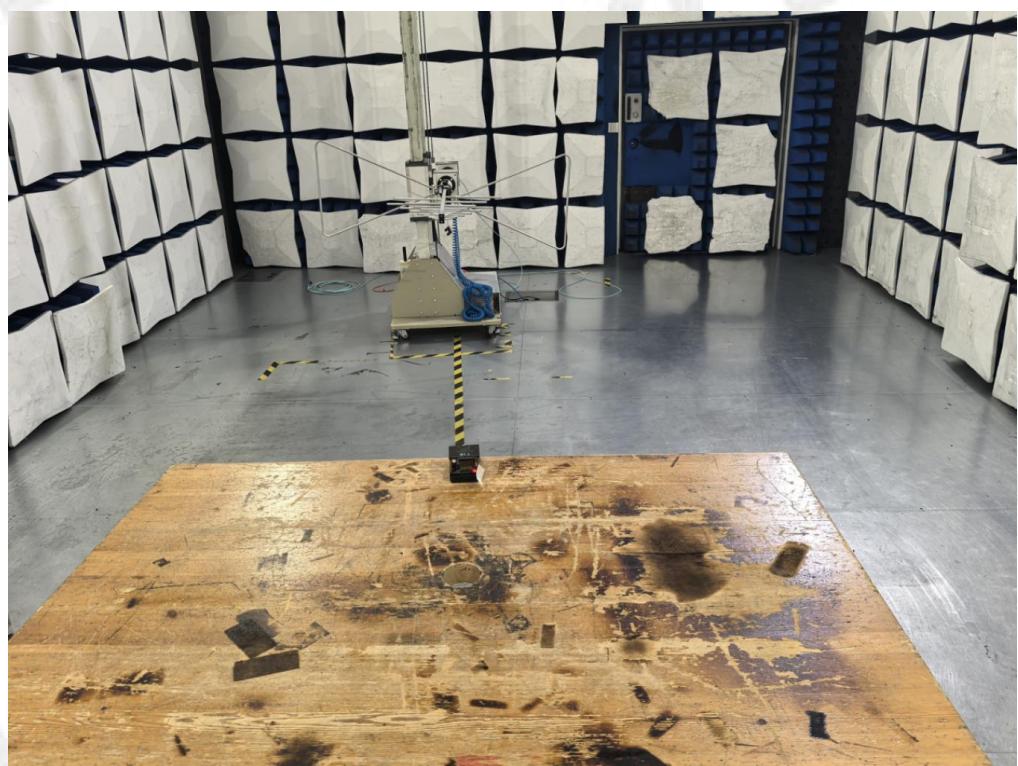

6. External and Internal Photos of the EUT

External Photos of EUT





