



FCC Test Report

Test report
On Behalf of
Shenzhen CTV Int Cloud Technology Co., Ltd.
For
Security Camera
Model No.: ZY-BB1, ZY-BB2, ZY-BB3, ZY-BB4, ZY-BB5, ZY-BB6,
Baby1, Baby 2, Baby 3, Baby 4, ZY-BY1, ZY-BY2, ZY-BY3,
ZY-BY4, ZY-BY5, ZY-BY6, ZY-BY7, ZY-BY8, ZY-BY9, ZY-BB7,
ZY-BB8, ZY-BB9, ZY-BB10, Baby 5, Baby 6, Baby 7, Baby 8, Baby
9, Baby 10

FCC ID: 2AZL7-ZY-BB1

Prepared For : Shenzhen CTV Int Cloud Technology Co., Ltd.
501, Building A, Debaoli Industrial Park, Shangxue Technology City, Xinxue
Community, Bantian Street, Longgang District, Shenzhen, China

Prepared By : Shenzhen DL Testing Technology Co., Ltd.
101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial
Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Date of Test: Apr. 08, 2024 ~ May 07, 2024

Date of Report: May 07, 2024

Report Number: DL-240606008-3ER



Test Result Certification

Applicant's name : Shenzhen CTV Int Cloud Technology Co., Ltd.
501, Building A, Debaoli Industrial Park, Shangxue Technology
Address : City, Xinxue Community, Bantian Street, Longgang District,
Shenzhen, China
Manufacturer's Name : Shenzhen CTV Int Cloud Technology Co., Ltd.
501, Building A, Debaoli Industrial Park, Shangxue Technology
Address : City, Xinxue Community, Bantian Street, Longgang District,
Shenzhen, China
Product description
Trade Mark: N/A
Product name..... : Security Camera
Model and/or type reference : ZY-BB1, ZY-BB2, ZY-BB3, ZY-BB4, ZY-BB5, ZY-BB6, Baby1,
Baby 2, Baby 3, Baby 4, ZY-BY1, ZY-BY2, ZY-BY3, ZY-BY4,
ZY-BY5, ZY-BY6, ZY-BY7, ZY-BY8, ZY-BY9, ZY-BB7, ZY-BB8,
ZY-BB9, ZY-BB10, Baby 5, Baby 6, Baby 7, Baby 8, Baby 9, Baby
10
Standards..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen DL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen DL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test..... :
Date (s) of performance of tests..... : **Apr. 08, 2024 ~ May 07, 2024**
Date of Issue..... : **May 07, 2024**
Test Result : **Pass**

Testing Engineer : Randy Xie
Randy Xie
Technical Manager : Jack Bu
Jack Bu
Authorized Signatory : Jade Yang
Jade Yang





Table of Contents

1. Test Result Summary	5
1.1. Test Procedures and Results	5
1.2. Information of the Test Laboratory	5
1.3. Measurement Uncertainty	6
2. EUT Description.....	7
2.1. General Description of EUT	7
2.2. Carrier Frequency of Channels.....	8
2.3. Operation of EUT During Testing	8
2.4. Description of Test Setup.....	9
2.5. Description of Support Units	10
2.6. Equipments List for All Test Items	11
3. Genera Information.....	12
3.1. Test Environment and Mode	12
4. Test Results and Measurement Data	15
4.1. Conducted Emission.....	15
4.2. Test Result	16
4.3. Maximum Conducted Output Power	18
4.4. Emission Bandwidth	20
4.5. Power Spectral Density	28
4.6. Conducted Band Edge and Spurious Emission Measurement	35
4.7. Radiated Spurious Emission Measurement	48
4.8. Antenna Requirement	73
5. Photograph of Test.....	74
6. Photos of the EUT.....	76



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	May 07, 2024	



1. Test Result Summary

1.1. Test Procedures and Results

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247(b)(4)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247(b)(3)	PASS
6dB Emission Bandwidth	§15.247(a)(2)	PASS
Power Spectral Density	§15.247(e)	PASS
Band Edge	§15.247(d)	PASS
Spurious Emission	§15.205/§15.209	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone,
Baolong Street, Longgang District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



1.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.71\text{dB}$
2	RF power, conducted	$\pm 0.37\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.90\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^{\circ}\text{C}$
7	Humidity	$\pm 1.0\%$



2. EUT Description

2.1. General Description of EUT

Equipment:	Security Camera
Model Name:	ZY-BB1
Series Model:	ZY-BB2, ZY-BB3, ZY-BB4, ZY-BB5, ZY-BB6, Baby1, Baby 2, Baby 3, Baby 4, ZY-BY1, ZY-BY2, ZY-BY3, ZY-BY4, ZY-BY5, ZY-BY6, ZY-BY7, ZY-BY8, ZY-BY9, ZY-BB7, ZY-BB8, ZY-BB9, ZY-BB10, Baby 5, Baby 6, Baby 7, Baby 8, Baby 9, Baby 10
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: ZY-BB1
FCC ID:	2AZL7-ZY-BB1
Antenna Type:	Iron sheet Antenna
Antenna Gain:	2.88dBi
Operation frequency:	802.11b/g/n/ax(HT20): 2412~2462MHz
Number of Channels:	802.11b/g/n/ax(HT20): 11CH
Modulation Type:	DSSS, OFDM
Power Source:	DC 5V 1A from Adapter
Power Rating:	DC 5V 1A from Adapter
Note:	
1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain Refer to the antenna specifications. 3. The cable loss data is obtained from the supplier. 4. The test results in the report only apply to the tested sample.	



2.2. Carrier Frequency of Channels

Channel List For 802.11b/802.11g/802.11n (HT20)/ 802.11ax (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452	--	--

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT During Testing

Operating Mode


The mode is used: Transmitting mode for 802.11b/802.11g/802.11n (HT20)
/ 802.11ax(HT20)

Low Channel: 2412MHz
Middle Channel: 2437MHz
High Channel: 2462MHz



2.4. Description of Test Setup

Operation of EUT during Conducted testing and Radiation testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Security Camera	N/A	ZY-BB1	N/A	EUT
2	USB Cable	N/A	N/A	Length: 1.5m	Accessory
3	Adapter	N/A	SA0051-0501000US	Input: AC100-240V, 50/60Hz, 0.2A Output: DC5V/1A, 5W	Accessory

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



2.6. Equipments List for All Test Items

Radiation test, Band-edge test and 20db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 04, 2023	Nov. 03, 2024
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 04, 2023	Nov. 03, 2024
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 04, 2023	Nov. 03, 2024
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 04, 2023	Nov. 03, 2024
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 04, 2023	Nov. 03, 2024
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 04, 2023	Nov. 03, 2024
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 04, 2023	Nov. 03, 2024
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 04, 2023	Nov. 03, 2024
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 04, 2023	Nov. 03, 2024
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 04, 2023	Nov. 03, 2024
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 04, 2023	Nov. 03, 2024
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 04, 2023	Nov. 03, 2024
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 04, 2023	Nov. 03, 2024
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 04, 2023	Nov. 03, 2024
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 04, 2023	Nov. 03, 2024
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 04, 2023	Nov. 03, 2024

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 04, 2023	Nov. 03, 2024
3	LISN	R&S	ENV216	102417	Nov. 04, 2023	Nov. 03, 2024
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 04, 2023	Nov. 03, 2024
5	10dB Attenuator	Schwarzbeck	VTSD9561F	00154	Nov. 04, 2023	Nov. 03, 2024

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. Genera Information

3.1. Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	



We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ax(HT20)	6.5Mbps

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20)/ 802.11ax (H20)

3. Mode Test Duty Cycle

Mode	Duty Cycle	Duty Cycle Factor (dB)
802.11b	0.99	-0.05
802.11g	0.99	-0.03
802.11n(H20)	0.98	-0.07
802.11ax(HT20)	0.98	-0.09

Test plots as follows:




802.11b




802.11g



802.11n(H20)

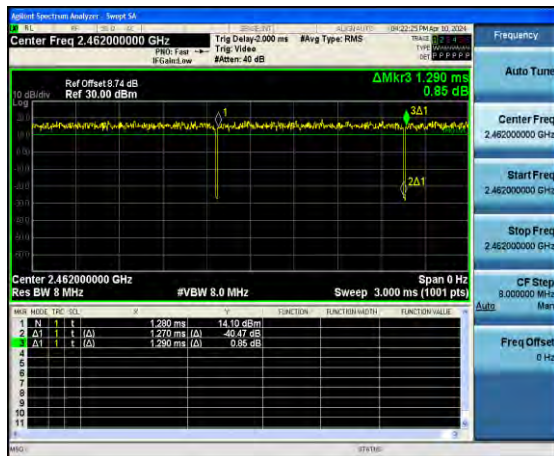

802.11ax(HT20)

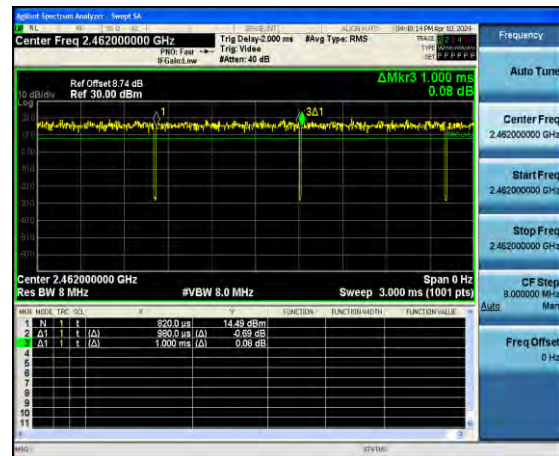



4. Test Results and Measurement Data

4.1. Conducted Emission

Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm E.U.T AC power Test table/Insulation plane 80cm LISN Filter AC power EMI Receiver Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	transmitting with modulation														
Test Procedure:	1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														




4.2. Test Result

Remark: All the test modes completed for test. only the worst result

Of was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

Test Specification: Line

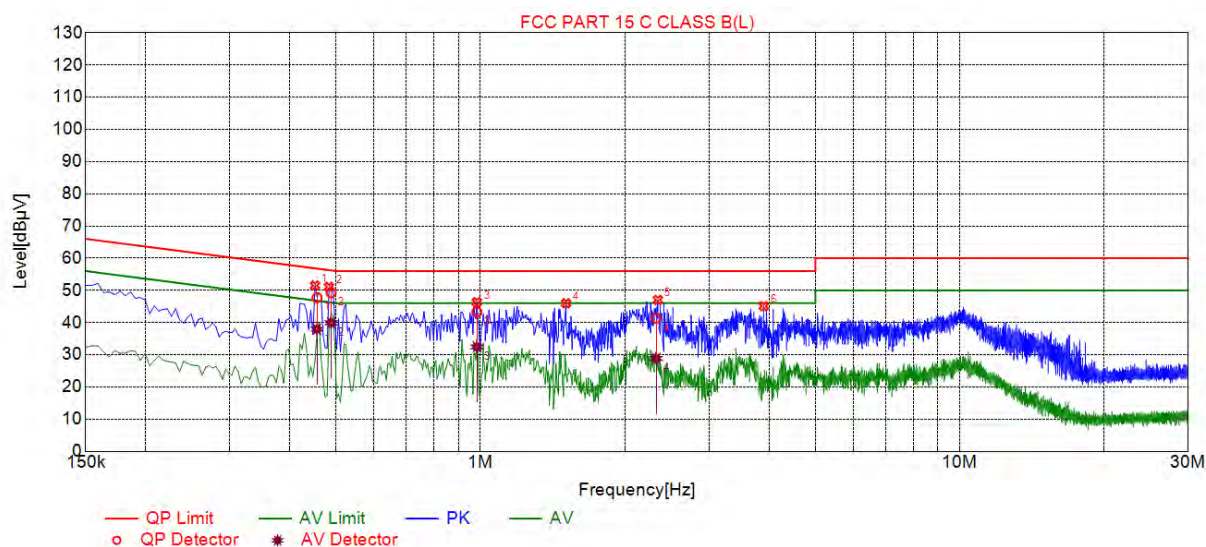

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.4515	51.51	20.04	56.85	5.34	31.47	PK	L
2	0.4830	51.07	20.04	56.29	5.22	31.03	PK	L
3	0.9825	46.33	20.06	56.00	9.67	26.27	PK	L
4	1.5090	45.97	20.11	56.00	10.03	25.86	PK	L
5	2.3460	47.04	20.18	56.00	8.96	26.86	PK	L
6	3.9030	45.09	20.25	56.00	10.91	24.84	PK	L

Final Data List


NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.4559	20.04	47.72	56.77	9.05	27.68	37.93	46.77	8.84	17.89	L
2	0.4878	20.04	49.29	56.20	6.91	29.25	39.95	46.20	6.25	19.91	L
3	0.9830	20.06	43.27	56.00	12.73	23.21	32.44	46.00	13.56	12.38	L
4	2.3271	20.18	41.39	56.00	14.61	21.21	28.88	46.00	17.12	8.70	L

Remark: Margin = Limit - Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

Test Specification: Neutral

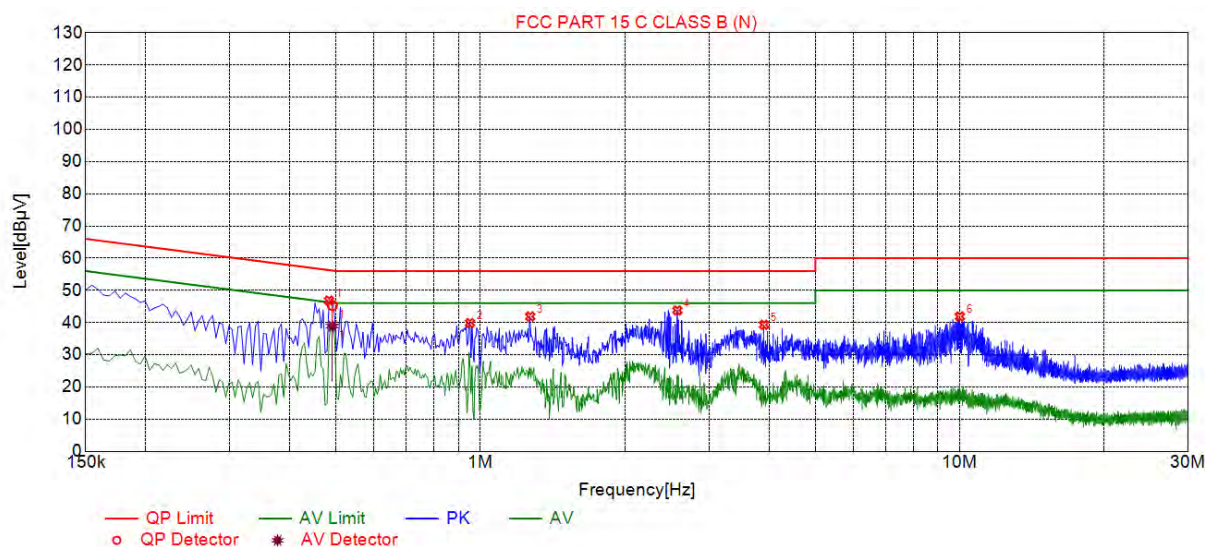

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.4830	46.84	20.04	56.29	9.45	26.80	PK	N
2	0.9510	39.87	20.06	56.00	16.13	19.81	PK	N
3	1.2705	41.89	20.09	56.00	14.11	21.80	PK	N
4	2.5755	43.79	20.20	56.00	12.21	23.59	PK	N
5	3.9075	39.32	20.25	56.00	16.68	19.07	PK	N
6	10.0140	41.89	20.06	60.00	18.11	21.83	PK	N

Final Data List

NO	Freq. [MHz]	Correction factor[dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.4907	20.04	45.34	56.16	10.82	25.30	38.93	46.16	7.23	18.89	N

Remark: Margin = Limit - Level


Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



4.3. Maximum Conducted Output Power

Test Specification

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular unit labeled 'RF automatic control unit'. It is connected by a black line (representing an RF cable) to a small white square (representing an attenuator). This is further connected by another black line to a yellow rectangular unit labeled 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the RF automatic control unit by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the Peak output power and record the results in the test report.
Test Result:	PASS

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



Test Data


Mode	Test Channel	Frequency	Maximum Peak Conducted Output Power	LIMIT
		(MHz)	(dBm)	dBm
802.11b	CH01	2412	13.54	30
802.11b	CH06	2437	14.16	30
802.11b	CH11	2462	14.12	30
802.11g	CH01	2412	13.54	30
802.11g	CH06	2437	14.06	30
802.11g	CH11	2462	13.82	30
802.11n(HT20)	CH01	2412	12.79	30
802.11n(HT20)	CH06	2437	13.30	30
802.11n(HT20)	CH11	2462	12.85	30
802.11ax(HT20)	CH01	2412	12.81	30
802.11ax(HT20)	CH06	2437	13.10	30
802.11ax(HT20)	CH11	2462	12.85	30

Note: 1.The test results including the cable lose.



4.4. Emission Bandwidth

Test Specification

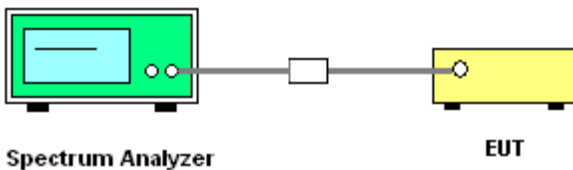Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	>500kHz
Test Setup:	 The diagram illustrates the test setup. On the left is a green rectangular box labeled 'Spectrum Analyzer'. A black cable connects it to a yellow rectangular box on the right labeled 'EUT'. A small white square is located on the cable between the two boxes.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

**Test data**

Test channel	6dB Emission Bandwidth (MHz)			
	802.11b	802.11g	802.11n(H20)	802.11ax(HT20)
Lowest	9.560	16.360	17.600	19.000
Middle	9.560	16.160	17.560	19.000
Highest	9.960	16.360	17.600	18.640
Limit:	>500kHz			
Test Result:	PASS			

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel



Highest channel



802.11g Modulation

Lowest channel



Middle channel



Highest channel





802.11n (HT20) Modulation

Lowest channel



Middle channel



Highest channel




802.11ax(HT20) Modulation


Lowest channel



Middle channel

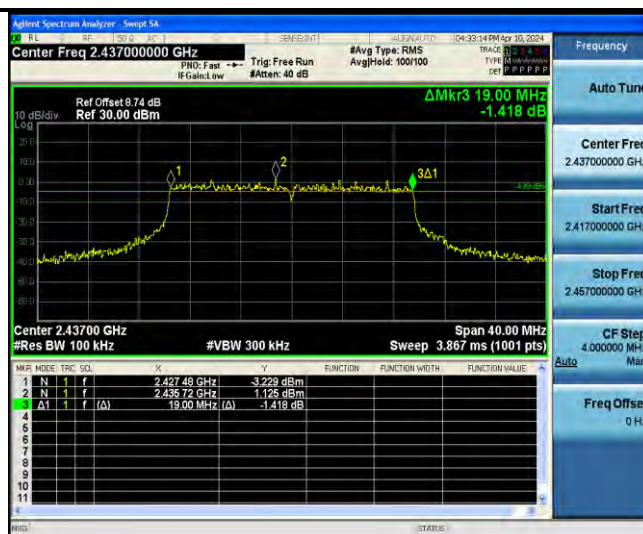


Highest channel

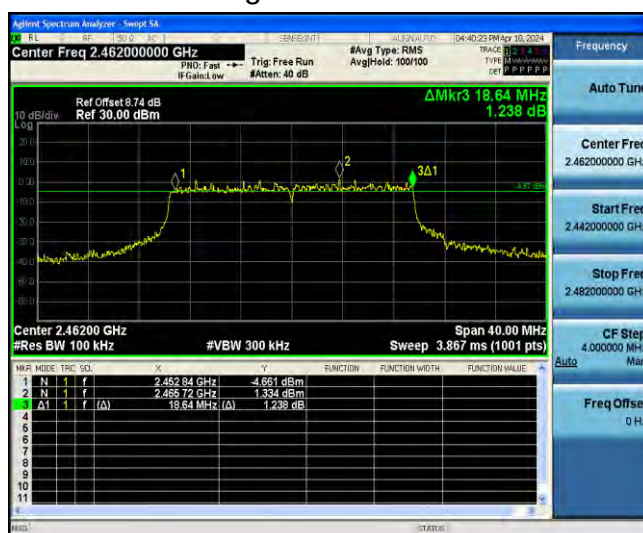



4.5. Power Spectral Density

Test Specification


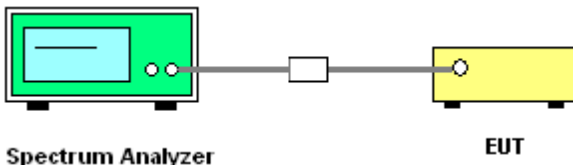
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'Spectrum Analyzer'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = Peak, Sweep time = auto couple. 6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 7. Measure and record the results in the test report.
Test Result:	PASS

**Test data**

EUT Set Mode	Channel	Test Result (dBm/30kHz)	Result (dBm/3kHz)
802.11b	Lowest	-2.06	-12.06
	Middle	-1.53	-11.53
	Highest	-1.41	-11.41
802.11g	Lowest	-1.59	-11.59
	Middle	-1.65	-11.65
	Highest	-2.07	-12.07
802.11n(H20)	Lowest	-2.1	-12.1
	Middle	-2.45	-12.45
	Highest	-3.19	-13.19
802.11ax(HT20)	Lowest	-2.21	-12.21
	Middle	-3.14	-13.14
	Highest	-2.26	-12.26
PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10			
Limit: 8dBm/3kHz			
Test Result:		PASS	

Test plots as follows:


**802.11b Modulation****Lowest channel****Middle channel****Highest channel**

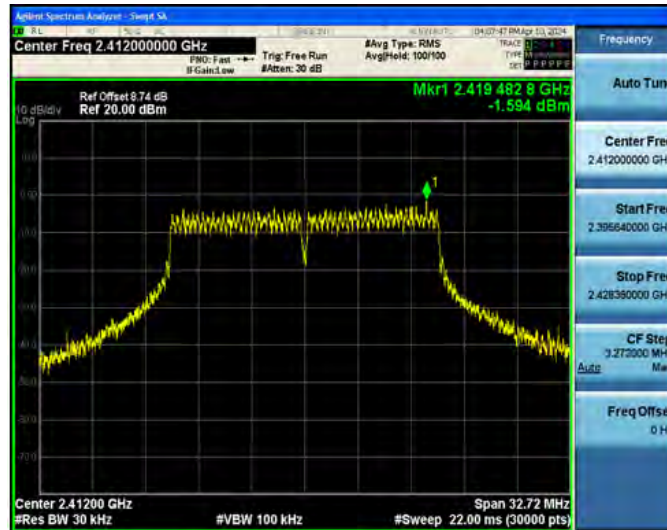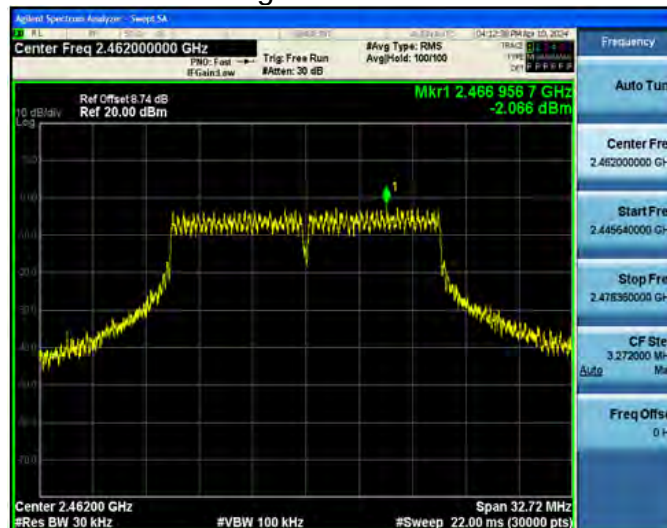**802.11g Modulation****Lowest channel****Middle channel****Highest channel**



802.11n (HT20) Modulation

Lowest channel

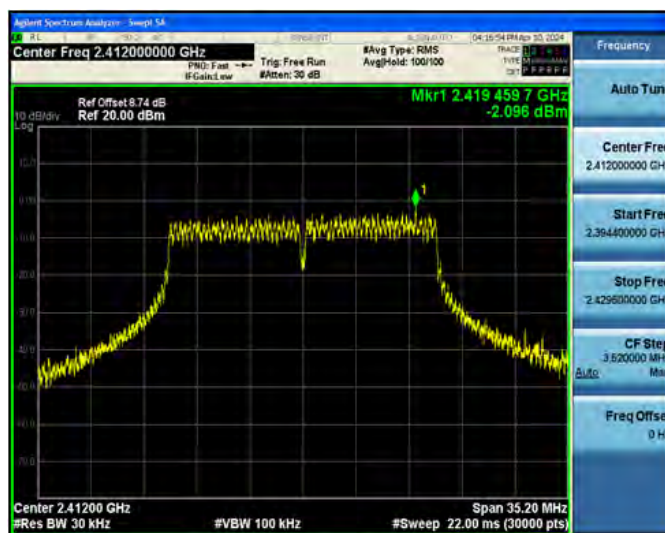


Middle channel





Highest channel

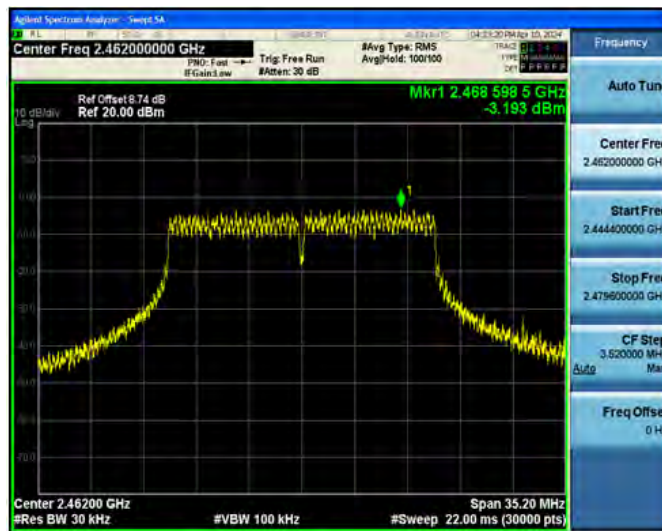

802.11ax(HT20) Modulation

Lowest channel






Middle channel




Highest channel

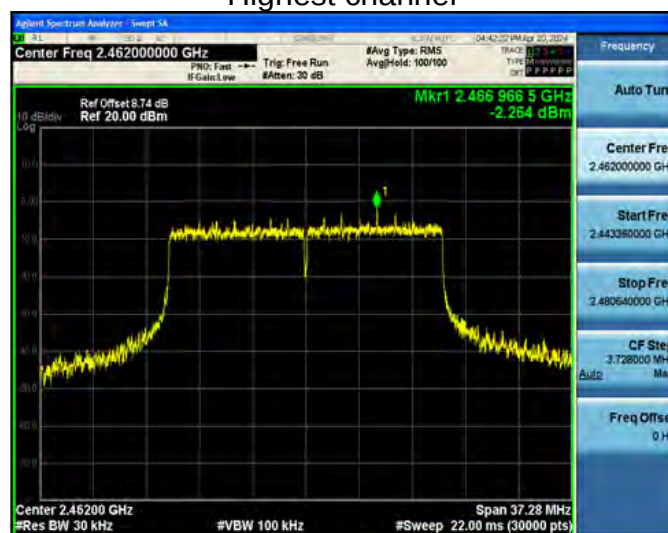



4.6. Conducted Band Edge and Spurious Emission Measurement

Test Specification


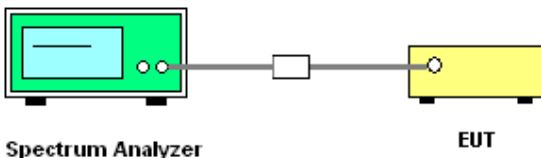
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d). 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
Test Result:	PASS




Test Data

802.11b Modulation





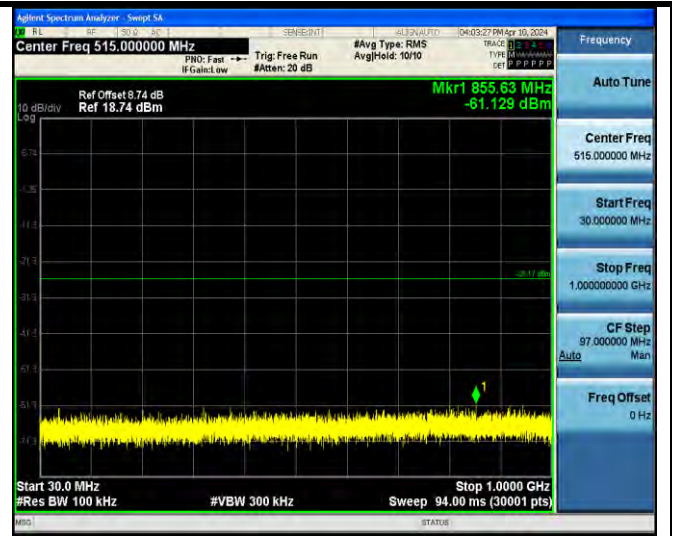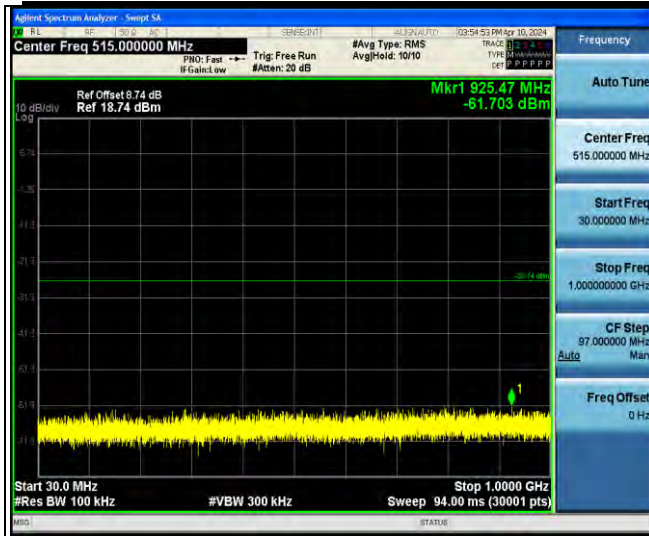

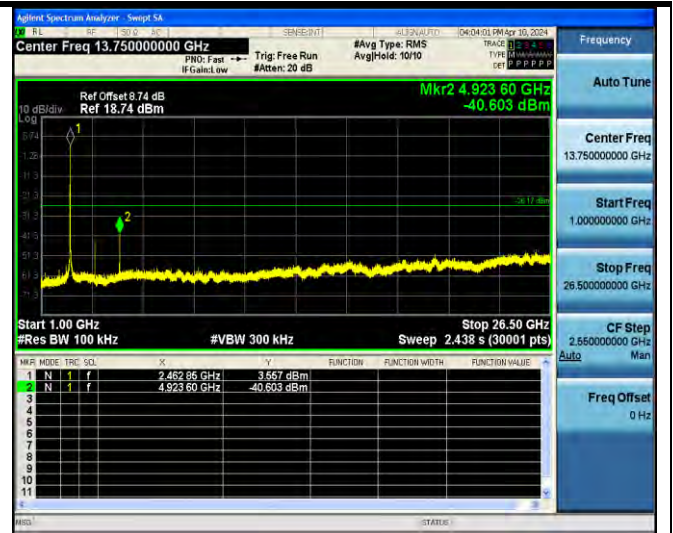


Middle Channel



Spurious Emission

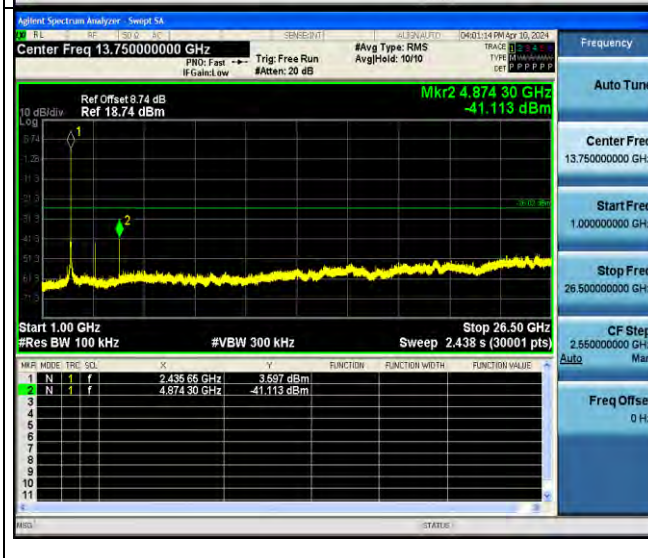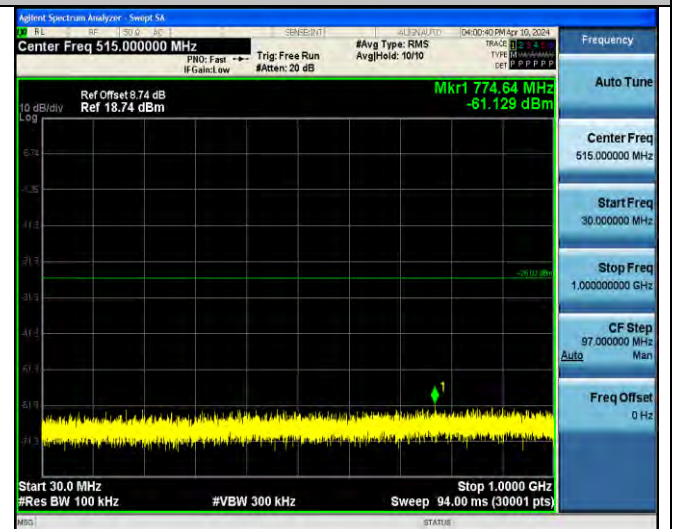





802.11g Modulation

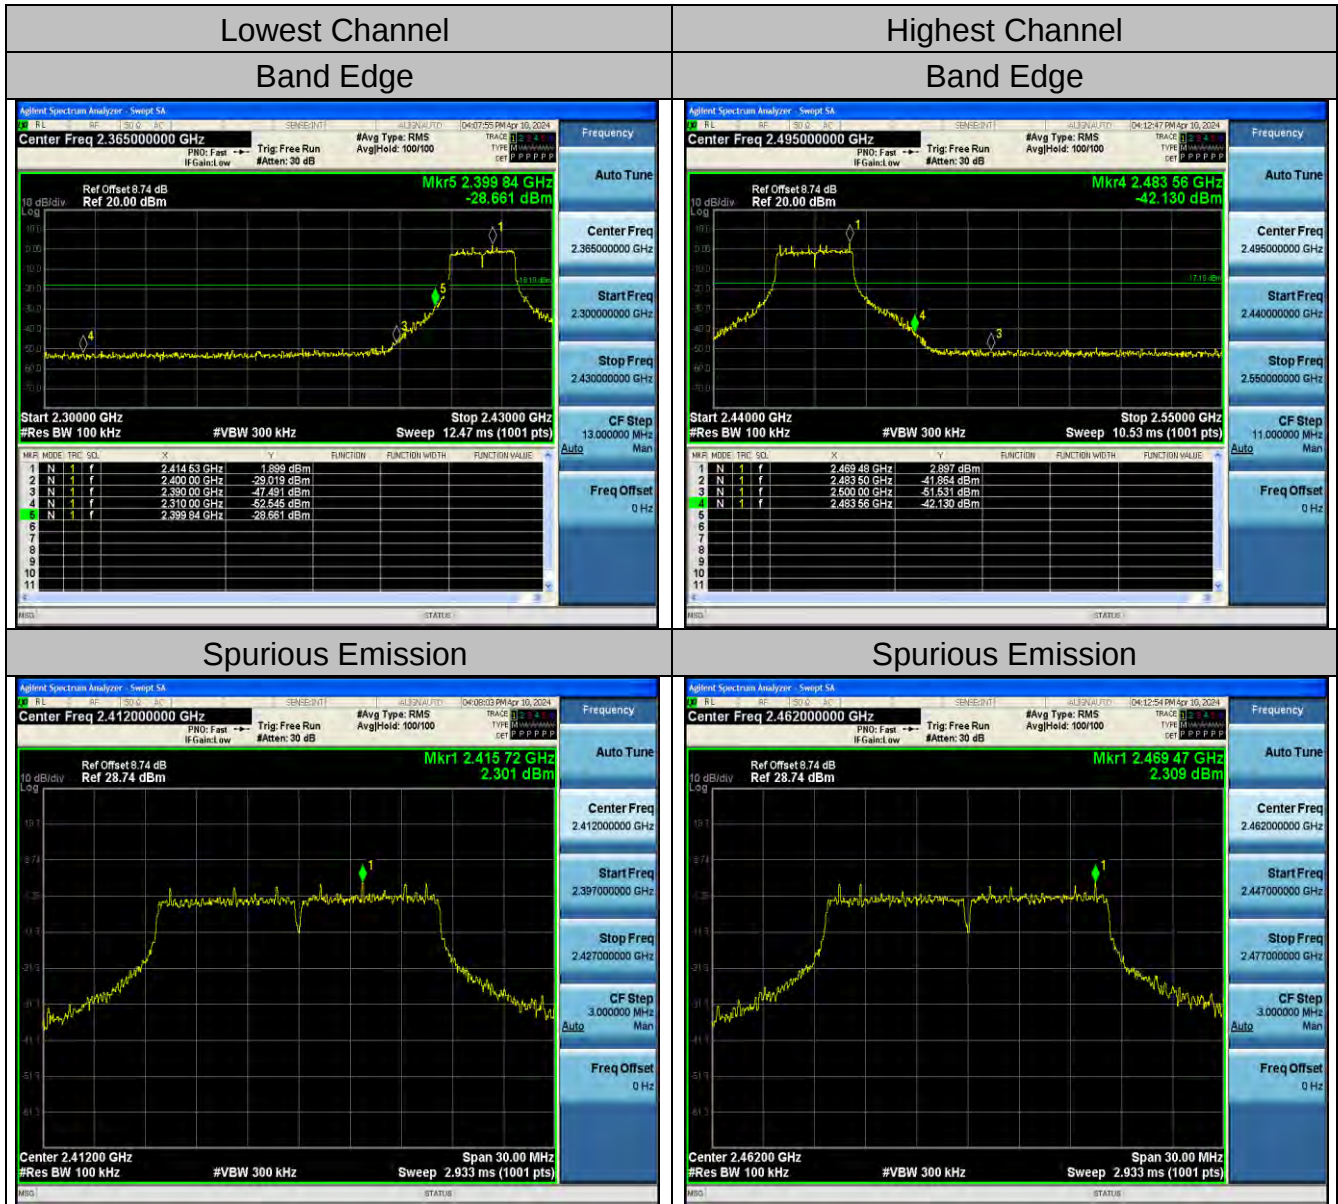

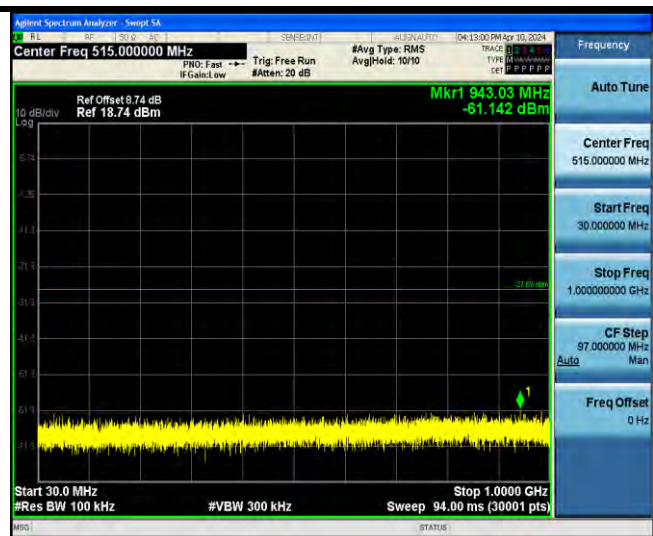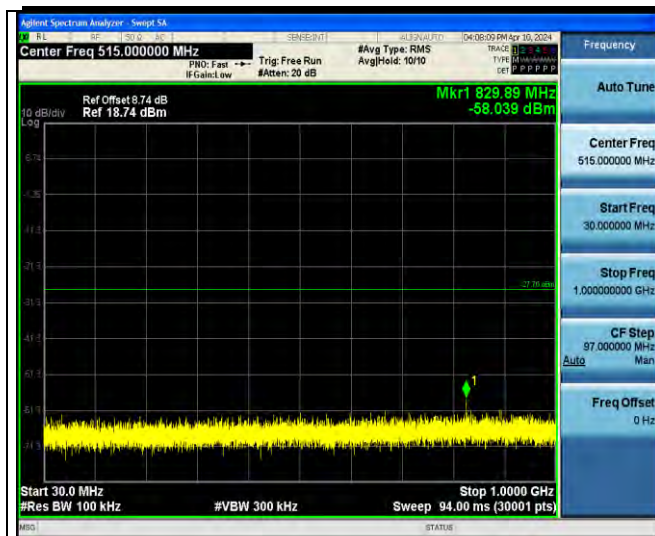

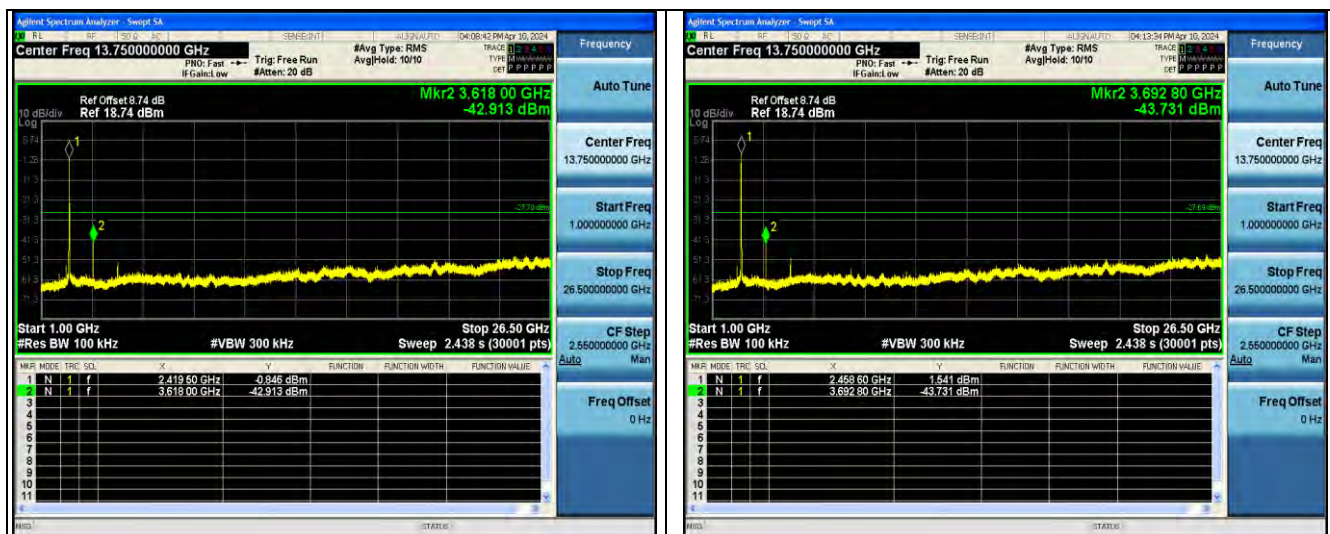



Middle Channel Spurious Emission

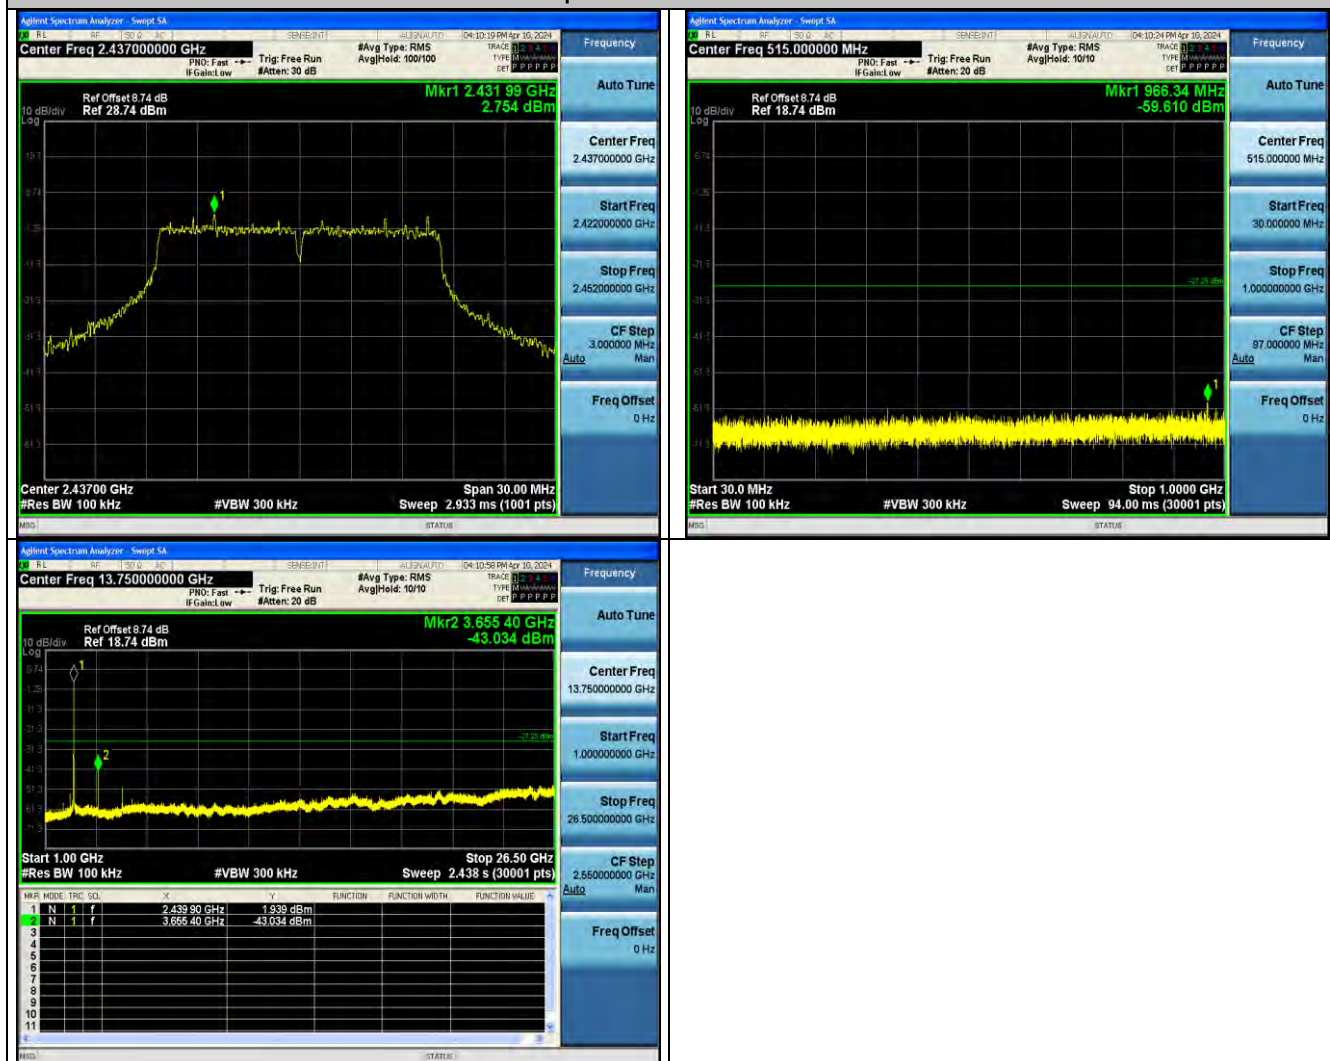




802.11n (HT20) Modulation





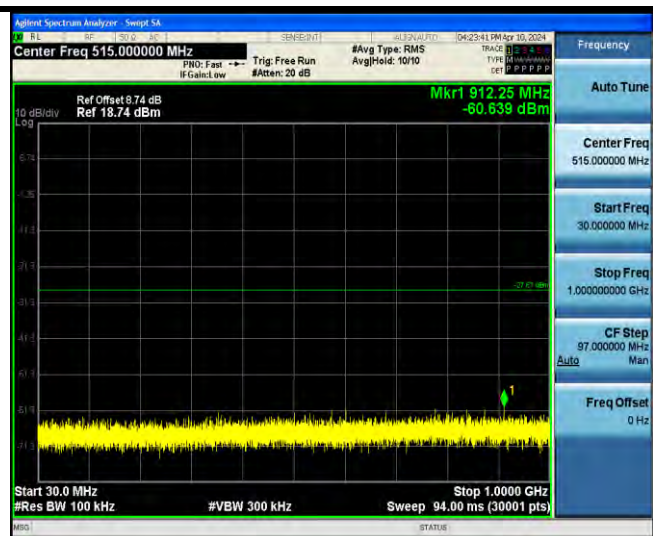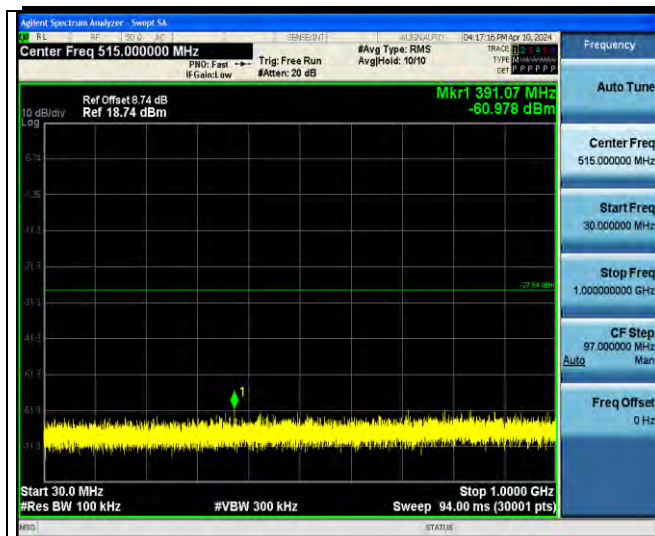

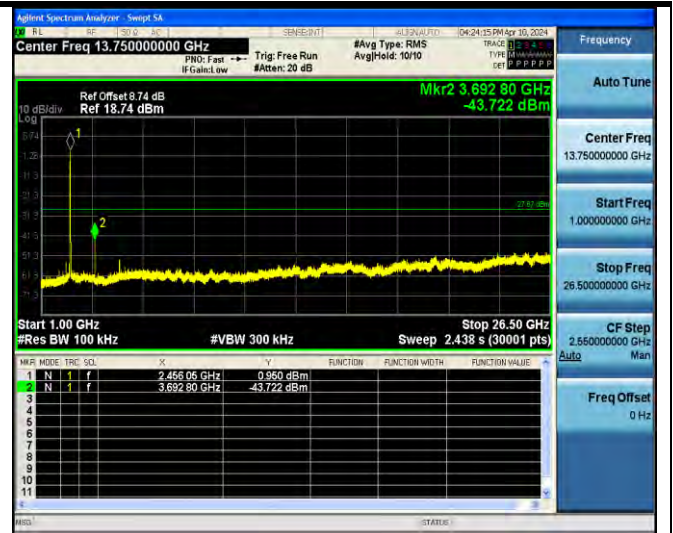

Middle Channel




Spurious Emission

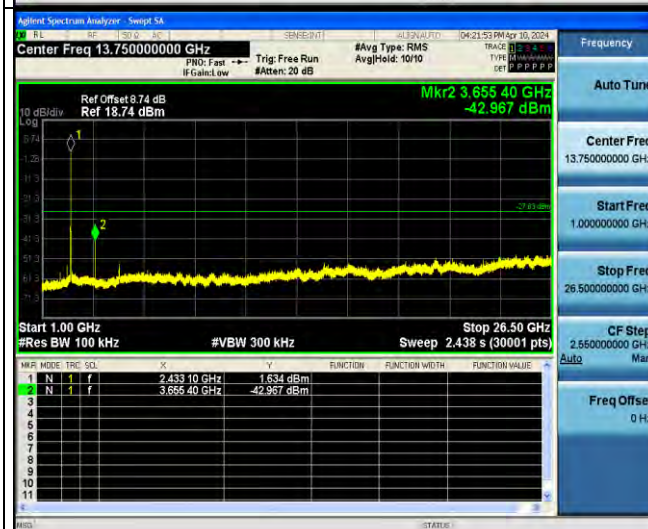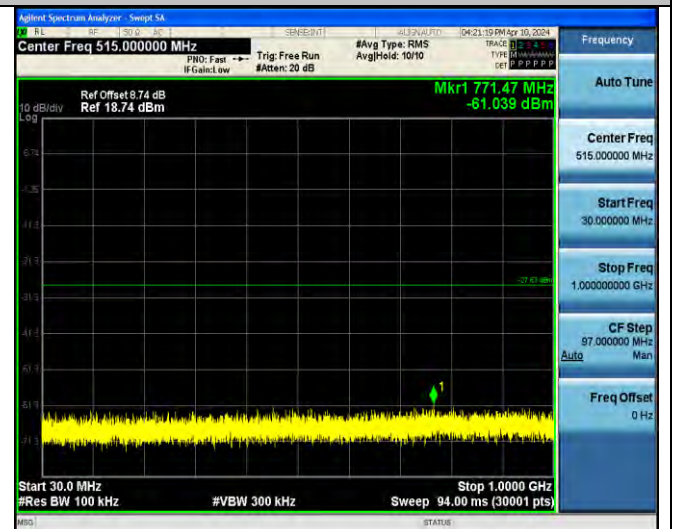




802.11ax(HT20) Modulation



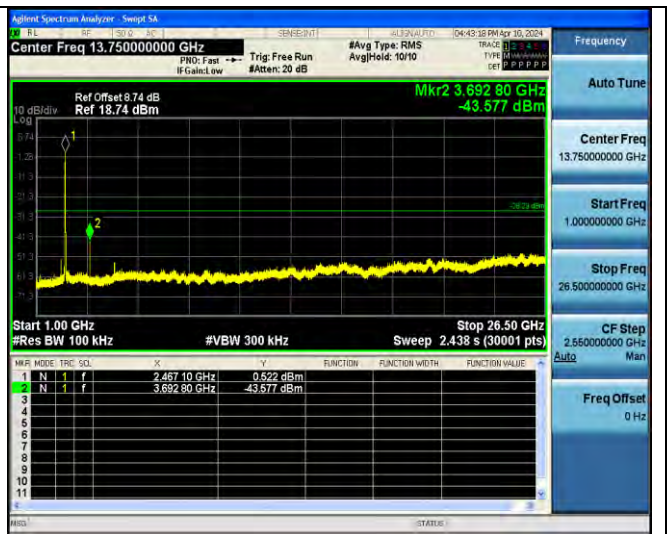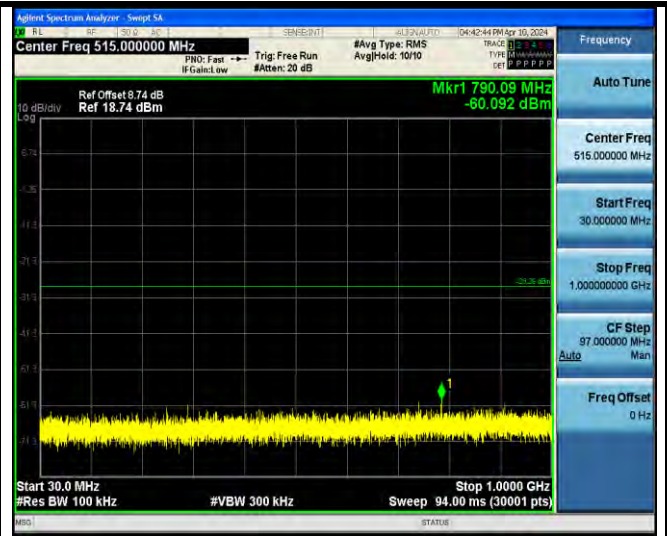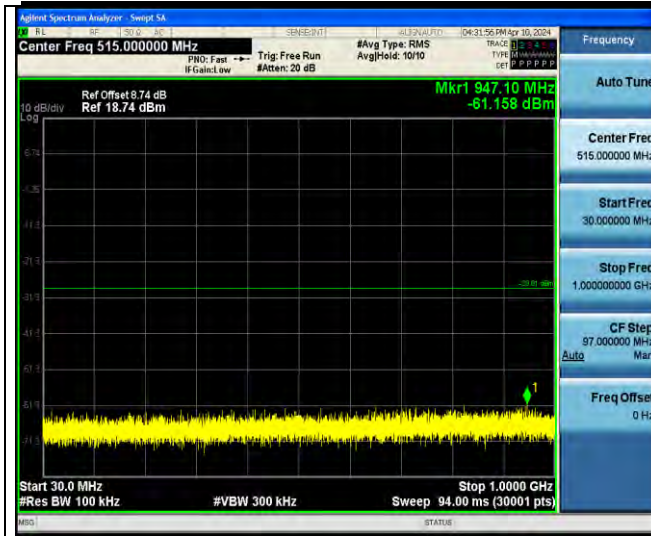


Middle Channel
Spurious Emission

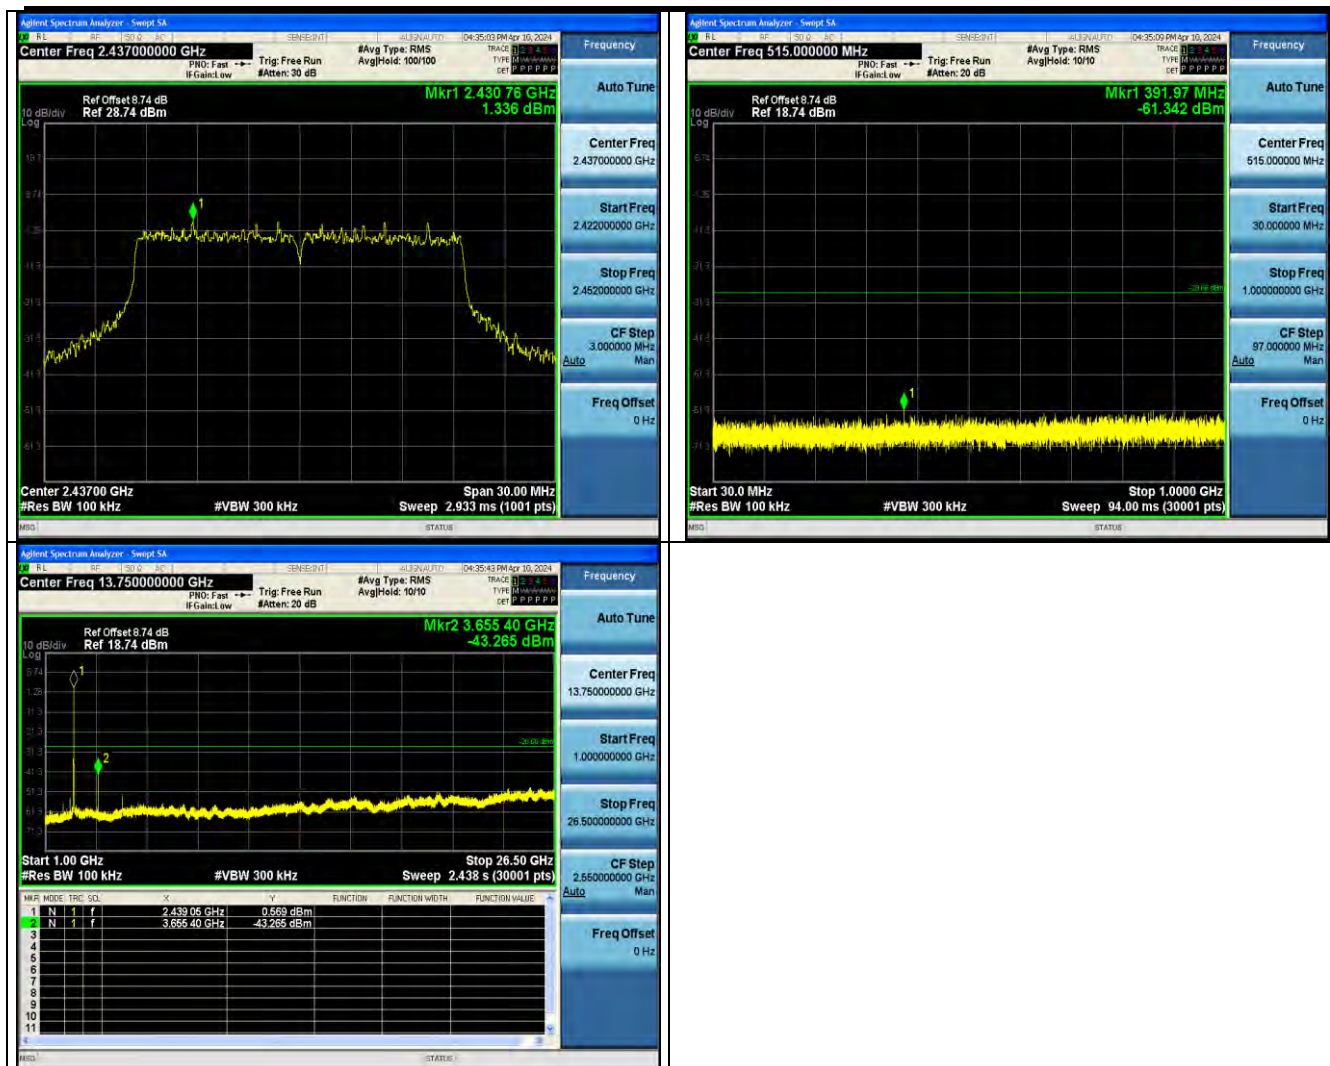





4.7. Radiated Spurious Emission Measurement

Test Specification

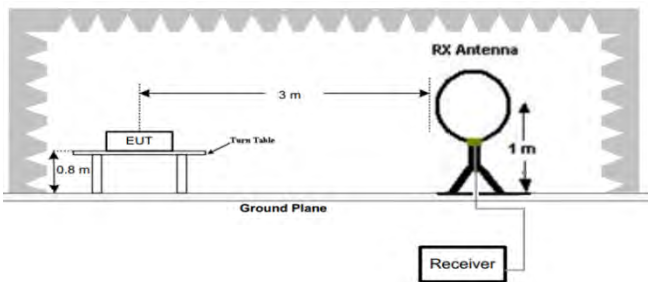Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10: 2013					
Frequency Range:	9 kHz to 25 GHz					
Measurement Distance:	3 m					
Antenna Polarization:	Horizontal & Vertical					
Operation mode:	Transmitting mode with modulation					
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)	
	0.009-0.490		2400/F(KHz)		300	
	0.490-1.705		24000/F(KHz)		30	
	1.705-30		30		30	
	30-88		100		3	
	88-216		150		3	
	216-960		200		3	
	Above 960		500		3	
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	
	Above 1GHz		500	3	Average	
			5000	3	Peak	
	Test setup:	For radiated emissions below 30MHz				
						
		30MHz to 1GHz				

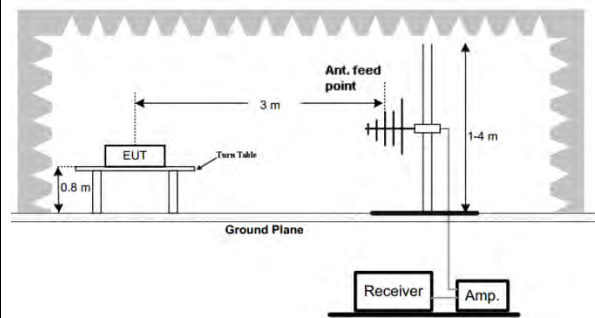

Above 1GHz

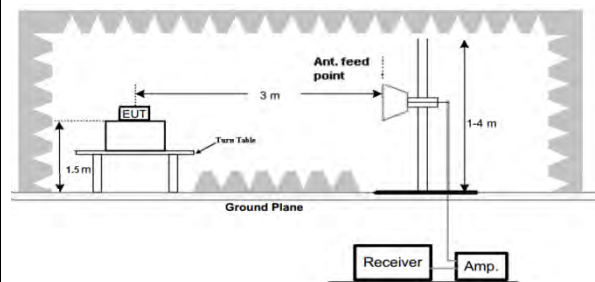**Test Procedure:**

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
2. For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal.



	The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. 3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level 4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 5. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=120 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement. 6. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test results:	PASS




Test Data

All the test modes completed for test. only the worst result of (802.11b at 2412MHz) was reported as below:


Below 1GHz

Horizontal

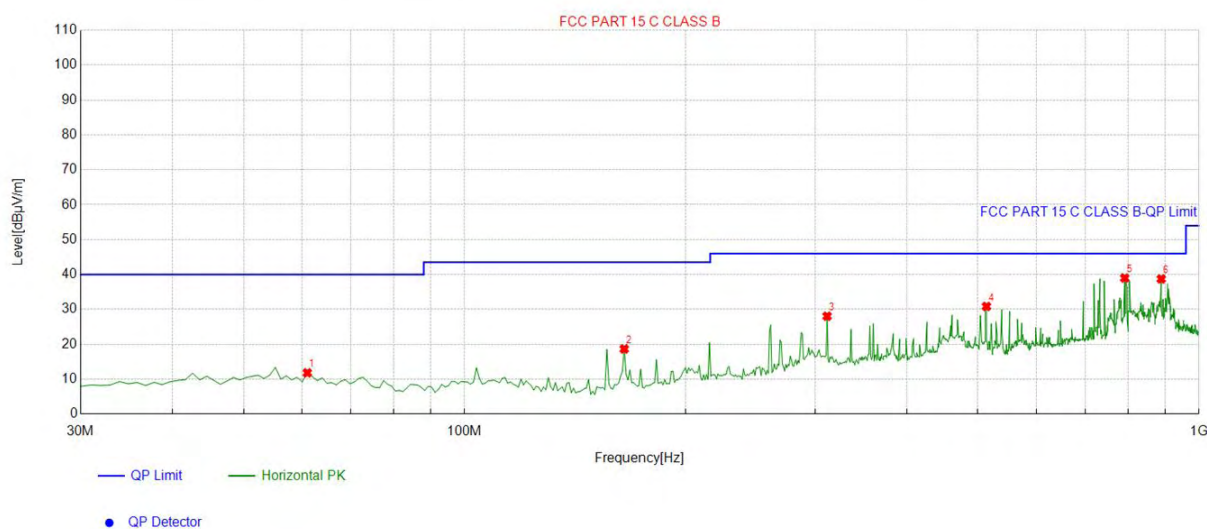

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.071071	-13.82	25.62	11.80	40.00	28.20	100	292	Horizontal
2	164.96496	-17.49	36.14	18.65	43.50	24.85	100	45	Horizontal
3	311.58158	-11.70	39.74	28.04	46.00	17.96	100	124	Horizontal
4	513.54354	-8.01	38.84	30.83	46.00	15.17	100	217	Horizontal
5	792.21221	-3.25	42.22	38.97	46.00	7.03	100	0	Horizontal
6	888.33833	-1.63	40.35	38.72	46.00	7.28	100	158	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Level-Limit.

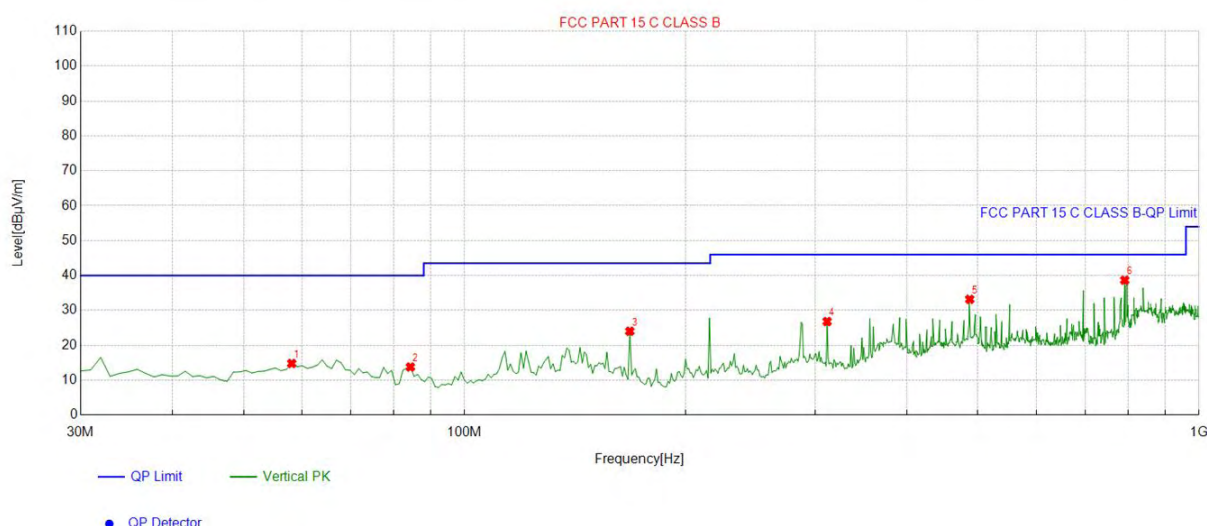**Vertical**

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.158158	-14.00	28.78	14.78	40.00	25.22	100	338	Vertical
2	84.374374	-17.88	31.65	13.77	40.00	26.23	100	330	Vertical
3	167.87787	-17.31	41.33	24.02	43.50	19.48	100	213	Vertical
4	311.58158	-11.70	38.50	26.80	46.00	19.20	100	226	Vertical
5	487.32732	-7.91	41.07	33.16	46.00	12.84	100	359	Vertical
6	792.21221	-3.25	41.89	38.64	46.00	7.36	100	221	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor;
Margin = Level-Limit.

Harmonics and Spurious Emissions**Frequency Range (9kHz-30MHz)**

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note:1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**Above 1GHz****Radiated Emission Test**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	51.94	-3.64	48.3	74	-25.7	peak
4824	40.92	-3.64	37.28	54	-16.72	AVG
7236	50.35	-0.95	49.4	74	-24.6	peak
7236	38.12	-0.95	37.17	54	-16.83	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	52.17	-3.64	48.53	74	-25.47	peak
4824	41.7	-3.64	38.06	54	-15.94	AVG
7236	50.26	-0.95	49.31	74	-24.69	peak
7236	40.71	-0.95	39.76	54	-14.24	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	51.84	-3.51	48.33	74	-25.67	peak
4874	42.83	-3.51	39.32	54	-14.68	AVG
7311	48.85	-0.82	48.03	74	-25.97	peak
7311	39.73	-0.82	38.91	54	-15.09	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	51.65	-3.51	48.14	74	-25.86	peak
4874	41.27	-3.51	37.76	54	-16.24	AVG
7311	50.64	-0.82	49.82	74	-24.18	peak
7311	39.28	-0.82	38.46	54	-15.54	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	52.76	-3.43	49.33	74	-24.67	peak
4924	41.24	-3.43	37.81	54	-16.19	AVG
7386	50.57	-0.75	49.82	74	-24.18	peak
7386	39.92	-0.75	39.17	54	-14.83	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	52.87	-3.43	49.44	74	-24.56	peak
4924	38.5	-3.43	35.07	54	-18.93	AVG
7386	50.91	-0.75	50.16	74	-23.84	peak
7386	38.26	-0.75	37.51	54	-16.49	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	52.02	-3.64	48.38	74	-25.62	peak
4824	44.83	-3.64	41.19	54	-12.81	AVG
7236	49.38	-0.95	48.43	74	-25.57	peak
7236	38.33	-0.95	37.38	54	-16.62	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	52.81	-3.64	49.17	74	-24.83	peak
4824	41.23	-3.64	37.59	54	-16.41	AVG
7236	48.37	-0.95	47.42	74	-26.58	peak
7236	39.16	-0.95	38.21	54	-15.79	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	53.48	-3.51	49.97	74	-24.03	peak
4874	40.29	-3.51	36.78	54	-17.22	AVG
7311	48.23	-0.82	47.41	74	-26.59	peak
7311	37.83	-0.82	37.01	54	-16.99	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	51.58	-3.51	48.07	74	-25.93	peak
4874	43.64	-3.51	40.13	54	-13.87	AVG
7311	47.99	-0.82	47.17	74	-26.83	peak
7311	41.25	-0.82	40.43	54	-13.57	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	50.19	-3.43	46.76	74	-27.24	peak
4924	41.52	-3.43	38.09	54	-15.91	AVG
7386	51.05	-0.75	50.3	74	-23.7	peak
7386	40.12	-0.75	39.37	54	-14.63	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	53.25	-3.43	49.82	74	-24.18	peak
4924	41.08	-3.43	37.65	54	-16.35	AVG
7386	49.87	-0.75	49.12	74	-24.88	peak
7386	41.78	-0.75	41.03	54	-12.97	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) < 93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) < 54dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	51.85	-3.64	48.21	74	-25.79	peak
4824	42.38	-3.64	38.74	54	-15.26	AVG
7236	50.52	-0.95	49.57	74	-24.43	peak
7236	39.39	-0.95	38.44	54	-15.56	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	51.85	-3.64	48.21	74	-25.79	peak
4824	38.72	-3.64	35.08	54	-18.92	AVG
7236	48.55	-0.95	47.6	74	-26.4	peak
7236	38.47	-0.95	37.52	54	-16.48	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	52.91	-3.51	49.40	74.00	-24.60	peak
4874	42.28	-3.51	38.77	54.00	-15.23	AVG
7311	48.33	-0.82	47.51	74.00	-26.49	peak
7311	39.30	-0.82	38.48	54.00	-15.52	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	49.95	-3.51	46.44	74.00	-27.56	peak
4874	44.91	-3.51	41.40	54.00	-12.60	AVG
7311	50.50	-0.82	49.68	74.00	-24.32	peak
7311	38.68	-0.82	37.86	54.00	-16.14	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	52.35	-3.43	48.92	74	-25.08	peak
4924	41.12	-3.43	37.69	54	-16.31	AVG
7386	52.15	-0.75	51.4	74	-22.6	peak
7386	39.76	-0.75	39.01	54	-14.99	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	52.84	-3.43	49.41	74	-24.59	peak
4924	41.18	-3.43	37.75	54	-16.25	AVG
7386	51.68	-0.75	50.93	74	-23.07	peak
7386	38.22	-0.75	37.47	54	-16.53	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



LOW CH3 802.11ax(HT20) Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	51.77	-3.63	48.14	74	-25.86	peak
4824	42.37	-3.63	38.74	54	-15.26	AVG
7236	50.95	-0.94	50.01	74	-23.99	peak
7236	40.33	-0.94	39.39	54	-14.61	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	53.62	-3.63	49.99	74	-24.01	peak
4824	40.47	-3.63	36.84	54	-17.16	AVG
7236	48.59	-0.94	47.65	74	-26.35	peak
7236	41.22	-0.94	40.28	54	-13.72	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	51.85	-3.51	48.34	74	-25.66	peak
4874	44.01	-3.51	40.5	54	-13.5	AVG
7311	51.72	-0.82	50.9	74	-23.1	peak
7311	39.56	-0.82	38.74	54	-15.26	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	50.57	-3.51	47.06	74	-26.94	peak
4874	39.93	-3.51	36.42	54	-17.58	AVG
7311	47.76	-0.82	46.94	74	-27.06	peak
7311	39.31	-0.82	38.49	54	-15.51	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



HIGH CH9 802.11ax (HT20) Mode/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	52.73	-3.43	49.3	74	-24.7	peak
4924	40.56	-3.43	37.13	54	-16.87	AVG
7386	49.65	-0.75	48.9	74	-25.1	peak
7386	38.19	-0.75	37.44	54	-16.56	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	50.91	-3.43	47.48	74	-26.52	peak
4924	42.53	-3.43	39.1	54	-14.9	AVG
7386	50.69	-0.75	49.94	74	-24.06	peak
7386	41.23	-0.75	40.48	54	-13.52	AVG

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency; “E” denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	50.48	-5.81	44.67	74	-29.33	peak
2310.00	39.67	-5.81	33.86	54	-20.14	AVG
2390.00	49.18	-5.84	43.34	74	-30.66	peak
2390.00	39.24	-5.84	33.4	54	-20.6	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	50.02	-5.81	44.21	74	-29.79	peak
2310.00	43.07	-5.81	37.26	54	-16.74	AVG
2390.00	51.76	-5.84	45.92	74	-28.08	peak
2390.00	37.99	-5.84	32.15	54	-21.85	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	52.1	-5.81	46.29	74	-27.71	peak
2483.50	41.02	-5.81	35.21	54	-18.79	AVG
2500.00	51.03	-6.06	44.97	74	-29.03	peak
2500.00	39.26	-6.06	33.2	54	-20.8	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.52	-5.81	48.71	74	-25.29	peak
2483.50	42.24	-5.81	36.43	54	-17.57	AVG
2500.00	50.05	-6.06	43.99	74	-30.01	peak
2500.00	41.64	-6.06	35.58	54	-18.42	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	49.41	-5.81	43.6	74	-30.4	peak
2310.00	41.87	-5.81	36.06	54	-17.94	AVG
2390.00	47.04	-5.84	41.2	74	-32.8	peak
2390.00	40.11	-5.84	34.27	54	-19.73	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	51.87	-5.81	46.06	74	-27.94	peak
2310.00	43.11	-5.81	37.3	54	-16.7	AVG
2390.00	50.76	-5.84	44.92	74	-29.08	peak
2390.00	40.48	-5.84	34.64	54	-19.36	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.41	-5.65	47.76	74	-26.24	peak
2483.50	42.13	-5.65	36.48	54	-17.52	AVG
2500.00	48.05	-5.65	42.4	74	-31.6	peak
2500.00	38.26	-5.65	32.61	54	-21.39	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	52.47	-5.65	46.82	74	-27.18	peak
2483.50	41.91	-5.65	36.26	54	-17.74	AVG
2500.00	52.09	-5.65	46.44	74	-27.56	peak
2500.00	39.29	-5.65	33.64	54	-20.36	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	50.98	-5.81	45.17	74	-28.83	peak
2310.00	42.11	-5.81	36.3	54	-17.7	AVG
2390.00	49.09	-5.84	43.25	74	-30.75	peak
2390.00	39.22	-5.84	33.38	54	-20.62	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	52.84	-5.81	47.03	74	-26.97	peak
2310.00	42.66	-5.81	36.85	54	-17.15	AVG
2390.00	49.97	-5.84	44.13	74	-29.87	peak
2390.00	39.94	-5.84	34.1	54	-19.9	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.15	-5.65	47.5	74	-26.5	peak
2483.50	39.48	-5.65	33.83	54	-20.17	AVG
2500.00	49.04	-5.65	43.39	74	-30.61	peak
2500.00	39.87	-5.65	34.22	54	-19.78	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	52.52	-5.65	46.87	74	-27.13	peak
2483.50	41.03	-5.65	35.38	54	-18.62	AVG
2500.00	47.51	-5.65	41.86	74	-32.14	peak
2500.00	38.29	-5.65	32.64	54	-21.36	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						



Operation Mode: 802.11ax (HT20) Mode TX CH Low (2412MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	52.99	-5.81	47.18	74	-26.82	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	51.98	-5.84	46.14	74	-27.86	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.20	-5.81	50.39	74	-23.61	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	56.18	-5.84	50.34	74	-23.66	peak
2390.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.12	-5.65	47.47	74	-26.53	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	49.84	-5.65	44.19	74	-29.81	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	51.24	-5.65	45.59	74	-28.41	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	57.98	-5.65	52.33	74	-21.67	peak
2500.00	/	-5.65	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is a Iron sheet Antenna, need professional installation, not easy to remove. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 2.88dBi.


Antenna

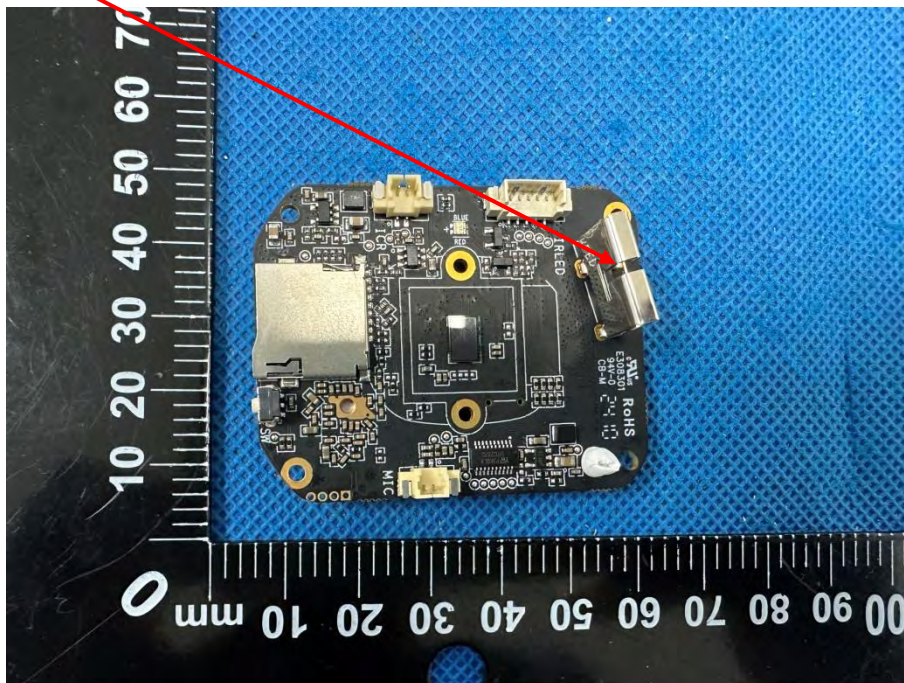




5. Photograph of Test

Radiated Emissions

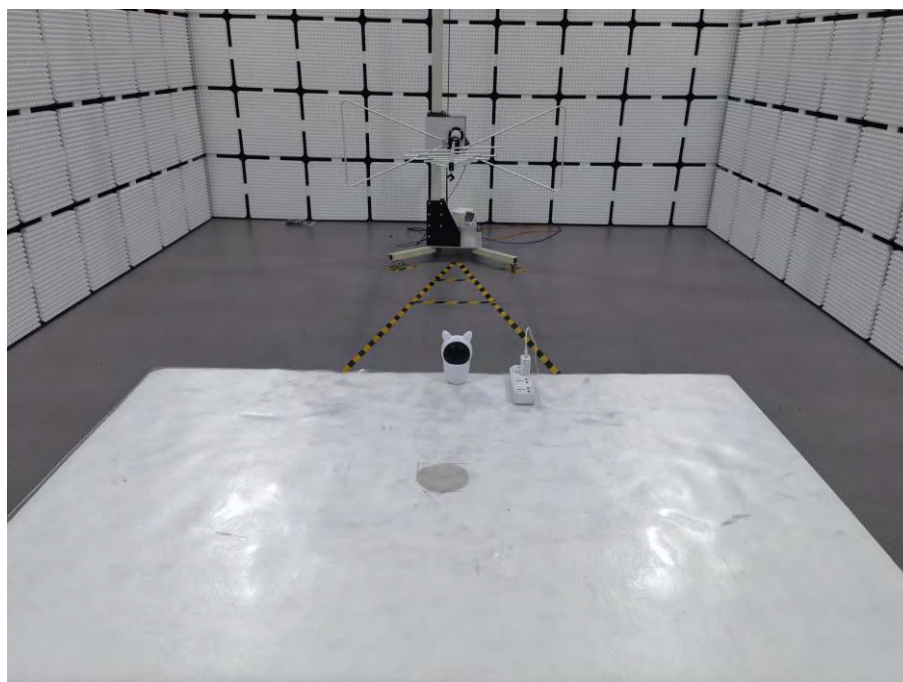



Conducted Emission

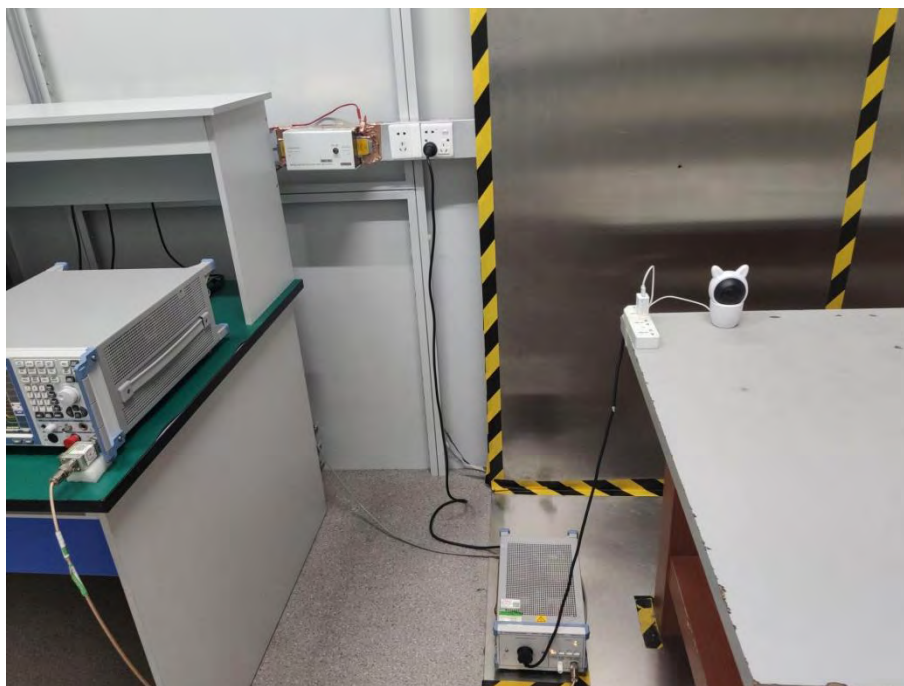



6. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----