



**FCC PART 24TEST REPORT**  
**Part 24 Subpart E**

Report Reference No.....: HK2210314830-1E

FCC ID.....: 2AZL7-ZY-G1

Compiled by

( position+printed name+signature)...: File administrators Gary Qian

Supervised by

( position+printed name+signature)...: Technique principal Eden Hu

Approved by

( position+printed name+signature)...: Manager Jason Zhou

Date of issue.....: Nov. 11, 2022

Testing Laboratory Name .....: Shenzhen HUAKE Testing Technology Co., Ltd.

Address .....: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name.....: Shenzhen CTV Int Cloud Technology Co., Ltd

Address .....: 601, B Building, No.10, East District, Shangxue Industrial City,  
Xinxue Community, Bantian Street, Shenzhen, China

Test specification .....

Standard .....: FCC CFR Title 47 Part 2, Part 24E

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

**Shenzhen HUAKE Testing Technology Co., Ltd.All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: 4G Security Camera

Trade Mark .....: N/A

Manufacturer.....: Shenzhen CTV Int Cloud Technology Co., Ltd

Model/Type reference.....: ZY-G1

Series Models .....: ZY-G2, ZY-G3, ZY-G4, ZY-G5, ZY-G6, ZY-G7, ZY-G8, ZY-G9,  
ZS-GX1S, ZS-GX7S, ZS-GX8S, ZS-GX9S

Modulation Type.....: QPSK, 16QAM

Rating .....: DC 3.7V from battery or DC 5V from USB

Hardware version .....: V1.0

Software version.....: V1.0

Result.....: **PASS**



## TEST REPORT

|                   |                 |               |
|-------------------|-----------------|---------------|
| Test Report No. : | HK2210314830-1E | Nov. 11, 2022 |
|                   |                 | Date of issue |

Equipment under Test : 4G Security Camera

Model /Type : ZY-G1

Series Models : ZY-G2, ZY-G3, ZY-G4, ZY-G5, ZY-G6, ZY-G7, ZY-G8, ZY-G9, ZS-GX1S, ZS-GX7S, ZS-GX8S, ZS-GX9S

Applicant : Shenzhen CTV Int Cloud Technology Co., Ltd

Address : 601, B Building, No.10, East District, Shangxue Industrial City, Xinxue Community, Bantian Street, Shenzhen, China

Manufacturer : Shenzhen CTV Int Cloud Technology Co., Ltd

Address : 601, B Building, No.10, East District, Shangxue Industrial City, Xinxue Community, Bantian Street, Shenzhen, China

|              |      |
|--------------|------|
| Test Result: | PASS |
|--------------|------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Nov. 11, 2022 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |



## Contents

|          |                                                     |           |
|----------|-----------------------------------------------------|-----------|
| <b>1</b> | <b>TEST STANDARDS.....</b>                          | <b>5</b>  |
| <b>2</b> | <b>SUMMARY .....</b>                                | <b>6</b>  |
| 2.1      | General Remarks                                     | 6         |
| 2.2      | Product Description                                 | 6         |
| 2.3      | Equipment Under Test                                | 6         |
| 2.4      | Short Description of The Equipment Under Test (EUT) | 6         |
| 2.5      | Test Frequency List                                 | 7         |
| 2.6      | Normal Accessory Setting                            | 7         |
| 2.7      | EUT Configuration                                   | 7         |
| 2.8      | Related Submittal(s) / Grant (s)                    | 7         |
| 2.9      | Modifications                                       | 7         |
| 2.10     | General Test Conditions/Configurations              | 8         |
| <b>3</b> | <b>TEST ENVIRONMENT.....</b>                        | <b>9</b>  |
| 3.1      | Information of The Test Laboratory                  | 9         |
| 3.2      | Environmental Conditions                            | 9         |
| 3.3      | Test Description                                    | 9         |
| 3.4      | Equipments Used During The Test                     | 10        |
| <b>4</b> | <b>TEST CONDITIONS AND RESULTS.....</b>             | <b>11</b> |
| 4.1      | Output Power                                        | 11        |
| 4.2      | Peak-to-Average Ratio (PAR)                         | 17        |
| 4.3      | Occupied Bandwidth and Emission Bandwidth           | 24        |
| 4.4      | Band Edge Compliance                                | 31        |
| 4.5      | Spurious Emission on Antenna Port                   | 38        |
| 4.6      | Radiated Spurious Emission                          | 57        |
| 4.7      | Frequency Stability                                 | 65        |
| <b>5</b> | <b>TEST SETUP PHOTOS OF THE EUT .....</b>           | <b>67</b> |
| <b>6</b> | <b>PHOTOS OF THE EUT.....</b>                       | <b>68</b> |



## **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Part 24](#):PUBLIC MOBILE SERVICES.

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB971168 D01:v02r02](#):MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS.

[ANSI C63.4:2014](#):Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Oct. 31, 2022 |
|                                |   |               |
| Testing commenced on           | : | Oct. 31, 2022 |
|                                |   |               |
| Testing concluded on           | : | Nov. 11, 2022 |

### 2.2 Product Description

The **Shenzhen CTV Int Cloud Technology Co., Ltd's** Model:ZY-G1 or the "EUT" as referred to in this report; more general information as follows,for more details, refer to the user's manual of the EUT.

|                           |                                                                                            |
|---------------------------|--------------------------------------------------------------------------------------------|
| Name of EUT:              | 4G Security Camera                                                                         |
| Model/Type reference:     | ZY-G1                                                                                      |
| Series Models:            | ZY-G2, ZY-G3, ZY-G4, ZY-G5, ZY-G6, ZY-G7, ZY-G8, ZY-G9, ZS-GX1S, ZS-GX7S, ZS-GX8S, ZS-GX9S |
| Power supply:             | DC 3.7V from battery or DC 5V from USB                                                     |
| Modulation Type:          | QPSK,16QAM                                                                                 |
| Antenna Type:             | External Antenna                                                                           |
| Antenna Gain:             | 2.76dBi                                                                                    |
| Operation Frequency Band: | LTE Band 2                                                                                 |
| Operation frequency:      | LTE Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(TX)                                           |
| LTE Release:              | R8                                                                                         |
| Extreme temp. Tolerance:  | -30°C to +70°C                                                                             |
| Extreme vol. Limits:      | 4.25VDC to5.75VDC (nominal: 5.0VDC)                                                        |

### 2.3 Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                 |
|----------------------|---|-------------------------------------------------------------------|---------------------------------|
| Power supply voltage | : | <input type="radio"/> 120V/ 60 Hz                                 | <input type="radio"/> 115V/60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC   |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                 |

DC 3.7V from battery or DC 5V from USB

### 2.4 Short Description of The Equipment Under Test (EUT)

#### 2.4.1 General Description

This is a 4G Security Camera.

For more details, refer to the user's manual of the EUT.



## 2.5 Test Frequency List

| TX Channel Bandwidth | Frequency (MHz) | channel |
|----------------------|-----------------|---------|
| 1.4 MHz              | 1850.7          | 18607   |
|                      | 1880.0          | 18900   |
|                      | 1909.3          | 19193   |
| 3 MHz                | 1851.5          | 18615   |
|                      | 1880.0          | 18900   |
|                      | 1908.5          | 19185   |
| 5 MHz                | 1852.5          | 18625   |
|                      | 1880.0          | 18900   |
|                      | 1907.5          | 19175   |
| 10 MHz               | 1855.0          | 18650   |
|                      | 1880.0          | 18900   |
|                      | 1905.0          | 19150   |
| 15 MHz               | 1857.5          | 18675   |
|                      | 1880.0          | 18900   |
|                      | 1902.5          | 19125   |
| 20 MHz               | 1860.0          | 18700   |
|                      | 1880.0          | 18900   |
|                      | 1900.0          | 19100   |

## 2.6 Normal Accessory Setting

Fully charged battery was used during the test.

## 2.7 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

|               |                |   |
|---------------|----------------|---|
| ○ Power Cable | Length (m) :   | / |
|               | Shield :       | / |
|               | Detachable :   | / |
| ○ Multimeter  | Manufacturer : | / |
|               | Model No. :    | / |

## 2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AZL7-ZY-G1** filing to comply with FCC Part 24, Rules.

## 2.9 Modifications

No modifications were implemented to meet testing criteria.



## 2.10 General Test Conditions/Configurations

### 2.10.1 Test Environment

| Environment Parameter | Selected Values During Tests |         |
|-----------------------|------------------------------|---------|
| Relative Humidity     | Ambient                      |         |
| Temperature           | TN                           | Ambient |
| Voltage               | VL                           | 4.25V   |
|                       | VN                           | 5.0V    |
|                       | VH                           | 5.75V   |

NOTE: VL=lower extreme test voltage VN=nominal voltage  
VH=upper extreme test voltage TN=normal temperature



### 3 TEST ENVIRONMENT

#### 3.1 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.  
FCC Designation Number is CN1229.  
Canada IC CAB identifier is CN0045.  
CNAS Registration Number is L9589.

#### 3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

| Test Item                                                                                 | FCCRuleNo.                  | Requirements                                                                                         | Verdict |
|-------------------------------------------------------------------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------|---------|
| Effective(Isotropic)Radiated Output Power                                                 | Part§2.1046,<br>Part§24.232 | EIRP ≤ 2W                                                                                            | Pass    |
| Peak-Average Ratio                                                                        | Part§2.1046,<br>Part§24.232 | FCC:Limits≤13dB                                                                                      | Pass    |
| Bandwidth                                                                                 | Part§2.1049<br>RSS-133      | OBW: Nolimit.<br>EBW: Nolimit.                                                                       | Pass    |
| Band Edges Compliance                                                                     | Part§2.1051,<br>Part§24.238 | ≤ -13dBm/1%*EBW,<br>In1MHz bands immediately outside and adjacent<br>to The frequency block.         | Pass    |
| Spurious Emission at Antenna Terminals                                                    | Part§2.1051,<br>Part§24.238 | ≤-13dBm/1MHz,<br>from 9kHz to10th harmonics but outside<br>authorized<br>Operating frequency ranges. | Pass    |
| Field Strength of Spurious Radiation                                                      | Part§2.1053,<br>Part§24.238 | ≤ -13dBm/1MHz.                                                                                       | Pass    |
| Frequency Stability                                                                       | Part§2.1055,<br>Part§24.235 | FCC:within authorized frequency<br>block.                                                            | Pass    |
| NOTE 1:For the verdict, the "N/A"denotes "not applicable", the "N/T"denotes "not tested". |                             |                                                                                                      |         |

Remark:

1. The measurement uncertainty is not included in the test result.



### 3.4 Equipments Used During The Test

| Test Equipment                  | Manufacturer | Model No.   | Serial No. | Calibration Date | Calibration Due Date |
|---------------------------------|--------------|-------------|------------|------------------|----------------------|
| LISN                            | ENV216       | R&S         | HKE-059    | 2022/02/18       | 2023/02/17           |
| LISN                            | R&S          | ENV216      | HKE-002    | 2022/02/18       | 2023/02/17           |
| Broadband antenna               | Schwarzbeck  | VULB 9163   | HKE-012    | 2022/02/18       | 2023/02/17           |
| Receiver                        | R&S          | ESCI 7      | HKE-010    | 2022/02/18       | 2023/02/17           |
| Spectrum analyzer               | Agilent      | N9020A      | HKE-048    | 2022/02/18       | 2023/02/17           |
| RF automatic control unit       | Tonscend     | JS0806-2    | HKE-060    | 2022/02/18       | 2023/02/17           |
| Horn antenna                    | Schwarzbeck  | 9120D       | HKE-013    | 2022/02/18       | 2023/02/17           |
| Loop antenna                    | Schwarzbeck  | FMZB 1519 B | HKE-014    | 2022/02/18       | 2023/02/17           |
| Preamplifier                    | EMCI         | EMC051845SE | HKE-015    | 2022/02/18       | 2023/02/17           |
| Preamplifier                    | Agilent      | 83051A      | HKE-016    | 2022/02/18       | 2023/02/17           |
| Temperature and humidity meter  | Boyang       | HTC-1       | HKE-075    | 2022/02/18       | 2023/02/17           |
| High pass filter unit           | Tonscend     | JS0806-F    | HKE-055    | 2022/02/18       | 2023/02/17           |
| RF cable                        | Times        | 1-40G       | HKE-034    | 2022/02/18       | 2023/02/17           |
| Power meter                     | Agilent      | E4419B      | HKE-085    | 2022/02/18       | 2023/02/17           |
| Power Sensor                    | Agilent      | E9300A      | HKE-086    | 2022/02/18       | 2023/02/17           |
| Wireless Communication Test Set | R&S          | CMU200      | HKE-026    | 2022/02/18       | 2023/02/17           |
| High gain antenna               | Schwarzbeck  | LB-180400KF | HKE-054    | 2022/02/18       | 2023/02/17           |
| Horn antenna                    | Schwarzbeck  | 9120D       | HKE-135    | 2022/02/18       | 2023/02/17           |
| High gain antenna               | Schwarzbeck  | LB-180400KF | HKE-128    | 2022/02/18       | 2023/02/17           |
| Broadband antenna               | Schwarzbeck  | VULB 9163   | HKE-087    | 2022/02/18       | 2023/02/17           |
| Signal generator                | Agilent      | E4433B      | HKE-120    | 2022/02/18       | 2023/02/17           |
| Signal generator                | Agilent      | E4421B      | HKE-121    | 2022/02/18       | 2023/02/17           |



## 4 TEST CONDITIONS AND RESULTS


### 4.1 Output Power

#### 4.1.1 Conducted Output Power

##### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

##### TEST CONFIGURATION

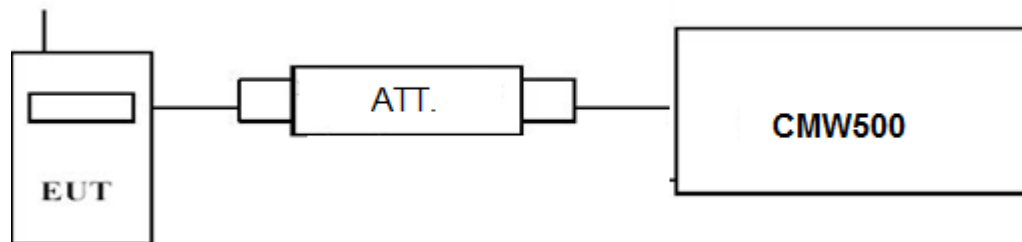

##### TEST PROCEDURE

###### Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

##### TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;

| LTE FDD Band 2       |                 |                |                           |       |
|----------------------|-----------------|----------------|---------------------------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | Burst Average Power [dBm] |       |
|                      |                 |                | QPSK                      | 16QAM |
| 1.4 MHz              | 1850.7          | 1 RB low       | 24.96                     | 23.89 |
|                      |                 | 1 RB high      | 25.16                     | 24.18 |
|                      |                 | 50% RB mid     | 25.08                     | 23.99 |
|                      |                 | 100% RB        | 25.03                     | 24.08 |
|                      | 1880.0          | 1 RB low       | 24.98                     | 24.11 |
|                      |                 | 1 RB high      | 24.94                     | 23.88 |
|                      |                 | 50% RB mid     | 24.04                     | 23.07 |
|                      |                 | 100% RB        | 24.95                     | 23.81 |
|                      | 1909.3          | 1 RB low       | 24.85                     | 23.79 |
|                      |                 | 1 RB high      | 24.50                     | 23.71 |
|                      |                 | 50% RB mid     | 24.78                     | 23.55 |
|                      |                 | 100% RB        | 24.58                     | 23.46 |
| 3 MHz                | 1851.5          | 1 RB low       | 24.72                     | 23.84 |
|                      |                 | 1 RB high      | 24.70                     | 23.72 |
|                      |                 | 50% RB mid     | 24.83                     | 23.76 |
|                      |                 | 100% RB        | 23.68                     | 22.60 |
|                      | 1880.0          | 1 RB low       | 23.57                     | 22.85 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



|        |        |            |       |       |
|--------|--------|------------|-------|-------|
| 5 MHz  | 1908.5 | 1 RB high  | 23.70 | 22.87 |
|        |        | 50% RB mid | 23.58 | 22.70 |
|        |        | 100% RB    | 24.36 | 23.35 |
|        | 1852.5 | 1 RB low   | 24.47 | 23.15 |
|        |        | 1 RB high  | 24.38 | 23.15 |
|        |        | 50% RB mid | 23.55 | 22.44 |
|        | 1880.0 | 100% RB    | 23.45 | 22.53 |
|        |        | 1 RB low   | 24.58 | 23.56 |
|        |        | 1 RB high  | 24.67 | 23.22 |
|        | 1907.5 | 50% RB mid | 24.81 | 23.57 |
|        |        | 100% RB    | 23.58 | 22.68 |
|        |        | 1 RB low   | 23.58 | 22.68 |
| 10 MHz | 1855.0 | 1 RB high  | 23.58 | 22.77 |
|        |        | 50% RB mid | 23.61 | 22.83 |
|        |        | 100% RB    | 24.43 | 23.57 |
|        | 1880.0 | 1 RB low   | 24.55 | 23.53 |
|        |        | 1 RB high  | 24.34 | 23.32 |
|        |        | 50% RB mid | 23.52 | 22.67 |
|        | 1905.0 | 100% RB    | 23.53 | 22.59 |
|        |        | 1 RB low   | 24.52 | 23.81 |
|        |        | 1 RB high  | 24.65 | 23.90 |
|        | 1905.0 | 50% RB mid | 24.55 | 23.68 |
|        |        | 100% RB    | 23.60 | 22.67 |
|        |        | 1 RB low   | 23.60 | 22.67 |
| 15 MHz | 1857.5 | 1 RB high  | 23.60 | 22.80 |
|        |        | 50% RB mid | 23.69 | 22.79 |
|        |        | 100% RB    | 24.33 | 23.18 |
|        | 1880.0 | 1 RB low   | 24.36 | 23.48 |
|        |        | 1 RB high  | 24.21 | 23.40 |
|        |        | 50% RB mid | 23.40 | 22.60 |
|        | 1902.5 | 100% RB    | 23.34 | 22.43 |
|        |        | 1 RB low   | 24.92 | 23.99 |
|        |        | 1 RB high  | 24.82 | 23.85 |
|        | 1880.0 | 50% RB mid | 24.63 | 23.74 |
|        |        | 100% RB    | 23.94 | 22.85 |
|        |        | 1 RB low   | 23.82 | 22.98 |
| 20 MHz | 1860.0 | 1 RB high  | 23.80 | 22.86 |
|        |        | 50% RB mid | 23.54 | 22.68 |
|        |        | 100% RB    | 24.38 | 23.58 |
|        | 1880.0 | 1 RB low   | 24.32 | 23.46 |
|        |        | 1 RB high  | 24.30 | 23.59 |
|        |        | 50% RB mid | 23.59 | 22.73 |
|        | 1900.0 | 100% RB    | 23.49 | 22.72 |
|        |        | 1 RB low   | 25.01 | 24.08 |
|        |        | 1 RB high  | 25.32 | 24.57 |
|        | 1880.0 | 50% RB mid | 24.90 | 23.96 |
|        |        | 100% RB    | 23.93 | 23.09 |
|        |        | 1 RB low   | 23.92 | 22.99 |
| 20 MHz | 1880.0 | 1 RB high  | 23.93 | 23.00 |
|        |        | 50% RB mid | 23.86 | 22.92 |
|        |        | 100% RB    | 24.74 | 24.40 |
|        | 1900.0 | 1 RB low   | 25.20 | 24.74 |
|        |        | 1 RB high  | 24.63 | 24.20 |
|        |        | 50% RB mid | 23.97 | 22.87 |
|        | 1900.0 | 100% RB    | 23.89 | 22.98 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


### 4.1.2. Radiated Output Power

#### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

#### TEST CONFIGURATION

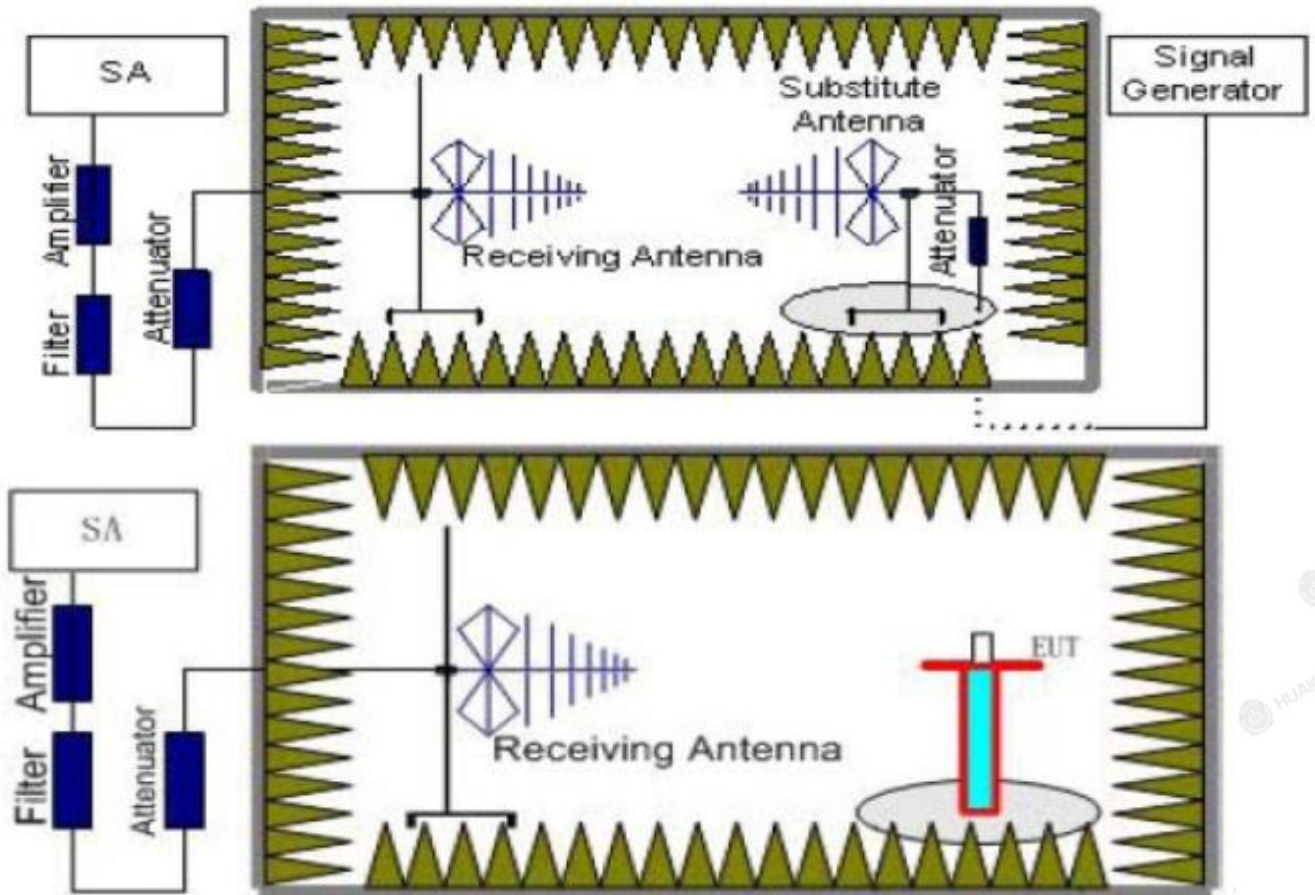

#### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna.



5. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.  
The measurement results are obtained as described below:  
Power(EIRP)= $P_{Mea} - P_{cl} + G_a$   
We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:  
Power(EIRP)= $P_{Mea} - P_{cl} + G_a$
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

## TEST RESULTS

### Radiated Measurement:

#### Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. We measured both Horizontal and Vertical direction, recorded worst case direction.

#### LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1850.7          | -14.16          | 3.41          | 10.24                  | 33.6          | 26.27                    | 33.01       | 6.74        | V            |
| 1880.0          | -15.35          | 3.49          | 10.24                  | 33.6          | 25                       | 33.01       | 8.01        | V            |
| 1909.3          | -15.79          | 3.55          | 10.23                  | 33.6          | 24.49                    | 33.01       | 8.52        | V            |

#### LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1851.5          | -13.98          | 3.41          | 10.24                  | 33.6          | 26.45                    | 33.01       | 6.56        | V            |
| 1880.0          | -14.52          | 3.49          | 10.24                  | 33.6          | 25.83                    | 33.01       | 7.18        | V            |
| 1908.5          | -15.32          | 3.55          | 10.23                  | 33.6          | 24.96                    | 33.01       | 8.05        | V            |

#### LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|--------------------------|-------------|-------------|--------------|
| 1852.5          | -15.37          | 3.41          | 10.24                  | 33.6          | 25.06                    | 33.01       | 7.95        | V            |
| 1880.0          | -14.79          | 3.49          | 10.24                  | 33.6          | 25.56                    | 33.01       | 7.45        | V            |
| 1907.5          | -16.16          | 3.55          | 10.23                  | 33.6          | 24.12                    | 33.01       | 8.89        | V            |

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1855.0          | -16.78                 | 3.41                 | 10.24                           | 33.6                 | 23.65                    | 33.01       | 9.36        | V            |
| 1880.0          | -14.95                 | 3.49                 | 10.24                           | 33.6                 | 25.4                     | 33.01       | 7.61        | V            |
| 1905.0          | -14.71                 | 3.55                 | 10.23                           | 33.6                 | 25.57                    | 33.01       | 7.44        | V            |

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1857.5          | -14.73                 | 3.41                 | 10.24                           | 33.6                 | 25.7                     | 33.01       | 7.31        | V            |
| 1880.0          | -15.73                 | 3.49                 | 10.24                           | 33.6                 | 24.62                    | 33.01       | 8.39        | V            |
| 1902.5          | -15.28                 | 3.55                 | 10.23                           | 33.6                 | 25                       | 33.01       | 8.01        | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1860.0          | -14.31                 | 3.41                 | 10.24                           | 33.6                 | 26.12                    | 33.01       | 6.89        | V            |
| 1880.0          | -15.63                 | 3.49                 | 10.24                           | 33.6                 | 24.72                    | 33.01       | 8.29        | V            |
| 1900.0          | -16.98                 | 3.55                 | 10.23                           | 33.6                 | 23.3                     | 33.01       | 9.71        | V            |

*LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1850.7          | -14.24                 | 3.41                 | 10.24                           | 33.6                 | 26.19                    | 33.01       | 6.82        | V            |
| 1880.0          | -14.88                 | 3.49                 | 10.24                           | 33.6                 | 25.47                    | 33.01       | 7.54        | V            |
| 1909.3          | -14.18                 | 3.55                 | 10.23                           | 33.6                 | 26.1                     | 33.01       | 6.91        | V            |

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1851.5          | -15.86                 | 3.41                 | 10.24                           | 33.6                 | 24.57                    | 33.01       | 8.44        | V            |
| 1880.0          | -15.18                 | 3.49                 | 10.24                           | 33.6                 | 25.17                    | 33.01       | 7.84        | V            |
| 1908.5          | -15.44                 | 3.55                 | 10.23                           | 33.6                 | 24.84                    | 33.01       | 8.17        | V            |

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1852.5          | -15.12                 | 3.41                 | 10.24                           | 33.6                 | 25.31                    | 33.01       | 7.7         | V            |
| 1880.0          | -13.61                 | 3.49                 | 10.24                           | 33.6                 | 26.74                    | 33.01       | 6.27        | V            |
| 1907.5          | -16.6                  | 3.55                 | 10.23                           | 33.6                 | 23.68                    | 33.01       | 9.33        | V            |

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1855.0          | -15.57                 | 3.41                 | 10.24                           | 33.6                 | 24.86                    | 33.01       | 8.15        | V            |
| 1880.0          | -14.27                 | 3.49                 | 10.24                           | 33.6                 | 26.08                    | 33.01       | 6.93        | V            |
| 1905.0          | -15.71                 | 3.55                 | 10.23                           | 33.6                 | 24.57                    | 33.01       | 8.44        | V            |

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1857.5          | -14.08                 | 3.41                 | 10.24                           | 33.6                 | 26.35                    | 33.01       | 6.66        | V            |
| 1880.0          | -15.03                 | 3.49                 | 10.24                           | 33.6                 | 25.32                    | 33.01       | 7.69        | V            |
| 1902.5          | -14.57                 | 3.55                 | 10.23                           | 33.6                 | 25.71                    | 33.01       | 7.3         | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Aq</sub> (dB) | Burst Average EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|--------------------------|-------------|-------------|--------------|
| 1860.0          | -14.38                 | 3.41                 | 10.24                           | 33.6                 | 26.05                    | 33.01       | 6.96        | V            |
| 1880.0          | -14.14                 | 3.49                 | 10.24                           | 33.6                 | 26.21                    | 33.01       | 6.8         | V            |
| 1900.0          | -15.99                 | 3.55                 | 10.23                           | 33.6                 | 24.29                    | 33.01       | 8.72        | V            |




## 4.2 Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

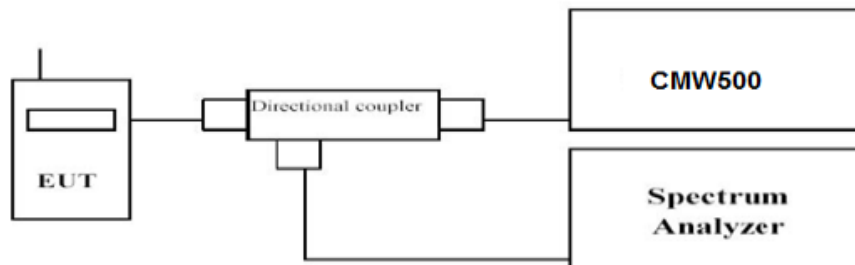

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

| LTE FDD Band 2       |                 |                |          |       |
|----------------------|-----------------|----------------|----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR(dB) |       |
|                      |                 |                | QPSK     | 16QAM |
| 1.4 MHz              | 1850.7          | 1RB#0          | 4.20     | 5.25  |
|                      | 1880.0          |                | 4.02     | 5.04  |
|                      | 1909.3          |                | 3.88     | 4.86  |
| 3 MHz                | 1851.5          | 1RB#0          | 4.28     | 5.15  |
|                      | 1880.0          |                | 4.06     | 5.01  |
|                      | 1908.5          |                | 3.94     | 4.73  |
| 5 MHz                | 1852.5          | 1RB#0          | 4.22     | 5.23  |
|                      | 1880.0          |                | 4.04     | 4.90  |
|                      | 1907.5          |                | 3.89     | 4.83  |
| 10 MHz               | 1855.0          | 1RB#0          | 4.25     | 5.18  |
|                      | 1880.0          |                | 4.14     | 5.10  |
|                      | 1905.0          |                | 4.27     | 5.10  |
| 15 MHz               | 1857.5          | 1RB#0          | 4.28     | 5.14  |
|                      | 1880.0          |                | 4.16     | 5.09  |
|                      | 1902.5          |                | 4.30     | 5.19  |
| 20 MHz               | 1860.0          | 1RB#0          | 4.32     | 5.22  |
|                      | 1880.0          |                | 4.29     | 5.19  |
|                      | 1900.0          |                | 4.31     | 5.19  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## LTE FDD Band 2 – 1.4 MHz Channel BandwidthPAPR

QPSK

16QAM

### Low Channel



1RB#0

1RB#0

### Middle Channel



1RB#0

1RB#0

### High Channel



1RB#0

1RB#0



## LTE FDD Band 2-3MHz Channel BandwidthPAPR

QPSK

16QAM

## Low Channel



1RB#0



1RB#0

## Middle Channel



1RB#0



1RB#0

## High Channel



1RB#0



1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## LTE FDD Band 2-5MHz Channel BandwidthPAPR

QPSK

16QAM

## Low Channel



1RB#0



1RB#0

## Middle Channel



1RB#0



1RB#0

## High Channel



1RB#0



1RB#0



## LTE FDD Band 2-10MHz Channel Bandwidth PAPR

QPSK

16QAM

## Low Channel



1RB#0



1RB#0

## Middle Channel



1RB#0



1RB#0

## High Channel



1RB#0



1RB#0



## LTE FDD Band 2– 15 MHz Channel BandwidthPAPR

QPSK

16QAM

### Low Channel



1RB#0

1RB#0


### Middle Channel



1RB#0

1RB#0

### High Channel

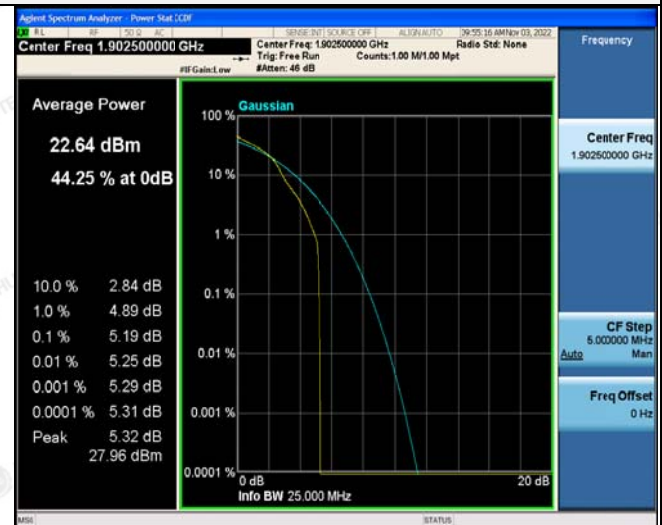

1RB#0

1RB#0



## LTE FDD Band 2-20MHz Channel Bandwidth PAPR

QPSK

16QAM

### Low Channel



1RB#0



1RB#0

### Middle Channel



1RB#0



1RB#0

### High Channel



1RB#0



1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




### 4.3 Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

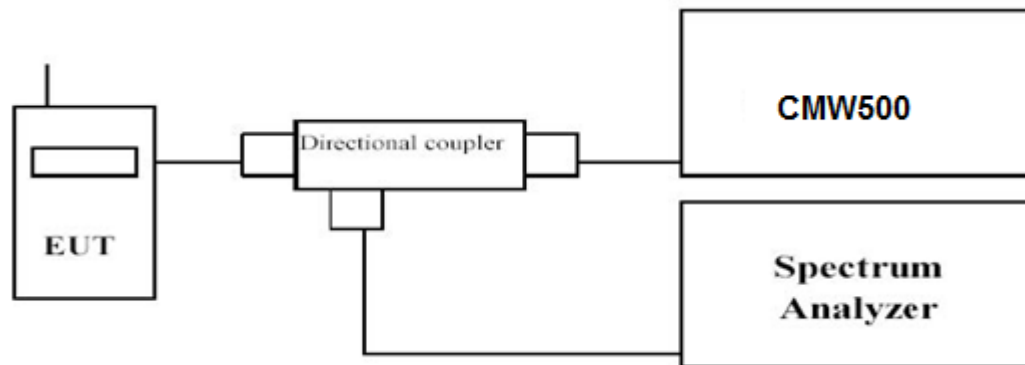

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW  $\geq 3$  times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

| LTE FDD Band 2       |                |                 |                                 |       |                              |        |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) |       | 99% Occupied bandwidth (MHz) |        |
|                      |                |                 | QPSK                            | 16QAM | QPSK                         | 16QAM  |
| 1.4 MHz              | 6RB#0          | 1850.7          | 1.291                           | 1.301 | 1.0934                       | 1.0988 |
|                      |                | 1880.0          | 1.289                           | 1.319 | 1.0935                       | 1.0957 |
|                      |                | 1909.3          | 1.313                           | 1.310 | 1.0931                       | 1.1002 |
| 3 MHz                | 15RB#0         | 1851.5          | 2.962                           | 2.963 | 2.7102                       | 2.6942 |
|                      |                | 1880.0          | 2.979                           | 2.963 | 2.6990                       | 2.6969 |
|                      |                | 1908.5          | 2.966                           | 2.975 | 2.7028                       | 2.6928 |
| 5 MHz                | 25RB#0         | 1852.5          | 5.035                           | 5.005 | 4.5128                       | 4.5118 |
|                      |                | 1880.0          | 5.021                           | 5.031 | 4.4980                       | 4.5125 |
|                      |                | 1907.5          | 5.019                           | 4.990 | 4.5072                       | 4.5018 |
| 10 MHz               | 50RB#0         | 1855.0          | 9.938                           | 9.857 | 8.9715                       | 8.9728 |
|                      |                | 1880.0          | 9.895                           | 9.910 | 8.9745                       | 8.9620 |
|                      |                | 1905.0          | 9.841                           | 9.860 | 8.9652                       | 8.9587 |
| 15 MHz               | 75RB#0         | 1857.5          | 14.78                           | 14.71 | 13.479                       | 13.468 |
|                      |                | 1880.0          | 14.83                           | 14.66 | 13.442                       | 13.445 |
|                      |                | 1902.5          | 14.80                           | 14.69 | 13.441                       | 13.430 |
| 20 MHz               | 100RB#0        | 1860.0          | 19.47                           | 19.44 | 17.913                       | 17.895 |
|                      |                | 1880.0          | 19.62                           | 19.37 | 17.907                       | 17.846 |
|                      |                | 1900.0          | 19.36                           | 19.43 | 17.895                       | 17.918 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

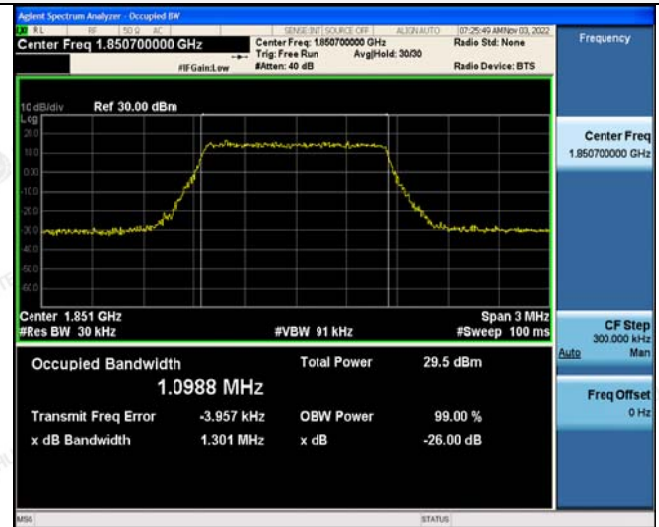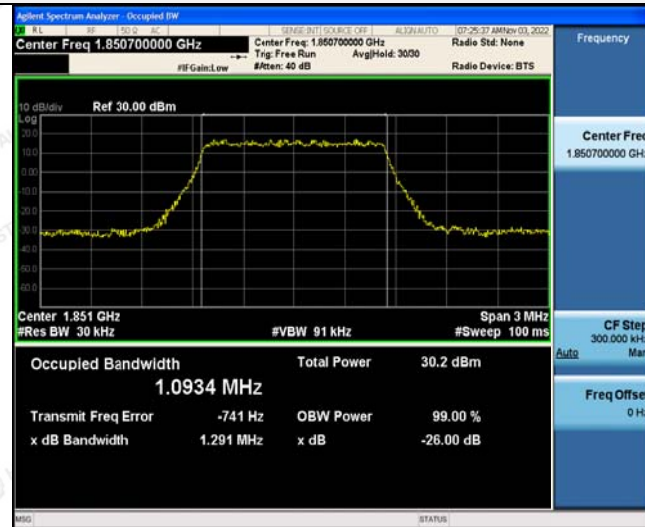

6RB#0

6RB#0



Middle Channel

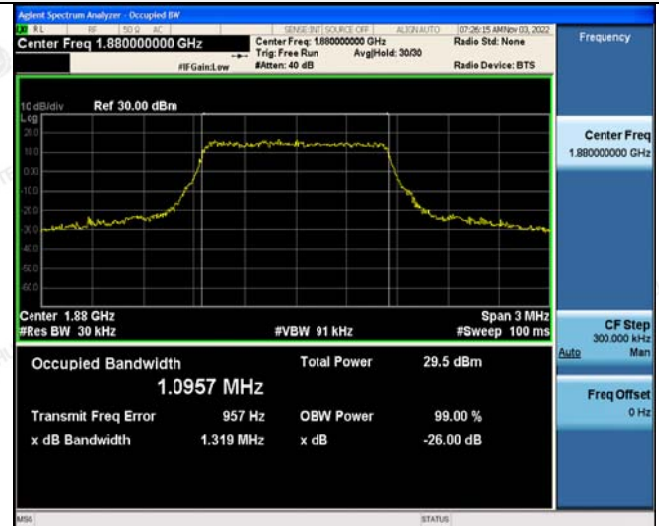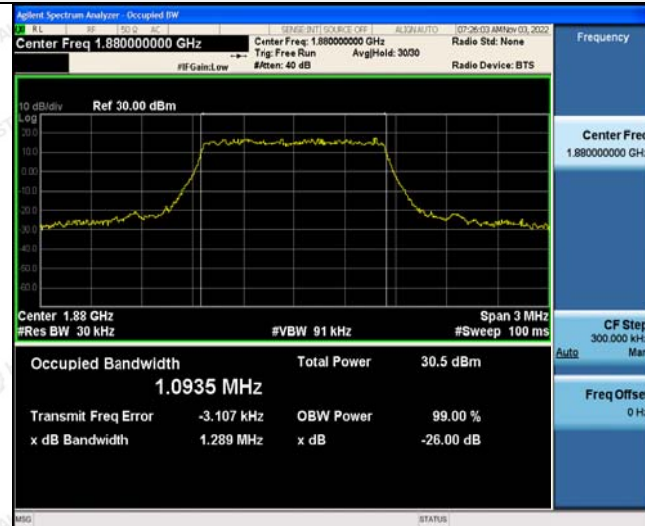

6RB#0

6RB#0

High Channel

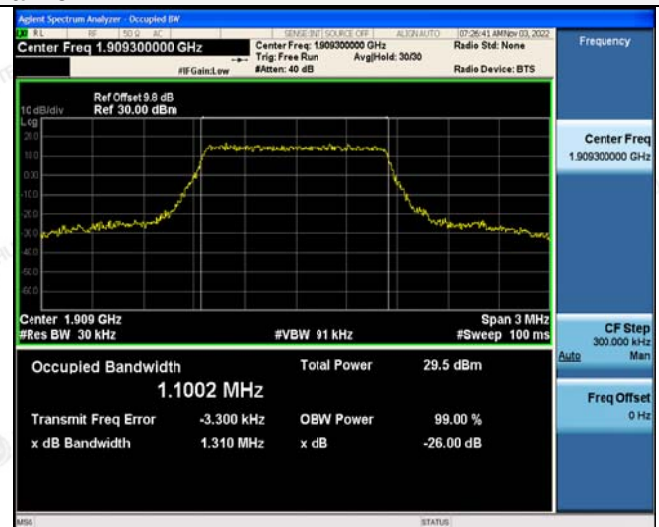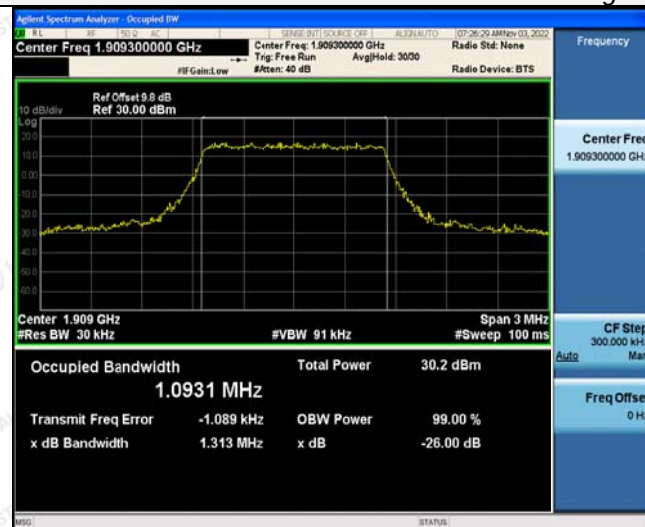

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## LTE FDD Band 2-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

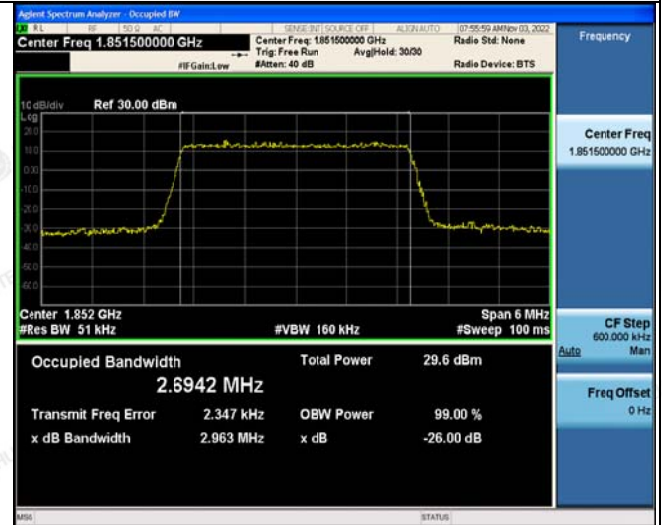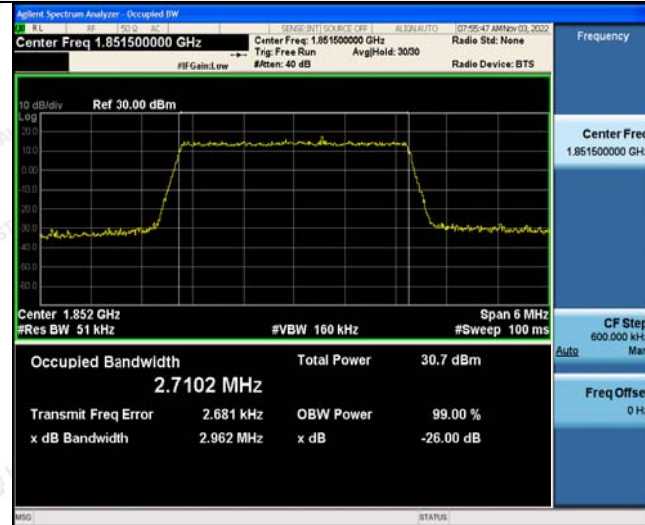

15RB#0

15RB#0



Middle Channel

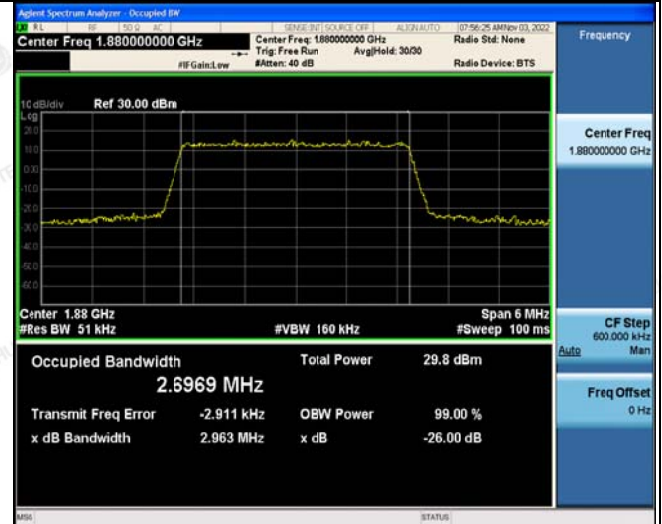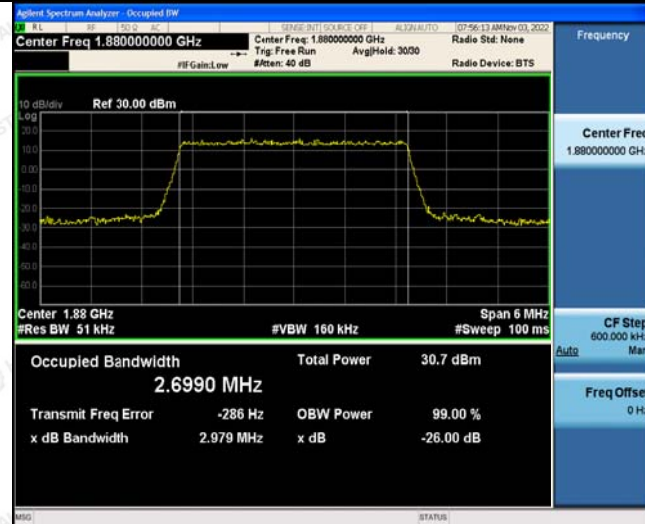

15RB#0

15RB#0

High Channel

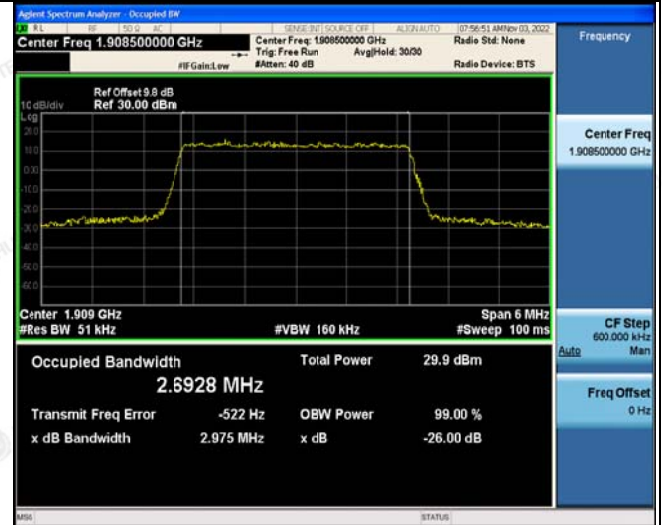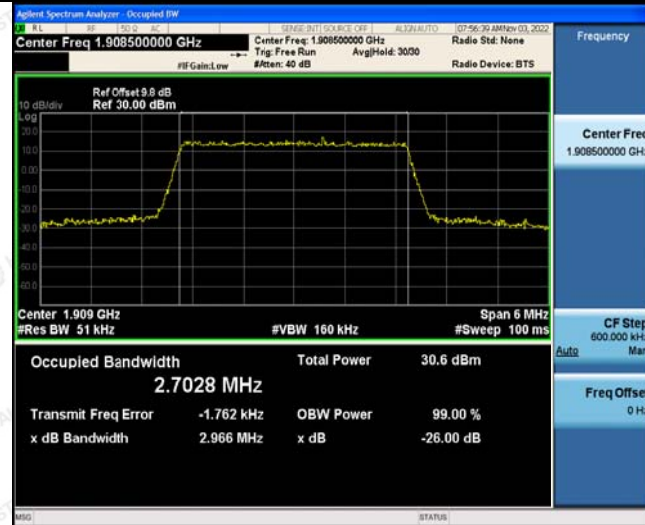

15RB#0

15RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## LTE FDD Band 2-5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

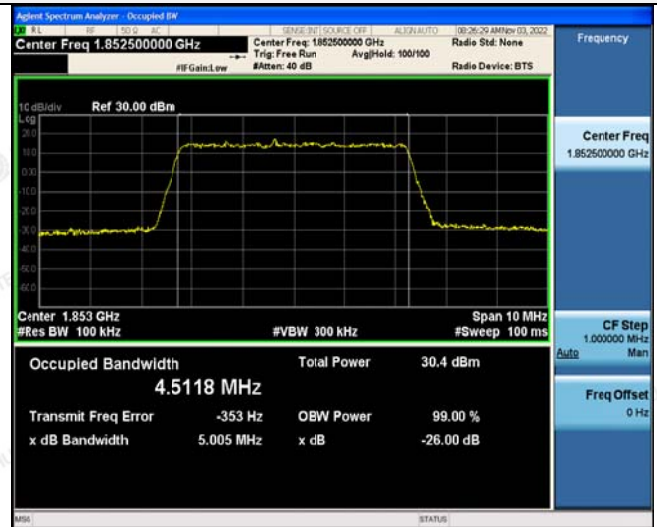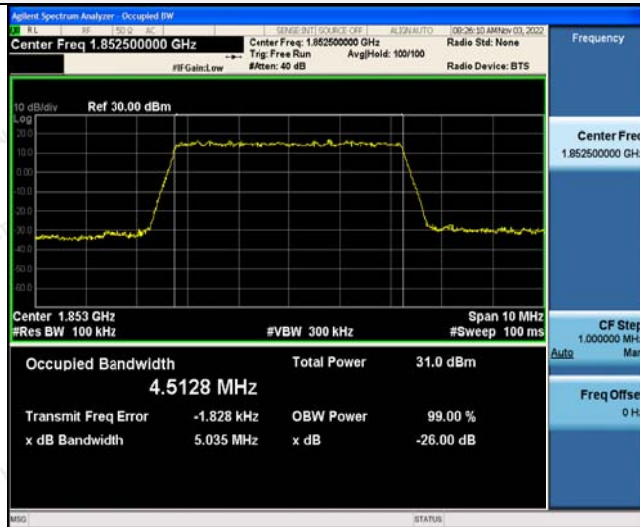

25RB#0

25RB#0



Middle Channel

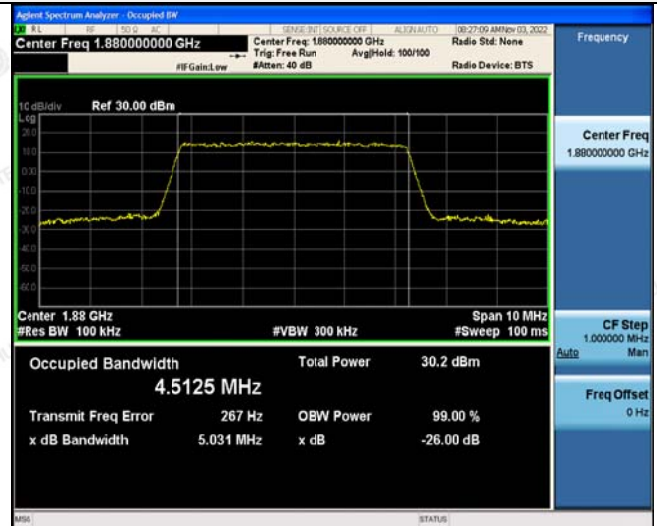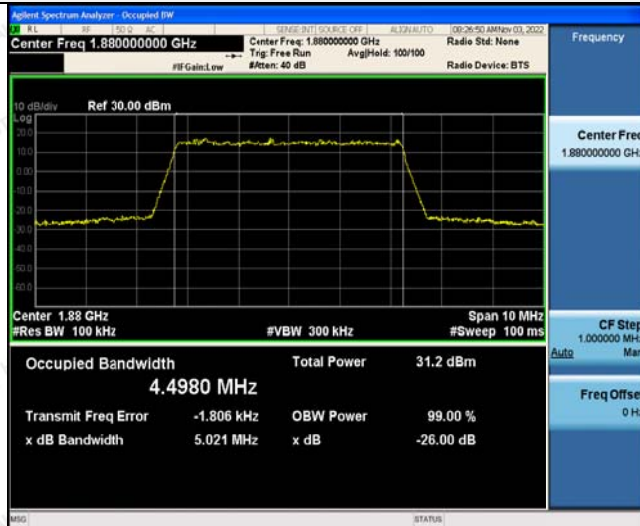

25RB#0

25RB#0

High Channel

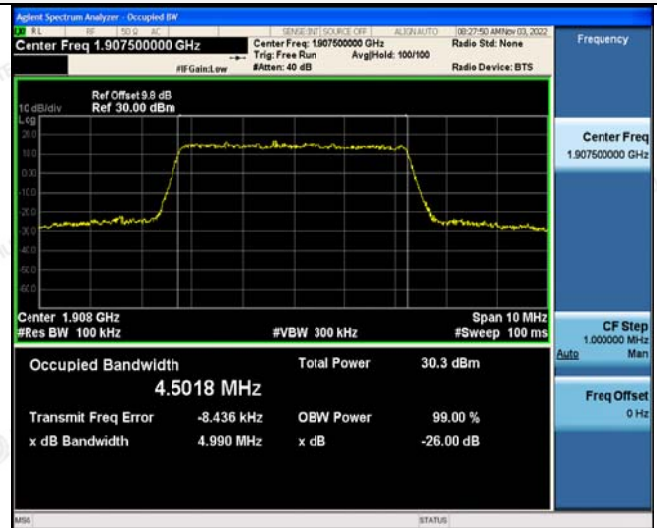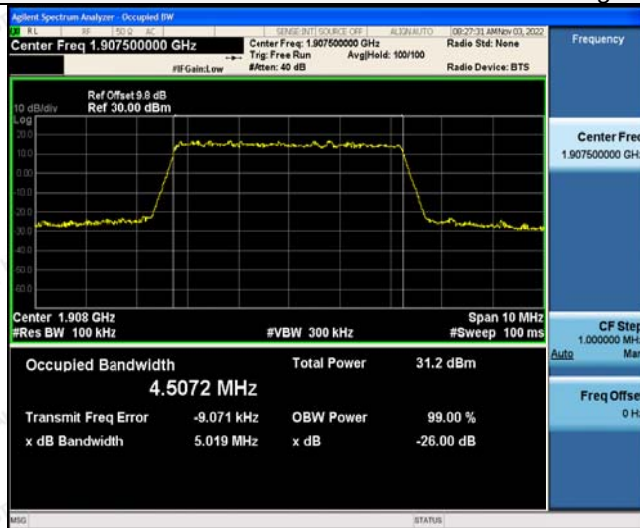

25RB#0

25RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## LTE FDD Band 2-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

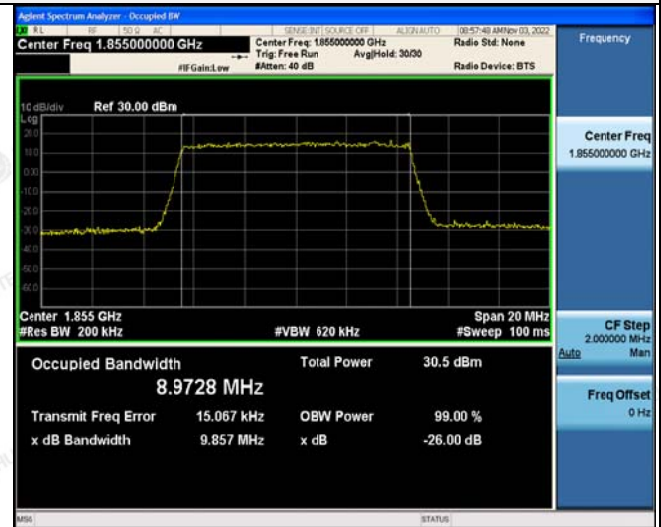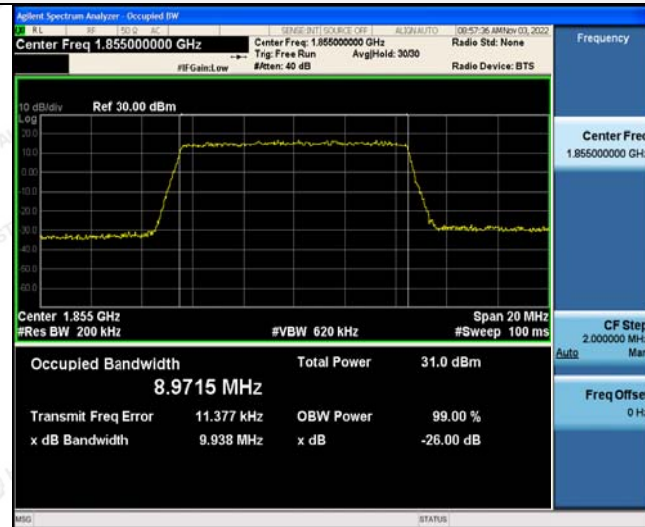

50RB#0

50RB#0

Middle Channel

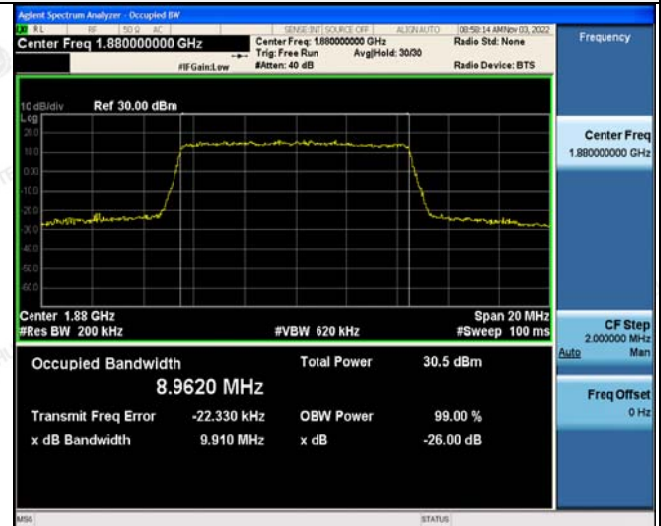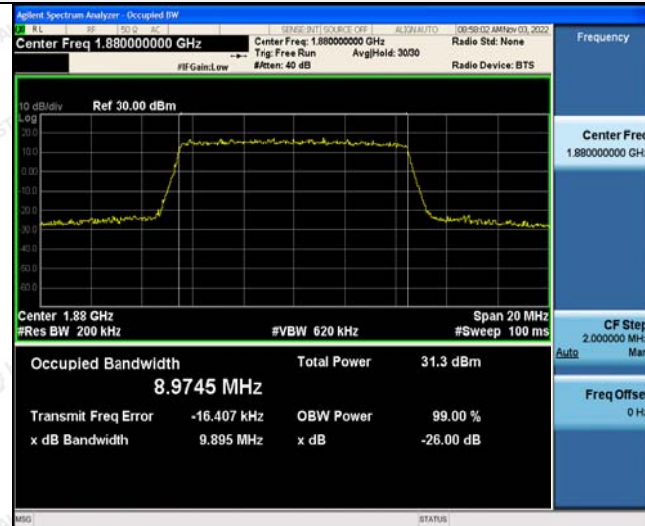

50RB#0

50RB#0

High Channel



50RB#0

50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





## LTE FDD Band 2-15MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

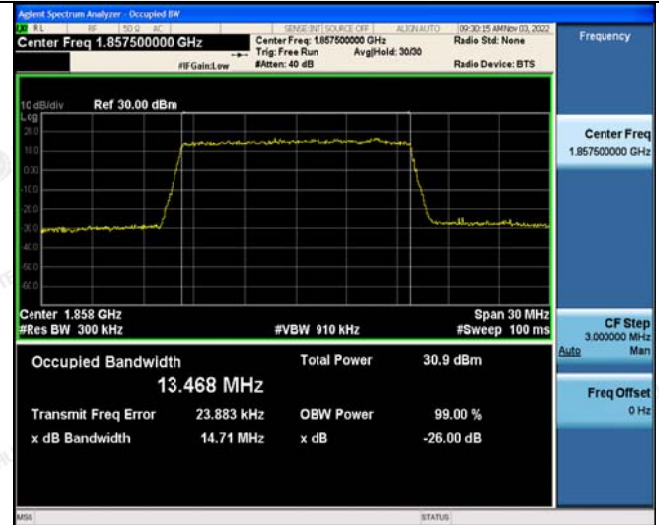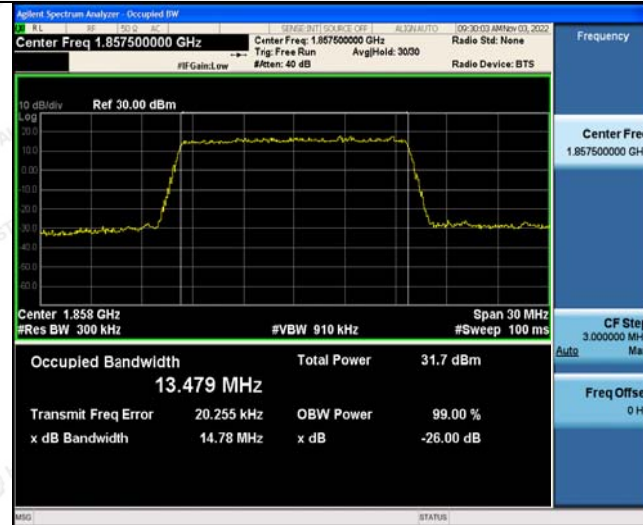

75RB#0

75RB#0



Middle Channel

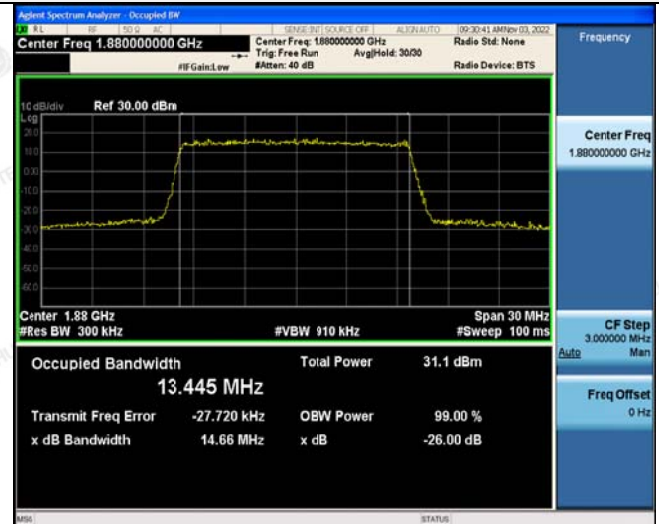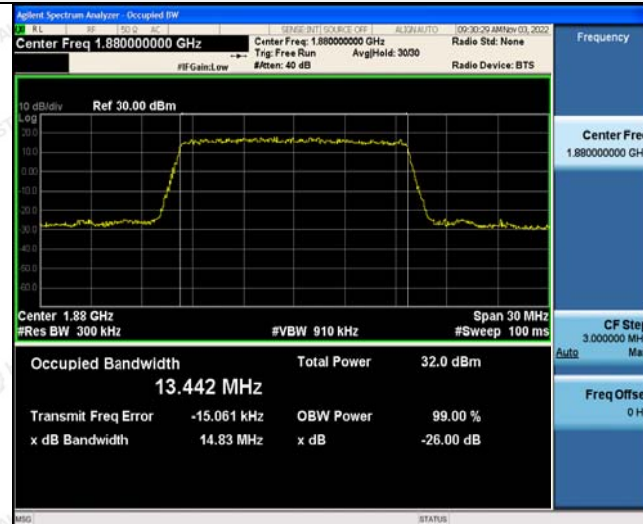

75RB#0

75RB#0

High Channel

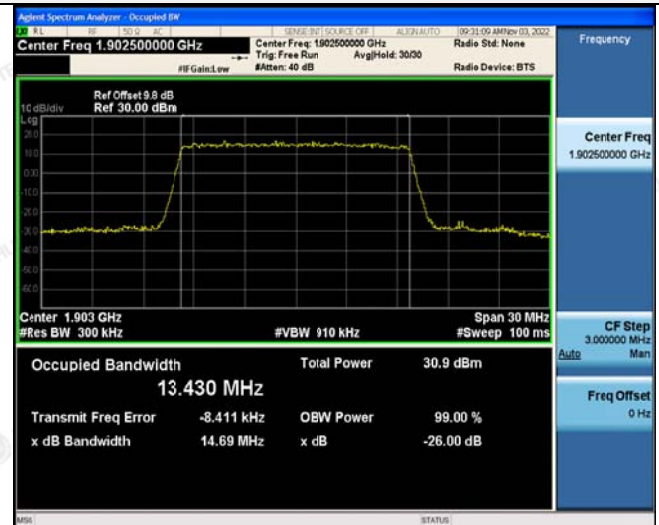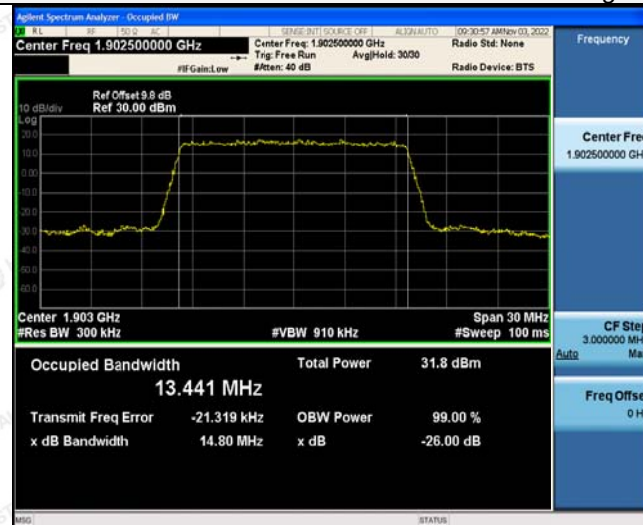

75RB#0

75RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## LTE FDD Band 2-20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

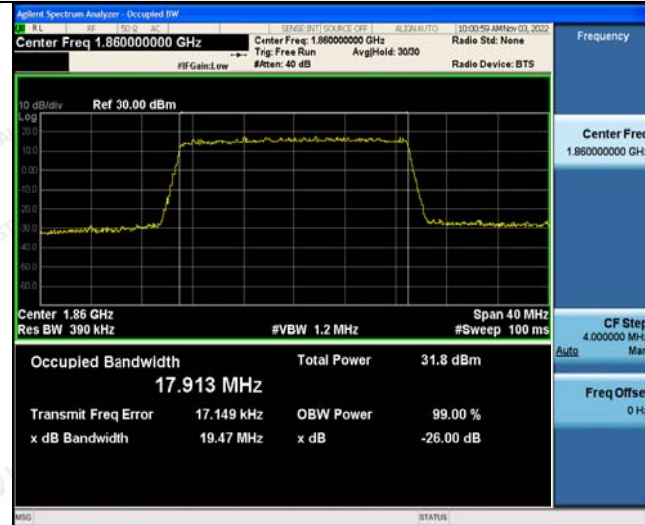

100RB#0

100RB#0

Middle Channel

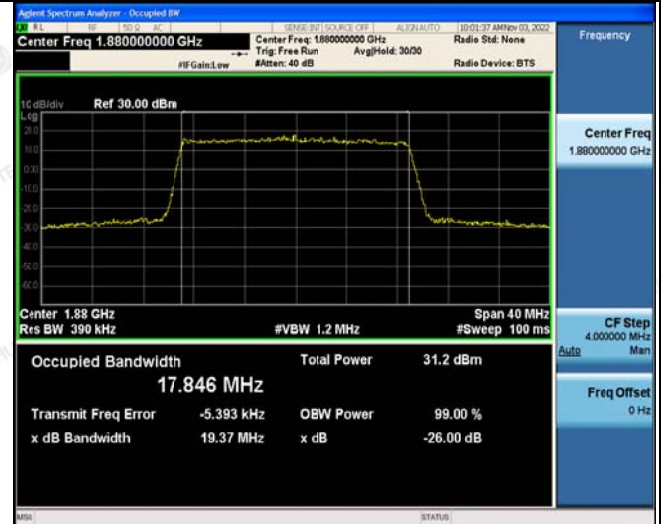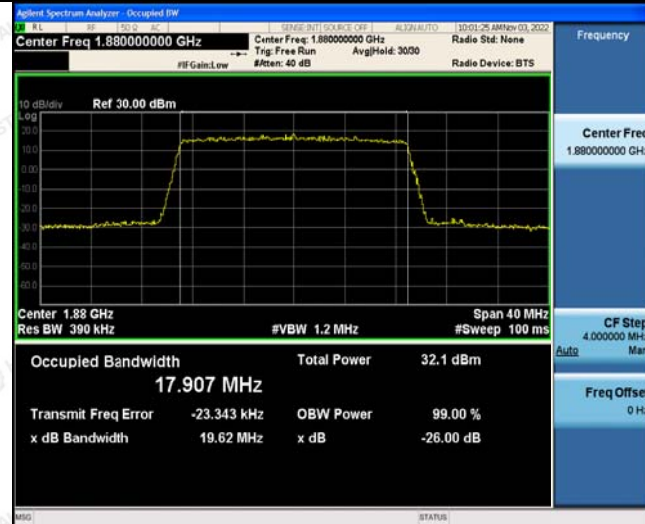

100RB#0

100RB#0

High Channel



100RB#0

100RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China