

TEST REPORT

Product Name : Wireless Speaker
Brand Mark : USG
Model No. : USG - PLAY 2, Q5
FCC ID : 2AZMA-USGPLAY2
Report Number : BLA-EMC-202103-A8602
Date of Sample Receipt : 2021/3/23
Date of Test : 2021/3/23 to 2021/4/13
Date of Issue : 2021/4/13
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

One Source Suppliers Inc.

1880 Sterling Place, Brooklyn, NY, 11233

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sweet. Liang

Approved by:

Tmen Li

Date:

2021/4/13



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/4/13	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
1	ANTENNA REQUIREMENT	14
1.1	CONCLUSION	14
2	RADIATED SPURIOUS EMISSIONS.....	15
2.1	LIMITS	15
2.2	BLOCK DIAGRAM OF TEST SETUP	16
2.3	PROCEDURE	16
2.4	TEST DATA	18
3	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	26
3.1	LIMITS	26
3.2	BLOCK DIAGRAM OF TEST SETUP	27
3.3	PROCEDURE	27
3.4	TEST DATA	29
4	CONDUCTED SPURIOUS EMISSIONS	33
4.1	LIMITS	33
4.2	BLOCK DIAGRAM OF TEST SETUP	33
4.3	TEST DATA	34
5	CONDUCTED BAND EDGES MEASUREMENT.....	35
5.1	LIMITS	35
5.2	BLOCK DIAGRAM OF TEST SETUP	35
5.3	TEST DATA	36

6	DWELL TIME.....	37
6.1	LIMITS	37
6.2	BLOCK DIAGRAM OF TEST SETUP	37
6.3	TEST DATA	38
7	HOPPING CHANNEL NUMBER	39
7.1	LIMITS	39
7.2	BLOCK DIAGRAM OF TEST SETUP	39
7.3	TEST DATA	39
8	CARRIER FREQUENCIES SEPARATION	40
8.1	LIMITS	40
8.2	BLOCK DIAGRAM OF TEST SETUP	40
8.3	TEST DATA	40
9	20DB BANDWIDTH.....	41
9.1	BLOCK DIAGRAM OF TEST SETUP	41
9.2	TEST DATA	41
10	CONDUCTED PEAK OUTPUT POWER	42
10.1	LIMITS	42
10.2	BLOCK DIAGRAM OF TEST SETUP	42
10.3	TEST DATA.....	43
11	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	44
11.1	LIMITS	44
11.2	BLOCK DIAGRAM OF TEST SETUP	44
11.3	PROCEDURE	44
11.4	TEST DATA.....	46
10	APPENDIX.....	48
10.1	APPENDIX A: 20dB EMISSION BANDWIDTH.....	48
	Test Result.....	48
	Test Graphs.....	49
10.2	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	52
	Test Result.....	52
	Test Graphs.....	53
10.3	APPENDIX D: CARRIER FREQUENCY SEPARATION	57
	Test Result.....	57

Test Graphs	58
10.4 APPENDIX E: TIME OF OCCUPANCY	59
Test Result	59
Test Graphs	60
10.5 APPENDIX F: NUMBER OF HOPPING CHANNELS	62
Test Result	62
Test Graphs	63
10.6 APPENDIX G: BAND EDGE MEASUREMENTS	64
Test Result	64
Test Graphs	65
10.7 APPENDIX H: CONDUCTED SPURIOUS EMISSION	69
Test Result	69
Test Graphs	70
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	79
APPENDIX B: PHOTOGRAPHS OF EUT	81

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

2 GENERAL INFORMATION

Applicant	One Source Suppliers Inc.
Address	1880 Sterling Place, Brooklyn, NY,11233
Manufacturer	Shenzhen Hutianmei Technology Co., Ltd
Address	32 Building, the third Industrial Park, Houting, Shajing, Baoan District, Shenzhen, China
Factory	Shenzhen Hutianmei Technology Co., Ltd
Address	32 Building, the third Industrial Park, Houting, Shajing, Baoan District, Shenzhen, China
Product Name	Wireless Speaker
Test Model No.	USG - PLAY 2

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V5.0
Software Version	V3.5
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	0.5dBi(Provided by customer)

Remark:

For Product Name : Wireless Speaker , Model No. : USG - PLAY 2, Q5 with FCC ID : 2AZMA-USGPLAY2, The device is electrically identical with certified Wireless Speaker , Model No. : J5 with FCC ID: 2AWTX-J5, so except Radiated emission test , all other data are from FCC test report of FCC ID: 2AWTX-J5 .

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	+25°C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned Only the 8-DPSK, of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	--	--

Note:

--" means no any support device during testing.

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25

Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Dwell Time

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11

Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

1 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


1.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.5dBi.

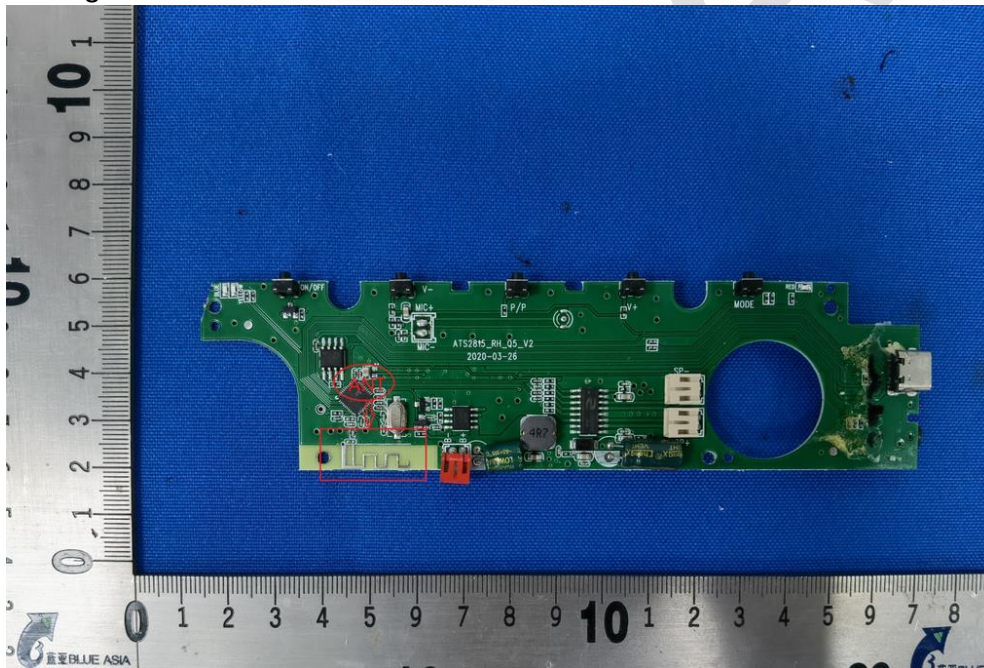

2 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX Low channel;TX middle channel;TX high channel
Test Mode (Final Test)	TX mode (SE) below 1G;TX Low channel;TX middle channel;TX high channel
Tester	Jozu
Temperature	25°C
Humidity	60%

2.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

2.2 BLOCK DIAGRAM OF TEST SETUP

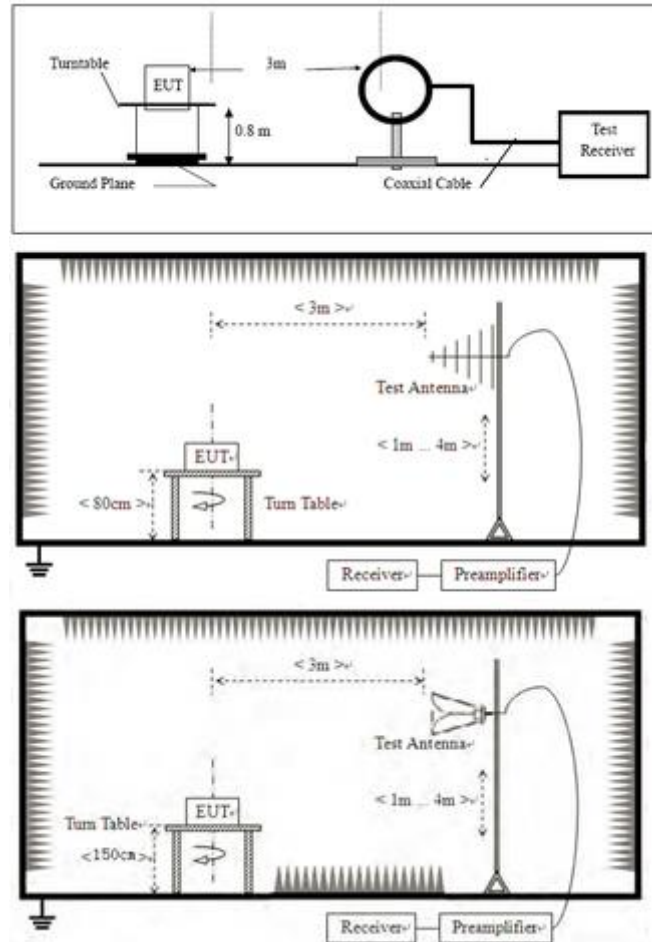

2.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

2.4 TEST DATA

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

Radiated Emission Measurement

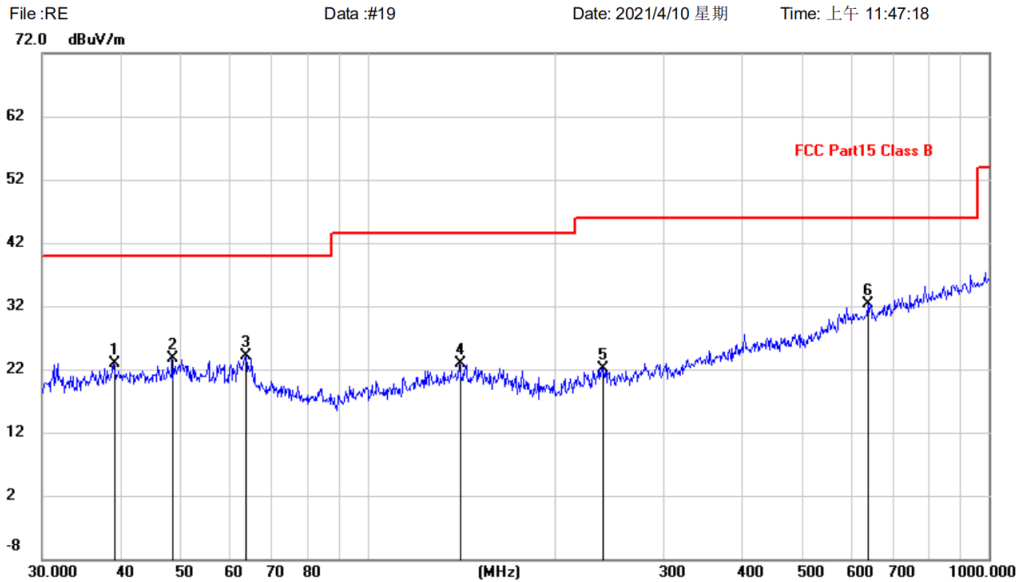

Site

Limit: FCC Part15 Class B

EUT: wireless speaker

M/N: USG-PLAY 2

Mode: TX mode

Note:

Polarization: **Horizontal**

Temperature:

Power:

Humidity: %

Distance: 3m

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		39.0245	-0.78	23.71	22.93	40.00	-17.07	QP		
2		48.5016	0.05	23.61	23.66	40.00	-16.34	QP		
3		63.7588	1.57	22.47	24.04	40.00	-15.96	QP		
4		140.8351	-0.37	23.29	22.92	43.50	-20.58	QP		
5		238.3102	-0.55	22.65	22.10	46.00	-23.90	QP		
6	*	638.3686	0.66	31.68	32.34	46.00	-13.66	QP		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

Radiated Emission Measurement


File :RE

Data :#20

Date: 2021/4/10 星期

Time: 上午 11:49:22

72.0 dBuV/m

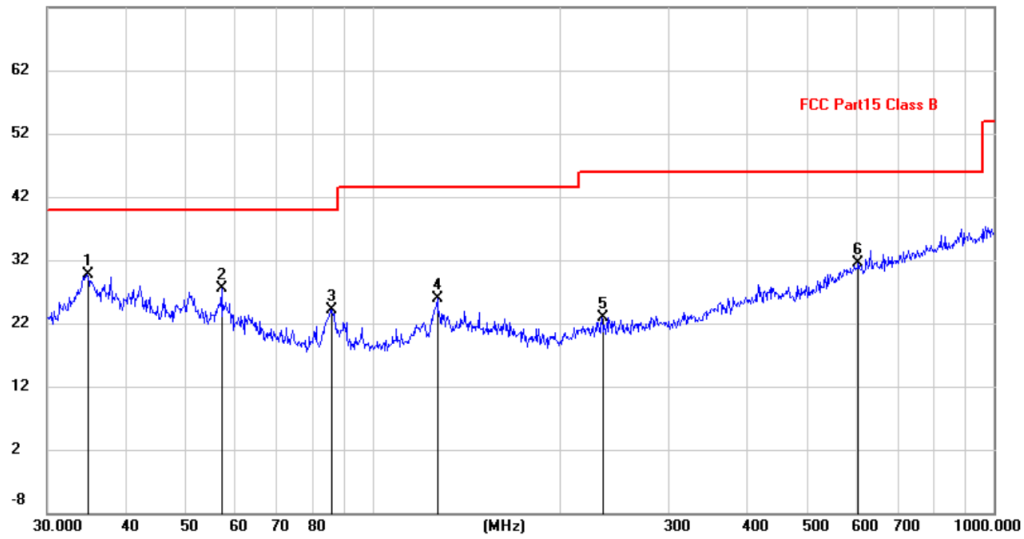

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 Class B

Power:

Humidity: %

EUT: wireless speaker

Distance: 3m

M/N: USG-PLAY 2

Mode: TX mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	34.7602	6.55	23.13	29.68	40.00	-10.32	QP		
2		57.1914	4.15	23.34	27.49	40.00	-12.51	QP		
3		86.2001	4.89	19.23	24.12	40.00	-15.88	QP		
4		127.2176	3.14	22.76	25.90	43.50	-17.60	QP		
5		234.1684	0.49	22.46	22.95	46.00	-23.05	QP		
6		605.6592	0.13	31.42	31.55	46.00	-14.45	QP		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Horizontal]

Radiated Emission Measurement

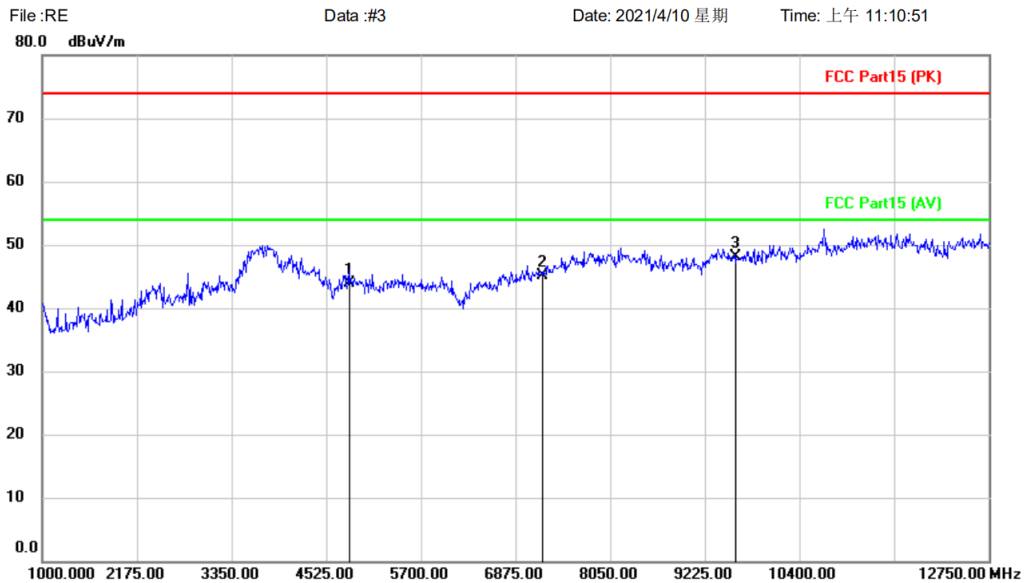

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4808.000	40.23	3.69	43.92	74.00	-30.08	peak		
2		7206.000	39.16	5.96	45.12	74.00	-28.88	peak		
3	*	9608.000	38.90	9.29	48.19	74.00	-25.81	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

Radiated Emission Measurement

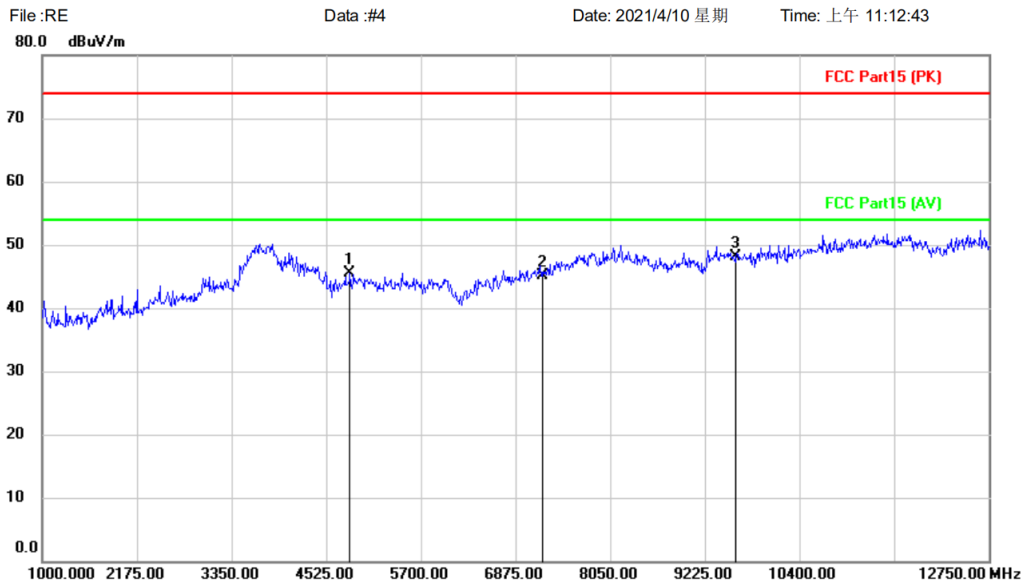

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4808.000	41.79	3.69	45.48	74.00	-28.52	peak		
2		7206.000	39.14	5.96	45.10	74.00	-28.90	peak		
3	*	9608.000	38.85	9.29	48.14	74.00	-25.86	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

Radiated Emission Measurement

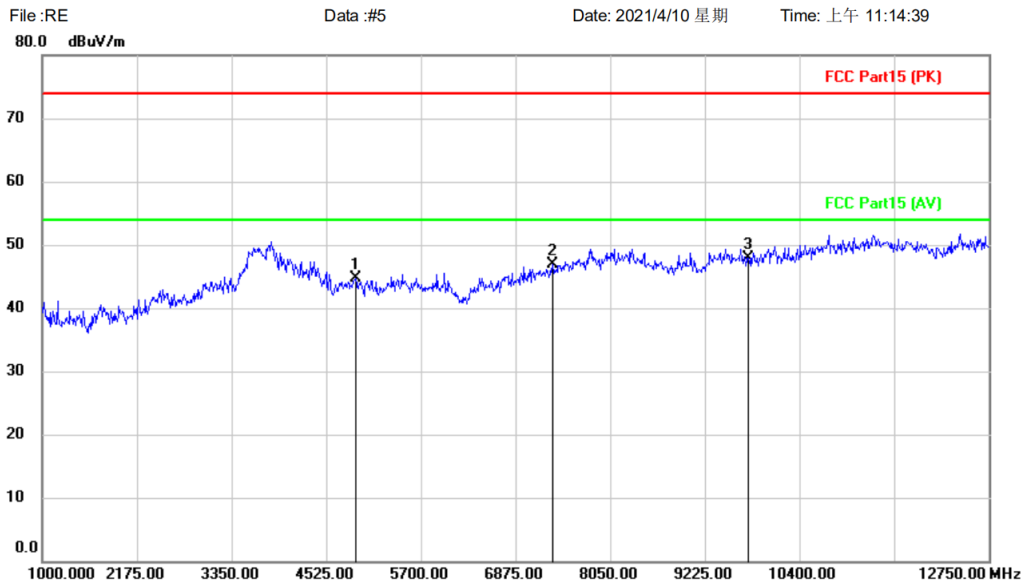

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-M
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4884.000	41.31	3.34	44.65	74.00	-29.35	peak		
2		7323.000	40.43	6.43	46.86	74.00	-27.14	peak		
3	*	9764.000	38.32	9.63	47.95	74.00	-26.05	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

Radiated Emission Measurement

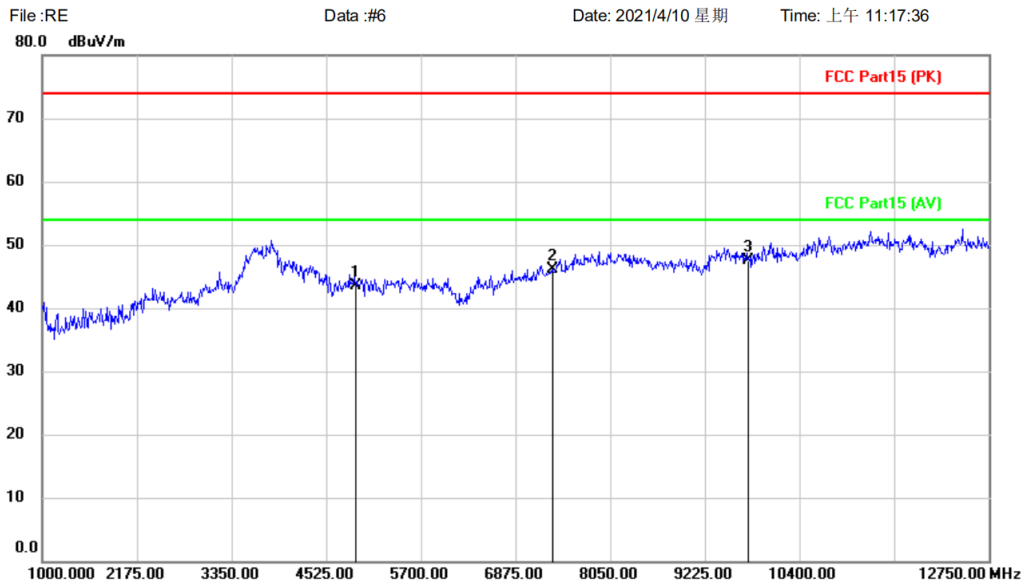

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-M
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4884.000	40.17	3.34	43.51	74.00	-30.49	peak		
2		7323.000	39.68	6.43	46.11	74.00	-27.89	peak		
3	*	9764.000	37.97	9.63	47.60	74.00	-26.40	peak		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

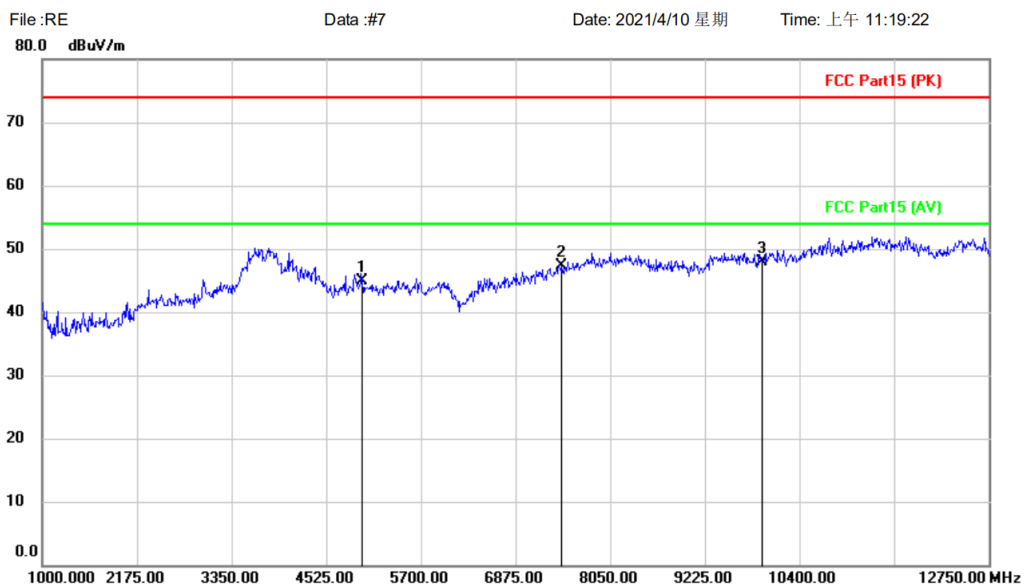

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4960.000	41.19	3.75	44.94	74.00	-29.06	peak		
2		7440.000	40.43	6.86	47.29	74.00	-26.71	peak		
3	*	9920.000	37.70	10.16	47.86	74.00	-26.14	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement

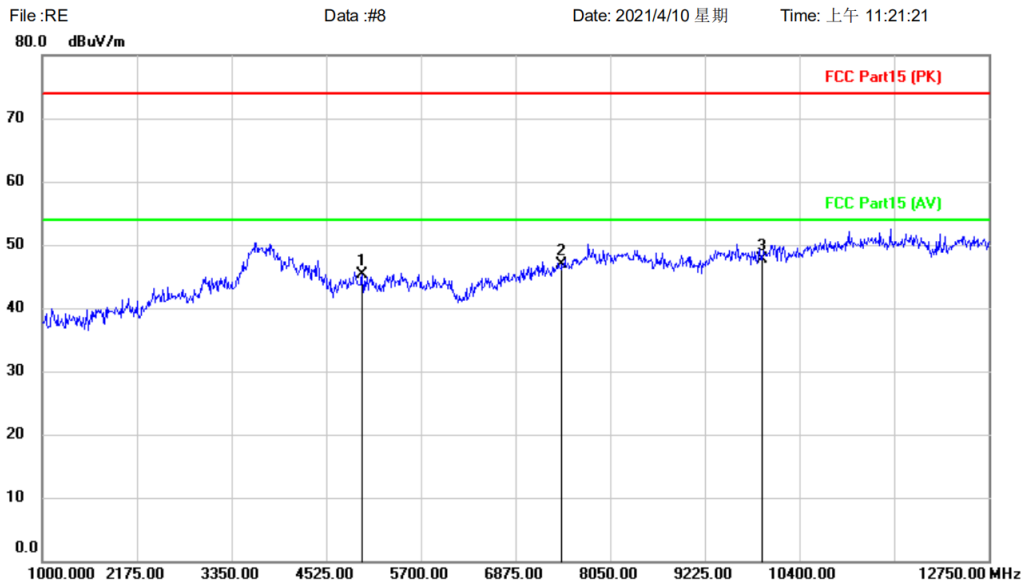

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4960.000	41.61	3.75	45.36	74.00	-28.64	peak		
2		7440.000	40.01	6.86	46.87	74.00	-27.13	peak		
3	*	9920.000	37.62	10.16	47.78	74.00	-26.22	peak		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

3 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX Low channel;TX high channel
Test Mode (Final Test)	TX Low channel;TX high channel
Tester	Jozu
Temperature	25℃
Humidity	60%

3.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3.2 BLOCK DIAGRAM OF TEST SETUP

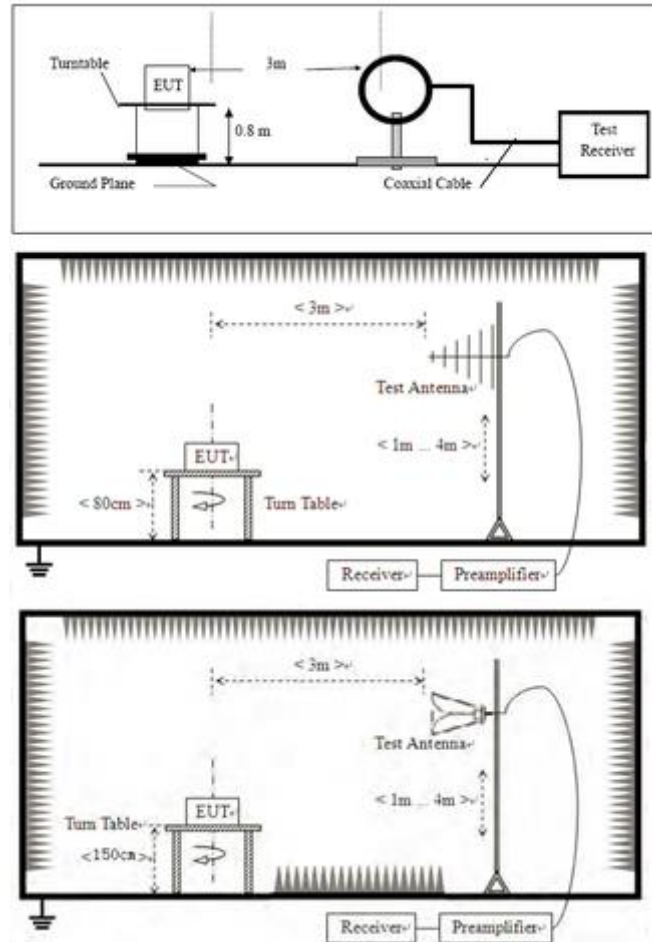

3.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

3.4 TEST DATA

[TestMode: TX Low channel]; [Polarity: Horizontal]

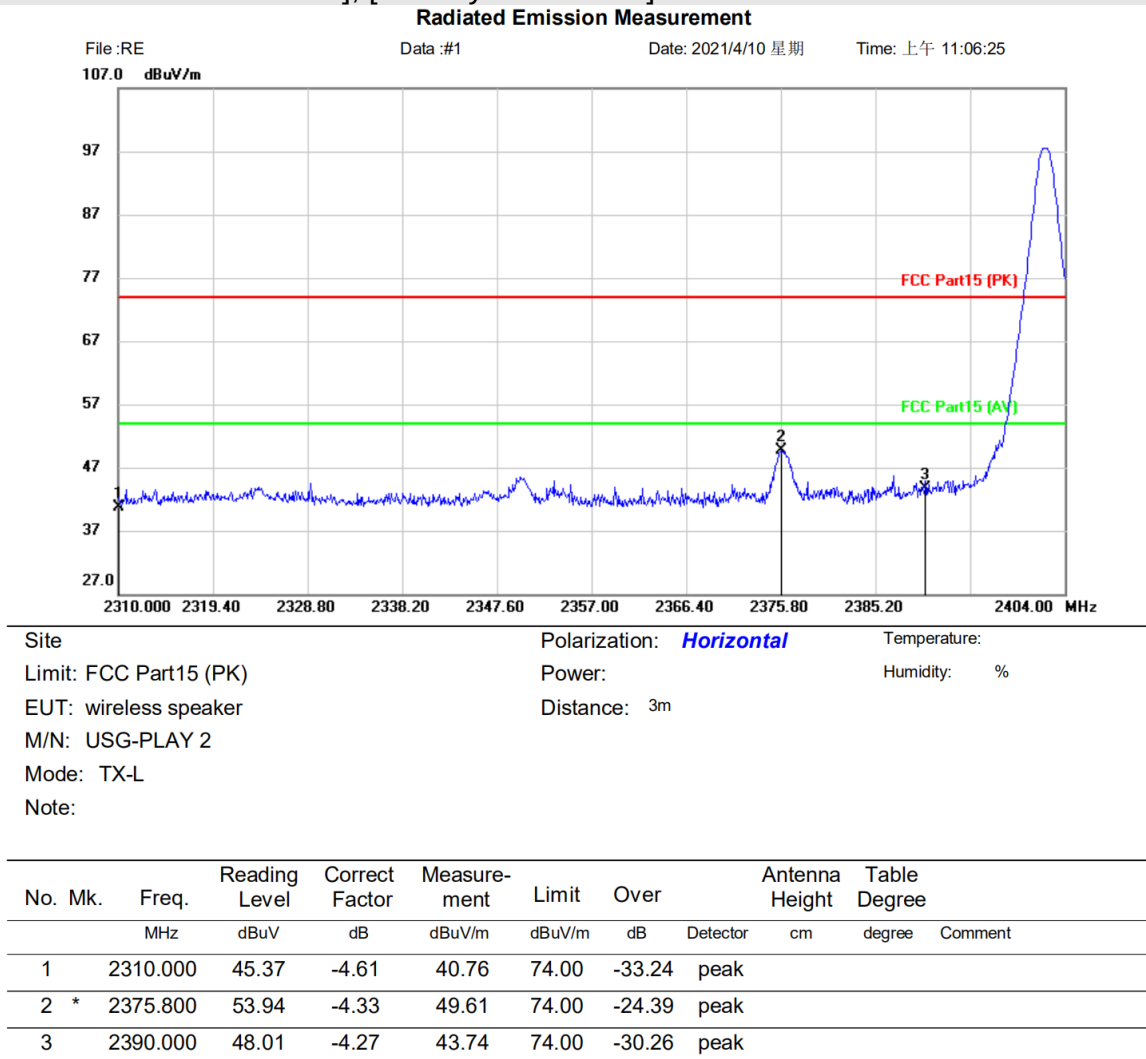


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

Radiated Emission Measurement

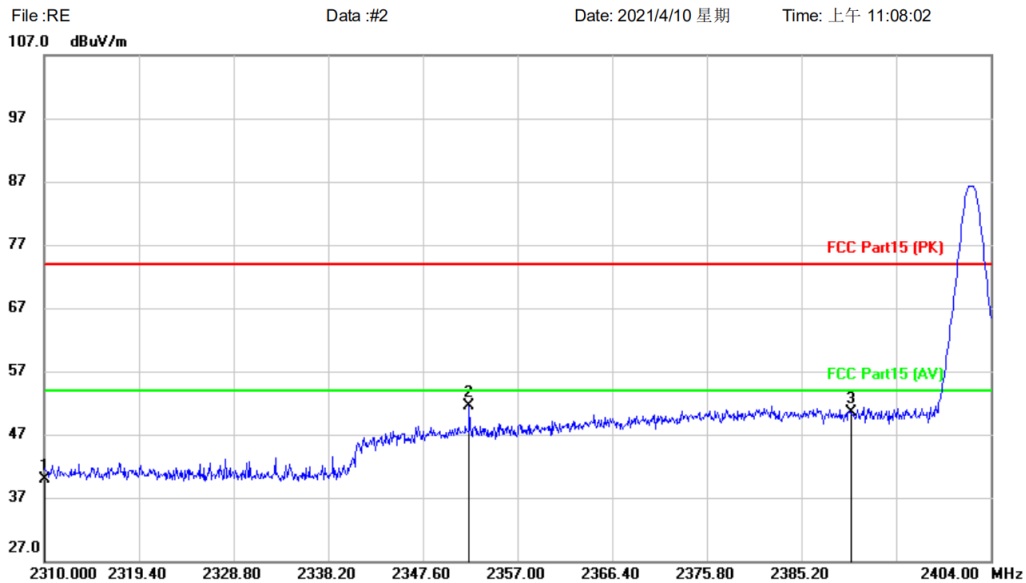

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-L
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2310.000	44.53	-4.61	39.92	74.00	-34.08	peak		
2	*	2352.206	55.88	-4.43	51.45	74.00	-22.55	peak		
3		2390.000	54.80	-4.27	50.53	74.00	-23.47	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

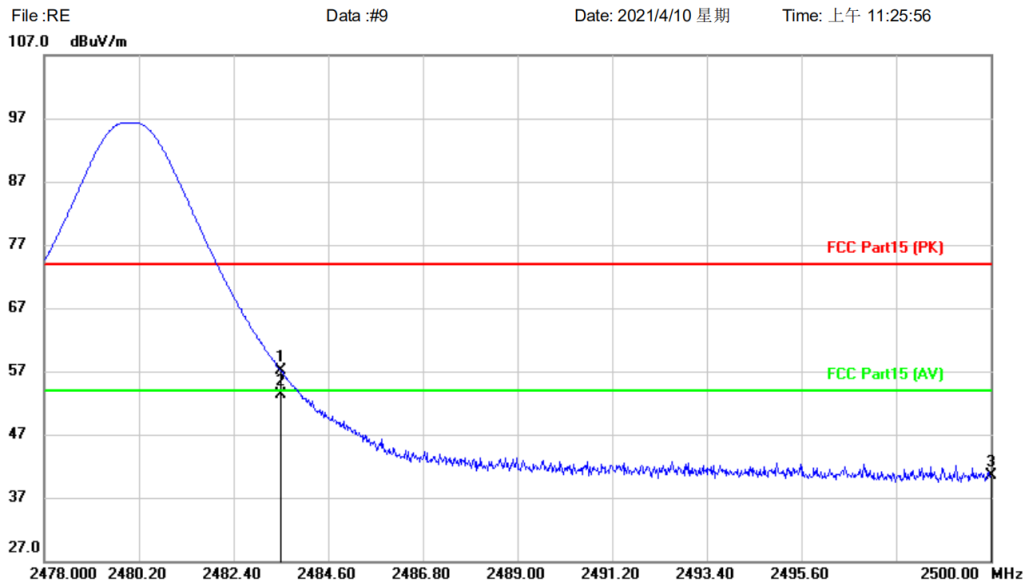

Site Limit: FCC Part15 (PK) Polarization: **Horizontal** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2483.500	60.89	-3.84	57.05	74.00	-16.95	peak		
2	*	2483.500	57.15	-3.84	53.31	54.00	-0.69	AVG		
3		2500.000	44.22	-3.78	40.44	74.00	-33.56	peak		


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

Radiated Emission Measurement

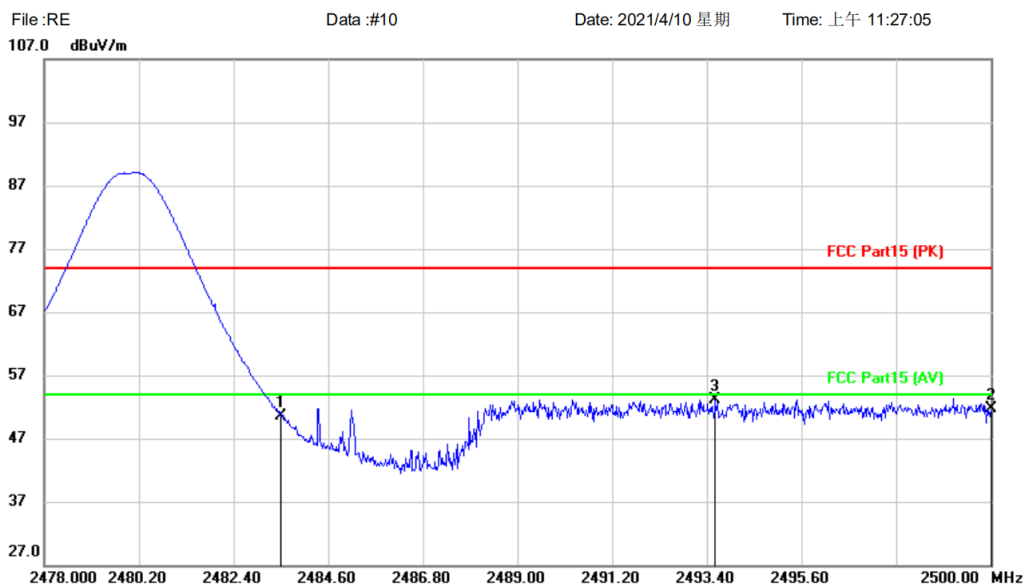

Site Limit: FCC Part15 (PK) Polarization: **Vertical** Temperature:
EUT: wireless speaker Power: Humidity: %
M/N: USG-PLAY 2 Distance: 3m
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2483.500	54.35	-3.84	50.51	74.00	-23.49	peak		
2		2500.000	55.51	-3.78	51.73	74.00	-22.27	peak		
3	*	2493.598	56.90	-3.81	53.09	74.00	-20.91	peak		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass


4 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

4.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

4.2 BLOCK DIAGRAM OF TEST SETUP

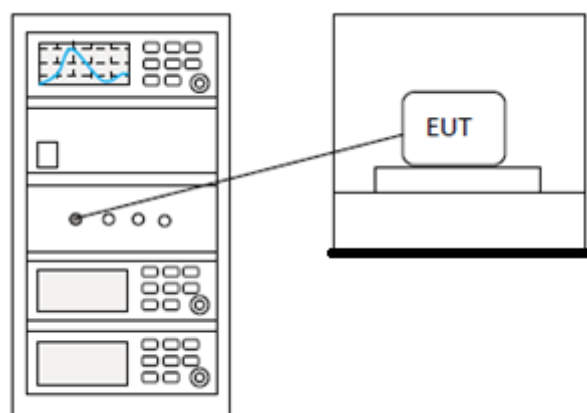

4.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


5 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

5.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

5.2 BLOCK DIAGRAM OF TEST SETUP

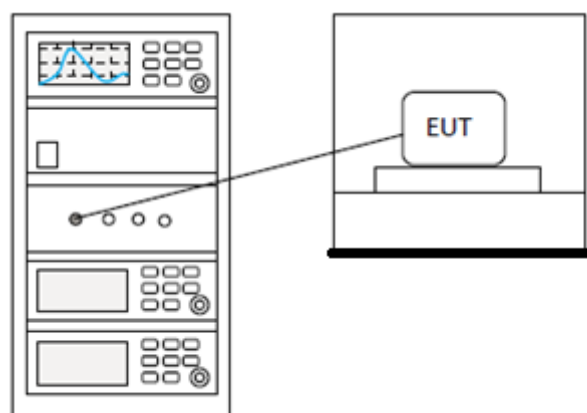

5.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


6 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

6.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

6.2 BLOCK DIAGRAM OF TEST SETUP

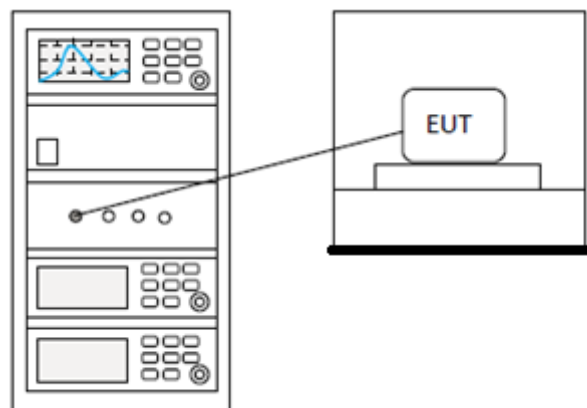

6.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


7 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

7.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.2 BLOCK DIAGRAM OF TEST SETUP

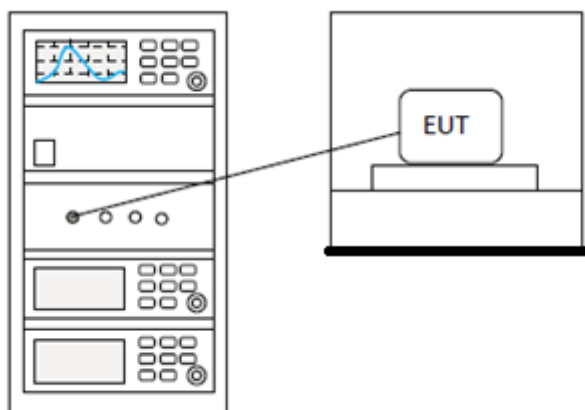

7.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


8 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

8.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

8.2 BLOCK DIAGRAM OF TEST SETUP

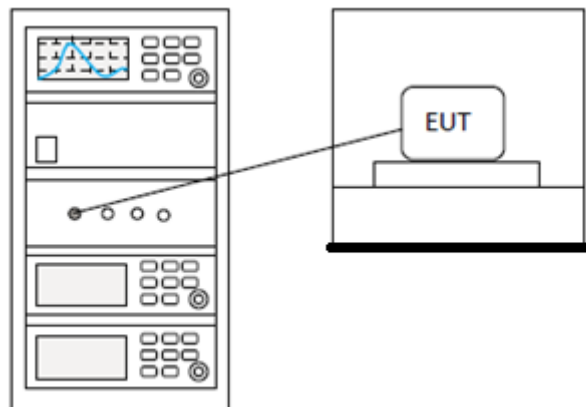


8.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

9 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

9.1 BLOCK DIAGRAM OF TEST SETUP

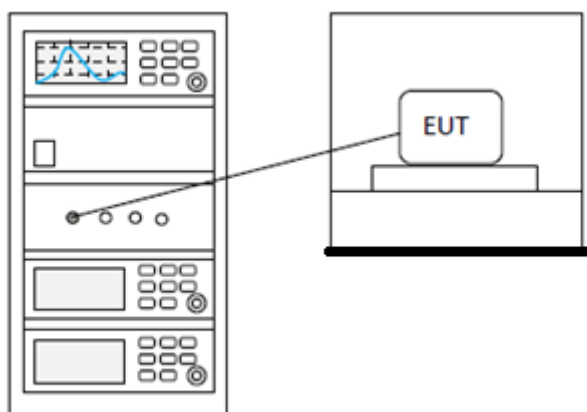

9.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


10 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

10.2 BLOCK DIAGRAM OF TEST SETUP

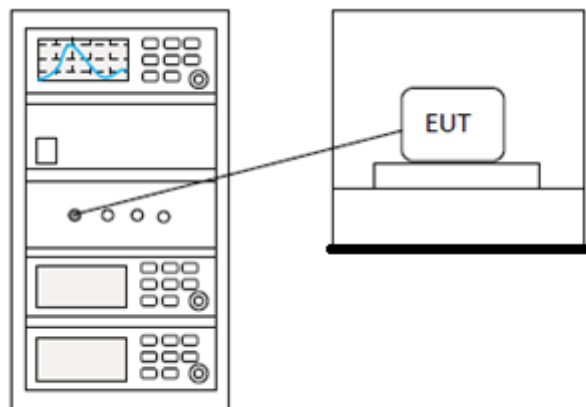

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

11 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

11.2 BLOCK DIAGRAM OF TEST SETUP

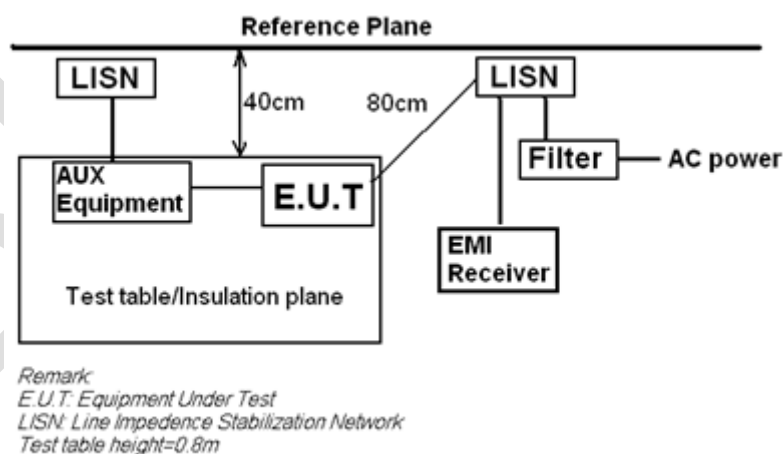

11.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.


- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

11.4 TEST DATA

[TestMode: TX]; [Line: Line];[Power:AC120V/60Hz]

Conducted Emission Measurement

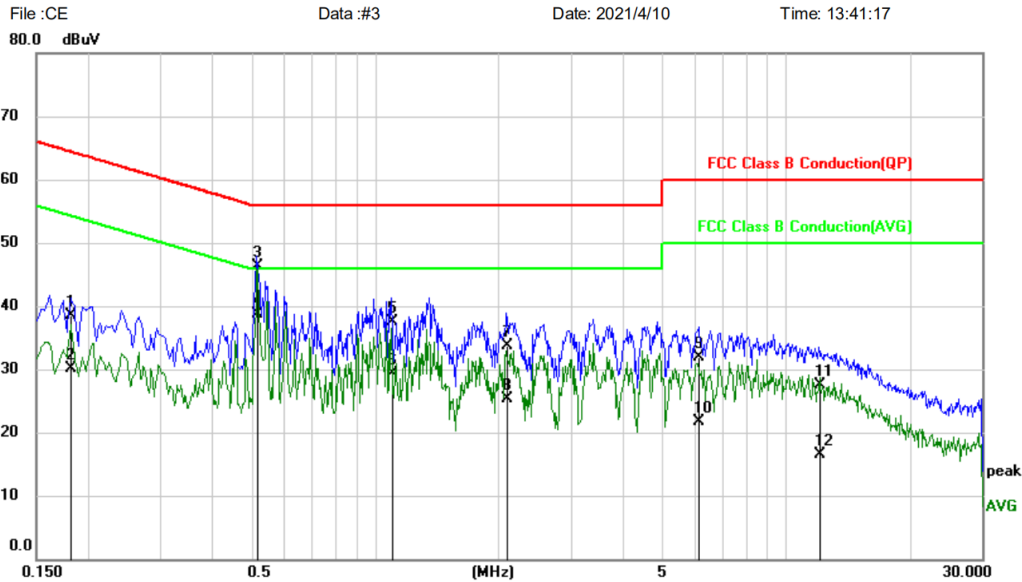

Site: Phase: **L1** Temperature:
Limit: FCC Class B Conduction(QP) Power: Humidity: %
EUT: Wireless speaker
M/N: USG-PLAY 2
Mode: BT mode
Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1819	28.74	9.82	38.56	64.40	-25.84	QP	
2	0.1819	20.30	9.82	30.12	54.40	-24.28	AVG	
3	0.5180	36.52	9.87	46.39	56.00	-9.61	QP	
4 *	0.5180	28.88	9.87	38.75	46.00	-7.25	AVG	
5	1.0940	27.55	9.92	37.47	56.00	-18.53	QP	
6	1.0940	19.31	9.92	29.23	46.00	-16.77	AVG	
7	2.0900	23.73	9.94	33.67	56.00	-22.33	QP	
8	2.0900	15.32	9.94	25.26	46.00	-20.74	AVG	
9	6.1420	21.89	10.06	31.95	60.00	-28.05	QP	
10	6.1420	11.67	10.06	21.73	50.00	-28.27	AVG	
11	12.0340	17.29	10.28	27.57	60.00	-32.43	QP	
12	12.0340	6.31	10.28	16.59	50.00	-33.41	AVG	


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Neutral] ;[Power:AC120V/60Hz]

Conducted Emission Measurement

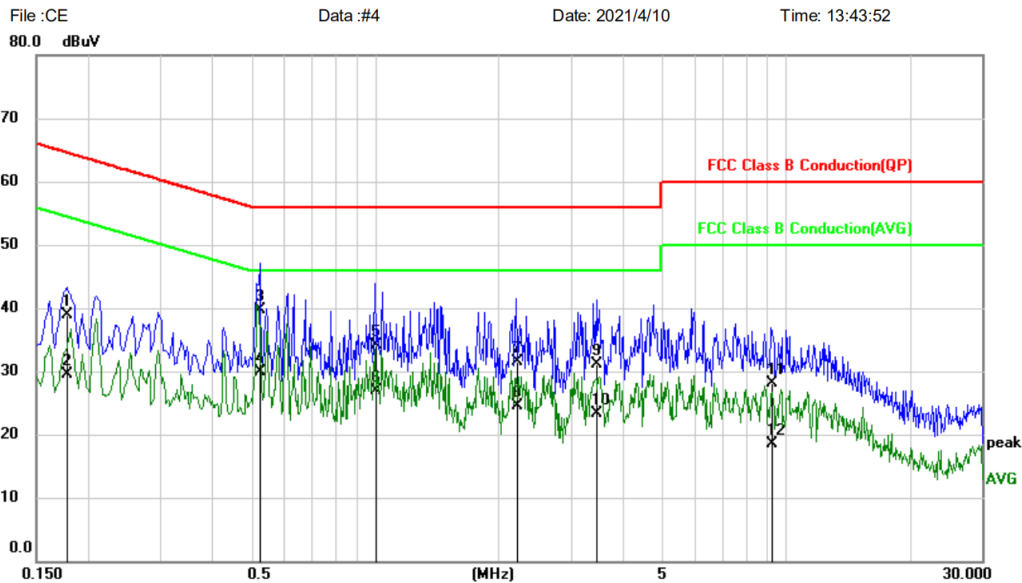

Site: Phase: **N** Temperature:
Limit: FCC Class B Conduction(QP) Power: Humidity: %
EUT: Wireless speaker
M/N: USG-PLAY 2
Mode: BT mode
Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1780	29.18	9.74	38.92	64.58	-25.66	QP	
2	0.1780	19.71	9.74	29.45	54.58	-25.13	AVG	
3	0.5260	29.83	9.79	39.62	56.00	-16.38	QP	
4 *	0.5260	20.05	9.79	29.84	46.00	-16.16	AVG	
5	1.0020	24.23	9.84	34.07	56.00	-21.93	QP	
6	1.0020	17.10	9.84	26.94	46.00	-19.06	AVG	
7	2.2060	21.64	9.87	31.51	56.00	-24.49	QP	
8	2.2060	14.64	9.87	24.51	46.00	-21.49	AVG	
9	3.4580	21.28	9.90	31.18	56.00	-24.82	QP	
10	3.4580	13.35	9.90	23.25	46.00	-22.75	AVG	
11	9.2420	18.03	10.11	28.14	60.00	-31.86	QP	
12	9.2420	8.34	10.11	18.45	50.00	-31.55	AVG	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

10 APPENDIX

Appendix1

10.1 APPENDIX A: 20DB EMISSION BANDWIDTH

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.098	2401.454	2402.552	---	PASS
		2441	1.095	2440.454	2441.549	---	PASS
		2480	1.101	2479.454	2480.555	---	PASS
2DH1	Ant1	2402	1.383	2401.307	2402.690	---	PASS
		2441	1.386	2440.307	2441.693	---	PASS
		2480	1.383	2479.310	2480.693	---	PASS
3DH1	Ant1	2402	1.362	2401.313	2402.675	---	PASS
		2441	1.362	2440.313	2441.675	---	PASS
		2480	1.362	2479.319	2480.681	---	PASS

Test Graphs



