

Shenzhen Reecoo Electronic Co., Ltd.

TEST REPORT

SCOPE OF WORK
FCC TESTING-CH1822

REPORT NUMBER
220112012SZN-001

ISSUE DATE [REVISED DATE]
27 January 2022 [-----]

PAGES
17

DOCUMENT CONTROL NUMBER
FCC ID JAB
© 2017 INTERTEK



Shenzhen Reecoo Electronic Co., Ltd.

Application
For
Certification

FCC ID: 2AZMB-CH1822**Class 2 Battery charger****Model: CH1822****Brand Name: yeedi****Part 15 Class B Digital Devices****Report No.: 220112012SZN-001**

Prepared and Checked by:

Vito Pan
Project Engineer
Date: 27 January 2022

Approved by:

Sewen Guo
Senior Project Engineer
Date: 27 January 2022

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, Shenzhen, P.R. China.
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT / TECHNICAL REPORT

This report concerns (check one): Original Grant Class I Change

Equipment Type: JAB-Part 15 Class B Digital Devices

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart B for unintentional radiator – the new 47 CFR [10-01-20 Edition] provision.

Report prepared by:

Vito Pan
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict, LongHua
District, Shenzhen, P.R. China
Phone: 86-755-8614 0684
Fax: 86-755-8601 6751

Table of Contents

1.0	SUMMARY OF TEST RESULT	4
2.0	General Description	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants	5
2.3	Test Methodology	5
2.4	Test Facility	5
3.0	System Test Configuration	6
3.1	Justification	6
3.2	EUT Exercising Software	6
3.3	Special Accessories	6
3.4	Equipment Modification	6
3.5	Measurement Uncertainty	7
3.6	Support Equipment List and Description	7
4.0	Emission Results	8
4.1	Field Strength Calculation	8
4.2	Radiated Emission Configuration Photograph	9
4.3	Radiated Emission Data	9
4.4	Conducted Emission at Mains Terminal	12
4.5	Conducted Emission Data	12
5.0	Equipment Photographs	15
6.0	Product Labelling	15
7.0	Technical Specifications	15
8.0	Instruction Manual	15
9.0	Miscellaneous Information	16
10.0	Test Equipment List	17

1.0 SUMMARY OF TEST RESULT

Grantee: Shenzhen Reecoo Electronic Co., Ltd.

Grantee Address: Building 5-6, ShangLiLang Science and Technology Park, ShangLiLang Community, NanWan Street, LongGang District, ShenZhen City, Guangdong Province, China

MODEL: CH1822
FCC ID: 2AZMB-CH1822

Test Specification	Reference	Results
Radiated Emission	15.107	Pass
Conducted Emission	15.109	Pass

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a Class 2 Battery charger to Charge the floor cleaning robot. The EUT is powered by Input: 100-240V~, 50-60Hz, 0.5A Output: 20V DC 1A.

2.2 Related Submittal(s) Grants

This is an application for certification of a Class 2 Battery charger to Charge the floor cleaning robot.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2014).

The device was powered by AC 120V/60Hz during the test. only the worst-case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Section 4.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency ranges from 30MHz to 1000MHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

3.2 EUT Exercising Software

N/A

3.3 Special Accessories

N/A

3.4 Equipment Modification

Any modifications installed previous to testing by Shenzhen Reecoo Electronic Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Measurement Uncertainty	Uncertainty
AC conducted Emission	±3.6dB
Radiated Emission (Up to 1GHz)	±4.8dB
Radiated Emission (1GHz to 6GHz)	±4.8dB
Radiated Emission (6GHz to 18GHz)	±5.1dB

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
floor cleaning robot	Reecoo	YDVN11
Cables(Length 192cm)	Reecoo	-

4.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG$$

Example

Assume a receiver reading of 62.0dB μ V is obtained. The antenna factor of 7.4dB/m and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The net field strength for comparison to the appropriate emission limit is 42dB μ V/m. This value in dB μ V/m was converted to its corresponding level in $\mu\text{V}/\text{m}$.

RA = 62.0dB μ V

AF = 7.4dB/m

CF = 1.6dB

AG = 29.0dB

$$FS = 62 + 7.4 + 1.6 - 29 = 42\text{dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(42\text{dB}\mu\text{V}/\text{m})/20] = 125.9\mu\text{V}/\text{m}$$

4.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
At
728.520000MHz (Charging Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

4.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 11.9dB margin (Charging Mode)

TEST PERSONNEL:*Sign on file*Vito Pan, Project Engineer*Typed/Printed Name*18 January 2022*Date*


Applicant: Shenzhen Reecoo Electronic Co., Ltd.

Date of Test: 18 January 2022

Model: CH1822

Worst Case Operating Mode:

Charging

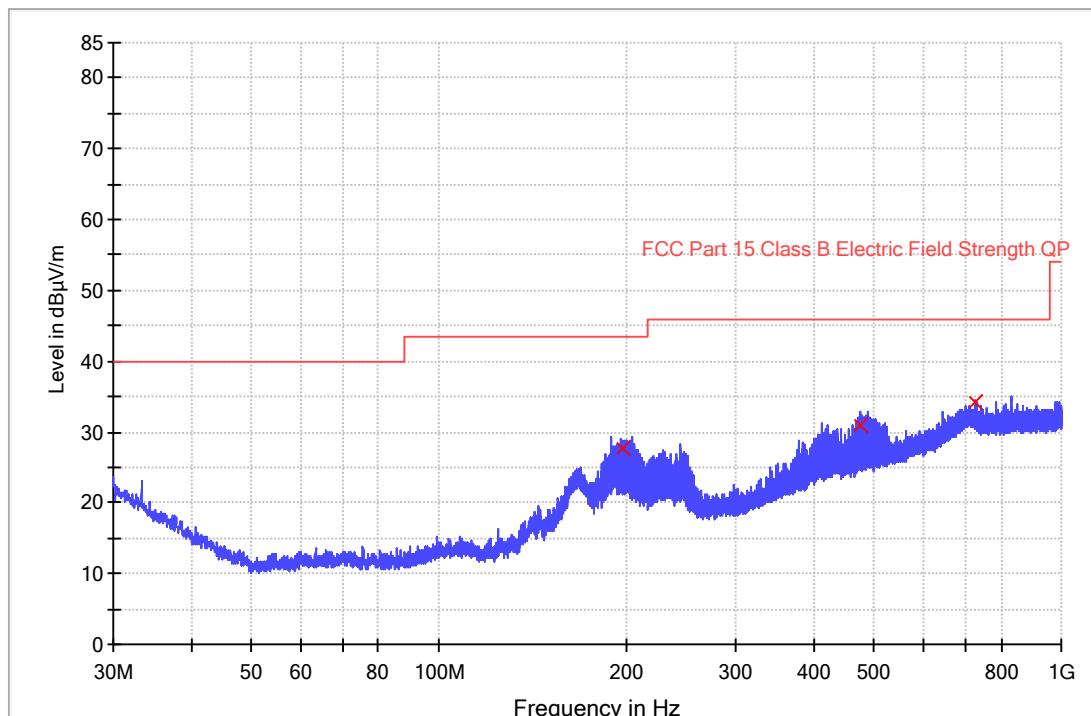Radiated Disturbance (30MHz to 1GHz)**Horizontal**

Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
197.880000	27.7	1000.0	120.000	100.0	H	19.2	15.8	43.5
475.920000	30.9	1000.0	120.000	100.0	H	26.2	15.1	46.0
728.520000	34.1	1000.0	120.000	100.0	H	32.0	11.9	46.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line (dB μ V/m) – Level (dB μ V/m)

Applicant: Shenzhen Reecoo Electronic Co., Ltd.


Date of Test: 18 January 2022

Model: CH1822

Worst Case Operating Mode:

Charging

Vertical

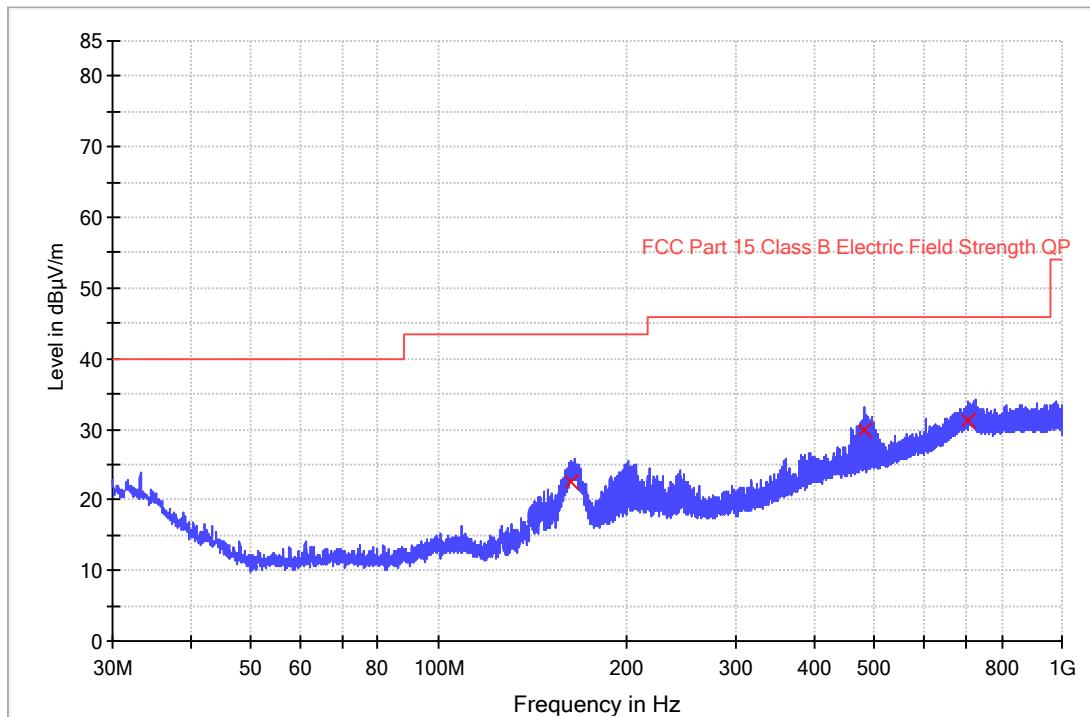

Frequency (MHz)	Quasi Peak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dB μ V/m)
162.631333	22.5	1000.0	120.000	100.0	V	17.3	21.0	43.5
483.475000	30.0	1000.0	120.000	100.0	V	26.4	16.0	46.0
709.064667	31.3	1000.0	120.000	100.0	V	32.0	14.7	46.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. Quasi Peak (dB μ V/m) = Corr. (dB/m) + Read Level (dB μ V)
3. Margin (dB) = Limit Line (dB μ V/m) – Level (dB μ V/m)

4.4 Conducted Emission at Mains Terminal**4.4.1 Conducted Emission Configuration Photograph**

Worst Case Conducted Configuration
at
0.438000 MHz (Charging Mode)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

4.5 Conducted Emission Data

Judgement: Passed by 11.7 dB margin(Charging Mode)

TEST PERSONNEL:

Sign on file

Vito Pan, Project Engineer
Typed/Printed Name

18 January 2022

Date

Applicant: Shenzhen Reecoo Electronic Co., Ltd.

Date of Test: 18 January 2022


Model: CH1822

Operating Mode: Charging

Phase: Live

Test Voltage: AC 120V/60Hz

Conducted Emission Test - FCC

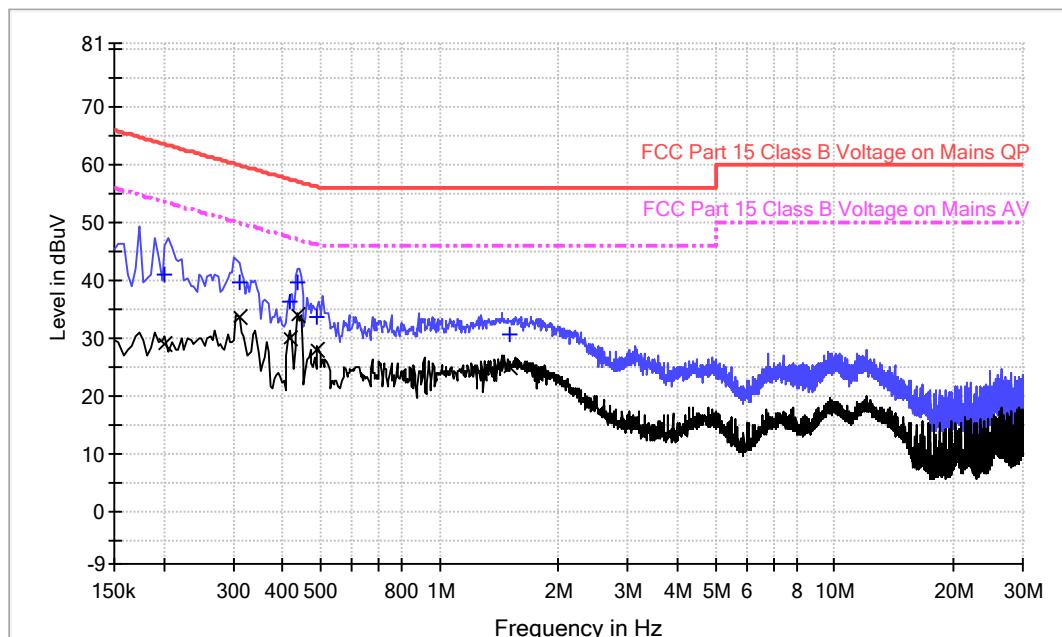

Result Table QP

Frequency (MHz)	Quasi Peak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.202000	41.1	L	9.6	22.4	63.5
0.310000	39.8	L	9.6	20.2	60.0
0.418000	36.2	L	9.6	21.3	57.5
0.438000	39.8	L	9.6	17.3	57.1
0.490000	33.6	L	9.6	22.6	56.2
1.510000	30.5	L	9.6	25.5	56.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.202000	29.1	L	9.6	24.4	53.5
0.310000	33.6	L	9.6	16.4	50.0
0.418000	30.1	L	9.6	17.4	47.5
0.438000	34.1	L	9.6	13.0	47.1
0.490000	28.1	L	9.6	18.1	46.2
1.510000	25.0	L	9.6	21.0	46.0

Test Report

Intertek Report No.: 220112012SZN-001

Applicant: Shenzhen Reecoo Electronic Co., Ltd.


Date of Test: 18 January 2022

Model: CH1822

Operating Mode: Charging

Phase: Neutral

Test Voltage: AC 120V/60Hz

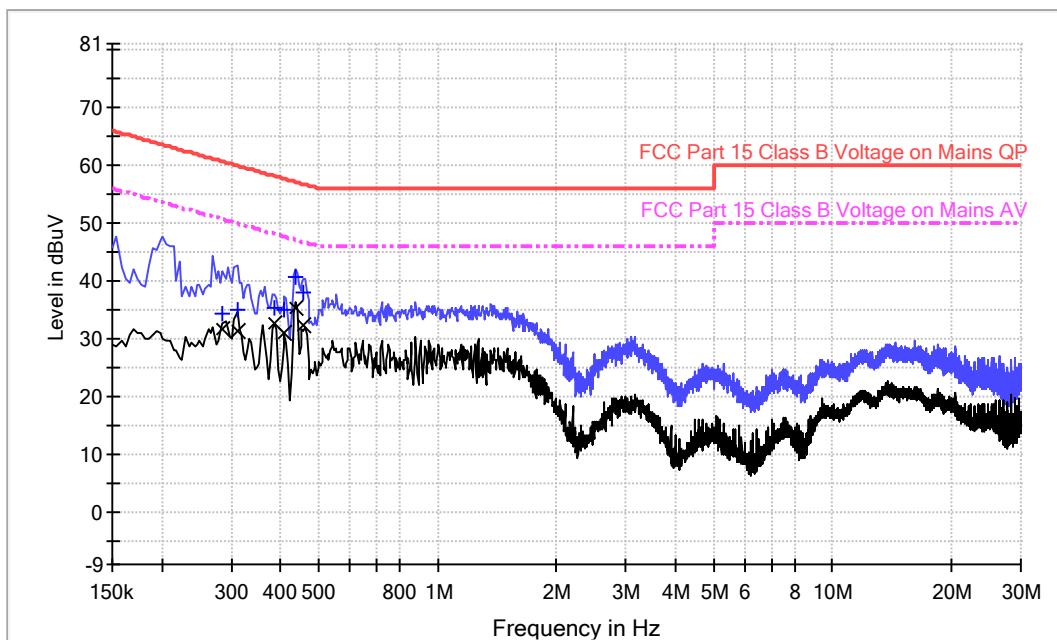Conducted Emission Test - FCC**Result Table QP**

Frequency (MHz)	Quasi Peak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.286000	34.2	N	9.5	26.4	60.6
0.310000	34.8	N	9.5	25.2	60.0
0.386000	35.3	N	9.5	22.8	58.1
0.410000	35.0	N	9.5	22.6	57.6
0.438000	40.6	N	9.5	16.5	57.1
0.458000	38.0	N	9.5	18.7	56.7

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.286000	31.6	N	9.5	19.0	50.6
0.310000	31.3	N	9.5	18.7	50.0
0.386000	32.6	N	9.5	15.5	48.1
0.410000	30.9	N	9.5	16.7	47.6
0.438000	35.4	N	9.5	11.7	47.1
0.458000	32.3	N	9.5	14.4	46.7

5.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

6.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure.

9.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2014.

The computer peripheral equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.1 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz and in PK & AV mode from frequency band 1GHz to 29.25GHz with RBW setting 1MHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 29.25GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz with RBW setting 9KHz.

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2014.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	04-Aug-2021	04-Aug-2024
SZ185-03	EMI Receiver	R&S	ESCI	100547	20-Dec-2021	20-Dec-2022
SZ061-08	Horn Antenna	ETS	3115	00092346	05-Sep-2021	05-Sep-2024
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	10-May-2021	10-May-2022
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	10-May-2021	10-May-2022
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	22-Dec-2021	22-Dec-2024
SZ062-23	RF Cable	RADIALL	SF104PE	--	26-Oct-2021	26-Oct-2022
SZ062-35	RF Cable	RADIALL	A50-3.5M3.5M-8M	--	26-Oct-2021	26-Oct-2022
SZ062-30	RF Cable	RADIALL	A50-3.5M3.5M-4.5M	--	26-Oct-2021	26-Oct-2022
SZ062-31	RF Cable	RADIALL	A50-3.5M3.5M-1M		26-Oct-2021	26-Oct-2022
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	12-Jul-2021	12-Jul-2022
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	12-May-2021	12-May-2022
SZ062-16	RF Cable	HUBER+SUHNE R	CBL2-BN-1m	110127-2231000	26-Oct-2021	26-Oct-2022
SZ188-03	Shielding Room	ETS	RFD-100	4100	07-Jan-2020	07-Jan-2023

*****End of Report*****