

Antenna Test Report

Model	: 2.4GHz_F
Product Type	: 2.4GHz Antenna
Applicant	: Wuxi Weida Intelligent Electronics Co.,Ltd.
Address	: 85, Feihong Road, Liangxi District, Wuxi City, Jiangsu Province, China.
Version	: V0.0.1
Test engineer.	: lanping
Recheck	:zhoujiamin


2.4GHz Antenna

Specifications

Summary

ITEM	SPEC.	
Model Name	ISM 2.4 GHz	
Center Frequency	2400 MHz 2450 MHz 2500 MHz	1.92 dBi 1.58 dBi 0.49 dBi
MAX. GAIN	1.92 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	10.35 mm	

Antenna Photo & Length

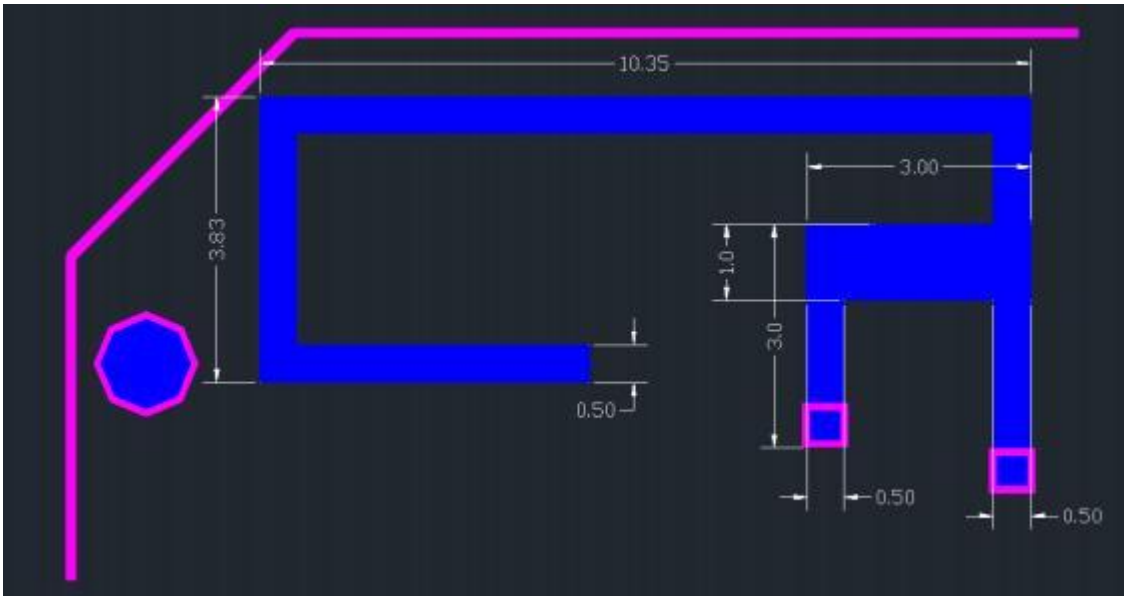


2.4GHz Antenna

TEST SETUP

Antenna measurements such as VSWR were measured with an Agilent E5071C vector network analyzer. Radiation patterns were measured with a CMT Planar 804/1 vector network analyzer in a Howland Company 3100 chamber equivalent. Phase center is nine inches above the Phi positioner.

Flat surface measurements were done with the antenna centered on a 1.5 mm-thick plate of polycarbonate. Curved surface measurements were taken by placing the antenna on the inside and outside of different diameter PVC tubing.

Antenna chamber

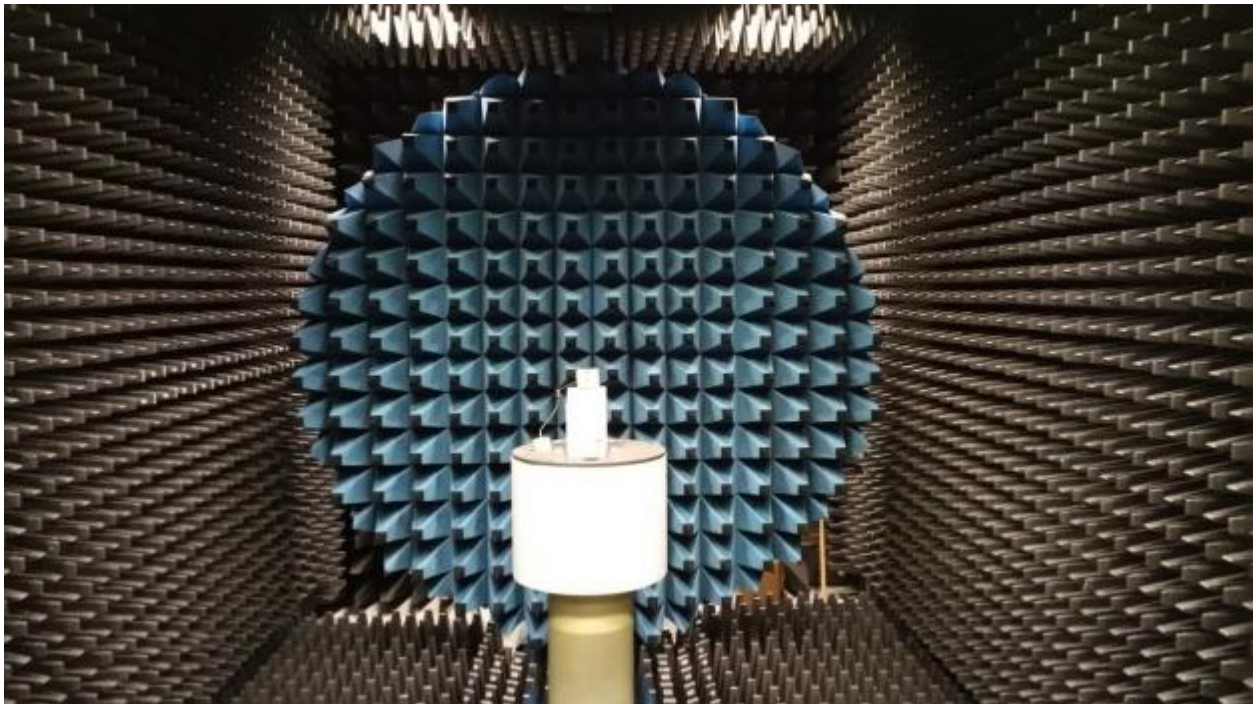


2.4GHz Antenna

FLAT SURFACE ANTENNA MEASUREMENTS

Return LOSS


Antenna RL measured on a 1.5 mm-thick plate of polycarbonate

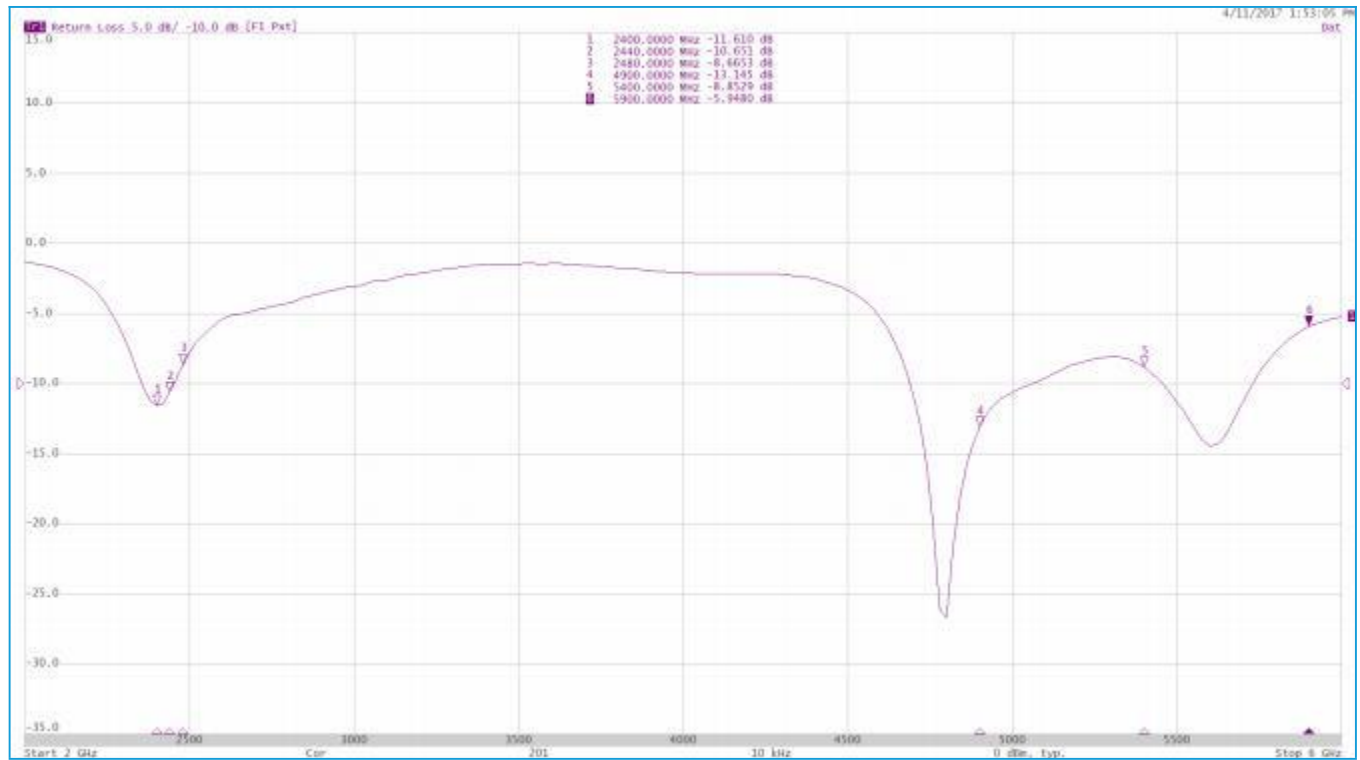

2.4GHz Antenna


1.Main antenna : 2400 MHz

1.1 Horizontal

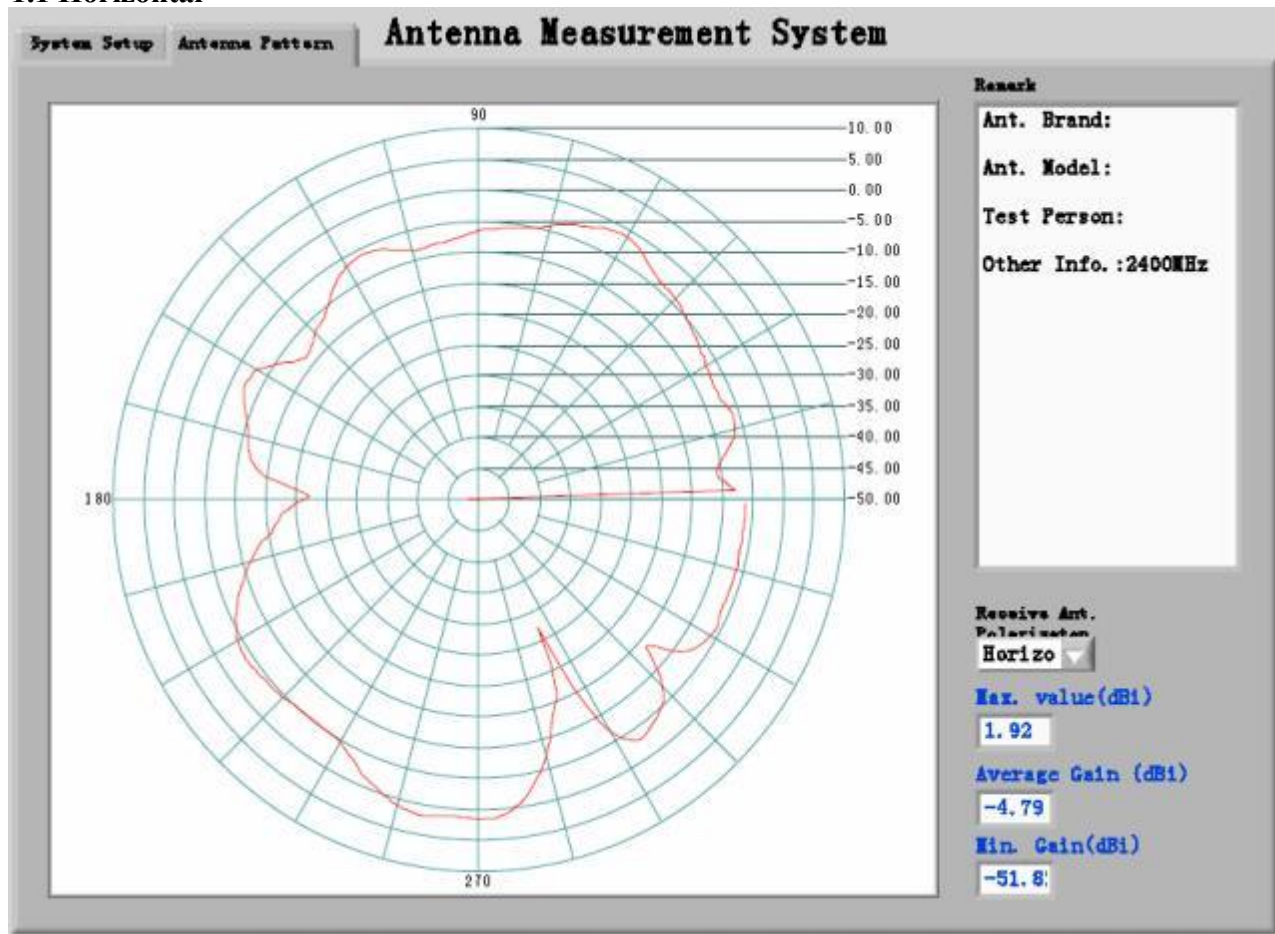

2.4GHz Antenna

1.2 Vertical

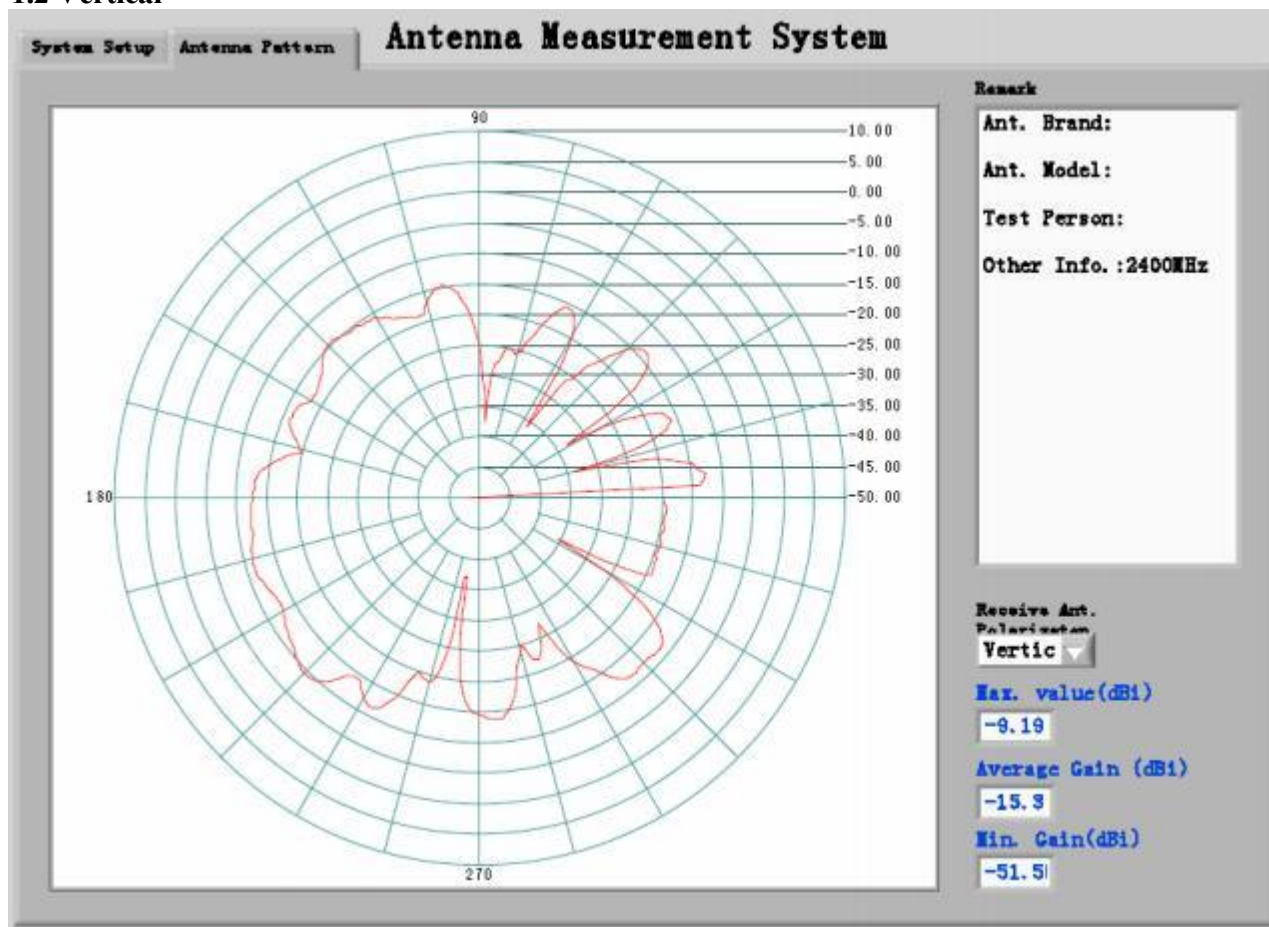


2.4GHz Antenna

FlexPIFA
3-dBi Antenna with UFL Cable


2.Main antenna : 2450 MHz

2.1 Horizontal

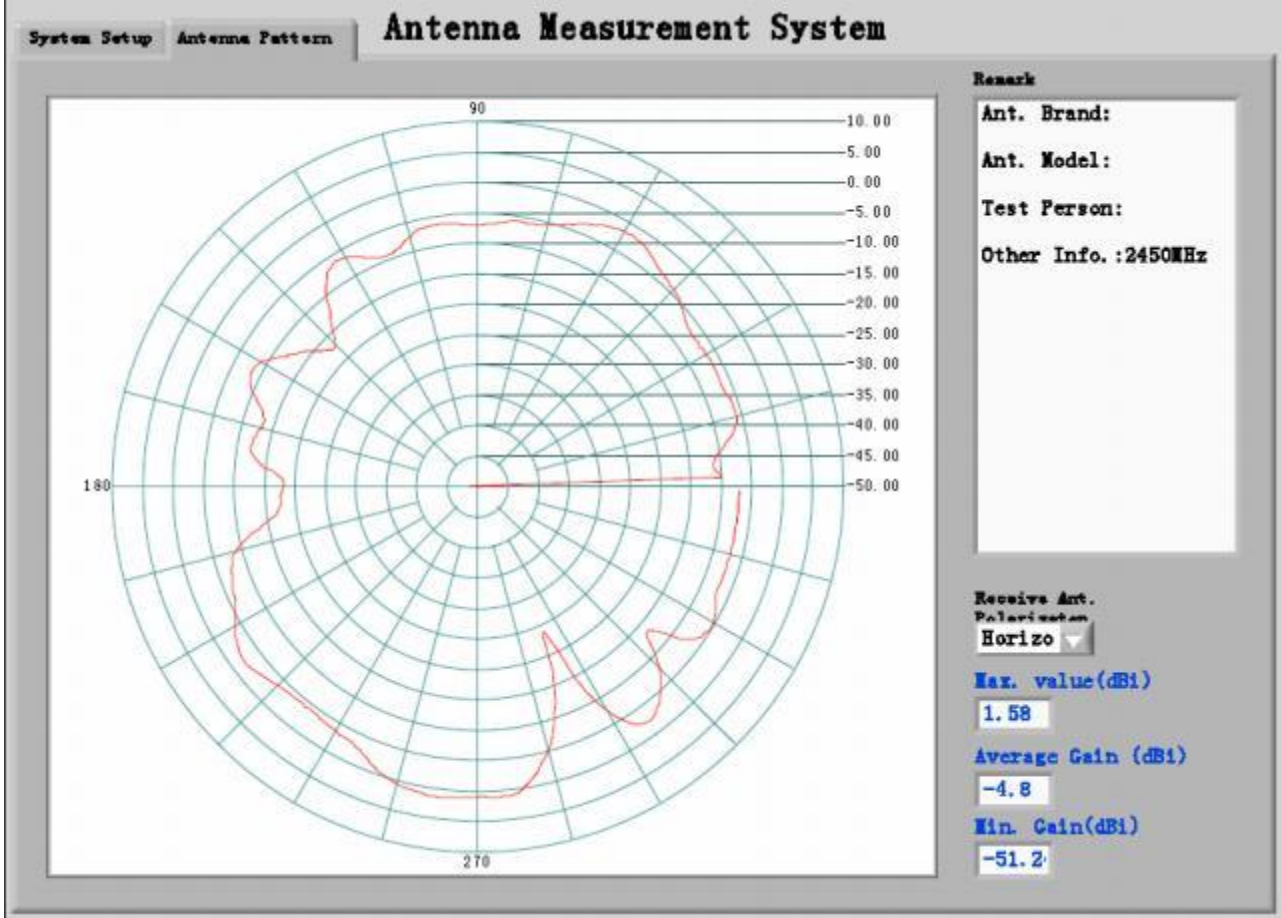

2.4GHz Antenna

2.2 Vertical

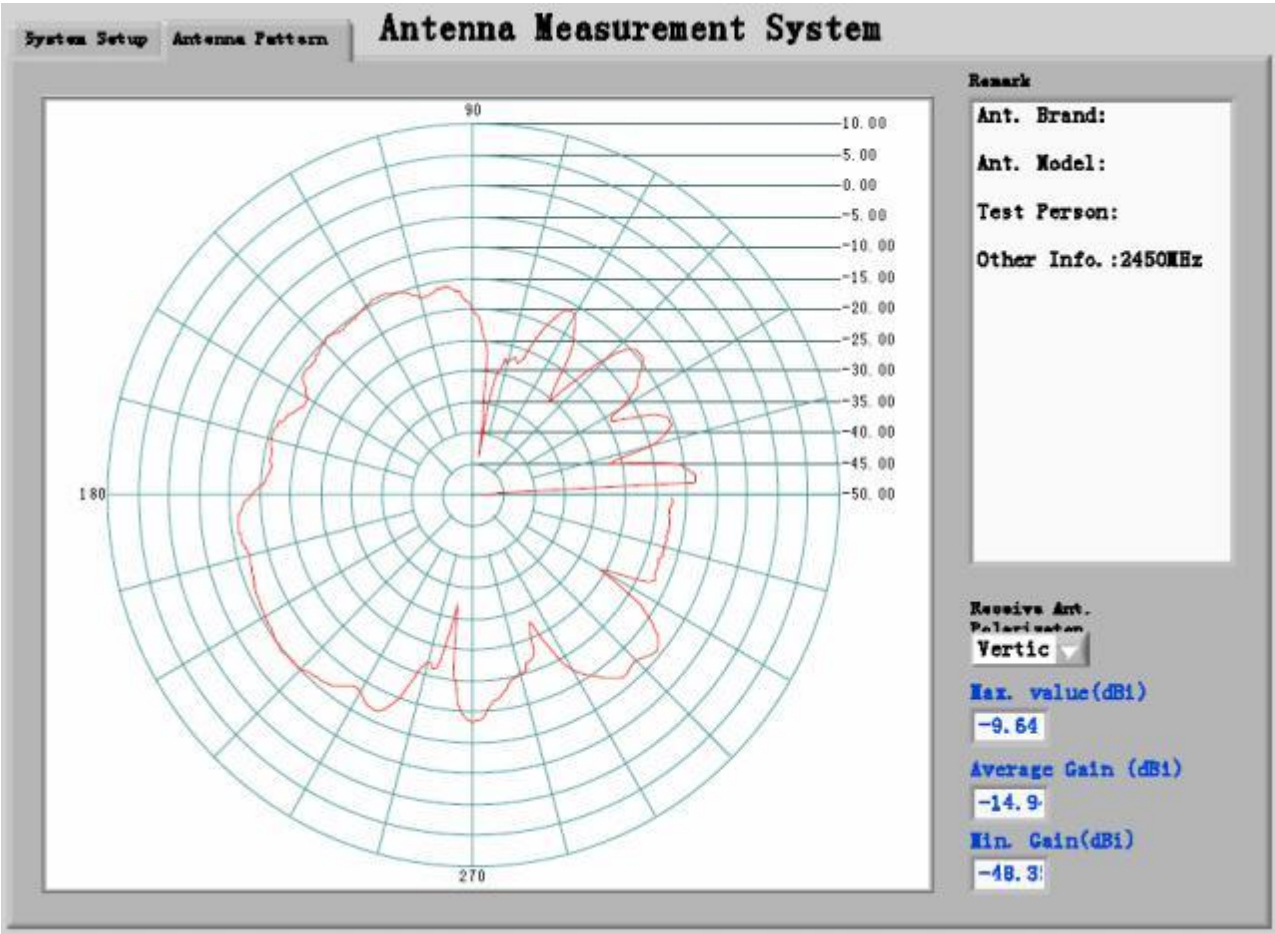


2.4GHz Antenna

FlexPIFA
3-dBi Antenna with UFL Cable


3.Main antenna : 2500 MHz

3.1 Horizontal

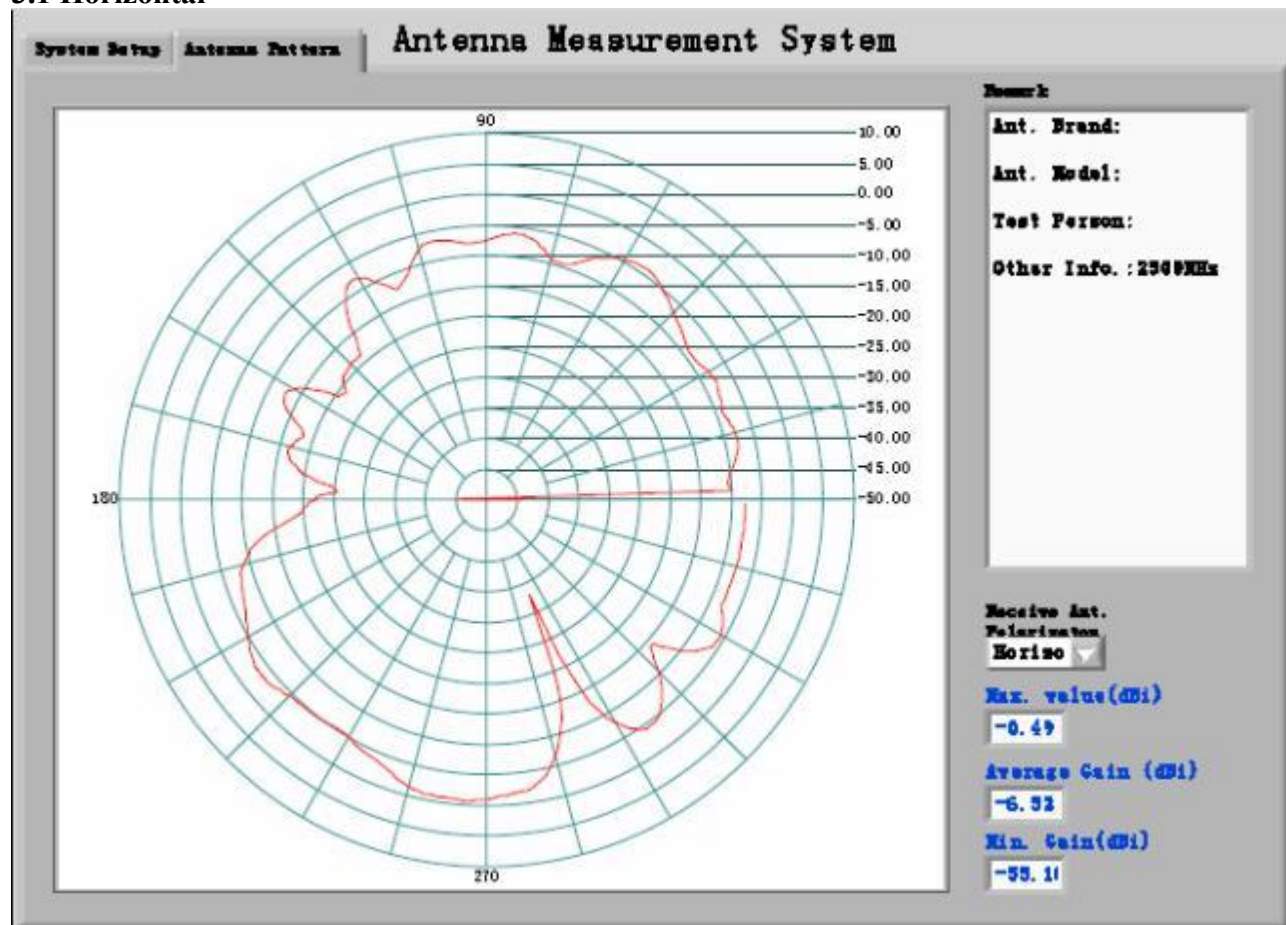

2.4GHz Antenna

3.2 Vertical

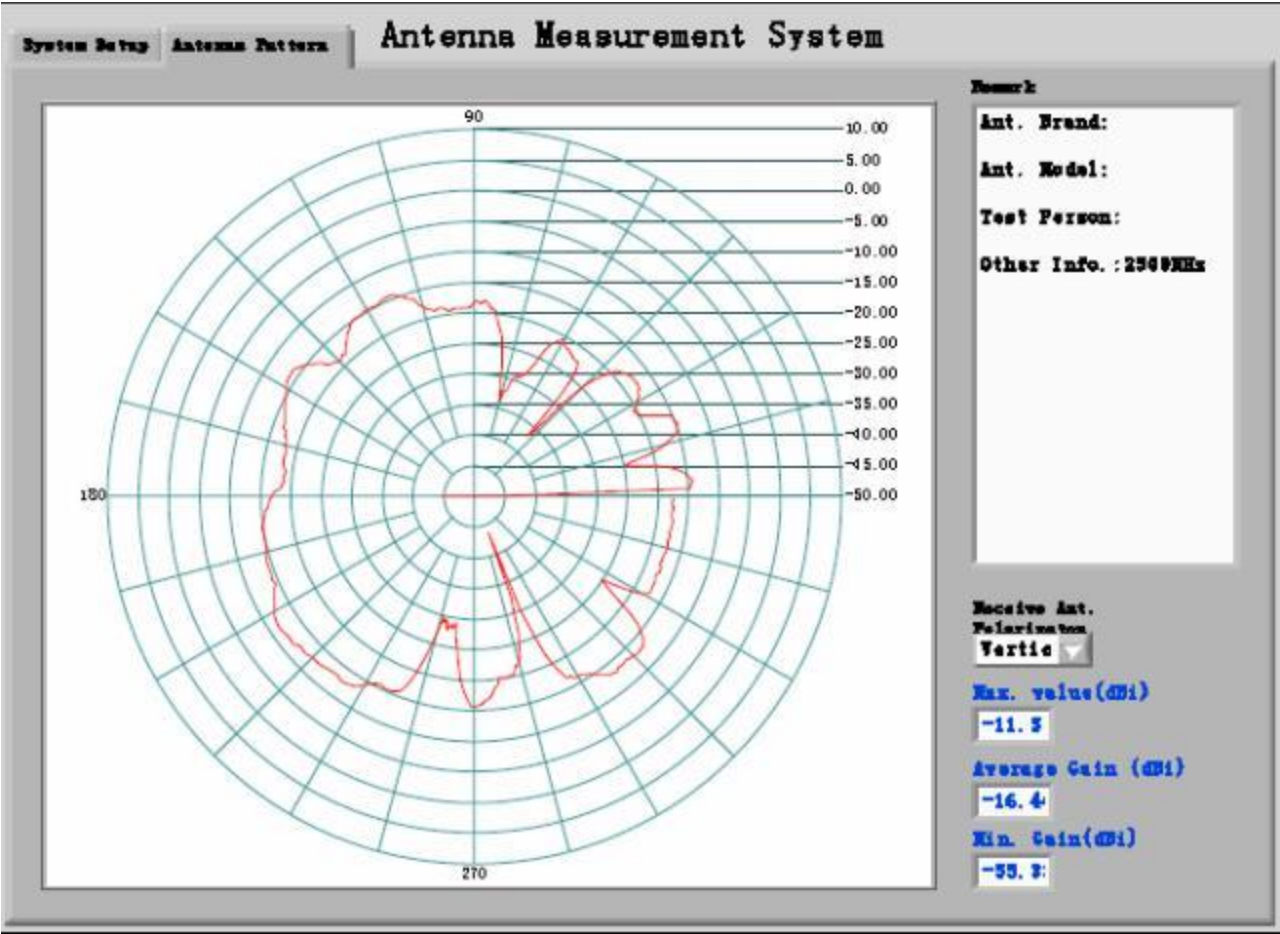


4. Result

Center Frequency		Maximum Ant Gain
2400 MHz	H	1.92 dBi
	V	-9.19 dBi
2450 MHz	H	1.58 dBi
	V	-9.64 dBi
2500 MHz	H	0.49 dBi
	V	-11.5 dBi

5OPTIMAL INSTALLATION GUIDE


E-field radiation from FlexPIFA - taken from CST simulation

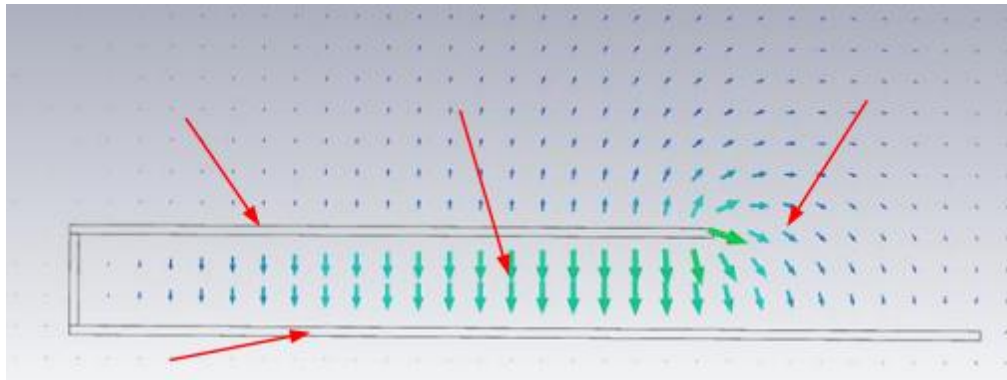

The main element should be kept clear of any non-metal objects (such as plastics) on top of it by at least three millimeters.


Similarly, the two long sides of the FlexPIFA should be kept clear of any non-metal object by at least two millimeters. A one-millimeter clearance should be observed from the ground wall to any non-metal object. Mounting the FlexPIFA in a situation that does not allow for these clearance recommendations may change the gain characteristics stated in the datasheet, which could impact overall range of the wireless system.

Top clearance

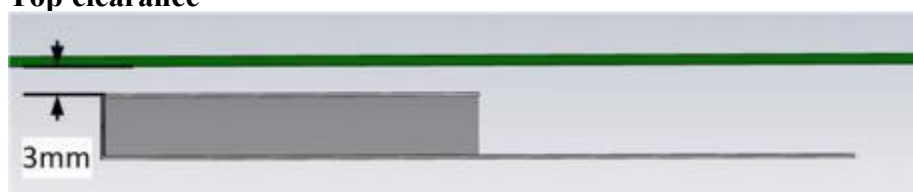

2.4GHz Antenna

Side and ground wall clearance

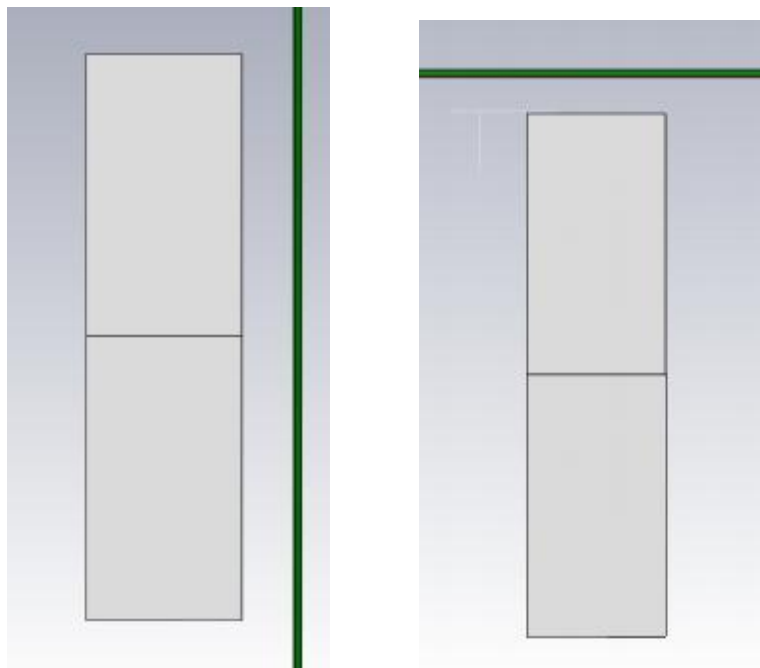

2.4GHz Antenna



Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© Copyright 2019 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names

