




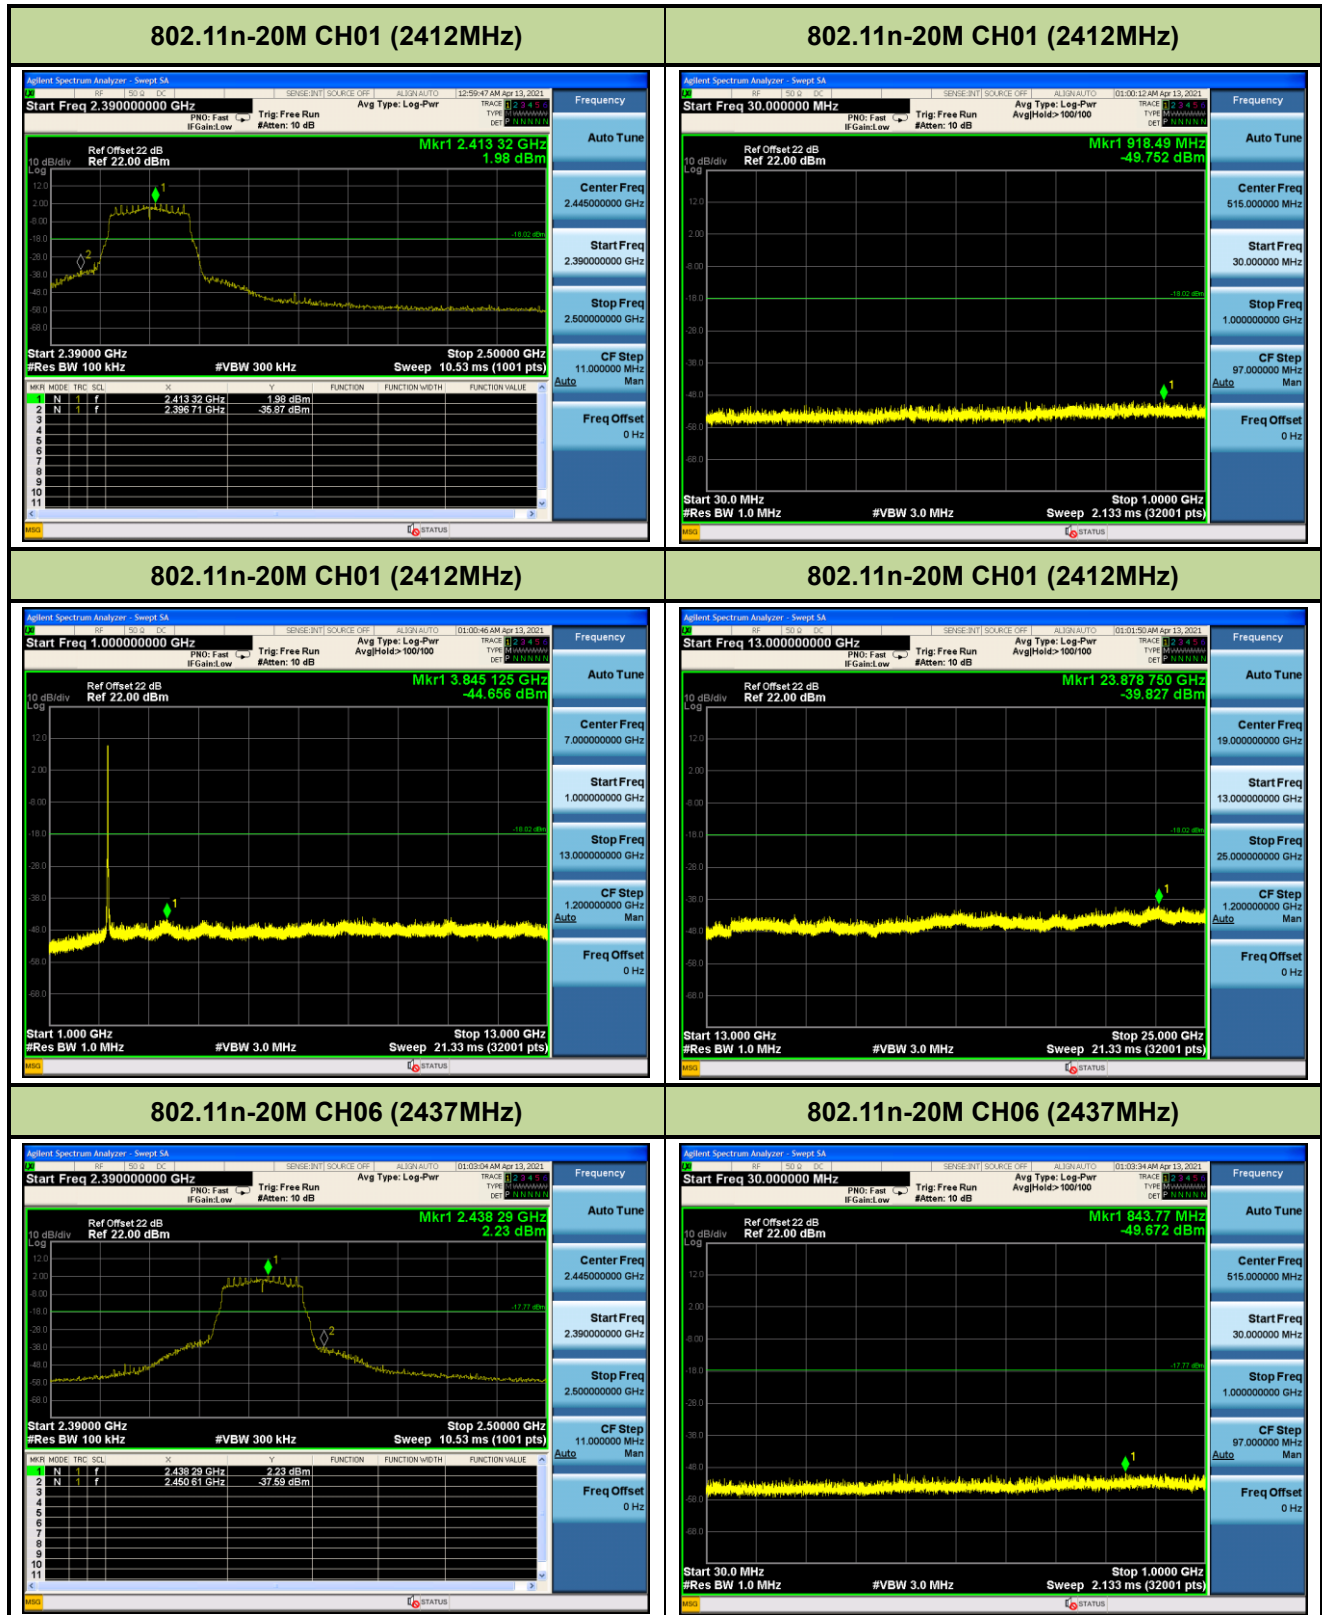


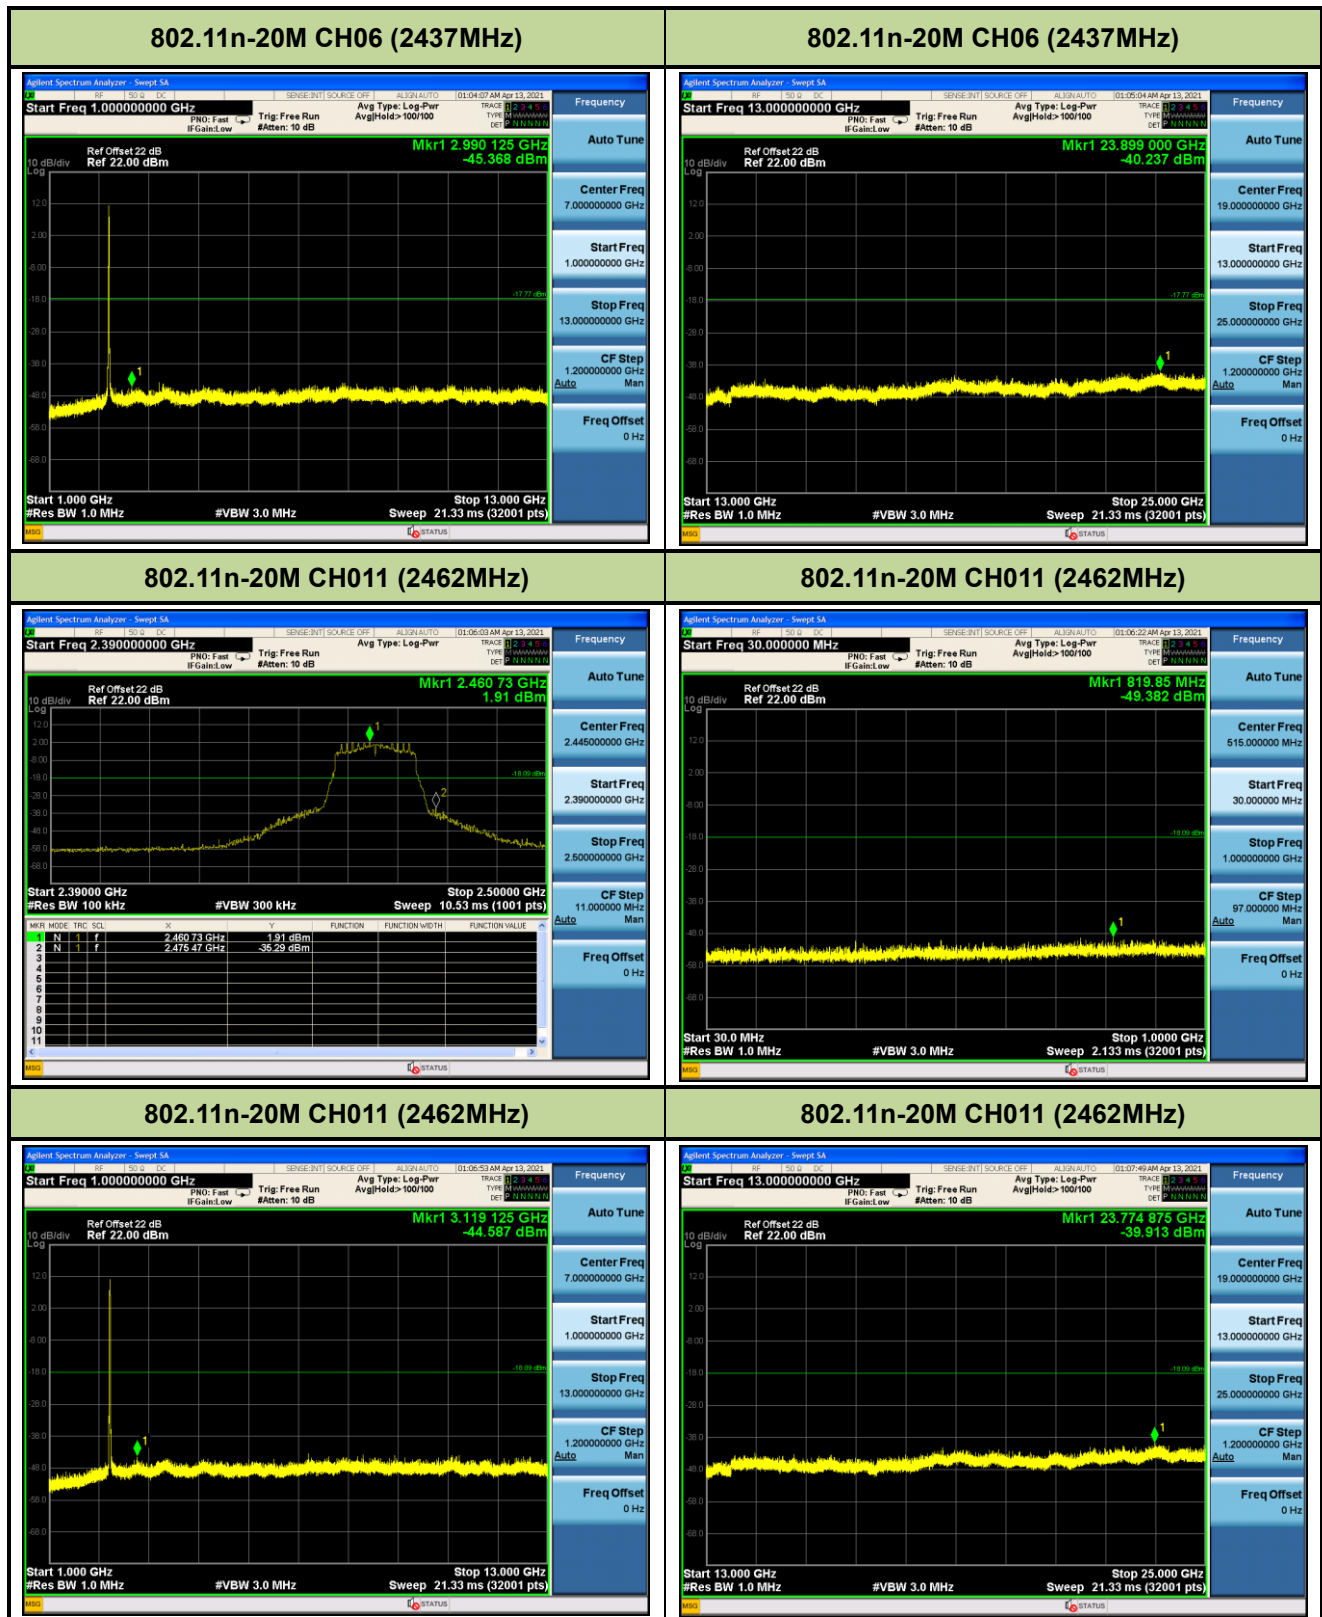


802.11n-40M CH03 (2422MHz)

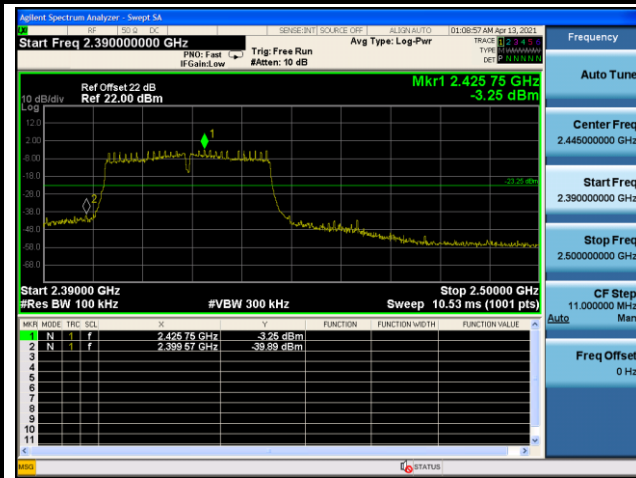


802.11n-40M CH03 (2422MHz)

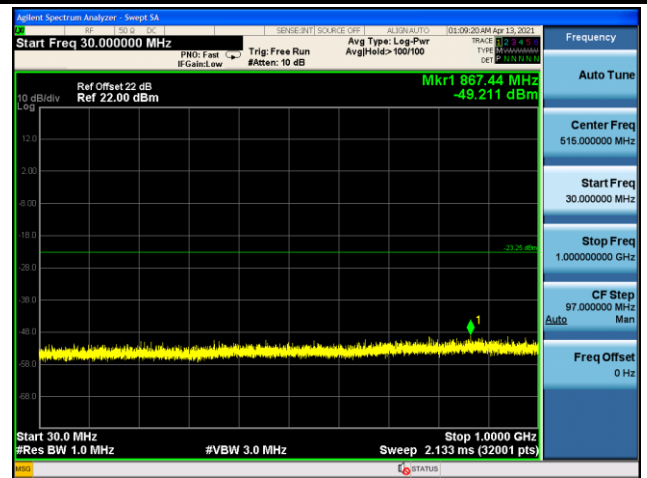


802.11n-40M CH03 (2422MHz)

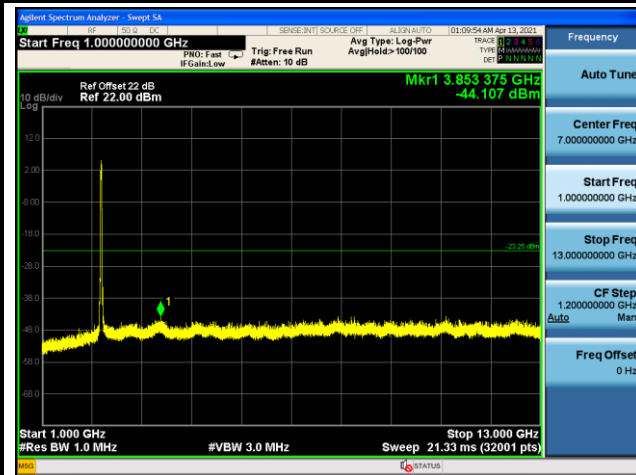


802.11n-40M CH03 (2422MHz)

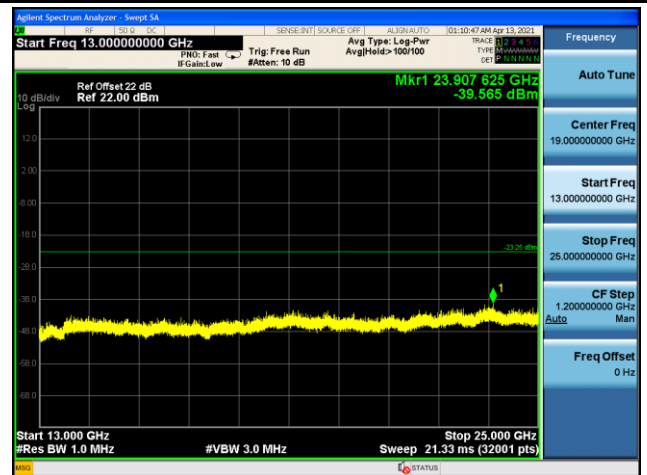


802.11n-40M CH06 (2437MHz)

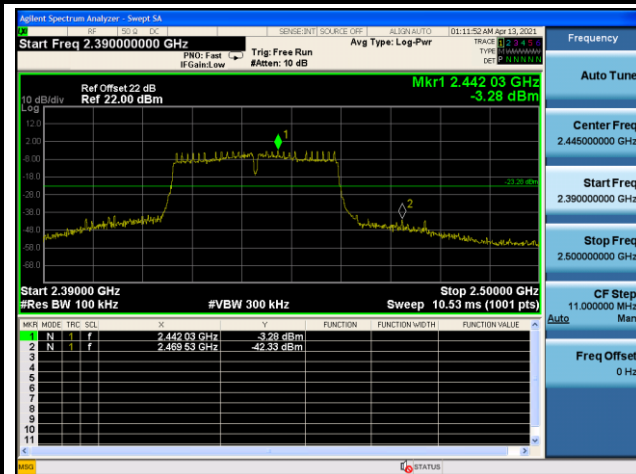

802.11n-40M CH06 (2437MHz)

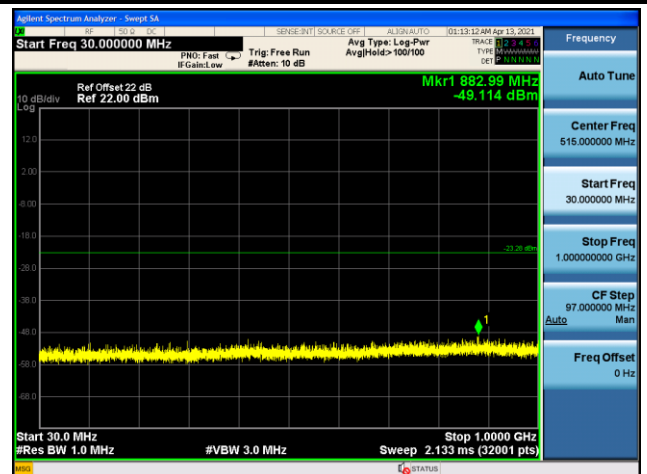

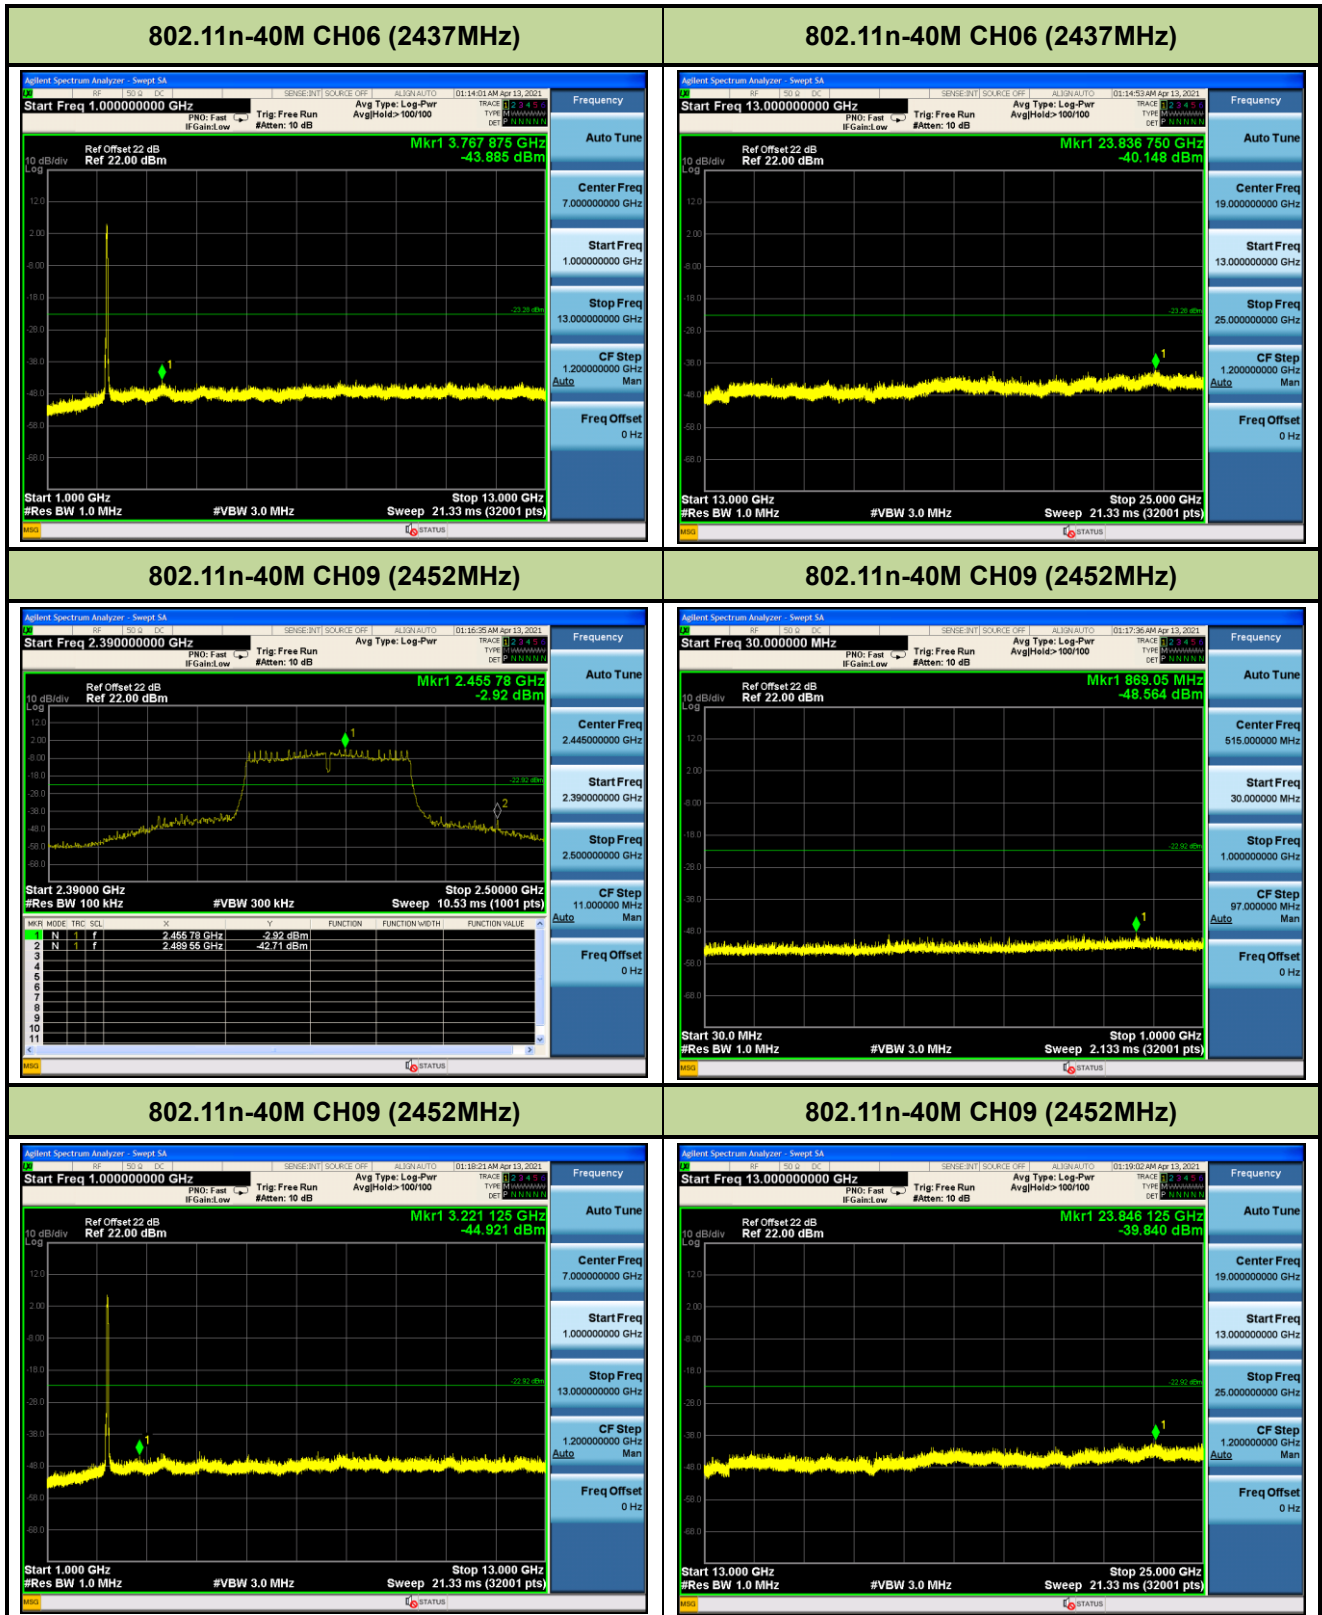

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - Section 11.12.2.3 (quasi-peak measurements)

ANSI C63.10 - Section 11.12.2.4 (peak power measurements)

ANSI C63.10 - Section 11.12.2.5 (average power measurements)

7.6.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW $\geq 1/T$

4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to “Voltage” regardless of the display mode

5. Detector = Peak


6. Sweep time = auto

7. Trace mode = max hold


8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.6.4. Test Setup


9kHz ~ 30MHz Test Setup:

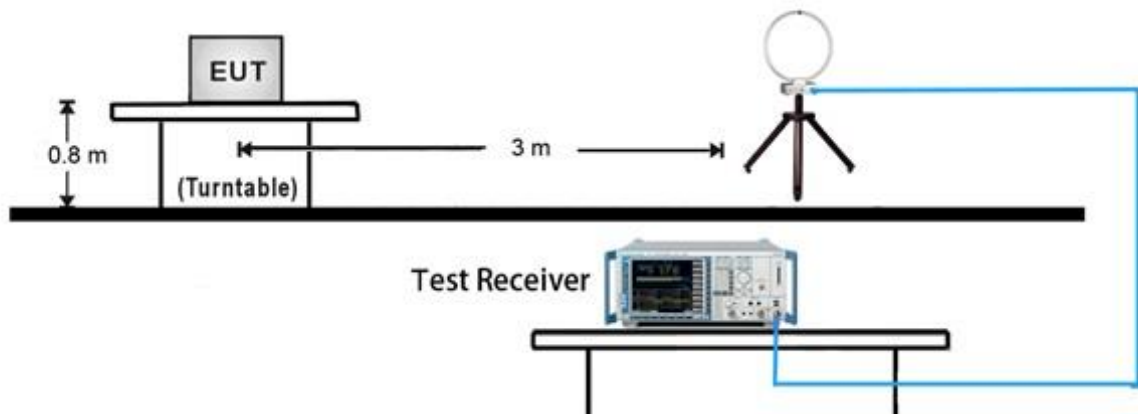


30MHz ~ 1GHz Test Setup:

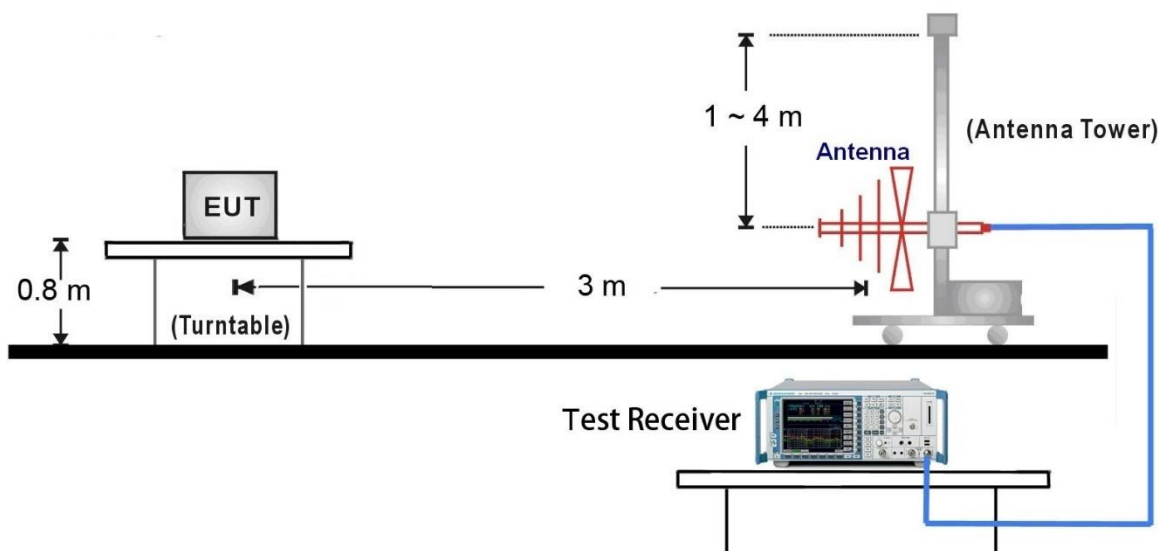

1GHz ~ 18GHz Test Setup:

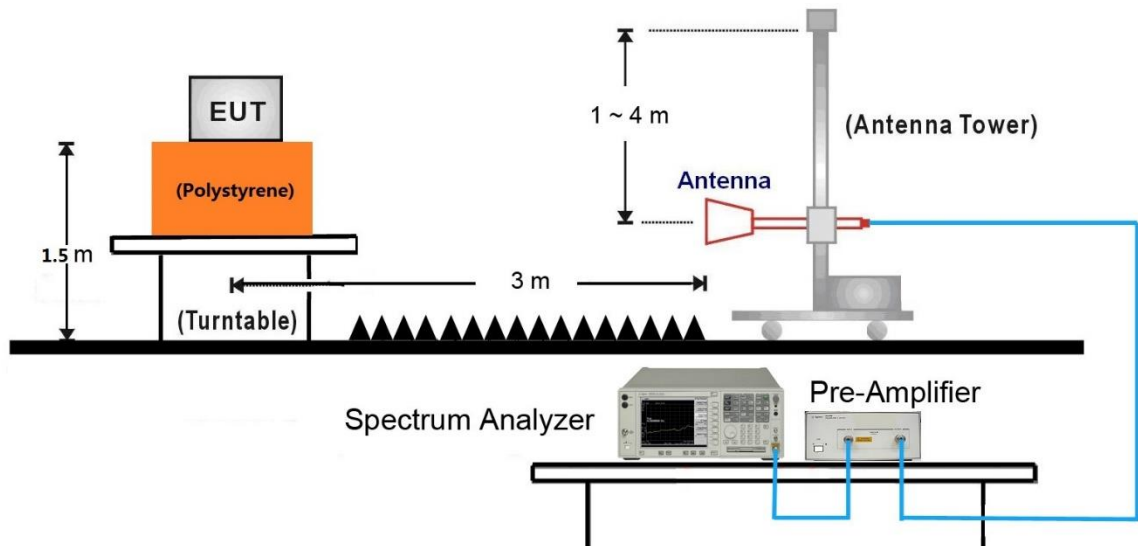


18GHz ~ 25GHz Test Setup:

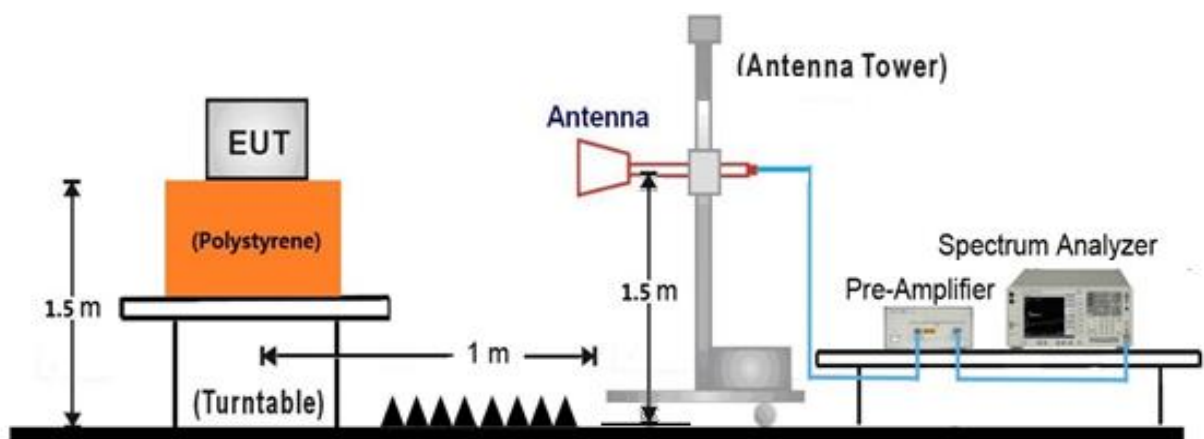

7.6.5. Test Result

EUT	8" Android Panel PC	Date of Test	2021-03-30
Factor	VULB 9162	Temp. / Humidity	23°C /65%
Polarity	Horizontal	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

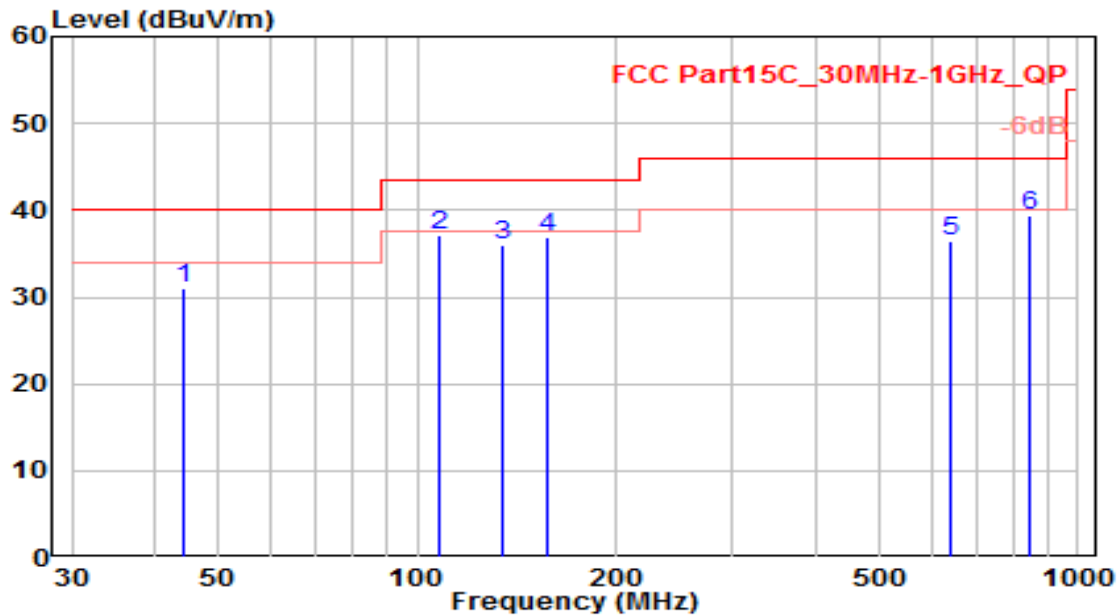


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	44.350	9.22	21.71	30.93	-9.07	40.00	100	225	QP
2	* 107.470	18.41	18.83	37.24	-6.26	43.50	150	280	QP
3	134.280	19.92	16.18	36.09	-7.41	43.50	100	170	QP
4	157.540	20.70	16.24	36.94	-6.56	43.50	100	350	QP
5	639.720	8.00	28.44	36.44	-9.56	46.00	100	260	QP
6	845.630	8.05	31.40	39.44	-6.56	46.00	100	190	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-03-30
Factor	VULB 9162	Temp. / Humidity	23°C /65%
Polarity	Vertical	Site / Test Engineer	AC1 / Kaunaz
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

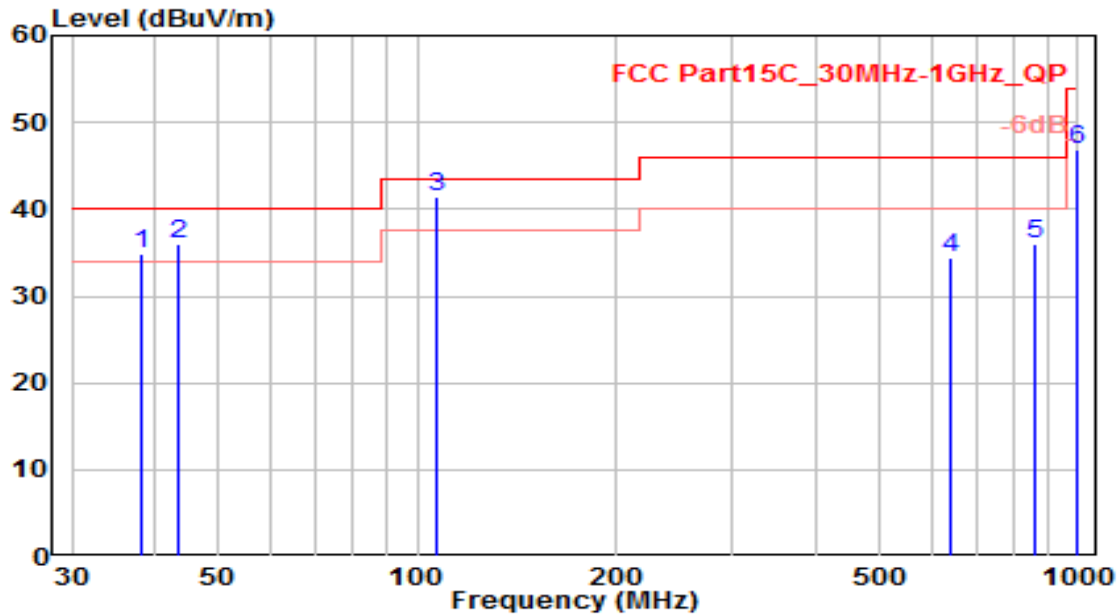


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	38.140	14.51	20.41	34.92	-5.08	40.00	100	215	QP
2	43.290	14.53	21.55	36.08	-3.92	40.00	100	40	QP
3	* 107.320	22.58	18.84	41.42	-2.08	43.50	100	215	QP
4	639.680	6.06	28.44	34.50	-11.50	46.00	100	20	QP
5	860.930	4.56	31.55	36.11	-9.89	46.00	100	115	QP
6	994.740	14.01	32.87	46.87	-7.13	54.00	100	340	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

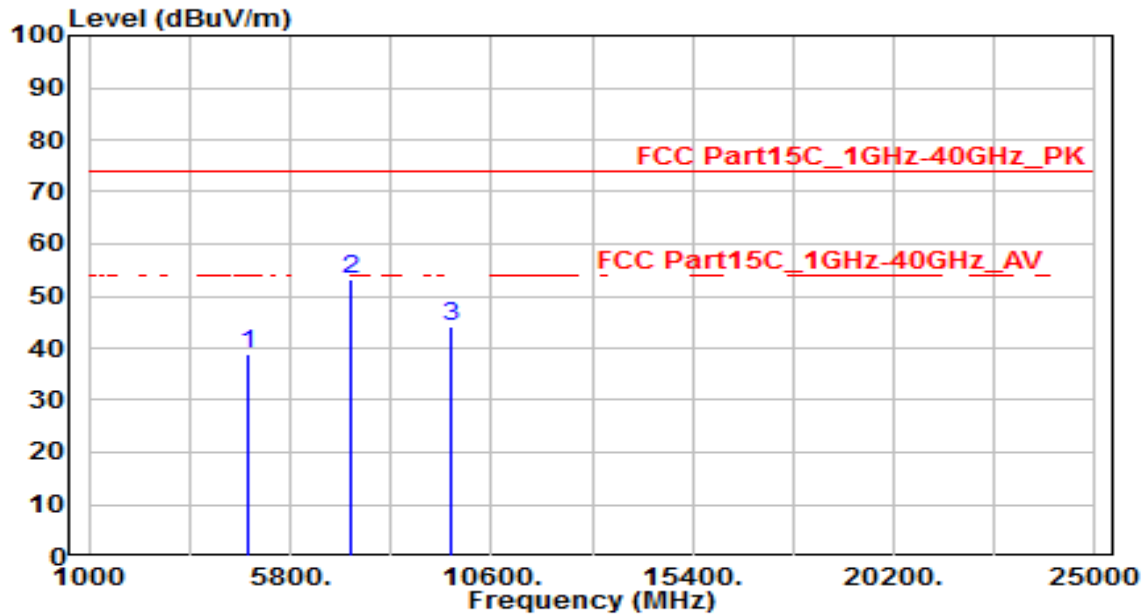


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.43	3.33	38.75	-35.25	74.00	150	360	Peak
2	* 7236.000	42.36	10.97	53.33	-20.67	74.00	150	360	Peak
3	9648.000	29.57	14.70	44.27	-29.73	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

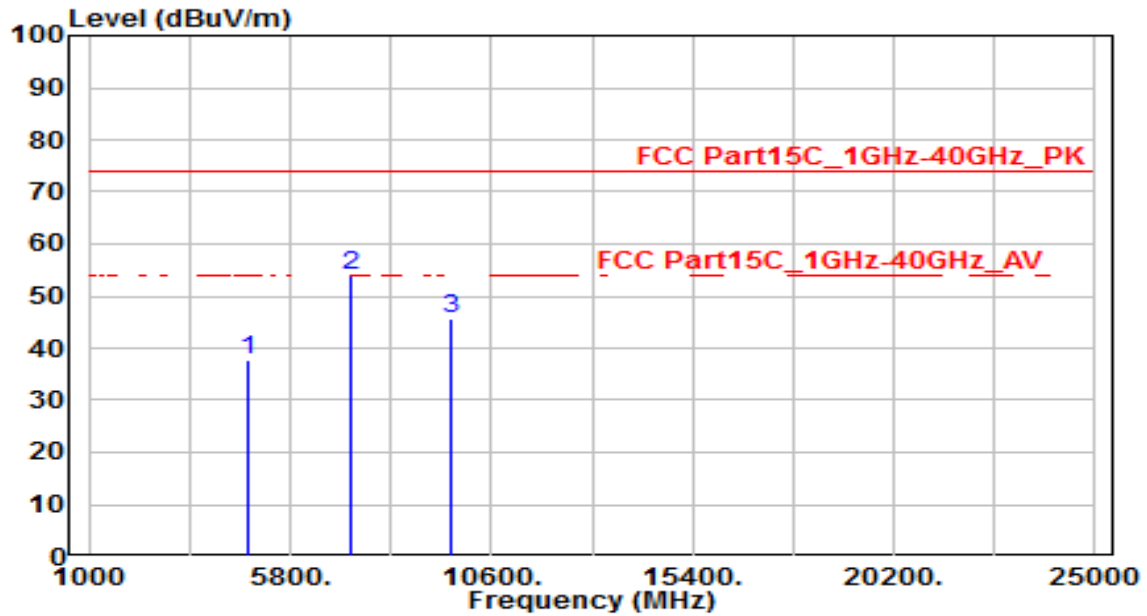


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.30	3.33	37.62	-36.38	74.00	150	360	Peak
2	* 7236.000	42.96	10.97	53.93	-20.07	74.00	150	360	Peak
3	9648.000	31.02	14.70	45.72	-28.28	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

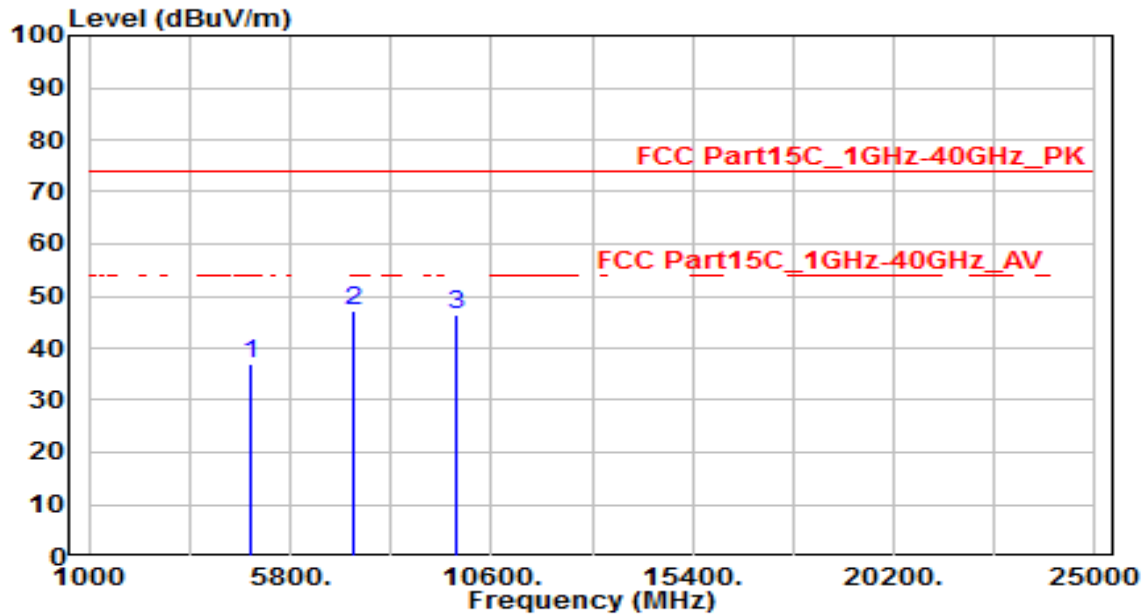


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.63	3.45	37.08	-36.92	74.00	150	360	Peak
2	* 7311.000	35.83	11.18	47.01	-26.99	74.00	150	360	Peak
3	9748.000	31.46	14.89	46.35	-27.65	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

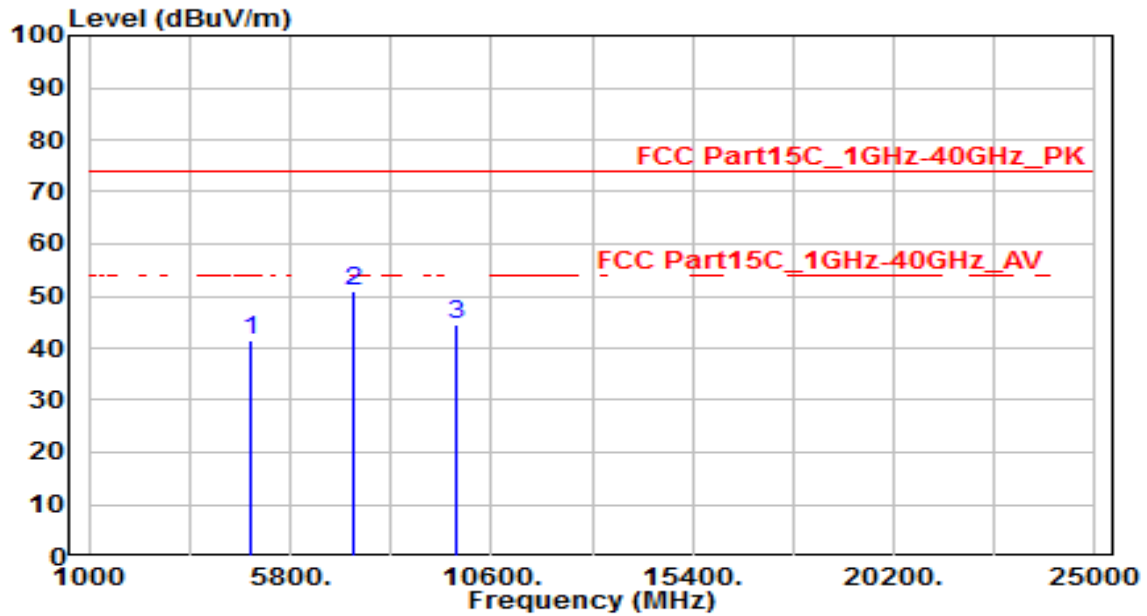


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.19	3.45	41.64	-32.36	74.00	150	360	Peak
2	* 7311.000	39.78	11.18	50.96	-23.04	74.00	150	360	Peak
3	9748.000	29.66	14.89	44.54	-29.46	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

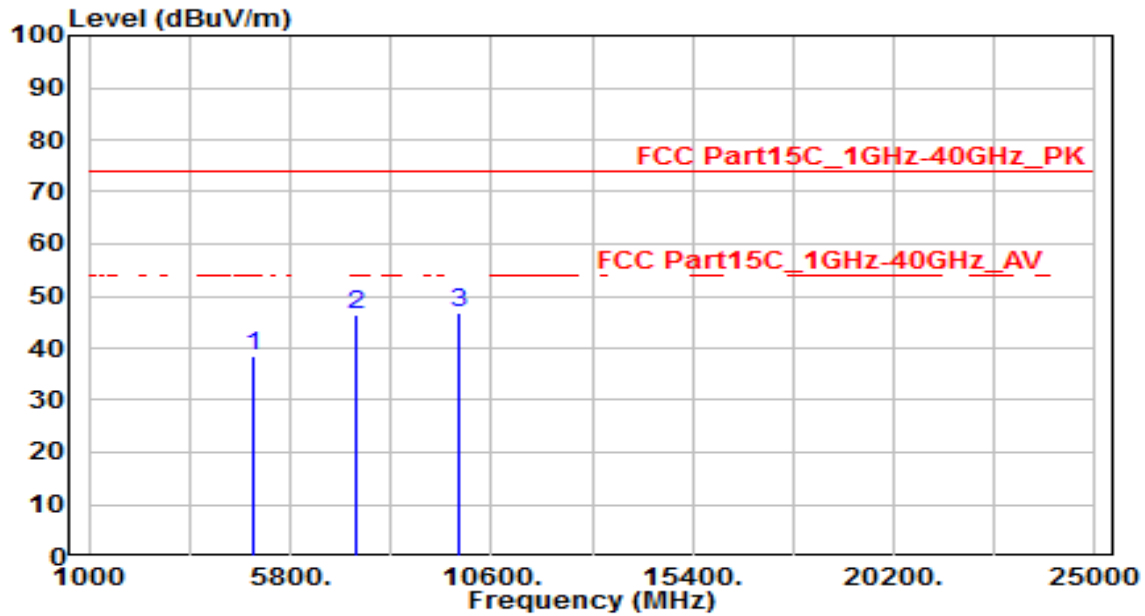


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.96	3.57	38.53	-35.47	74.00	150	360	Peak
2	7386.000	35.17	11.39	46.57	-27.43	74.00	150	360	Peak
3	* 9848.000	31.71	15.07	46.78	-27.22	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

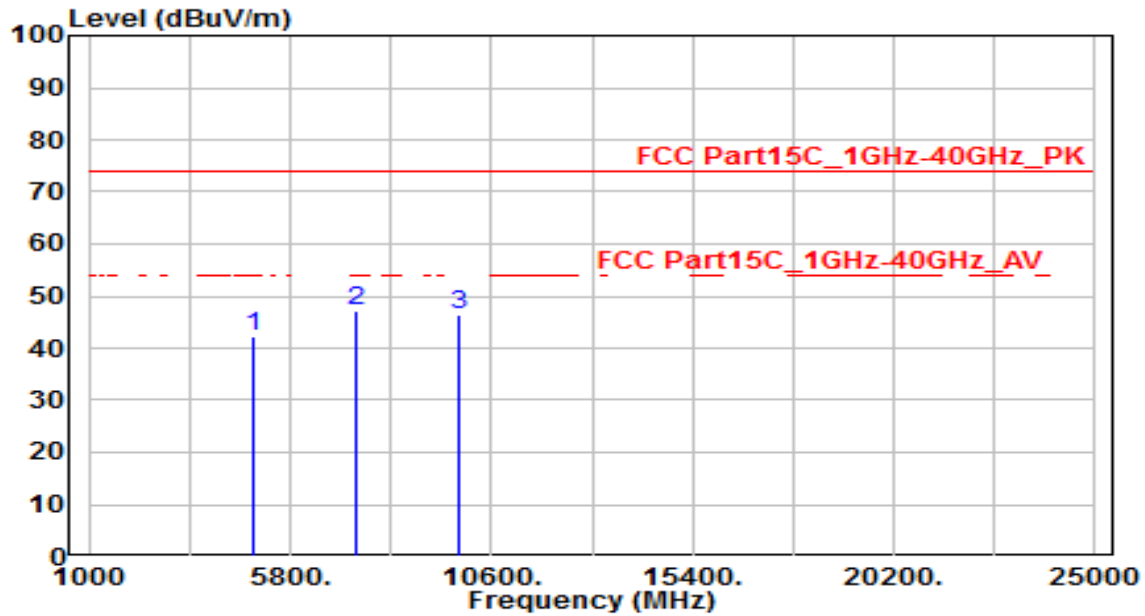


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.53	3.57	42.10	-31.90	74.00	150	360	Peak
2	* 7386.000	35.91	11.39	47.31	-26.69	74.00	150	360	Peak
3	9848.000	31.52	15.07	46.59	-27.41	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

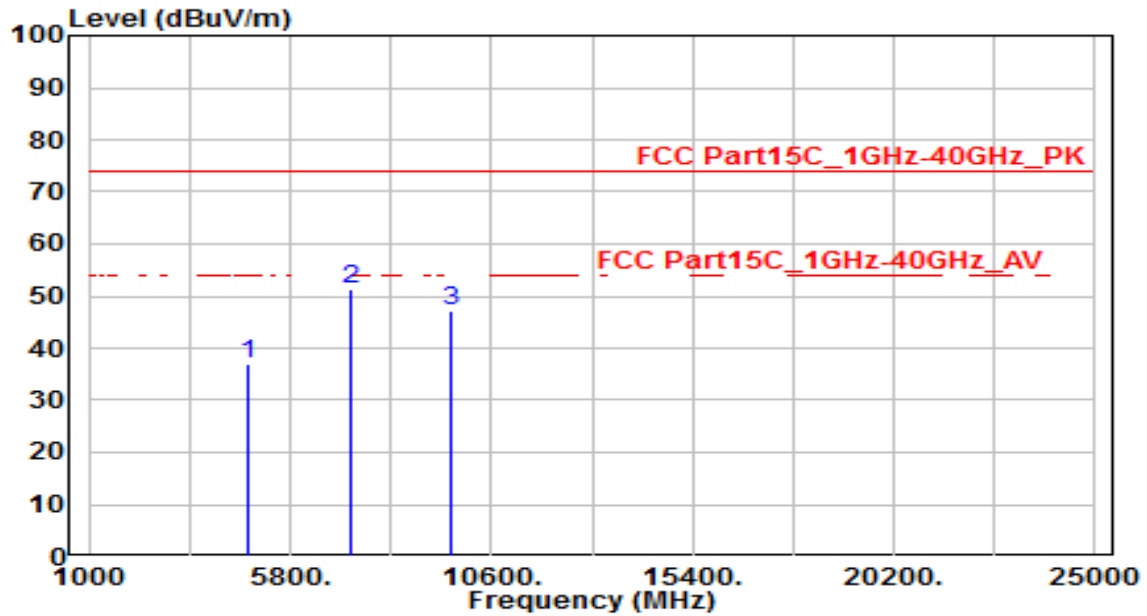


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.62	3.33	36.94	-37.06	74.00	150	360	Peak
2	* 7236.000	40.36	10.97	51.33	-22.67	74.00	150	360	Peak
3	9648.000	32.61	14.70	47.30	-26.70	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

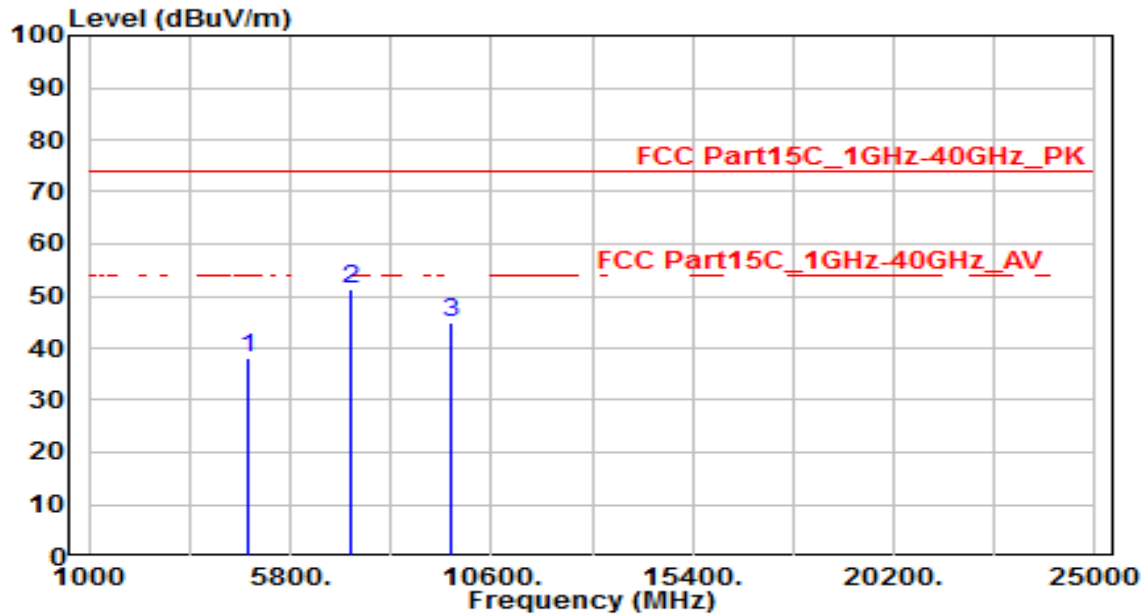


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	34.93	3.33	38.26	-35.74	74.00	150	360	Peak
2	* 7236.000	40.48	10.97	51.45	-22.55	74.00	150	360	Peak
3	9648.000	30.17	14.70	44.86	-29.14	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

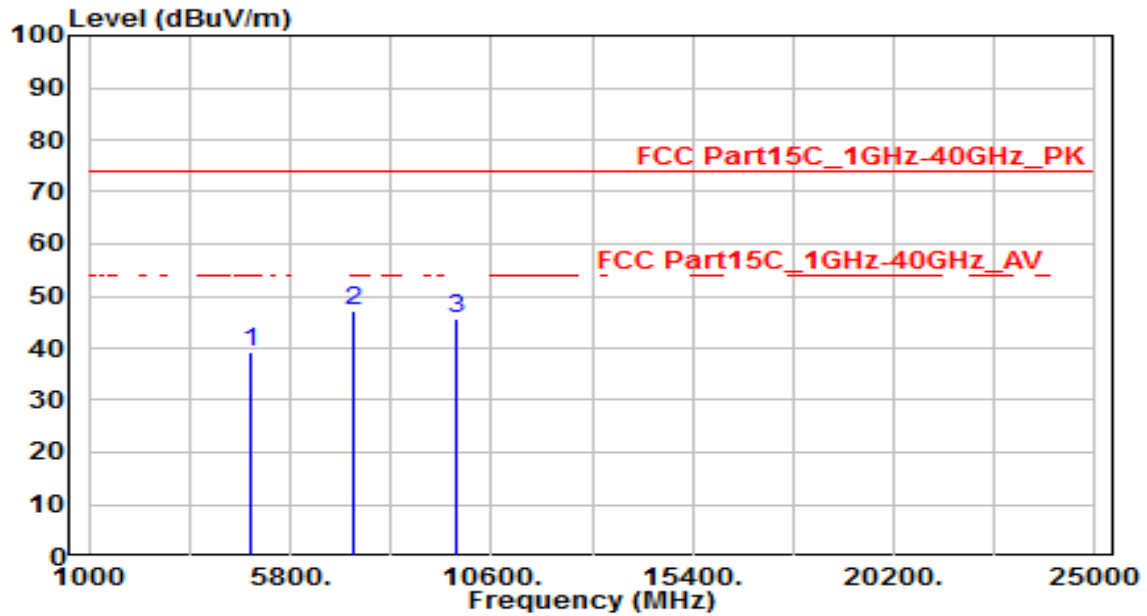


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.76	3.45	39.20	-34.80	74.00	150	360	Peak
2	* 7311.000	36.07	11.18	47.25	-26.75	74.00	150	360	Peak
3	9748.000	30.78	14.89	45.67	-28.33	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

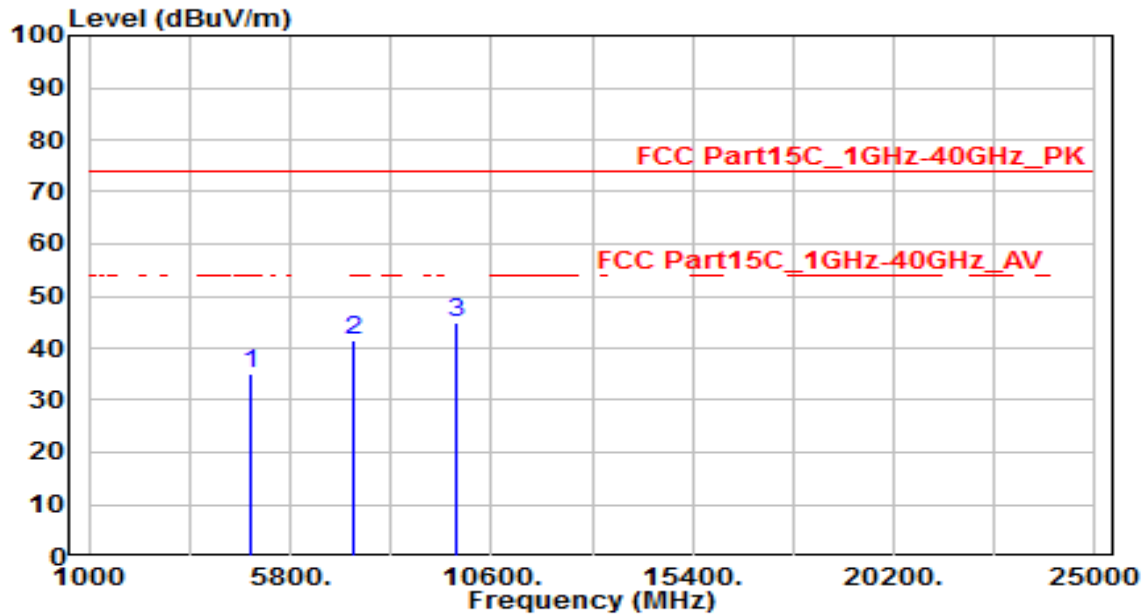


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	31.76	3.45	35.21	-38.79	74.00	150	360	Peak
2	7311.000	30.23	11.18	41.41	-32.59	74.00	150	360	Peak
3	* 9748.000	30.14	14.89	45.03	-28.97	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

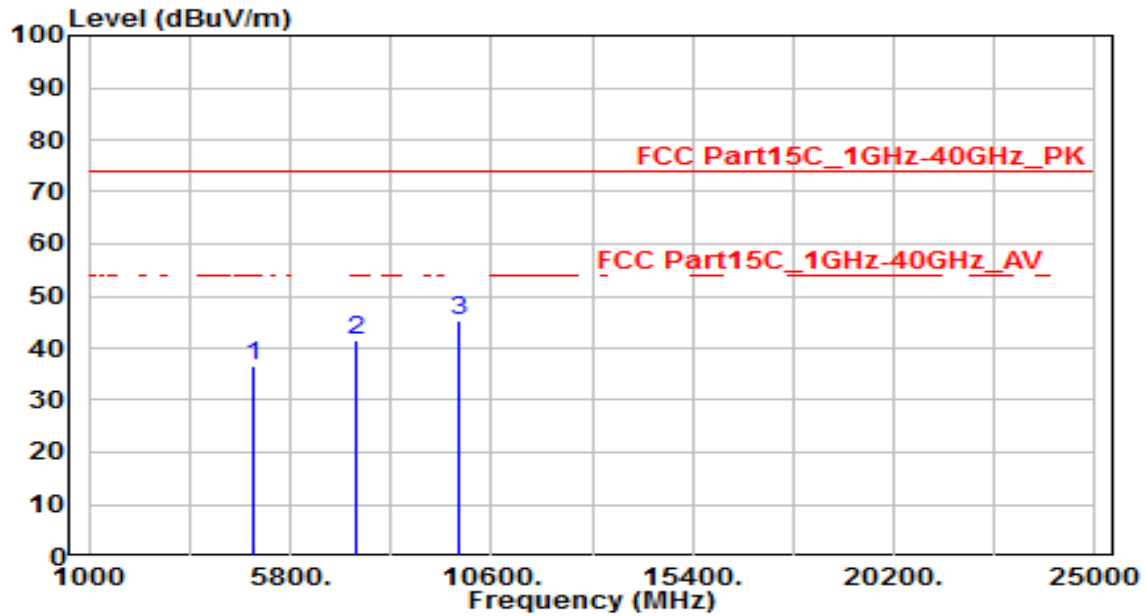


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	33.07	3.57	36.63	-37.37	74.00	150	360	Peak
2	7386.000	30.08	11.39	41.47	-32.53	74.00	150	360	Peak
3	* 9848.000	30.29	15.07	45.36	-28.64	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

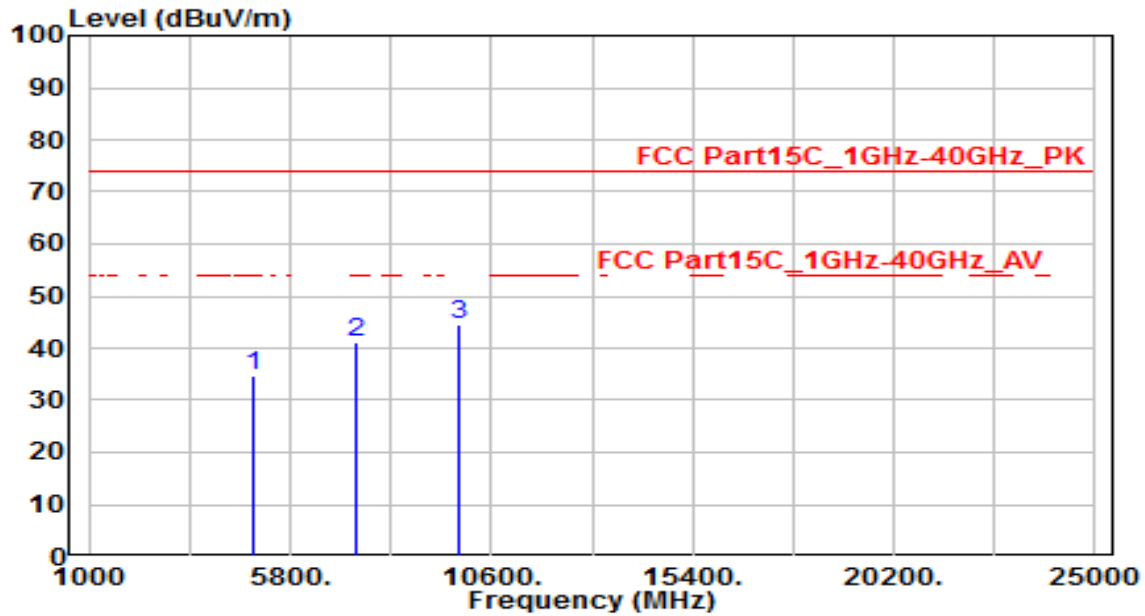


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	31.25	3.57	34.81	-39.19	74.00	150	360	Peak
2	7386.000	29.63	11.39	41.02	-32.98	74.00	150	360	Peak
3	* 9848.000	29.42	15.07	44.49	-29.51	74.00	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

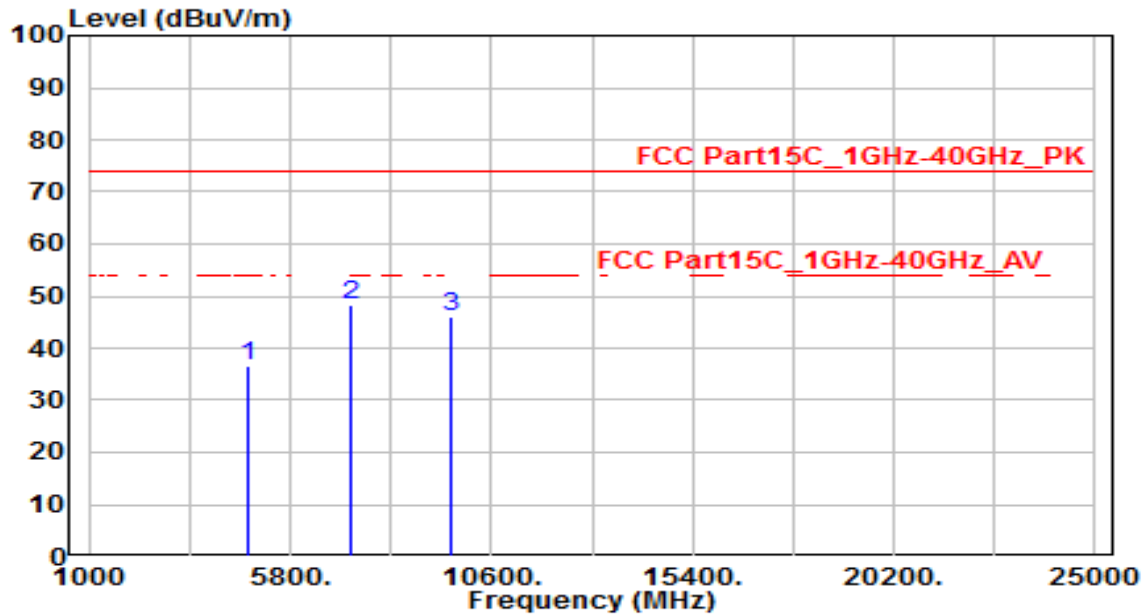


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.39	3.33	36.71	-37.29	74.00	150	360	Peak
2	* 7236.000	37.49	10.97	48.46	-25.54	74.00	150	360	Peak
3	9648.000	31.47	14.70	46.17	-27.83	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

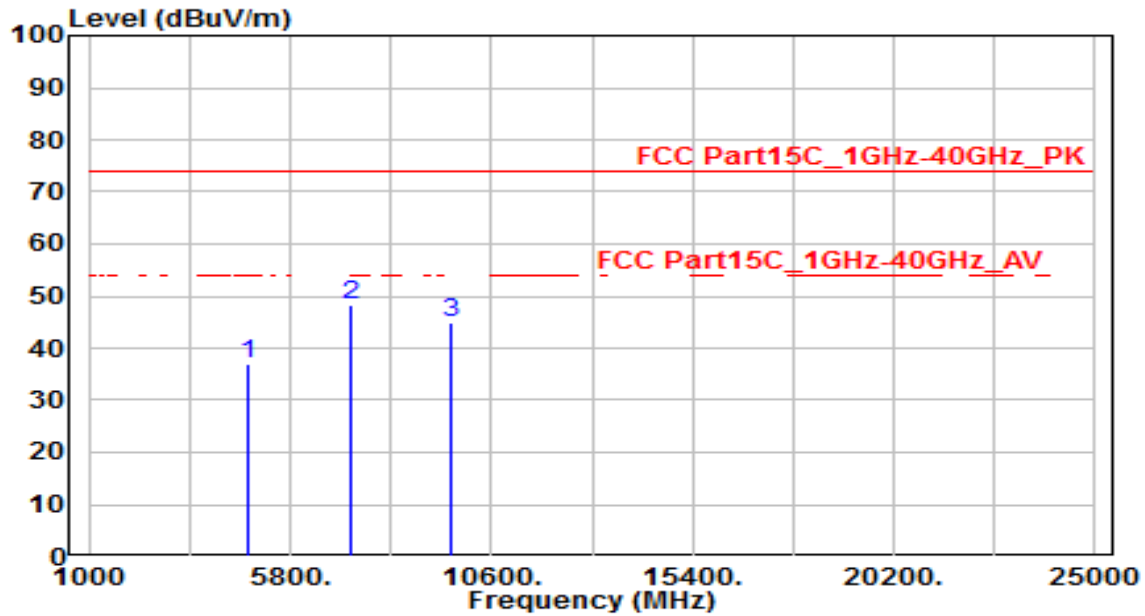


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	33.51	3.33	36.83	-37.17	74.00	150	360	Peak
2	* 7236.000	37.27	10.97	48.24	-25.76	74.00	150	360	Peak
3	9648.000	30.13	14.70	44.83	-29.17	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

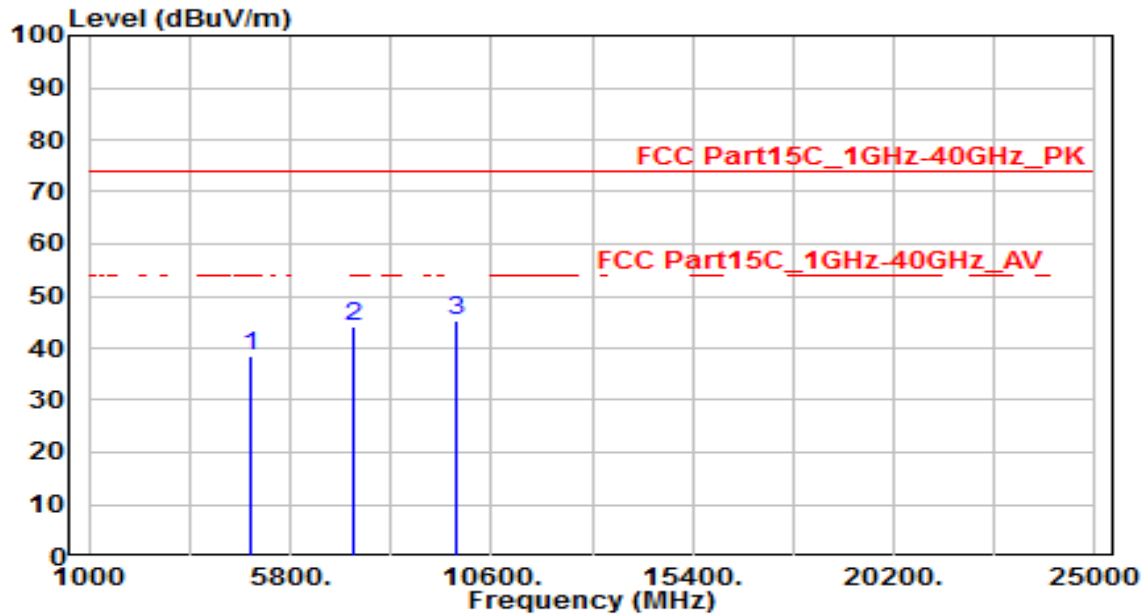


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.01	3.45	38.46	-35.54	74.00	150	360	Peak
2	7311.000	32.98	11.18	44.16	-29.84	74.00	150	360	Peak
3	* 9748.000	30.36	14.89	45.25	-28.75	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

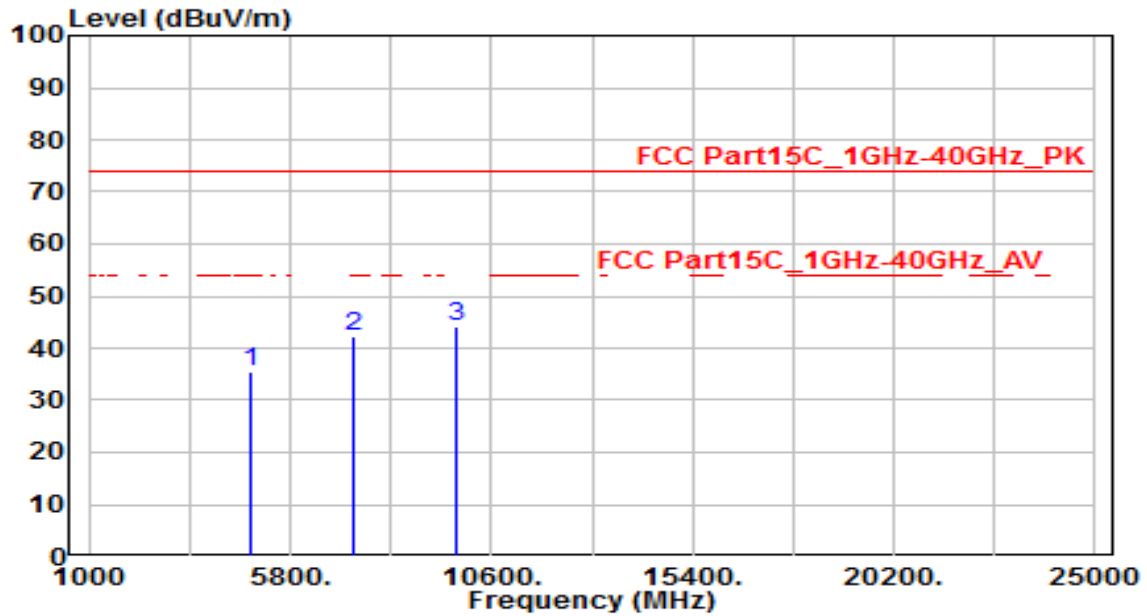


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	32.02	3.45	35.47	-38.53	74.00	150	360	Peak
2	7311.000	31.06	11.18	42.24	-31.76	74.00	150	360	Peak
3	* 9748.000	29.13	14.89	44.01	-29.99	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

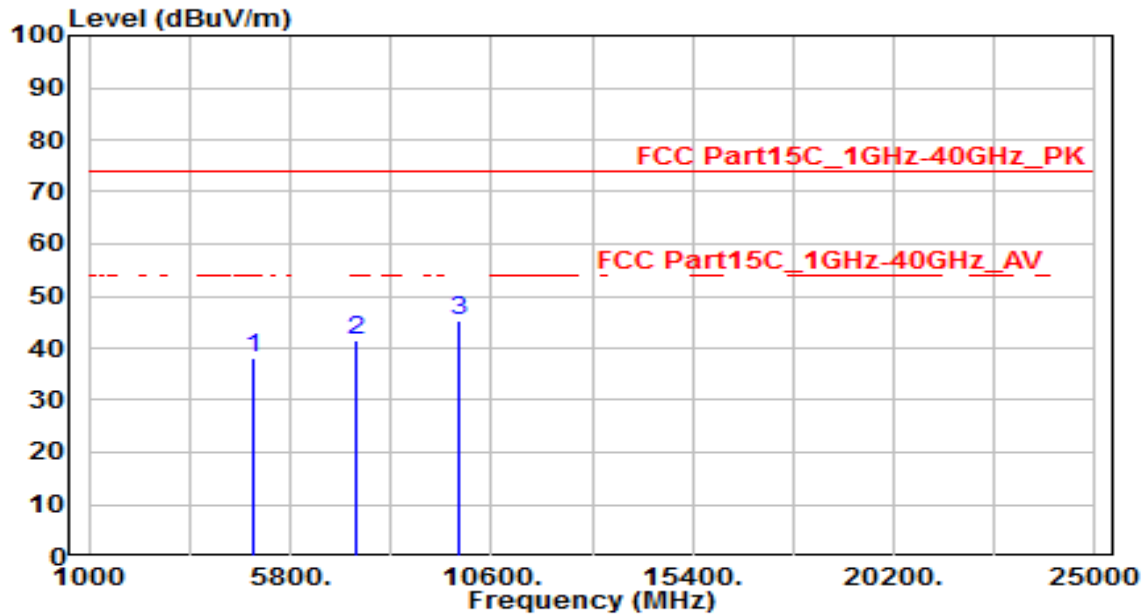


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	34.73	3.57	38.30	-35.70	74.00	150	360	Peak
2	7386.000	29.94	11.39	41.33	-32.67	74.00	150	360	Peak
3	* 9848.000	30.05	15.07	45.13	-28.87	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

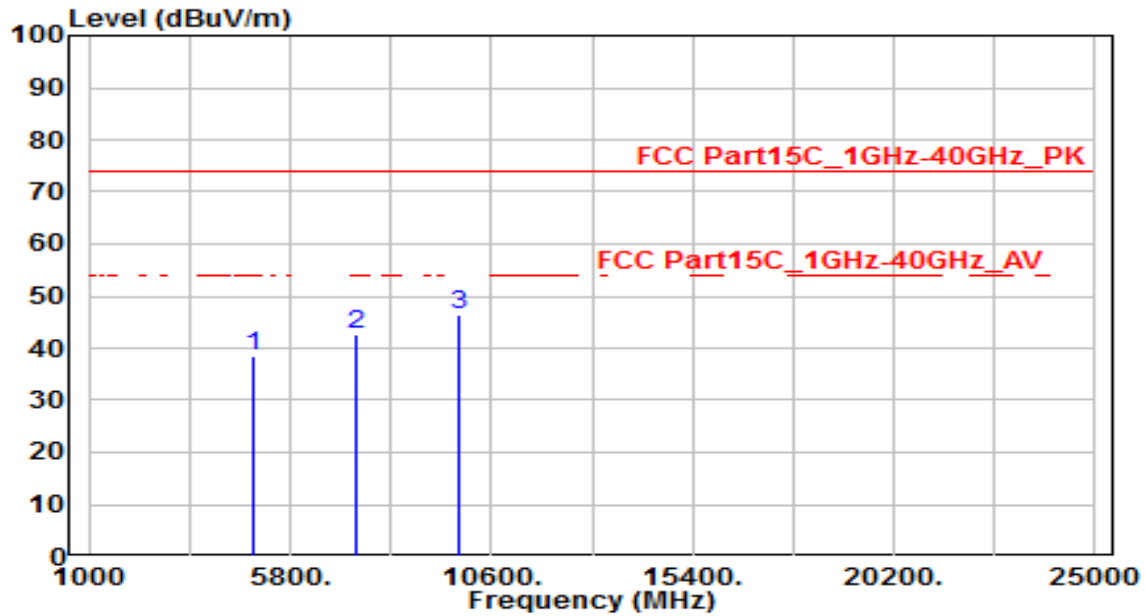


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.05	3.57	38.62	-35.38	74.00	150	360	Peak
2	7386.000	31.25	11.39	42.64	-31.36	74.00	150	360	Peak
3	* 9848.000	31.27	15.07	46.35	-27.65	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

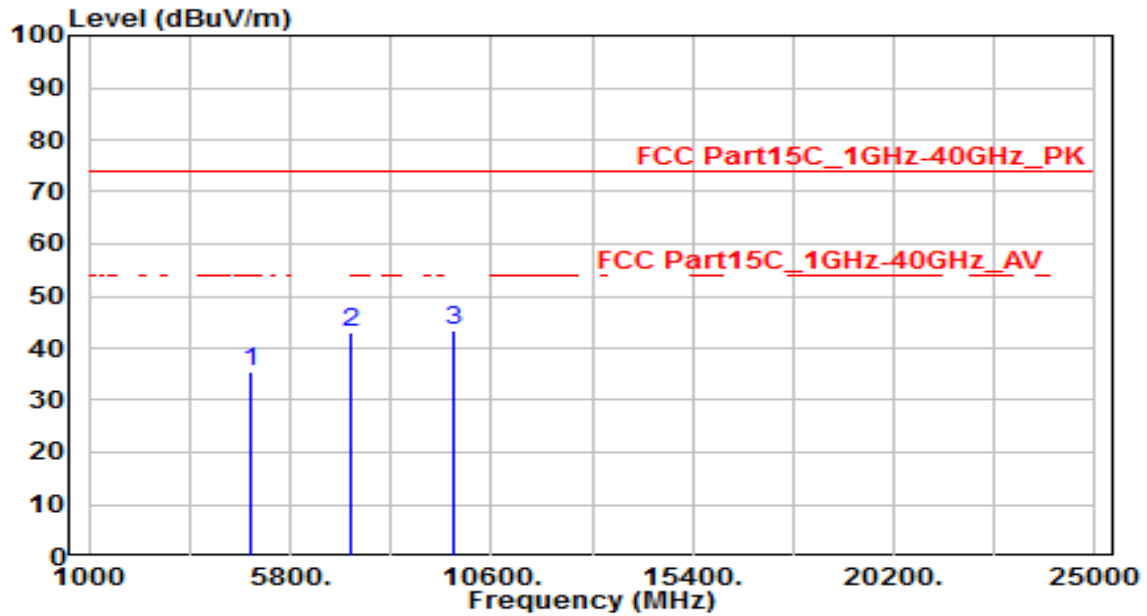


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	32.08	3.38	35.46	-38.54	74.00	150	360	Peak
2	7266.000	32.07	11.05	43.13	-30.87	74.00	150	360	Peak
3	* 9688.000	28.47	14.77	43.24	-30.76	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

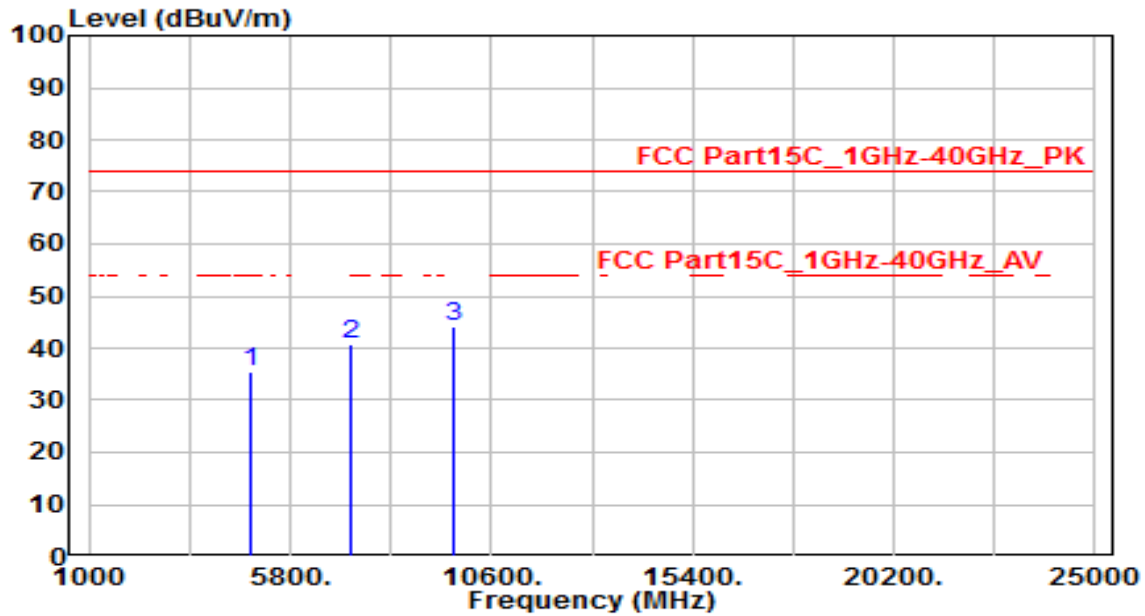


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	32.09	3.38	35.46	-38.54	74.00	150	360	Peak
2	7266.000	29.70	11.05	40.75	-33.25	74.00	150	360	Peak
3	* 9688.000	29.20	14.77	43.97	-30.03	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

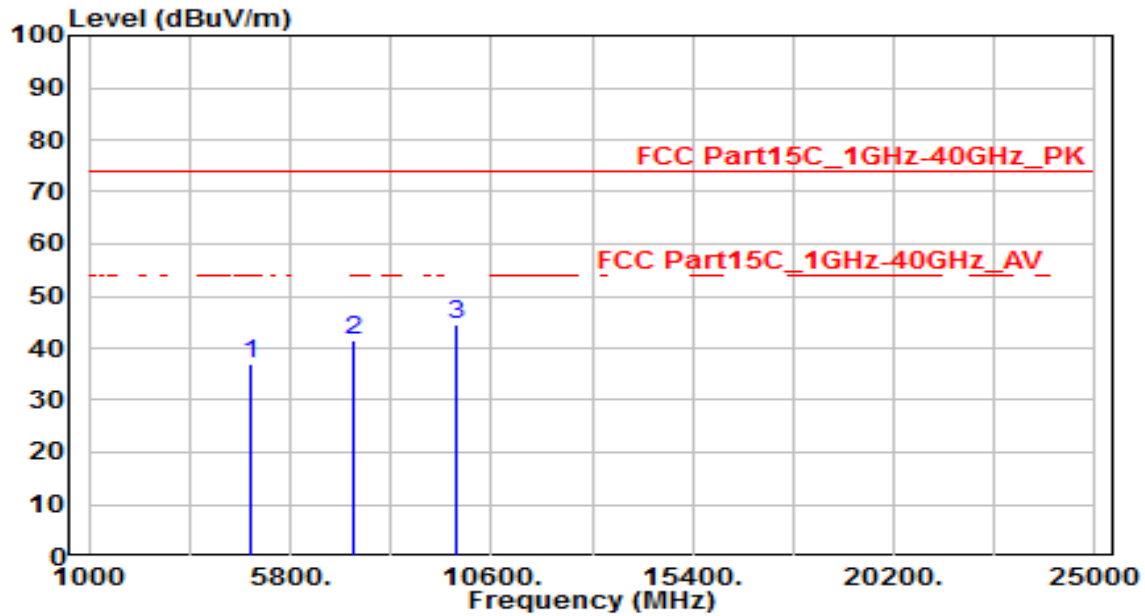


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	33.39	3.45	36.83	-37.17	74.00	150	360	Peak
2	7311.000	30.26	11.18	41.44	-32.56	74.00	150	360	Peak
3	* 9748.000	29.61	14.89	44.50	-29.50	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH6_ANT 0	Test Voltage	AC 120V/60Hz

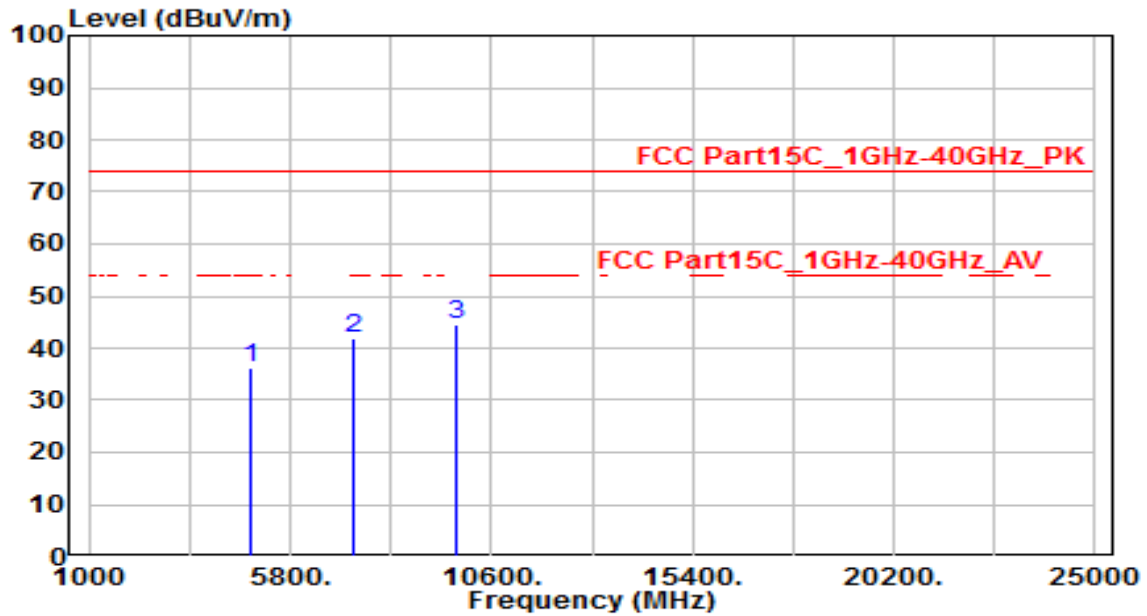


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	32.61	3.45	36.06	-37.94	74.00	150	360	Peak
2	7311.000	30.83	11.18	42.01	-31.99	74.00	150	360	Peak
3	* 9748.000	29.70	14.89	44.58	-29.42	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

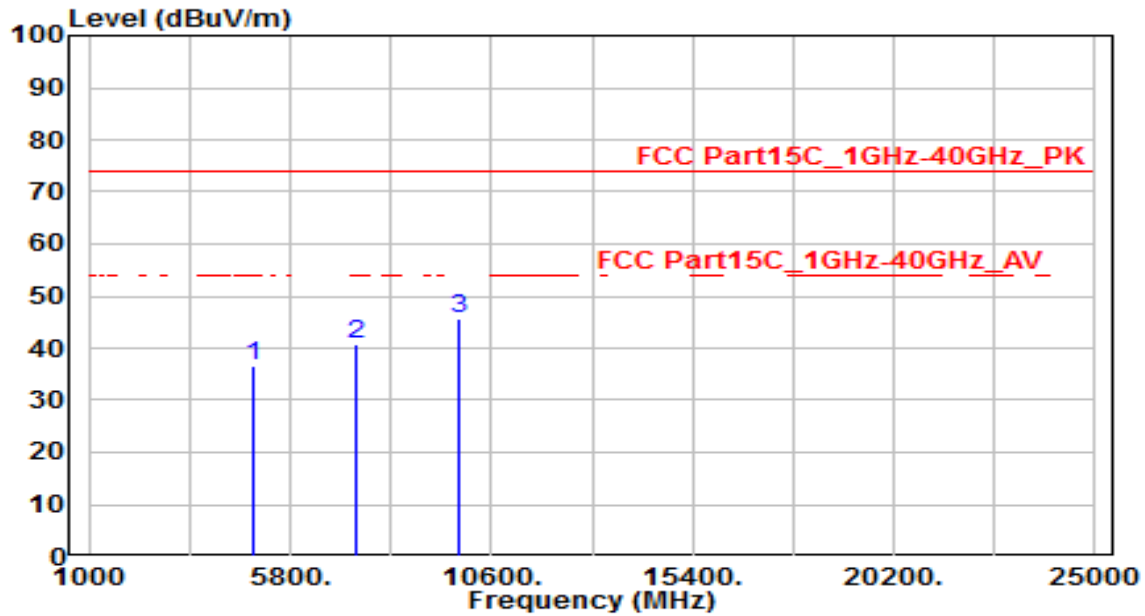


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.02	3.52	36.54	-37.46	74.00	150	360	Peak
2	7356.000	29.41	11.31	40.72	-33.28	74.00	150	360	Peak
3	* 9808.000	30.59	15.00	45.59	-28.41	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

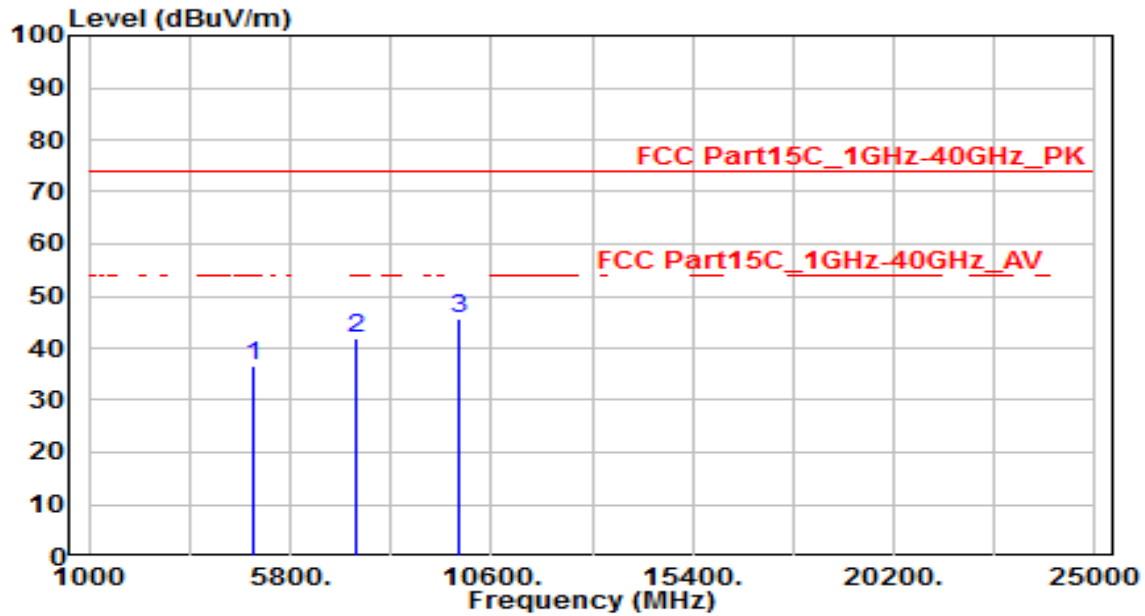

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	33.13	3.52	36.65	-37.35	74.00	150	360	Peak
2	7356.000	30.46	11.31	41.77	-32.23	74.00	150	360	Peak
3	* 9808.000	30.65	15.00	45.65	-28.35	74.00	150	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces


7.7.4. Test Setup

1GHz ~ 18GHz Test Setup:

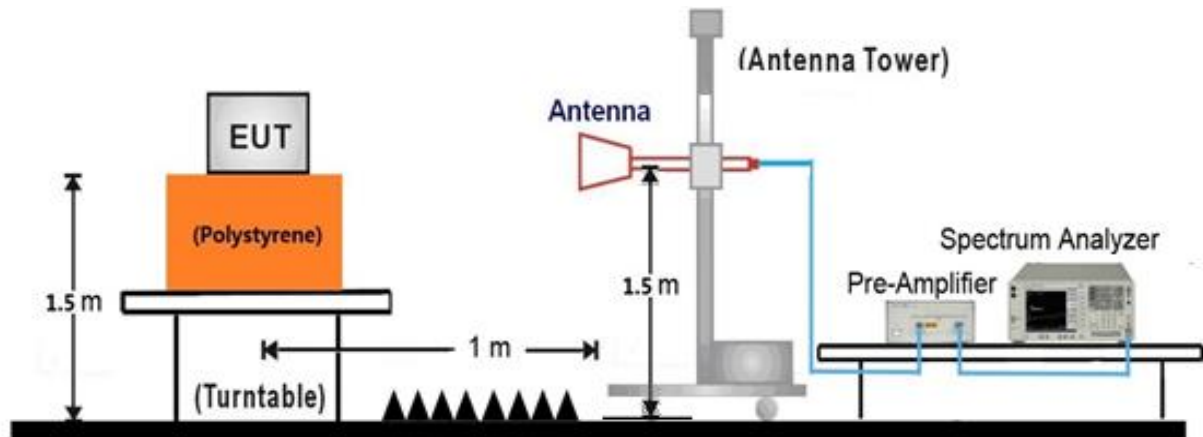

7.7.5. Test Result

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

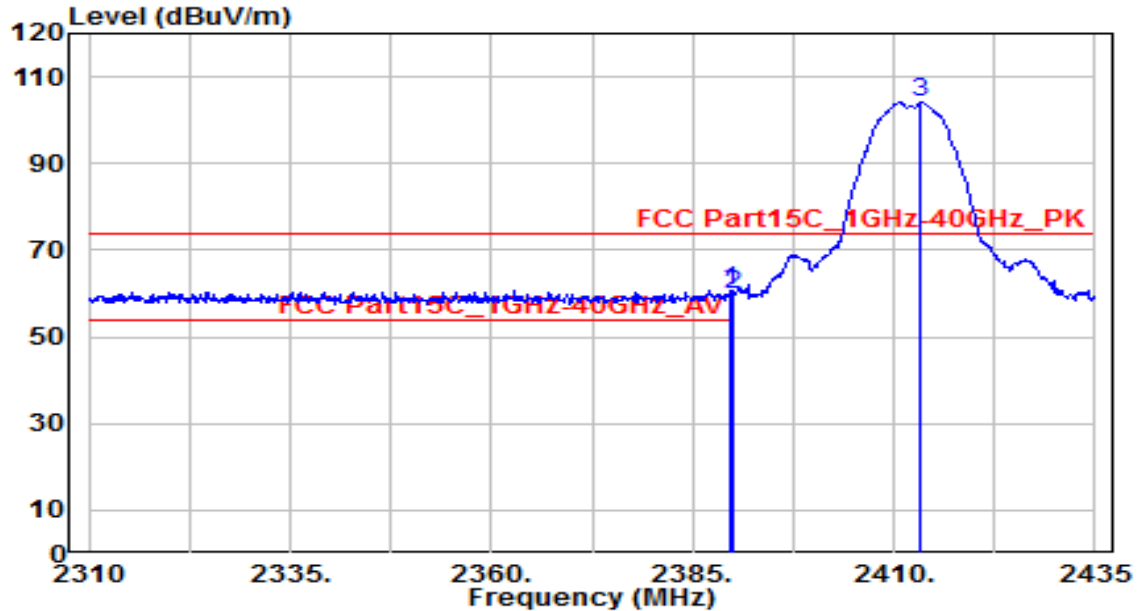


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.625	28.60	32.29	60.89	-13.11	74.00	215	125	Peak
2		2390.000	27.34	32.30	59.63	-14.37	74.00	215	125	Peak
3		2413.375	71.61	32.40	104.01	N/A	N/A	215	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

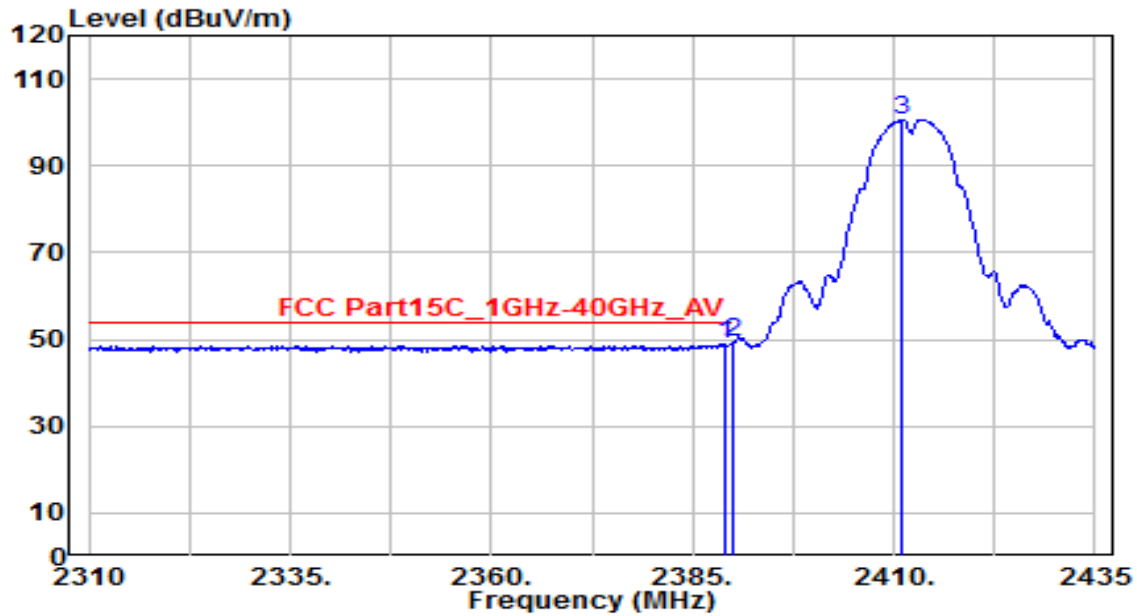


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	16.81	32.29	49.11	-4.89	54.00	215	125	Average
2	* 2390.000	17.14	32.30	49.44	-4.56	54.00	215	125	Average
3	2411.000	68.21	32.39	100.60	N/A	N/A	215	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

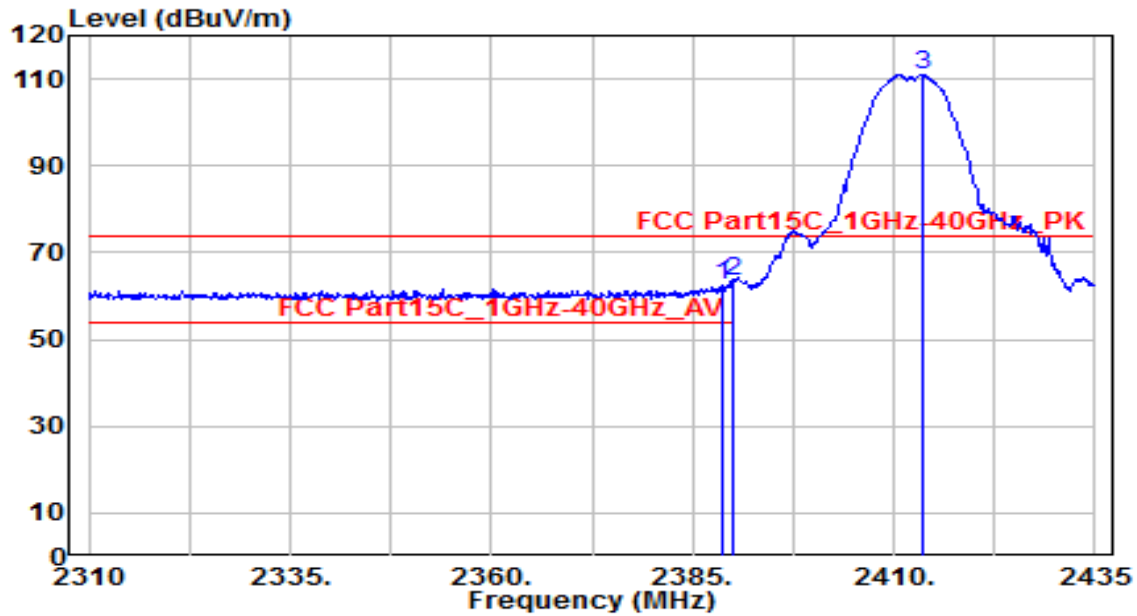


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	30.41	32.29	62.70	-11.30	74.00	180	180	Peak
2	* 2390.000	31.15	32.30	63.45	-10.55	74.00	180	180	Peak
3	2413.500	78.54	32.40	110.94	N/A	N/A	180	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

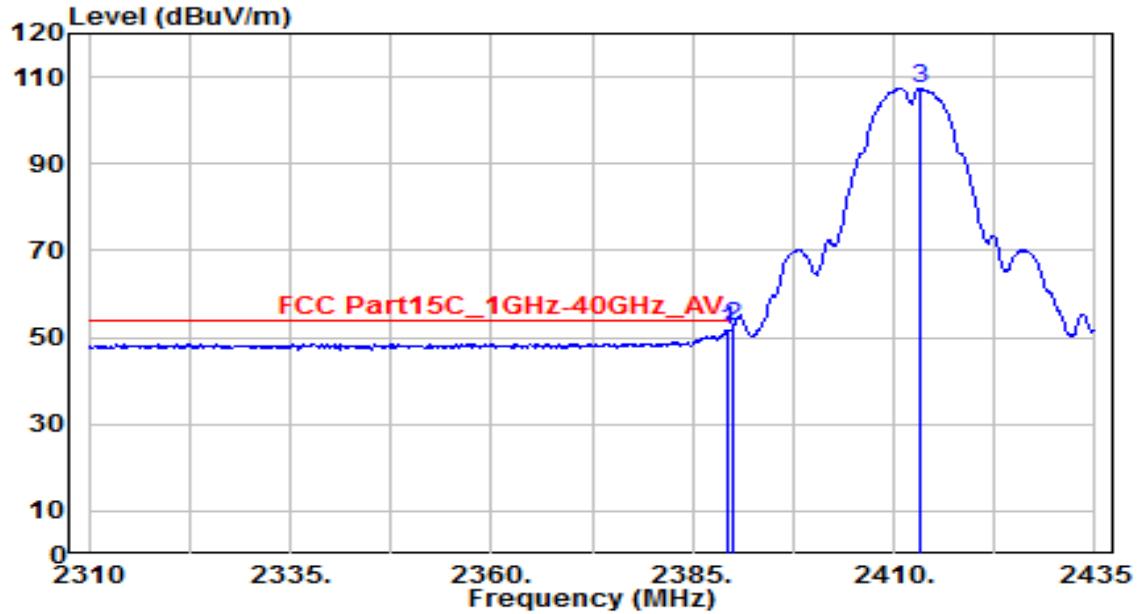


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.250	19.31	32.29	51.61	-2.39	54.00	180	180	Average
2	* 2390.000	20.22	32.30	52.52	-1.48	54.00	180	180	Average
3	2413.375	74.92	32.40	107.31	N/A	N/A	180	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

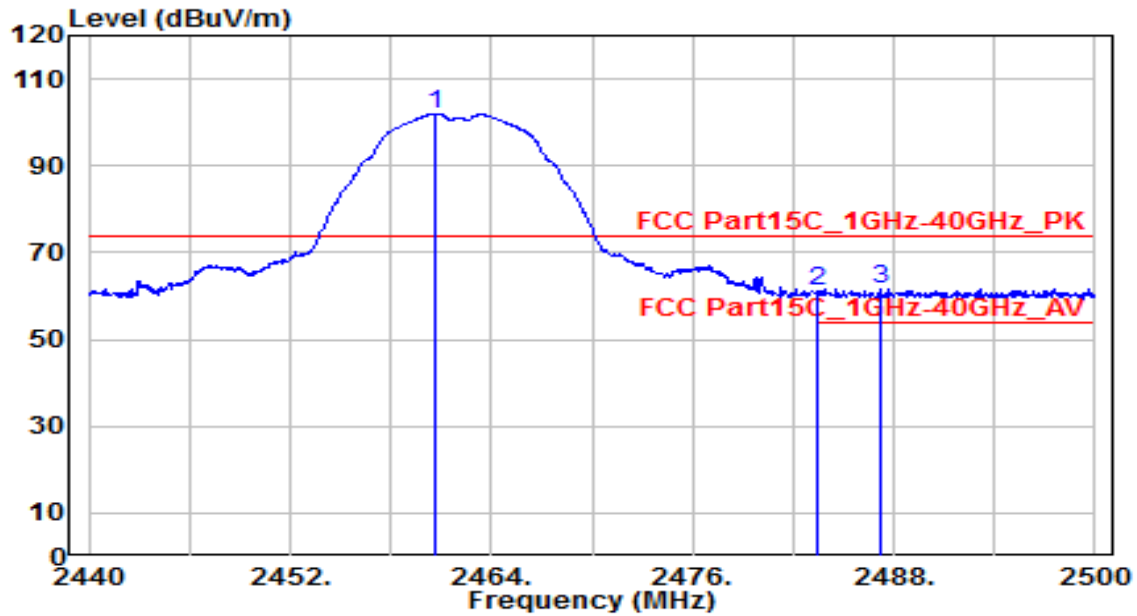


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.640	69.43	32.61	102.04	N/A	N/A	205	95	Peak
2	2483.500	28.34	32.71	61.04	-12.96	74.00	205	95	Peak
3	* 2487.220	29.03	32.72	61.76	-12.24	74.00	205	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

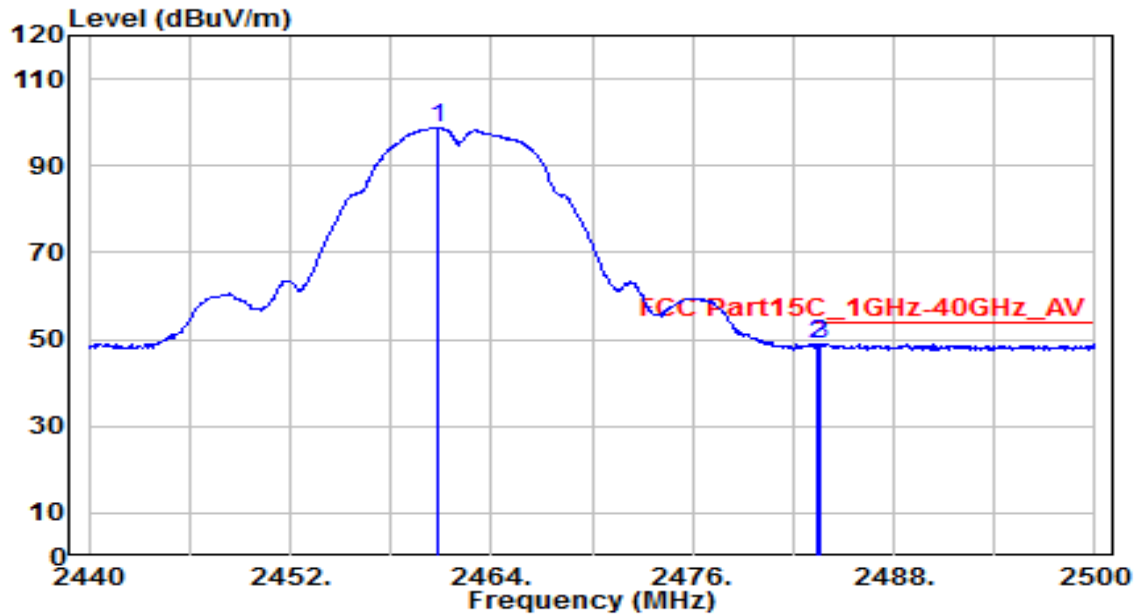


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.760	66.04	32.61	98.65	N/A	N/A	205	95	Average
2	2483.500	16.23	32.71	48.94	-5.06	54.00	205	95	Average
3	* 2483.560	16.34	32.71	49.05	-4.95	54.00	205	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

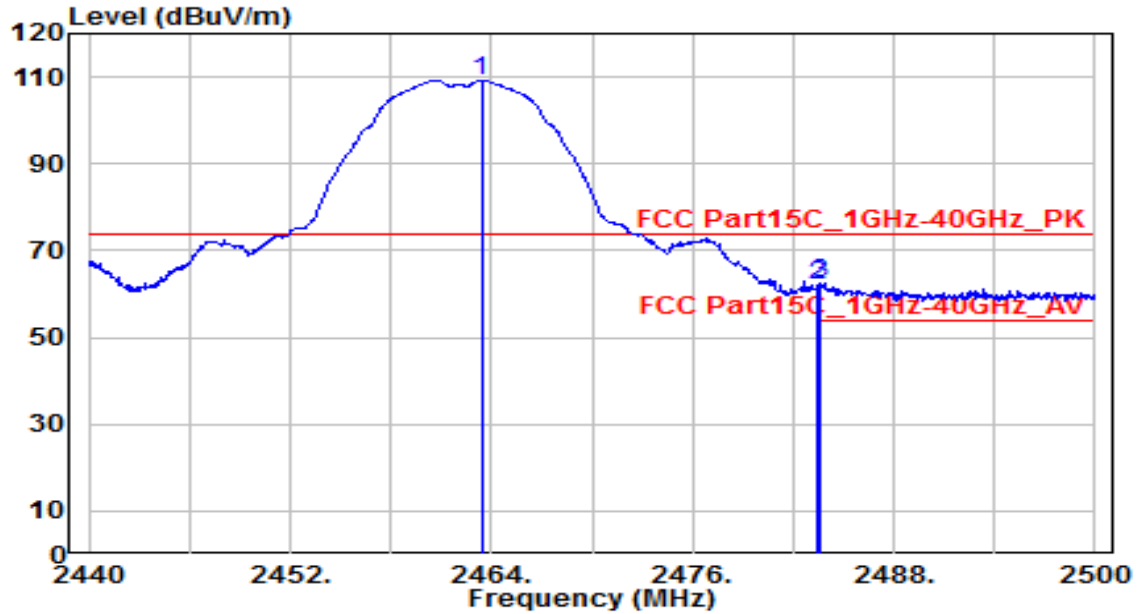


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.400	76.51	32.62	109.13	N/A	N/A	180	185	Peak
2	2483.500	29.45	32.71	62.15	-11.85	74.00	180	185	Peak
3	* 2483.560	29.63	32.71	62.33	-11.67	74.00	180	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11b_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

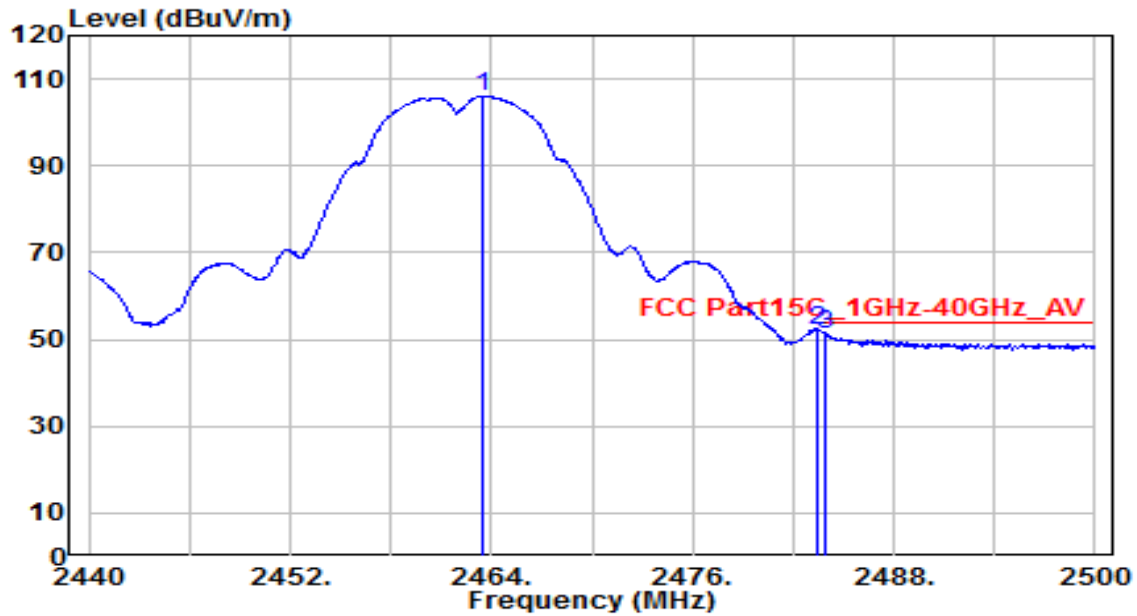


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.520	73.37	32.62	105.99	N/A	N/A	180	185	Average
2	* 2483.500	19.53	32.71	52.24	-1.76	54.00	180	185	Average
3	2483.980	18.24	32.71	50.95	-3.05	54.00	180	185	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

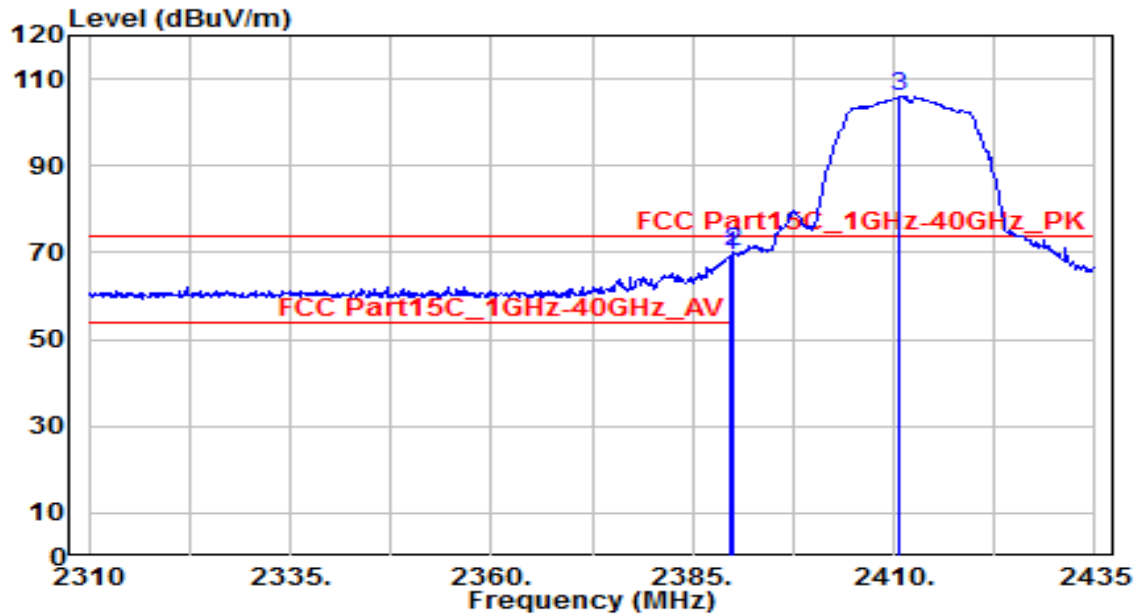


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.625	37.21	32.29	69.50	-4.50	74.00	210	275	Peak
2	* 2390.000	37.75	32.30	70.05	-3.95	74.00	210	275	Peak
3	2410.750	73.65	32.39	106.04	N/A	N/A	210	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

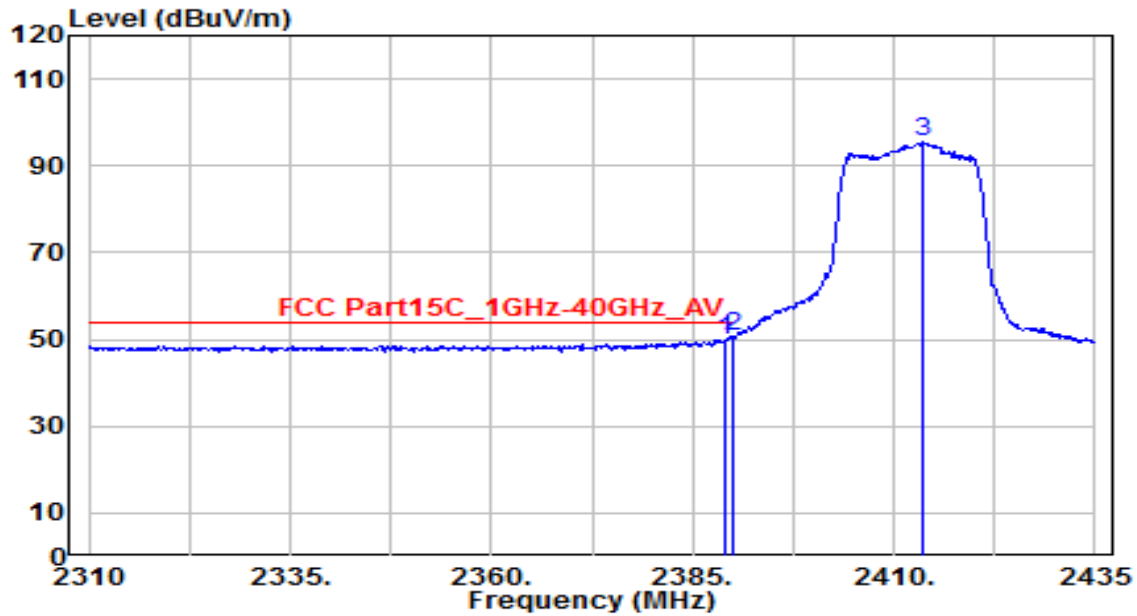


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	17.72	32.29	50.02	-3.98	54.00	210	275	Average
2	* 2390.000	18.20	32.30	50.50	-3.50	54.00	210	275	Average
3	2413.750	63.03	32.40	95.43	N/A	N/A	210	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

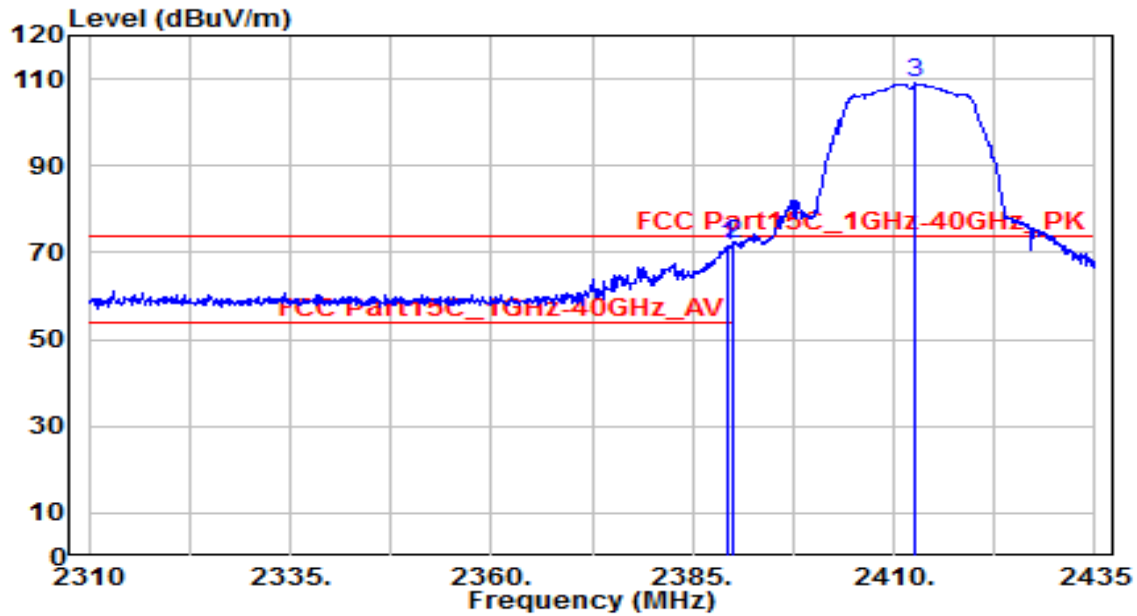


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.500	39.17	32.29	71.46	-2.54	74.00	140	170	Peak
2	* 2390.000	39.48	32.30	71.78	-2.22	74.00	140	170	Peak
3	2412.625	76.58	32.40	108.97	N/A	N/A	140	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

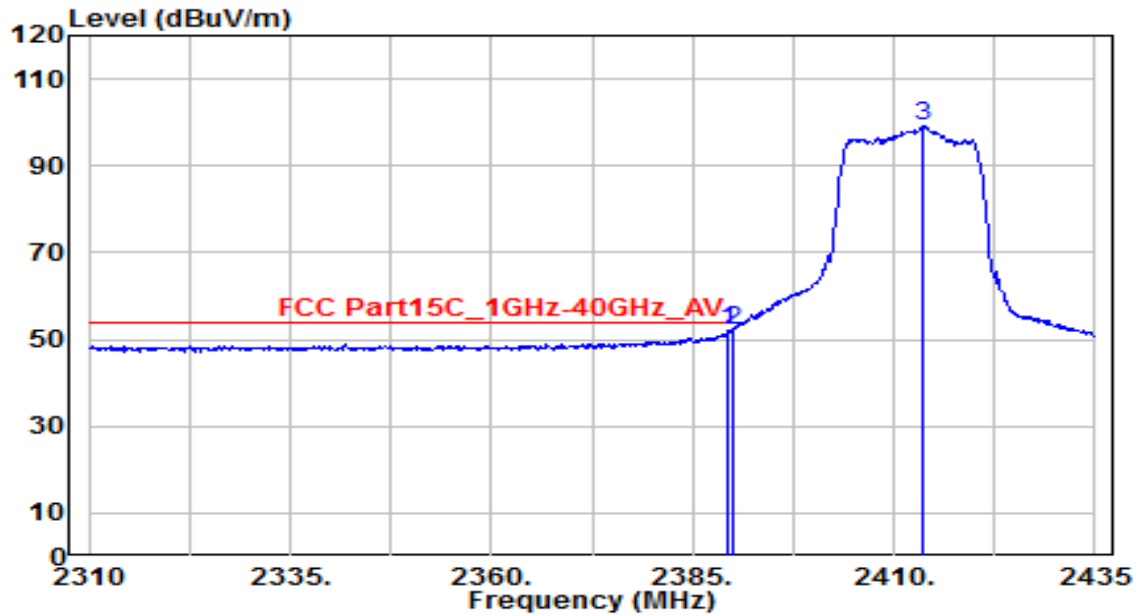


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.375	19.82	32.29	52.11	-1.89	54.00	140	170	Average
2	* 2390.000	19.94	32.30	52.23	-1.77	54.00	140	170	Average
3	2413.500	66.82	32.40	99.22	N/A	N/A	140	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

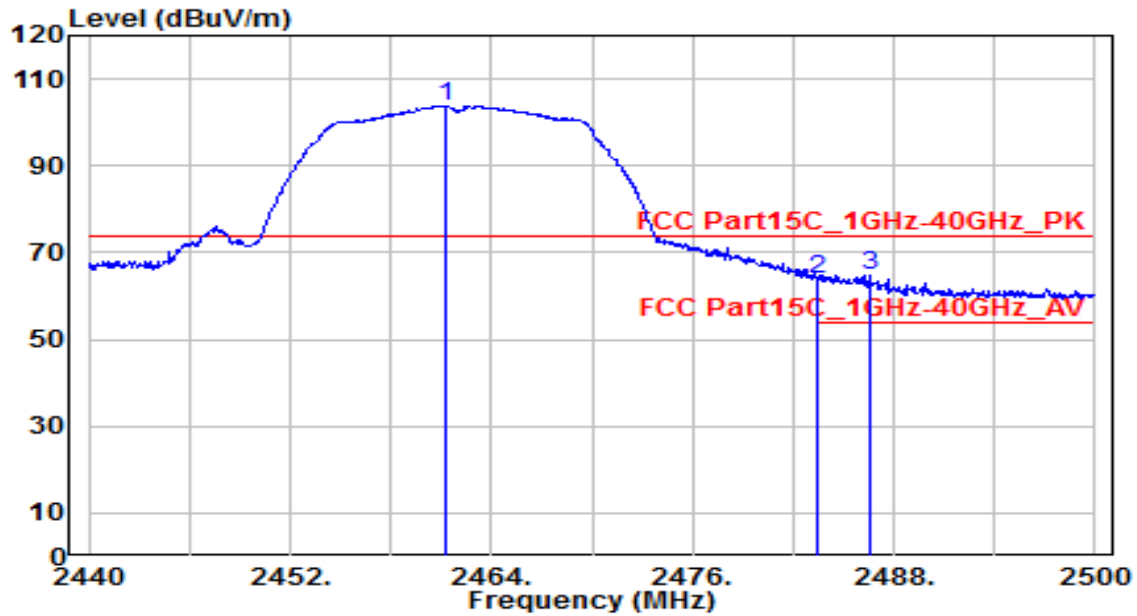


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.300	71.20	32.61	103.81	N/A	N/A	200	265	Peak
2	2483.500	31.34	32.71	64.05	-9.95	74.00	200	265	Peak
3	* 2486.560	32.21	32.72	64.93	-9.07	74.00	200	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

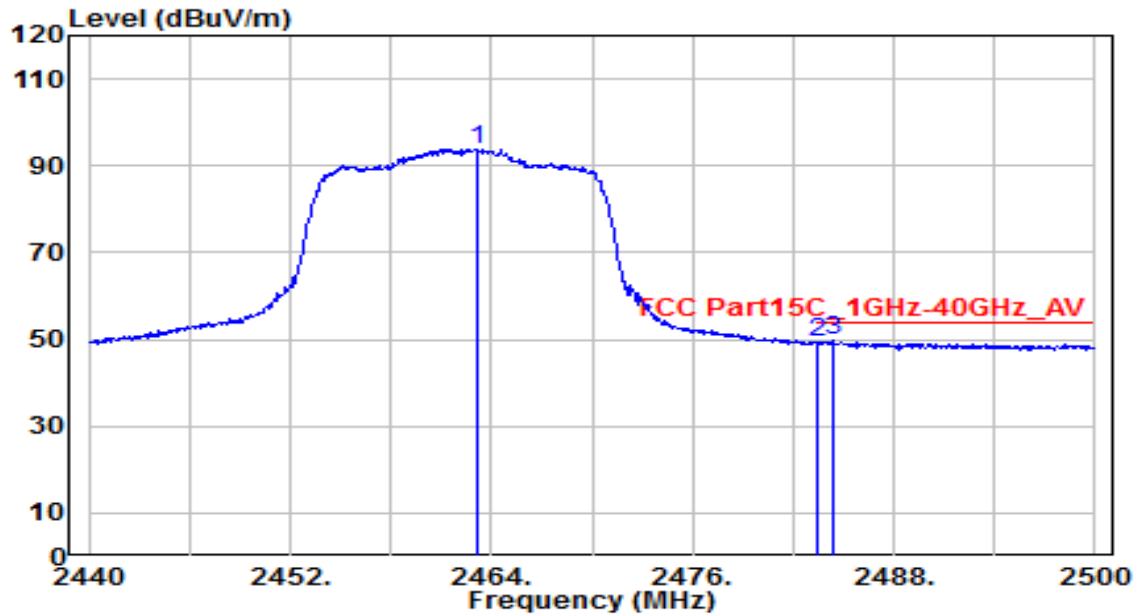


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.160	61.17	32.62	93.79	N/A	N/A	200	265	Average
2	2483.500	16.71	32.71	49.42	-4.58	54.00	200	265	Average
3	* 2484.460	16.90	32.71	49.61	-4.39	54.00	200	265	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

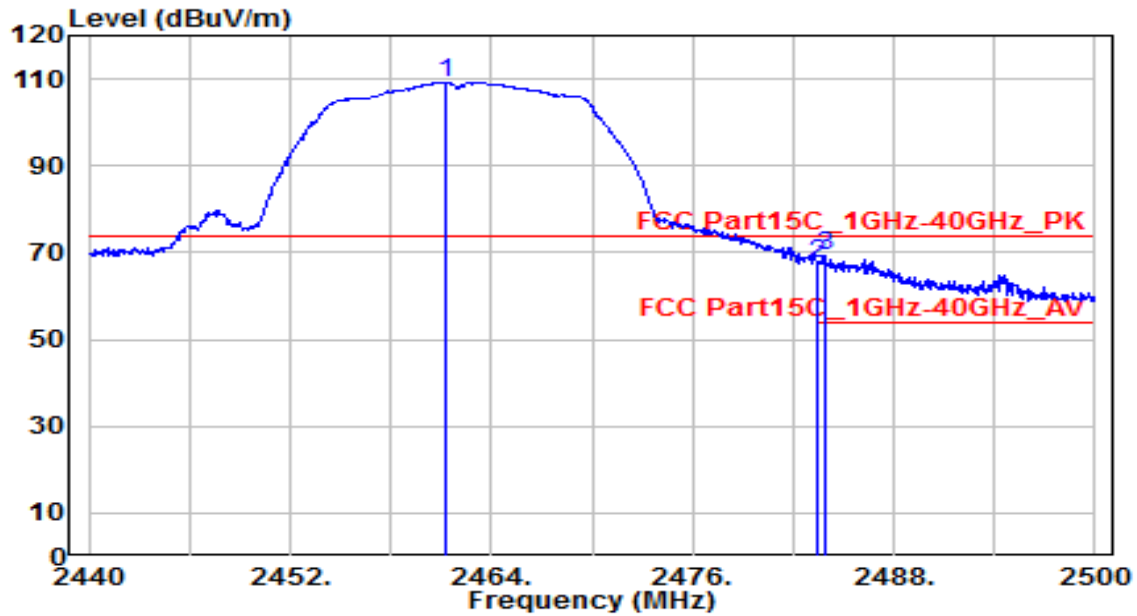


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.240	76.62	32.61	109.23	N/A	N/A	150	170	Peak
2	2483.500	34.76	32.71	67.47	-6.53	74.00	150	170	Peak
3	* 2483.920	36.36	32.71	69.07	-4.93	74.00	150	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11g_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

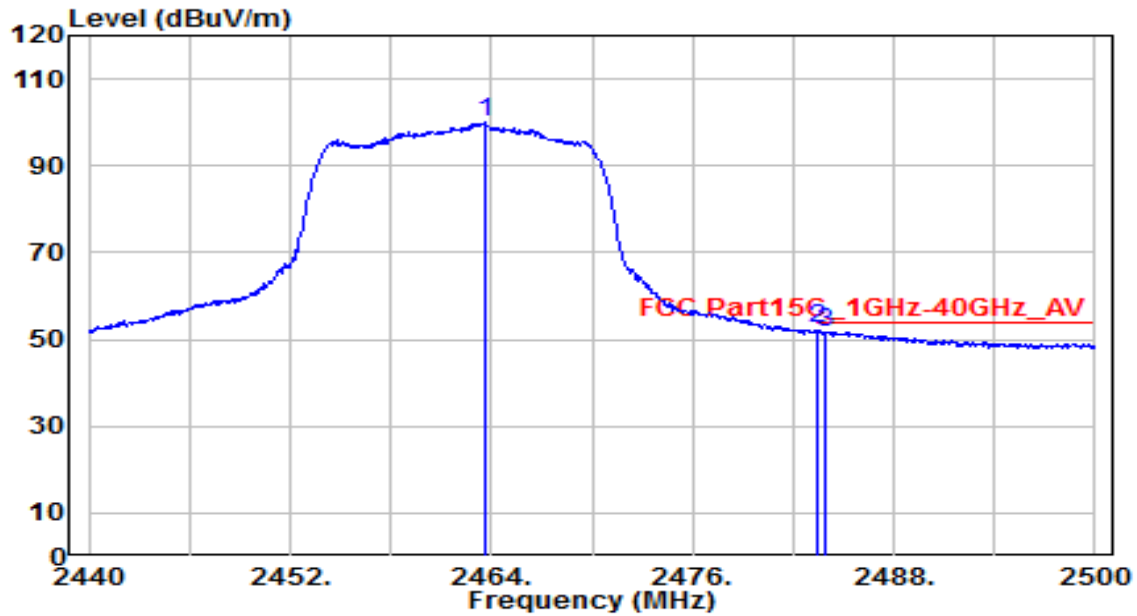


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.580	67.26	32.62	99.88	N/A	N/A	150	170	Average
2	* 2483.500	19.74	32.71	52.45	-1.55	54.00	150	170	Average
3	2483.980	19.05	32.71	51.76	-2.24	54.00	150	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

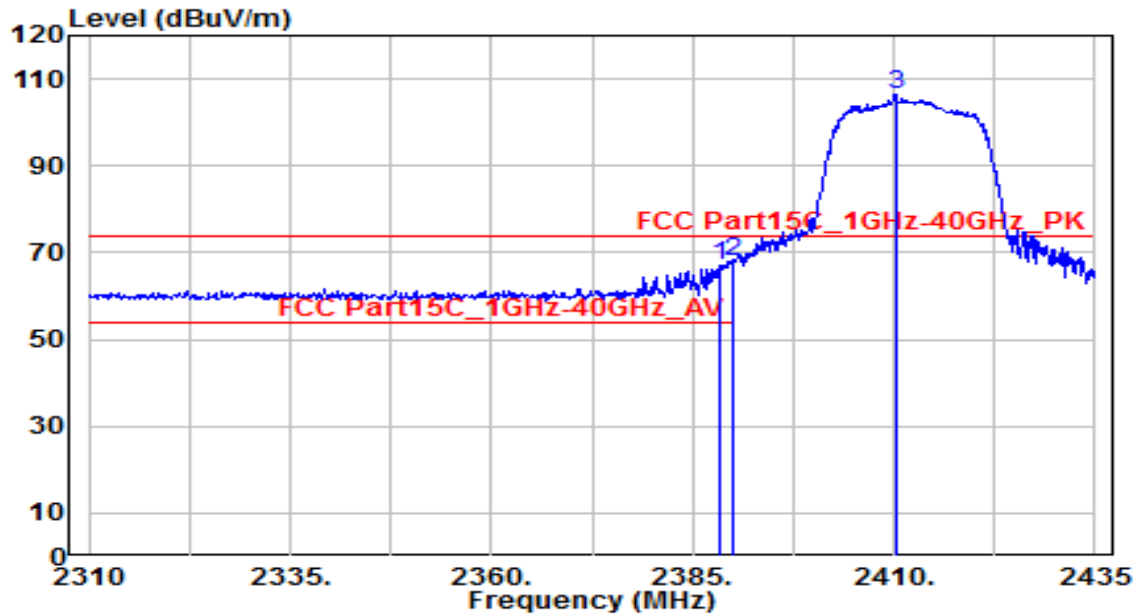


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.500	34.89	32.29	67.18	-6.82	74.00	210	270	Peak
2	* 2390.000	35.60	32.30	67.89	-6.11	74.00	210	270	Peak
3	2410.250	74.08	32.39	106.46	N/A	N/A	210	270	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

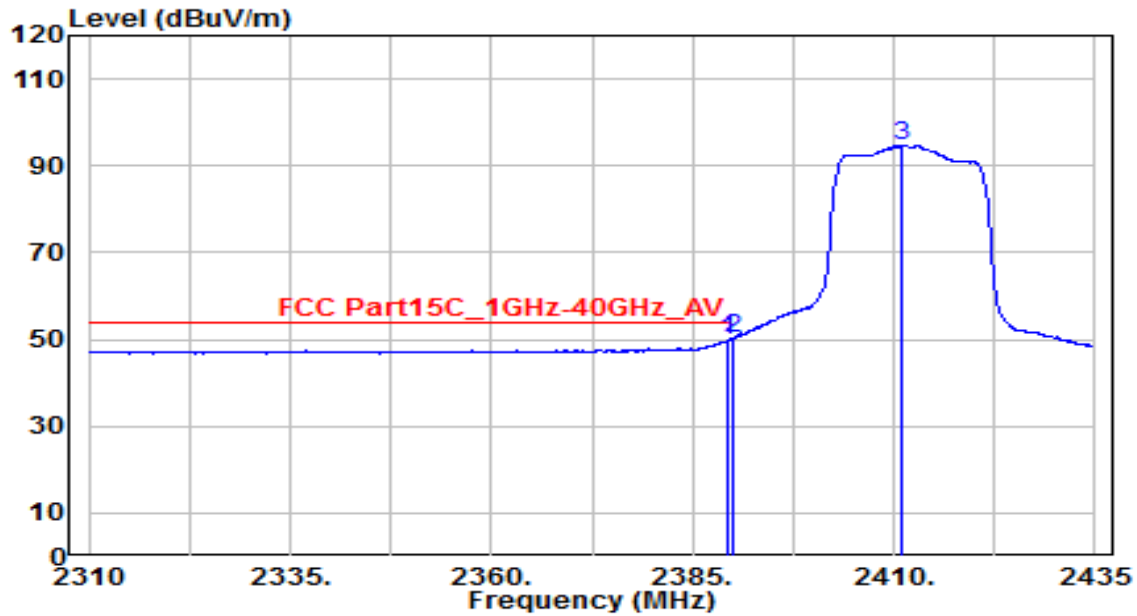


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.375	17.56	32.29	49.85	-4.15	54.00	210	270	Average
2	* 2390.000	17.86	32.30	50.15	-3.85	54.00	210	270	Average
3	2411.125	62.45	32.39	94.84	N/A	N/A	210	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

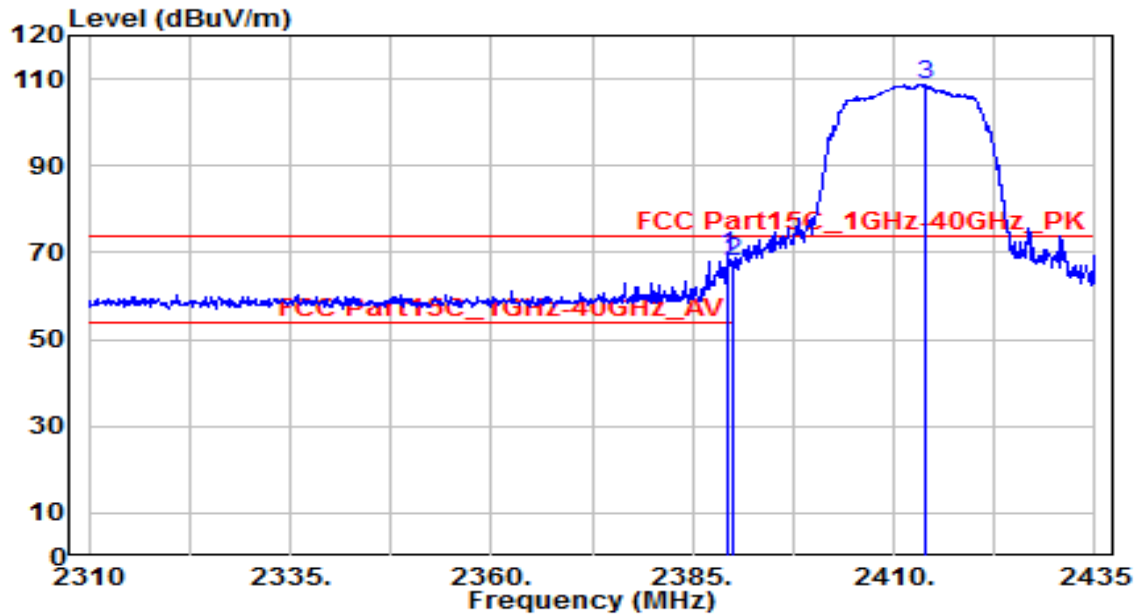


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.250	37.20	32.29	69.50	-4.50	74.00	150	170	Peak
2		2390.000	35.52	32.30	67.81	-6.19	74.00	150	170	Peak
3		2413.875	76.42	32.40	108.83	N/A	N/A	150	170	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH1_ANT 0	Test Voltage	AC 120V/60Hz

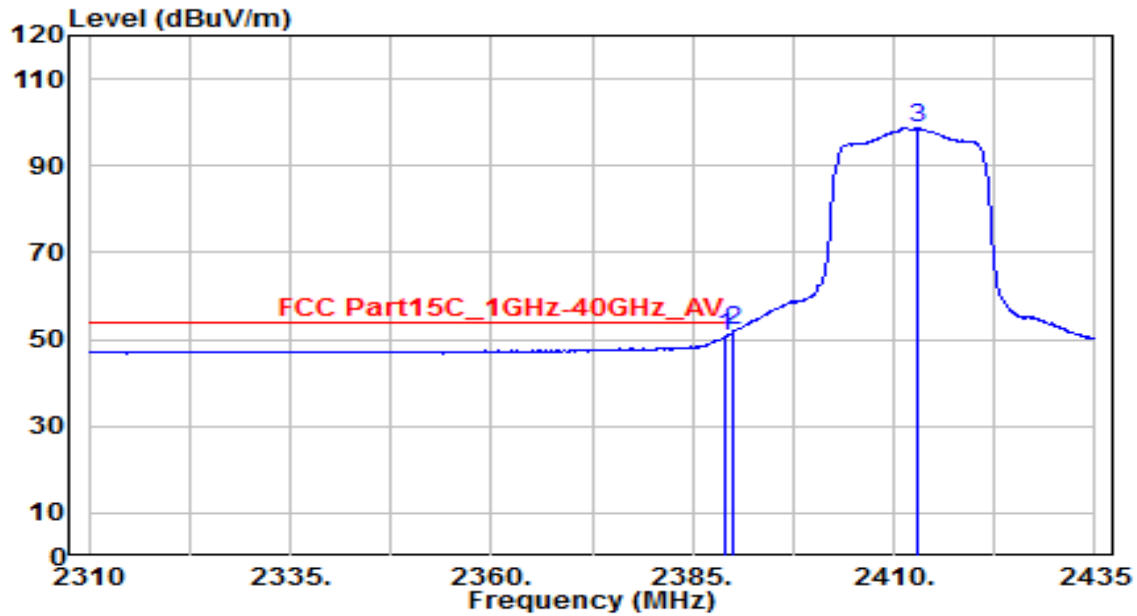


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	18.61	32.29	50.90	-3.10	54.00	150	170	Average
2	* 2390.000	19.89	32.30	52.19	-1.81	54.00	150	170	Average
3	2413.000	66.37	32.40	98.77	N/A	N/A	150	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

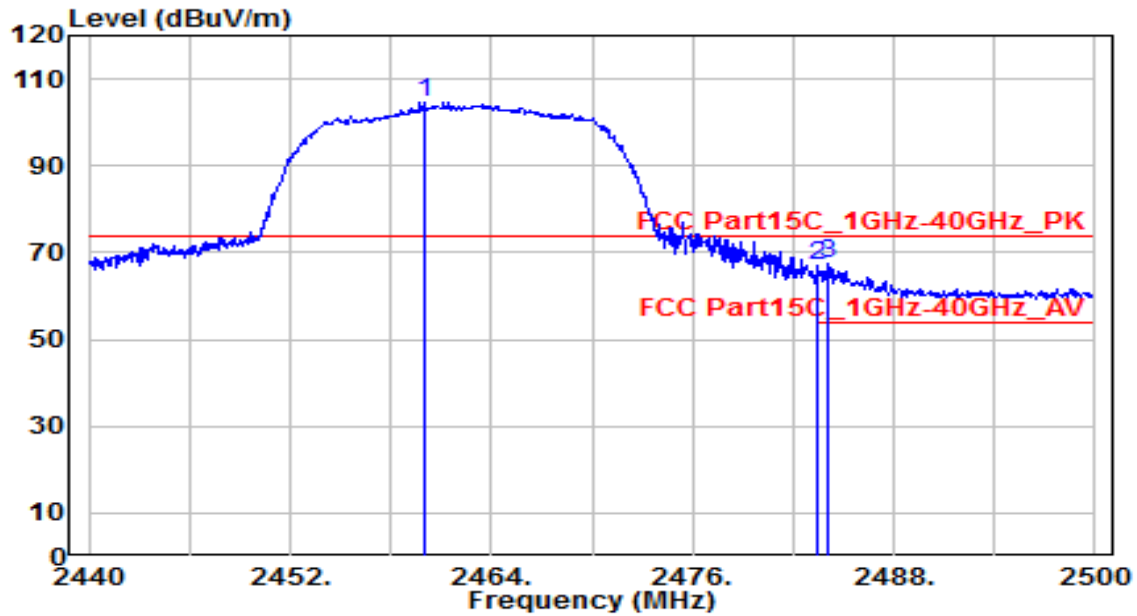


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.980	72.19	32.60	104.80	N/A	N/A	215	265	Peak
2	2483.500	34.20	32.71	66.90	-7.10	74.00	215	265	Peak
3	* 2484.100	34.64	32.71	67.35	-6.65	74.00	215	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

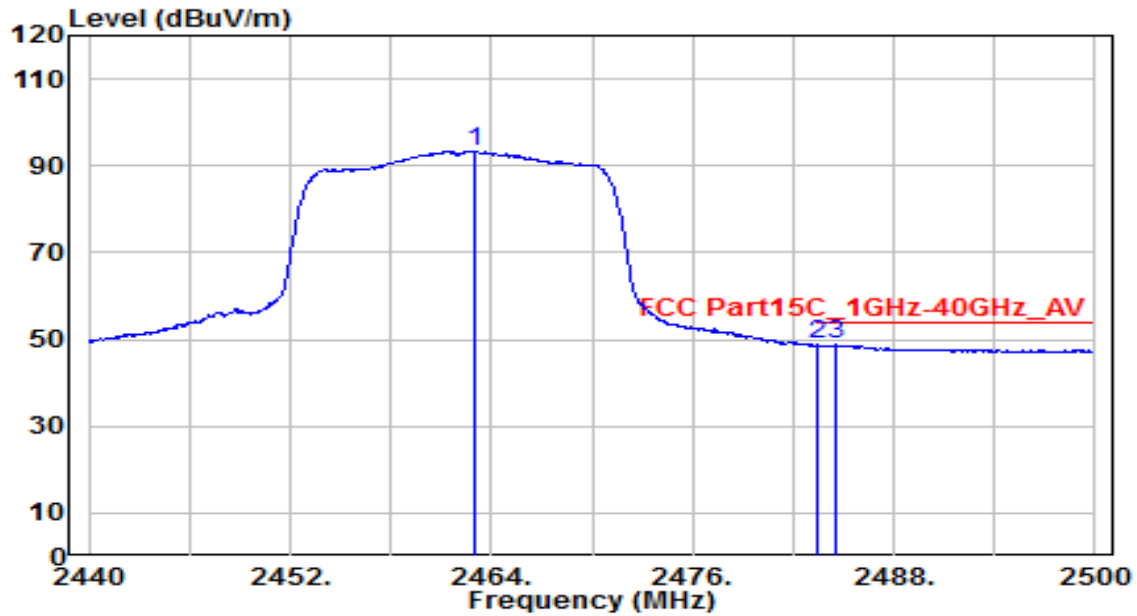


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.980	60.73	32.62	93.35	N/A	N/A	215	265	Average
2	* 2483.500	15.99	32.71	48.70	-5.30	54.00	215	265	Average
3	2484.520	15.97	32.71	48.69	-5.31	54.00	215	265	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

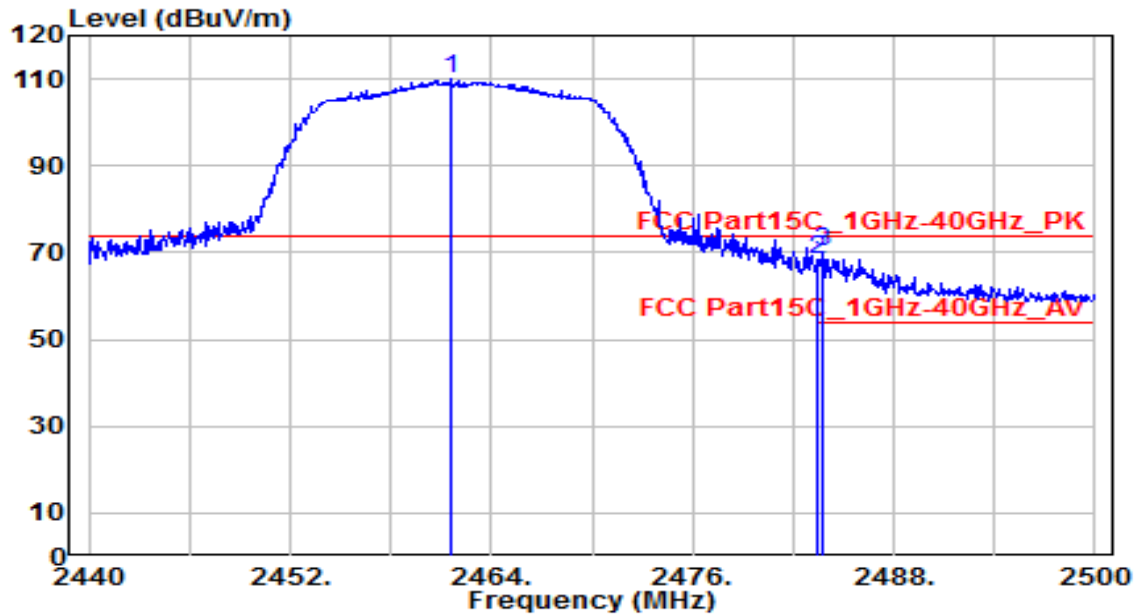


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.600	77.26	32.61	109.87	N/A	N/A	145	175	Peak
2	2483.500	35.60	32.71	68.31	-5.69	74.00	145	175	Peak
3	* 2483.740	37.33	32.71	70.04	-3.96	74.00	145	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n20_TX_CH11_ANT 0	Test Voltage	AC 120V/60Hz

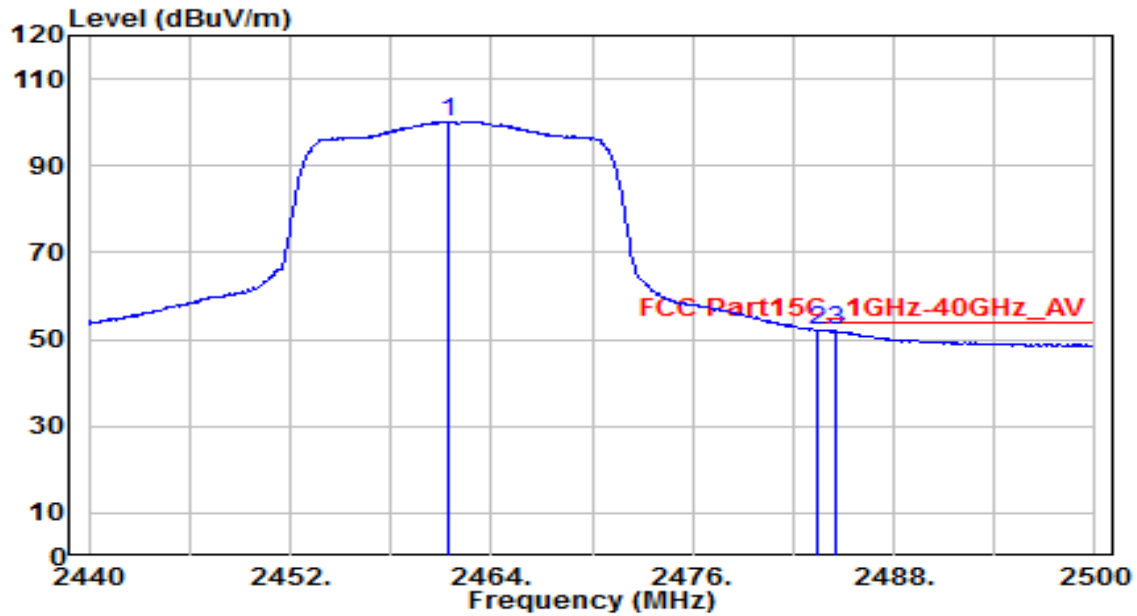


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.480	67.61	32.61	100.22	N/A	N/A	145	175	Average
2	* 2483.500	19.38	32.71	52.09	-1.91	54.00	145	175	Average
3	2484.520	19.37	32.71	52.08	-1.92	54.00	145	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

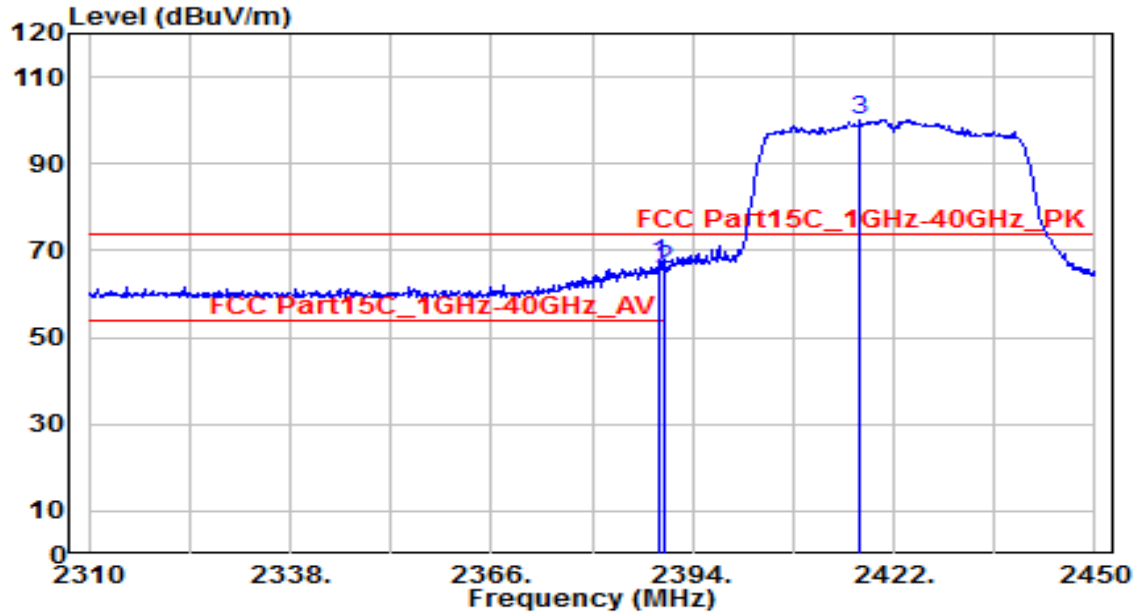


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2389.240	34.78	32.29	67.07	-6.93	74.00	215	275	Peak
2		2390.000	33.47	32.30	65.77	-8.23	74.00	215	275	Peak
3		2417.240	67.79	32.42	100.20	N/A	N/A	215	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

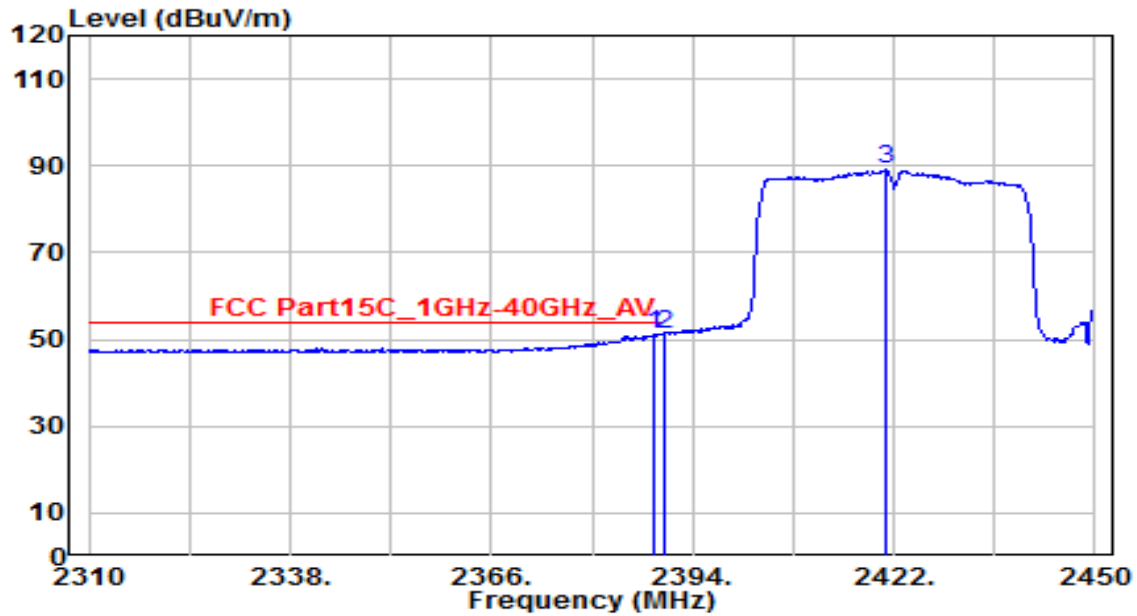


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.680	18.82	32.29	51.11	-2.89	54.00	215	275	Average
2	* 2390.000	19.07	32.30	51.37	-2.63	54.00	215	275	Average
3	2420.740	56.83	32.43	89.26	N/A	N/A	215	275	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

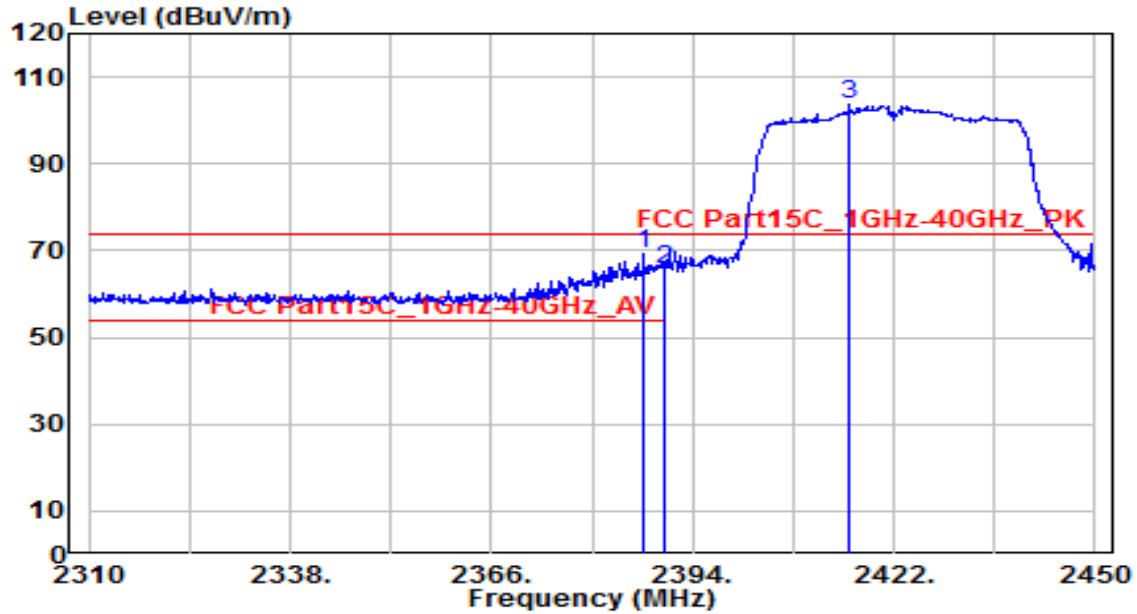


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 2387.140	36.77	32.28	69.06	-4.94	74.00	140	170	Peak
2	2390.000	33.38	32.30	65.68	-8.32	74.00	140	170	Peak
3	2415.840	71.09	32.41	103.49	N/A	N/A	140	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH3_ANT 0	Test Voltage	AC 120V/60Hz

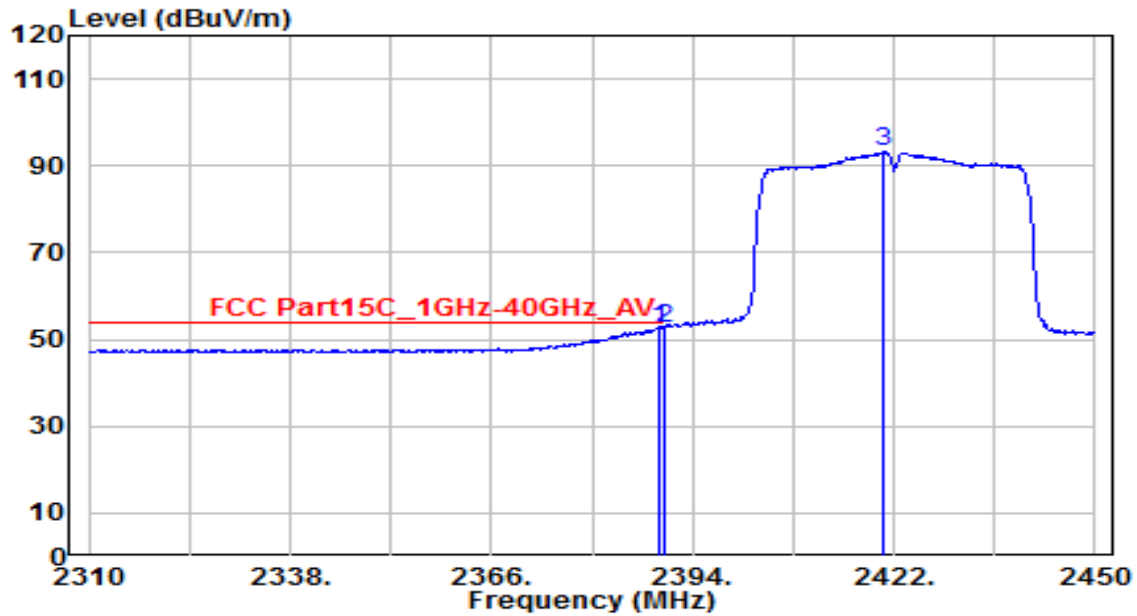


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.520	20.14	32.29	52.43	-1.57	54.00	140	170	Average
2	* 2390.000	20.28	32.30	52.58	-1.42	54.00	140	170	Average
3	2420.600	60.90	32.43	93.33	N/A	N/A	140	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

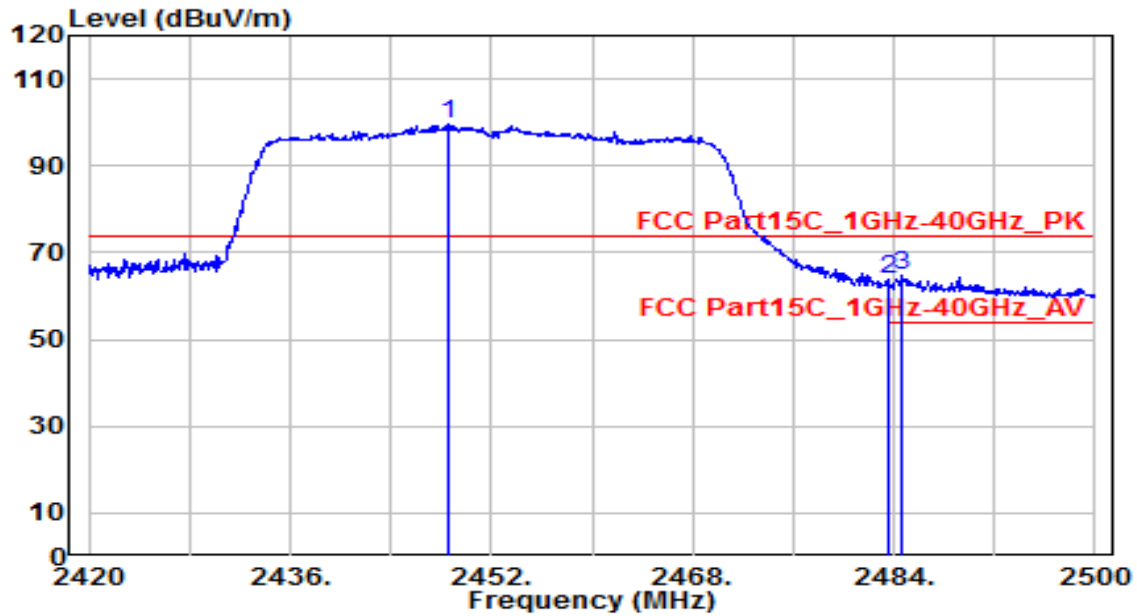


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.560	67.12	32.55	99.67	N/A	N/A	210	270	Peak
2	2483.500	31.17	32.71	63.88	-10.12	74.00	210	270	Peak
3	* 2484.560	31.93	32.71	64.64	-9.36	74.00	210	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

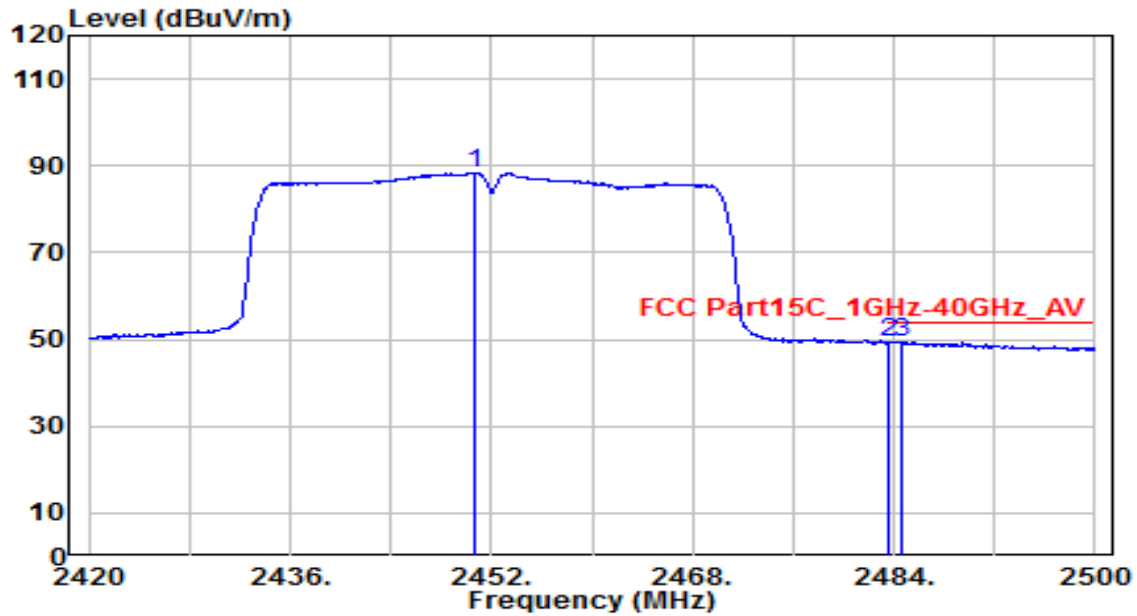


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.640	55.91	32.56	88.47	N/A	N/A	210	270	Average
2	2483.500	16.67	32.71	49.38	-4.62	54.00	210	270	Average
3	* 2484.560	16.69	32.71	49.40	-4.60	54.00	210	270	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

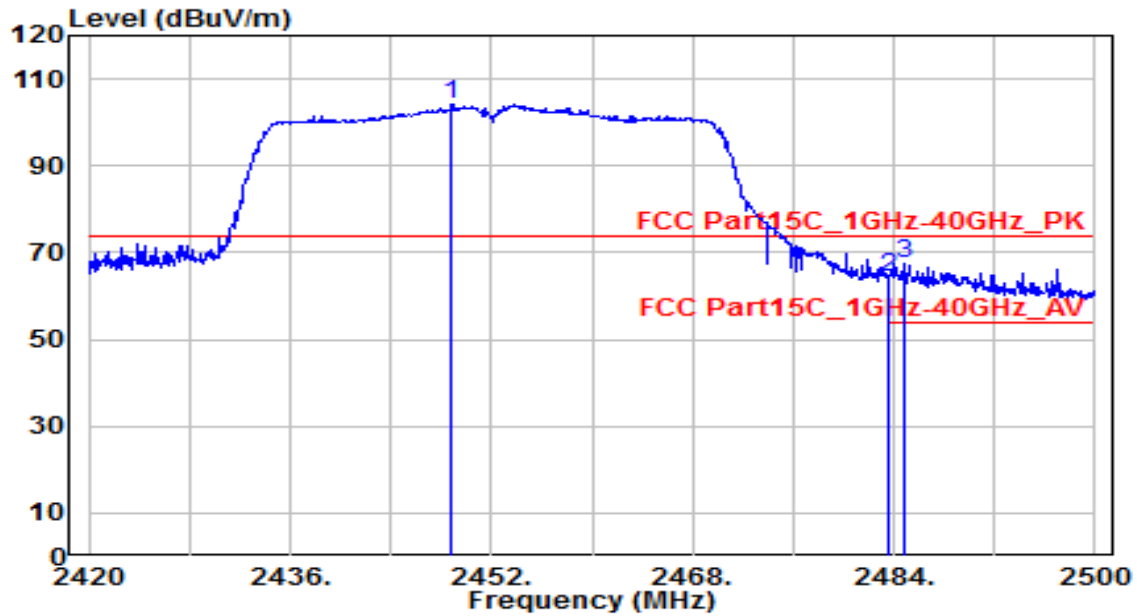


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.800	71.74	32.55	104.30	N/A	N/A	140	175	Peak
2	2483.500	31.64	32.71	64.35	-9.65	74.00	140	175	Peak
3	* 2484.800	34.77	32.71	67.48	-6.52	74.00	140	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	8" Android Panel PC	Date of Test	2021-04-17
Factor	BBHA 9120D	Temp. / Humidity	24°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Howard
Test Mode	802.11n40_TX_CH9_ANT 0	Test Voltage	AC 120V/60Hz

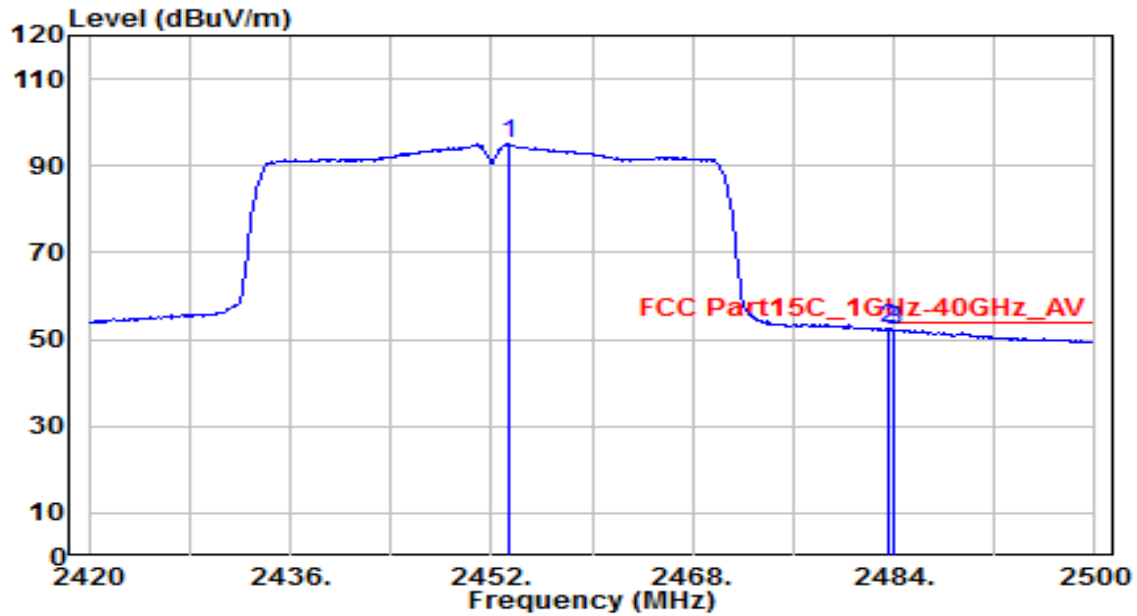

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2453.360	62.35	32.57	94.93	N/A	N/A	140	175	Average
2	* 2483.500	19.64	32.71	52.34	-1.66	54.00	140	175	Average
3	2484.080	19.50	32.71	52.21	-1.79	54.00	140	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

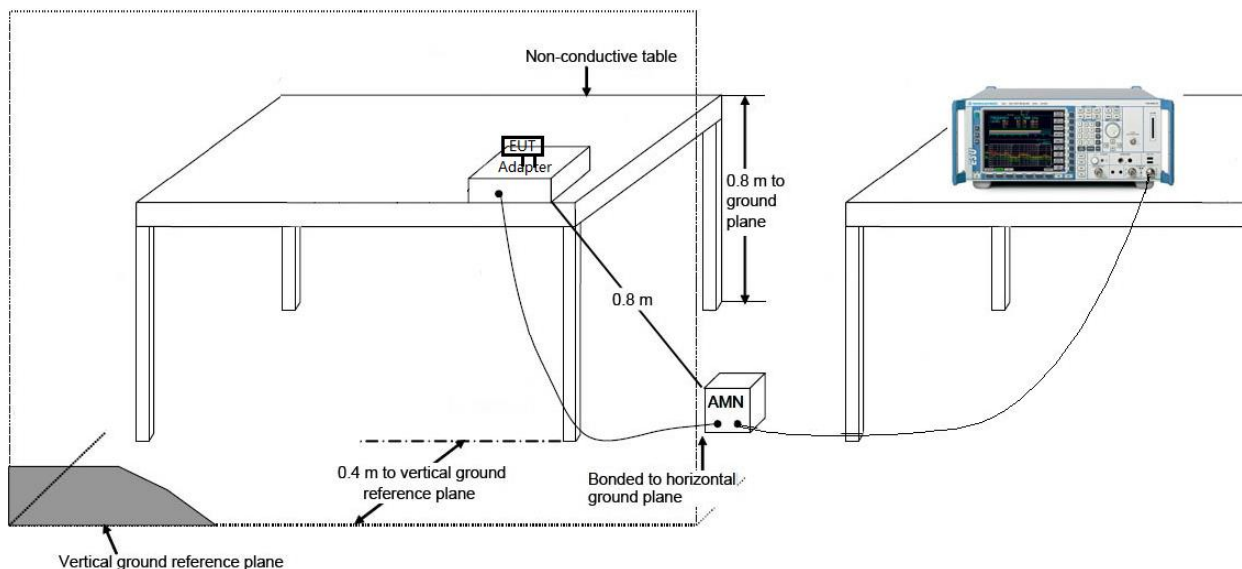

7.8.3. Test Result

EUT	8" Android Panel PC	Date of Test	2021-03-31
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.7°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n20_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

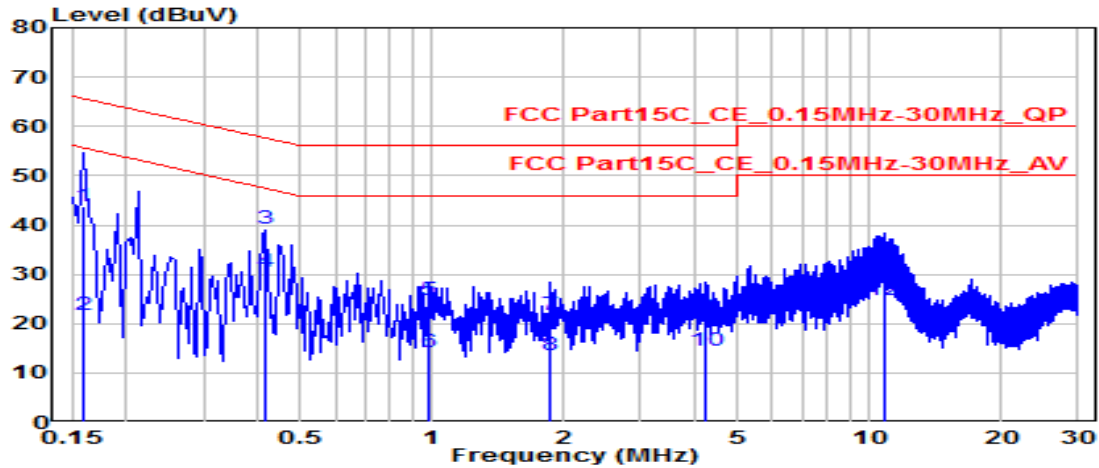


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.159	34.10	9.61	43.71	-21.80	65.52	QP
2	0.159	12.18	9.61	21.79	-33.72	55.52	Average
3	* 0.415	29.74	9.63	39.37	-18.17	57.54	QP
4	* 0.415	21.01	9.63	30.64	-16.90	47.54	Average
5	0.978	15.01	9.66	24.67	-31.33	56.00	QP
6	0.978	4.55	9.66	14.21	-31.79	46.00	Average
7	1.869	12.06	9.69	21.75	-34.25	56.00	QP
8	1.869	3.89	9.69	13.58	-32.42	46.00	Average
9	4.213	11.75	9.72	21.47	-34.53	56.00	QP
10	4.213	4.71	9.72	14.43	-31.57	46.00	Average
11	10.773	22.54	9.89	32.43	-27.57	60.00	QP
12	10.773	14.72	9.89	24.61	-25.39	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	8" Android Panel PC	Date of Test	2021-03-31
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.7°C / 58%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n20_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

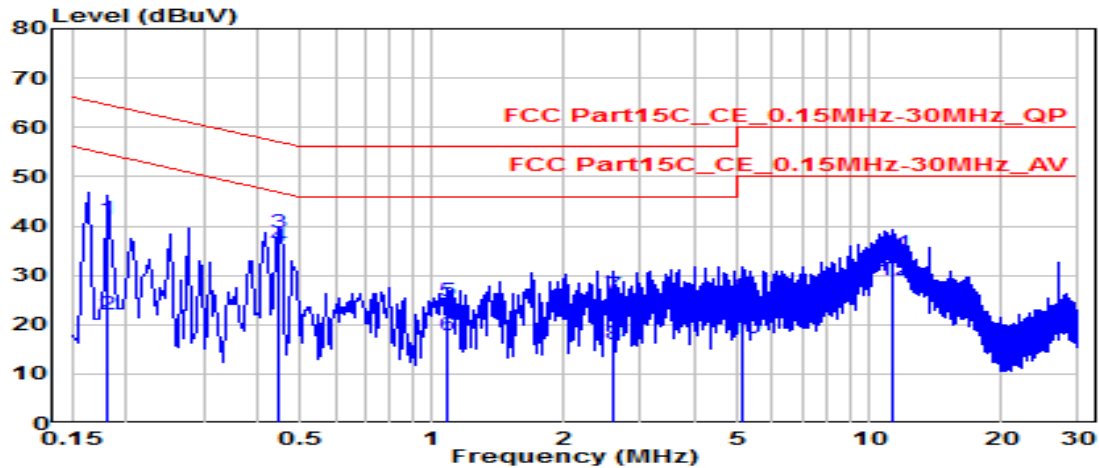


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.181	31.84	9.62	41.47	-22.95	64.42	QP
2	0.181	12.56	9.62	22.18	-32.24	54.42	Average
3	* 0.447	29.13	9.64	38.76	-18.17	56.93	QP
4	* 0.447	26.30	9.64	35.93	-11.00	46.93	Average
5	1.081	15.01	9.67	24.68	-31.32	56.00	QP
6	1.081	8.25	9.67	17.93	-28.07	46.00	Average
7	2.607	16.32	9.70	26.02	-29.98	56.00	QP
8	2.607	6.25	9.70	15.96	-30.04	46.00	Average
9	5.140	16.01	9.75	25.77	-34.23	60.00	QP
10	5.140	7.52	9.75	17.27	-32.73	50.00	Average
11	11.358	24.58	9.91	34.49	-25.51	60.00	QP
12	11.358	18.99	9.91	28.91	-21.09	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	8" Android Panel PC	Date of Test	2021-03-31
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.7°C /58%
Polarity	Line1	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n20_TX_CH6_Ant 0	Test Voltage	AC 240V/60Hz

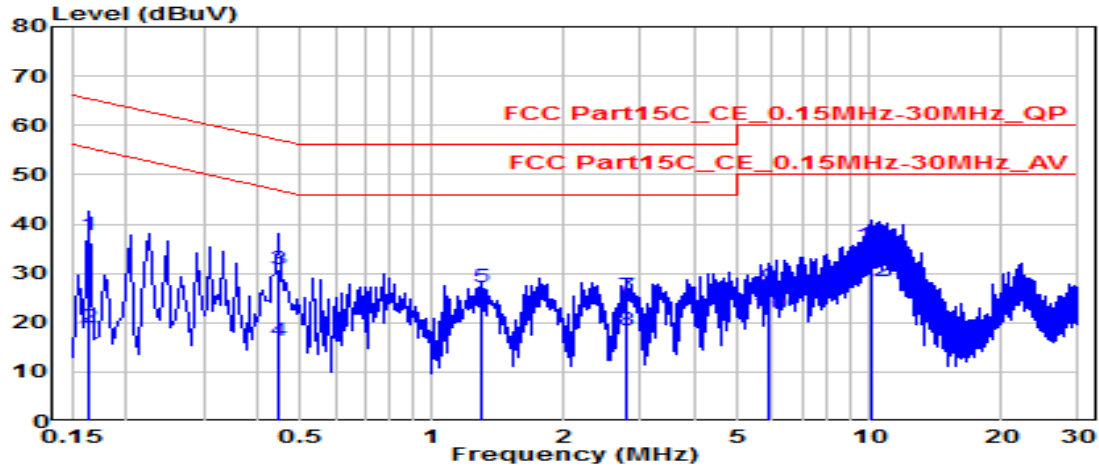


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.163	28.05	9.61	37.66	-27.62	65.28	QP
2	0.163	9.36	9.61	18.97	-36.31	55.28	Average
3	0.442	21.27	9.63	30.90	-26.12	57.02	QP
4	0.442	6.77	9.63	16.39	-30.62	47.02	Average
5	1.297	17.56	9.67	27.23	-28.77	56.00	QP
6	1.297	13.59	9.67	23.26	-22.74	46.00	Average
7	2.782	15.52	9.70	25.22	-30.78	56.00	QP
8	2.782	8.86	9.70	18.56	-27.44	46.00	Average
9	5.896	17.28	9.77	27.05	-32.95	60.00	QP
10	5.896	11.82	9.77	21.59	-28.41	50.00	Average
11	* 10.108	25.82	9.88	35.70	-24.30	60.00	QP
12	* 10.108	18.42	9.88	28.30	-21.70	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	8" Android Panel PC	Date of Test	2021-03-31
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.7°C /58%
Polarity	Neutral	Site / Test Engineer	SR2 / Tim
Test Mode	802.11n20_TX_CH6_Ant 0	Test Voltage	AC 240V/60Hz

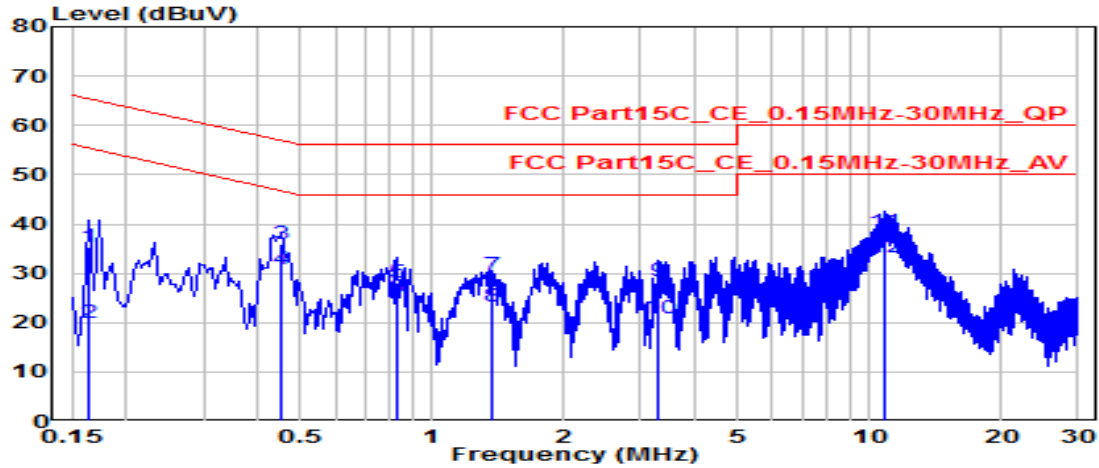

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	0.163	25.83	9.62	35.45	-29.83	65.28	QP
2	0.163	10.45	9.62	20.07	-35.21	55.28	Average
3	* 0.451	26.19	9.64	35.82	-21.02	56.85	QP
4	* 0.451	21.15	9.64	30.79	-16.06	46.85	Average
5	0.829	18.51	9.66	28.17	-27.83	56.00	QP
6	0.829	15.31	9.66	24.97	-21.03	46.00	Average
7	1.369	19.83	9.68	29.51	-26.49	56.00	QP
8	1.369	13.48	9.68	23.16	-22.84	46.00	Average
9	3.304	18.68	9.72	28.39	-27.61	56.00	QP
10	3.304	11.06	9.72	20.78	-25.22	46.00	Average
11	10.778	28.48	9.90	38.38	-21.62	60.00	QP
12	10.778	23.40	9.90	33.30	-16.70	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **8" Android Panel PC** is in compliance with Part 15C of the FCC Rules.

_____ The End _____