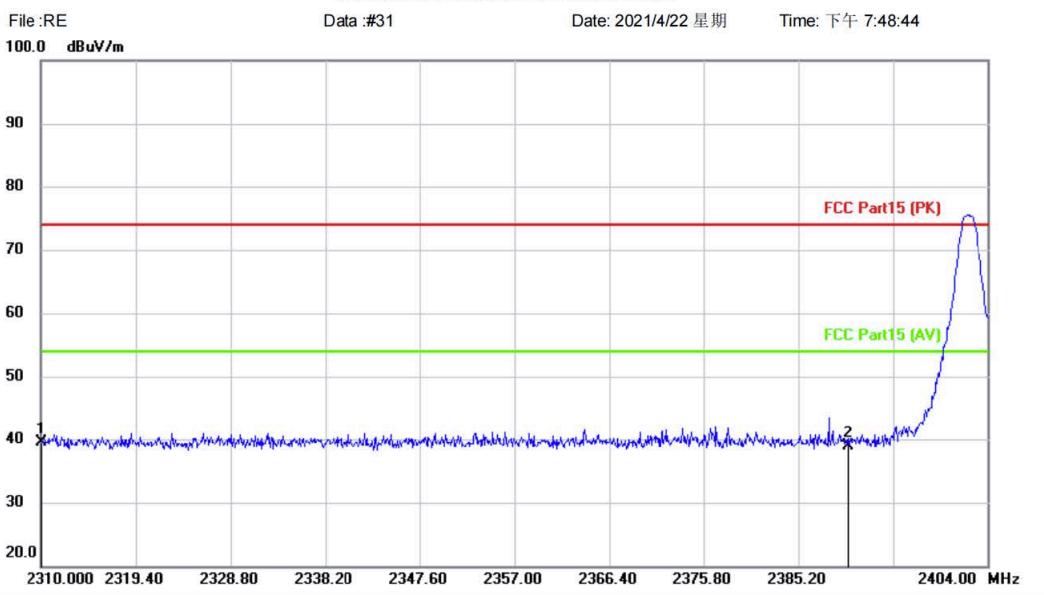


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

TEST DATA
[TestMode: TX]; [Polarity: Vertical]
Radiated Emission Measurement

Site
Polarization: Vertical
Temperature:
Limit: FCC Part15 (PK)
Power:
Humidity: %
EUT: Bluetooth wireless headset
Distance: 3m
M/N: SPHYNX
Mode: BLE-L
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2310.000	44.04	-4.61	39.43	74.00	-34.57	peak		
2		2390.000	43.08	-4.27	38.81	74.00	-35.19	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]


Radiated Emission Measurement

File :RE
100.0 dBw/m

Data :#32

Date: 2021/4/22 星期

Time: 下午 7:50:27

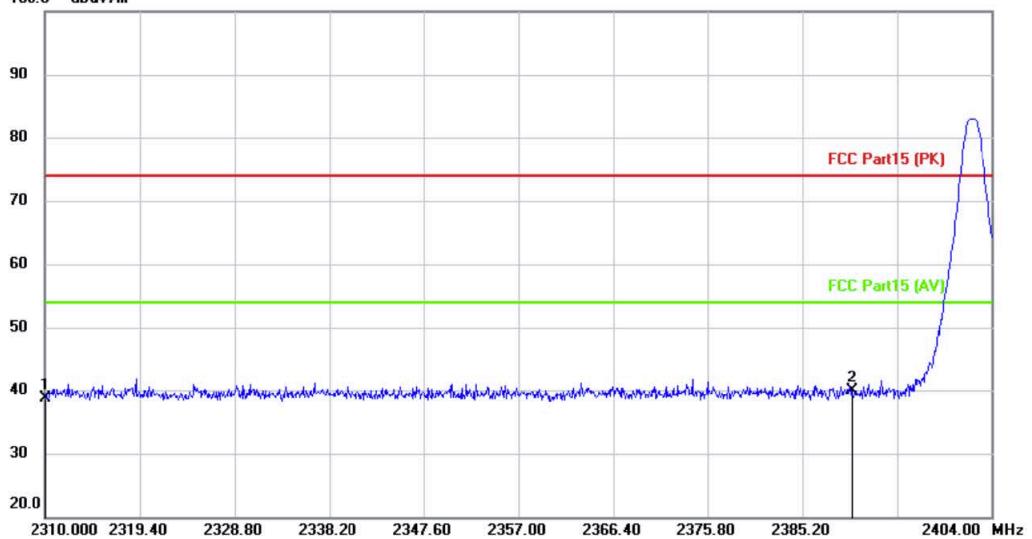

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth wireless headset

Distance: 3m

M/N: SPHYNX

Mode: BLE-L

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment				Height	Degree	
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1		2310.000	43.30	-4.61	38.69	74.00	-35.31	peak			
2	*	2390.000	44.22	-4.27	39.95	74.00	-34.05	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]


Radiated Emission Measurement

File :RE
100.0 dBuV/m

Data :#33

Date: 2021/4/22 星期

Time: 下午 8:00:39

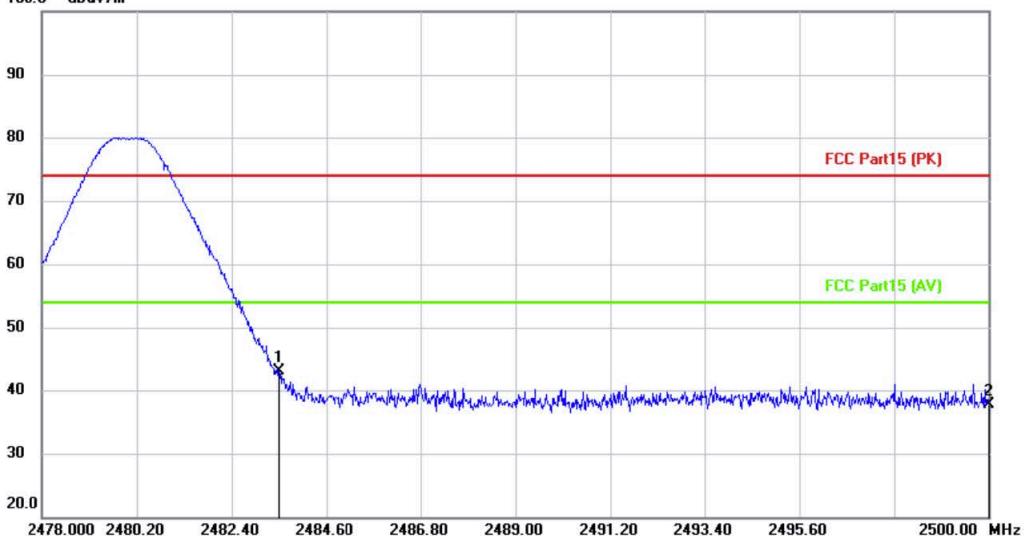

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Bluetooth wireless headset

Distance: 3m

M/N: SPHYNX

Mode: BLE-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
			Level	Factor	ment				Height	Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	2483.500	46.89	-3.84	43.05	74.00	-30.95	peak		Comment
2		2500.000	41.58	-3.78	37.80	74.00	-36.20	peak		

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Horizontal]


Radiated Emission Measurement

File :RE

Data :#34

Date: 2021/4/22 星期

Time: 下午 8:02:20

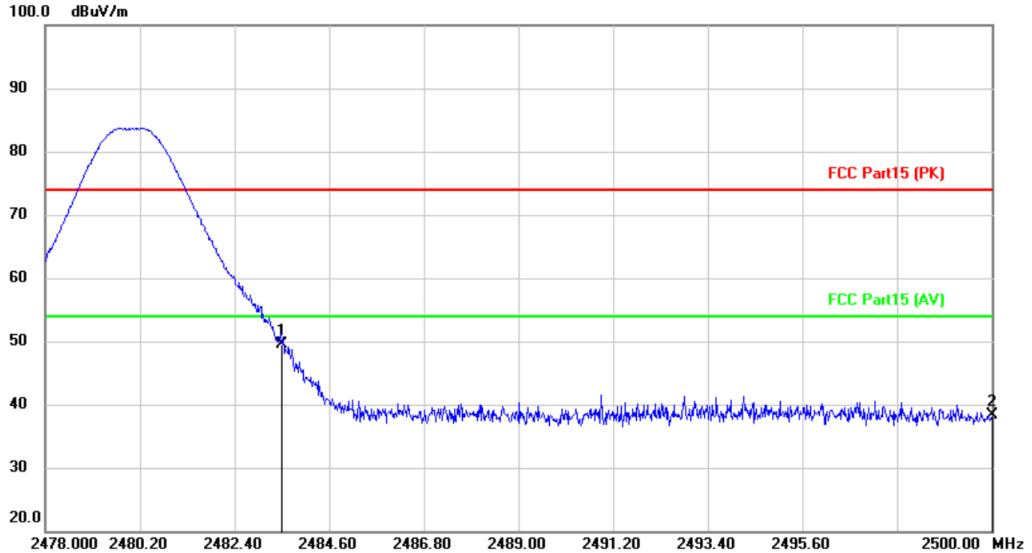

Site

Polarization: *Horizontal*

Temperature:

Limit: FCC Part15 (PK)

Power: AC120V/50Hz

Humidity: 0%

EUT: Bluetooth wireless headset

Distance: 3m

M/N: SPHYNX

Mode: BLE-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
			MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	2483.500	53.44	-3.84	49.60	74.00	-24.40	peak			
2		2500.000	42.07	-3.78	38.29	74.00	-35.71	peak			

*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass


CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

BLOCK DIAGRAM OF TEST SETUP

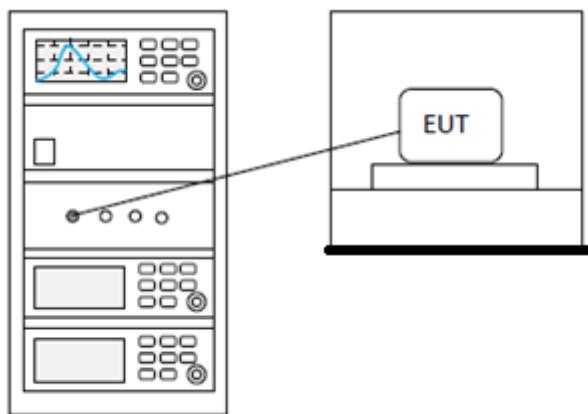

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

BLOCK DIAGRAM OF TEST SETUP

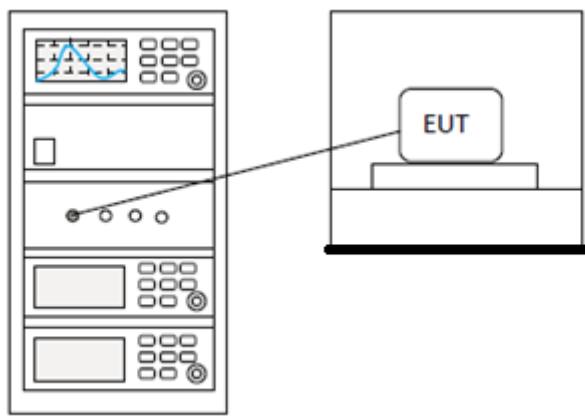

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

BLOCK DIAGRAM OF TEST SETUP

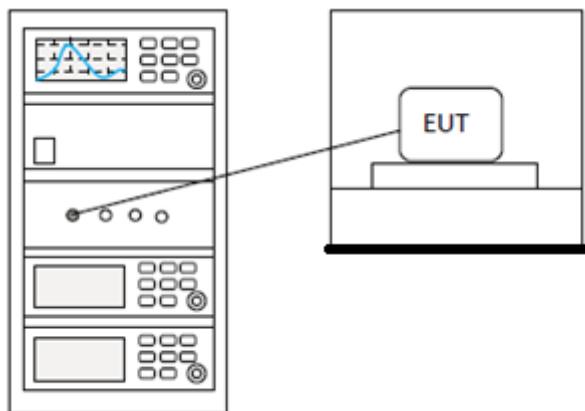

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25 °C
Humidity	60%

LIMITS

Limit: ≥ 500 kHz

BLOCK DIAGRAM OF TEST SETUP

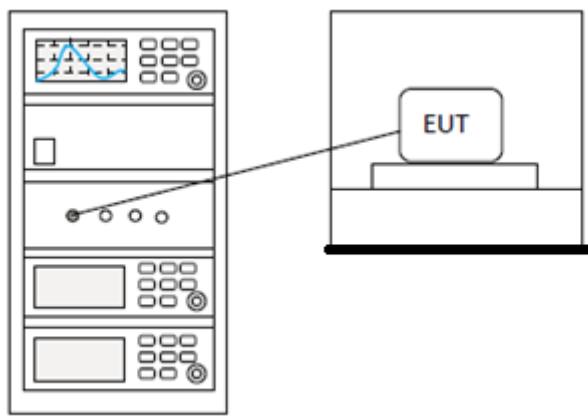

TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the PCB and no consideration of replacement. The best case gain of the antenna is -2.95dBi.

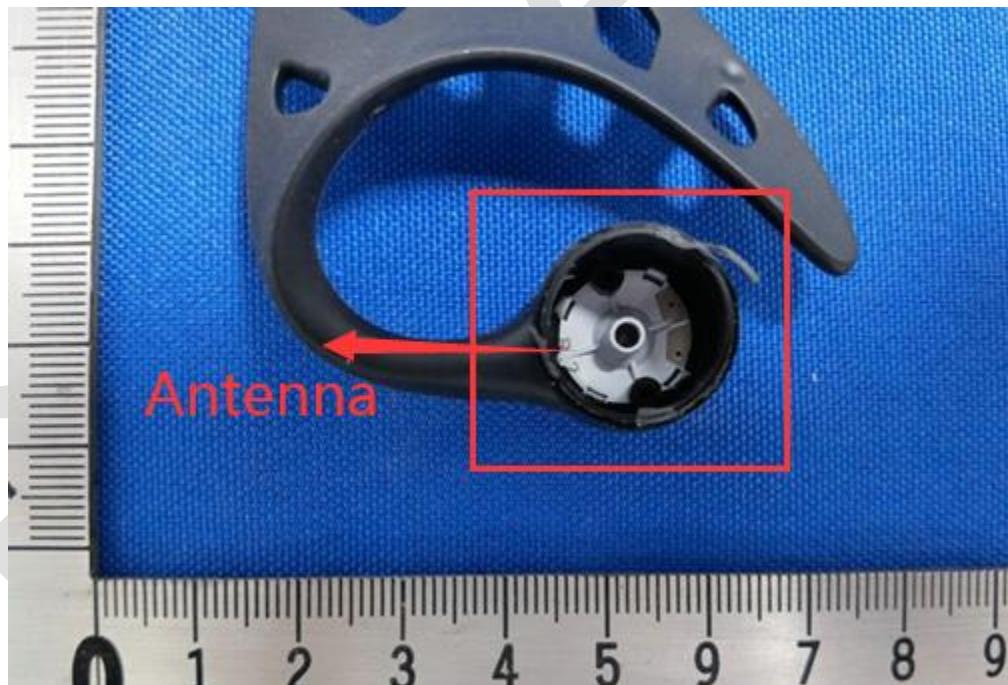


10 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.237	1.237	30	Pass
NVNT	BLE 1M	2442	Ant1	0.906	0.906	30	Pass
NVNT	BLE 1M	2480	Ant1	0.237	0.237	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

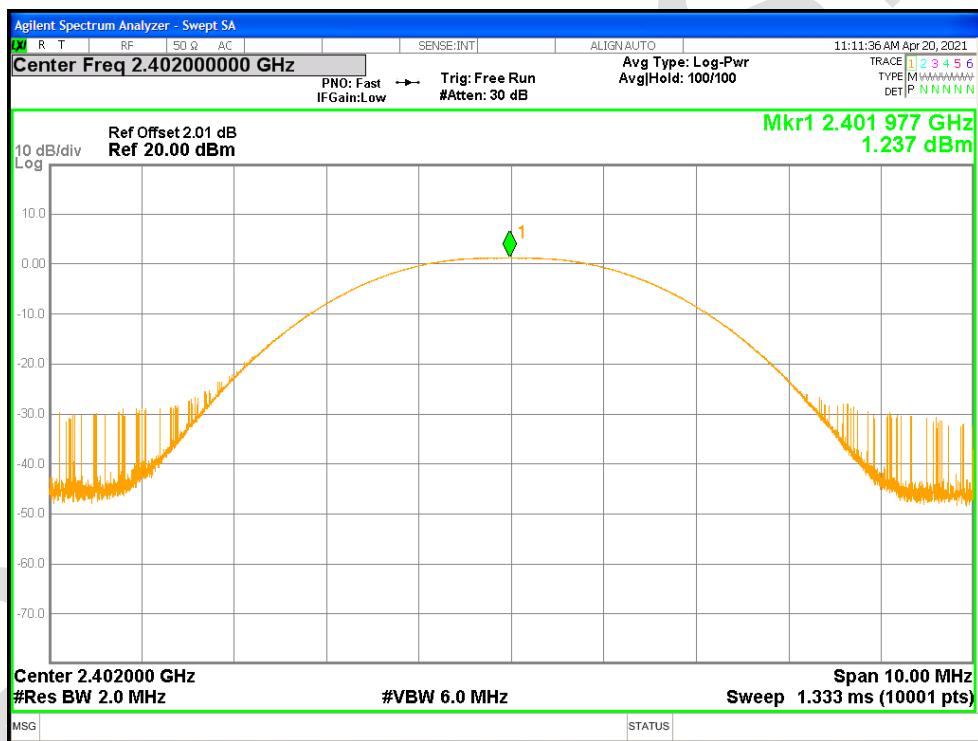

Power NVNT BLE 1M 2442MHz Ant1

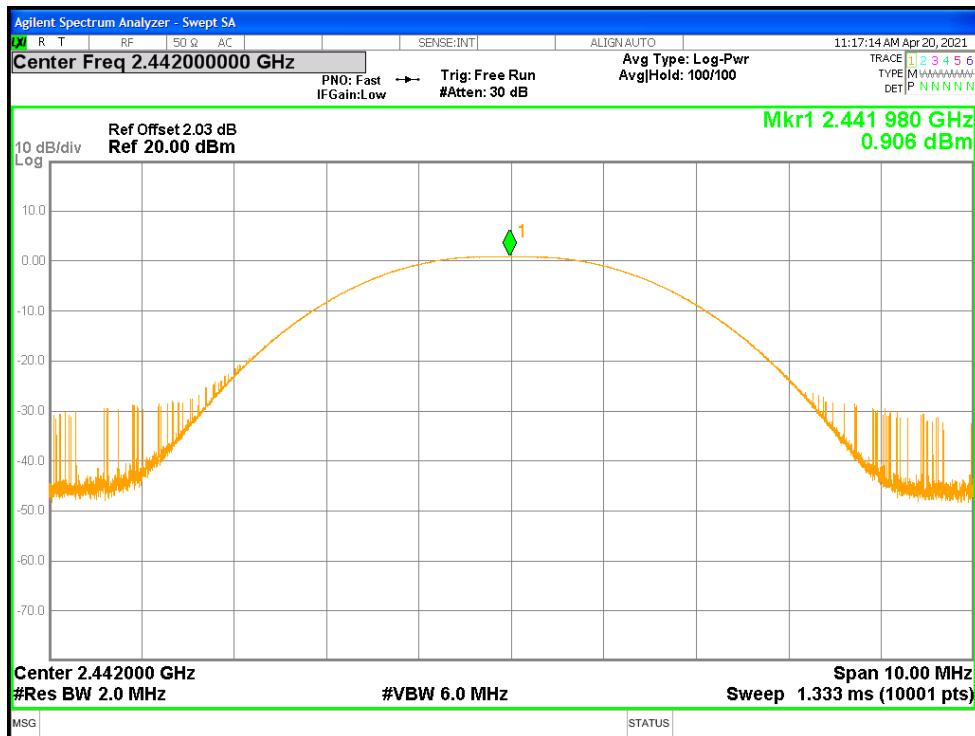


Power NVNT BLE 1M 2480MHz Ant1

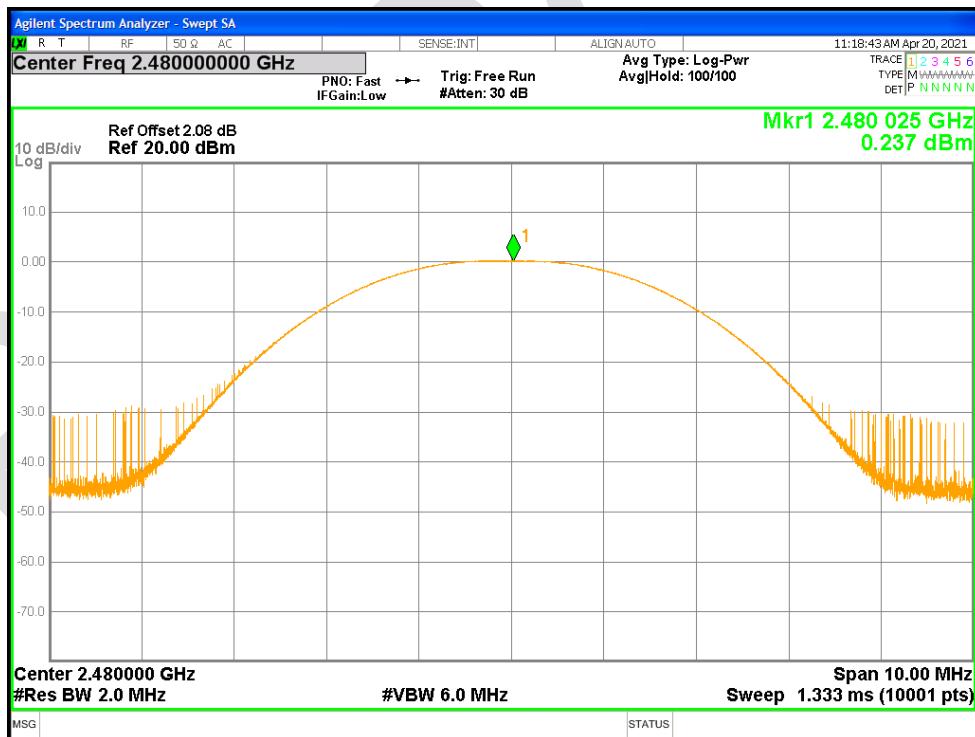


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.675	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.685	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.692	0.5	Pass

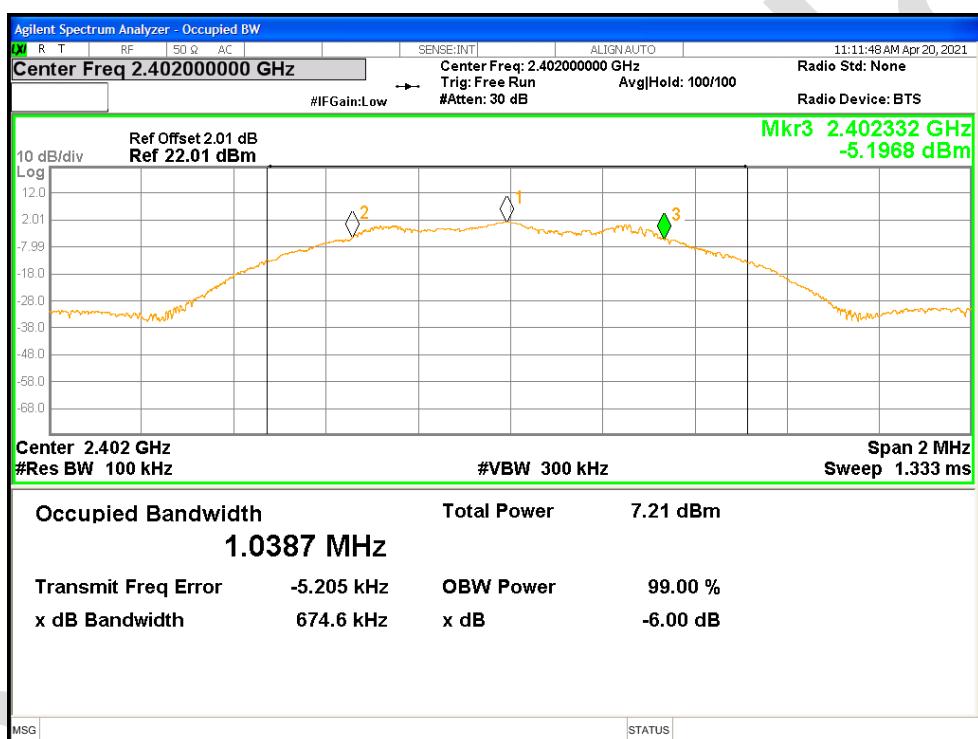-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

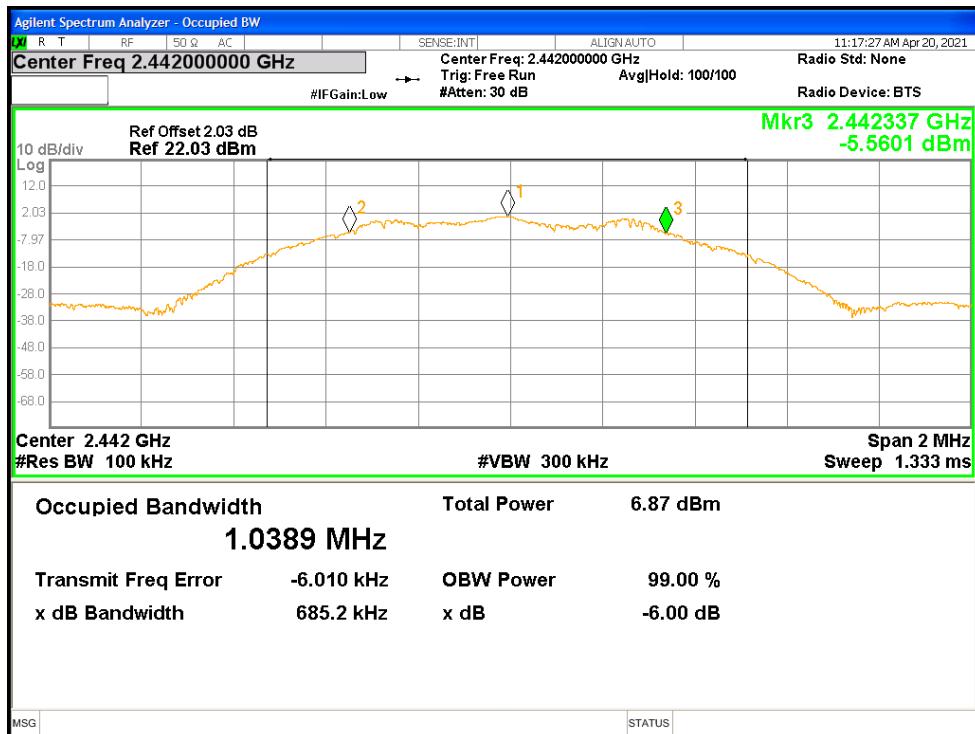




-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

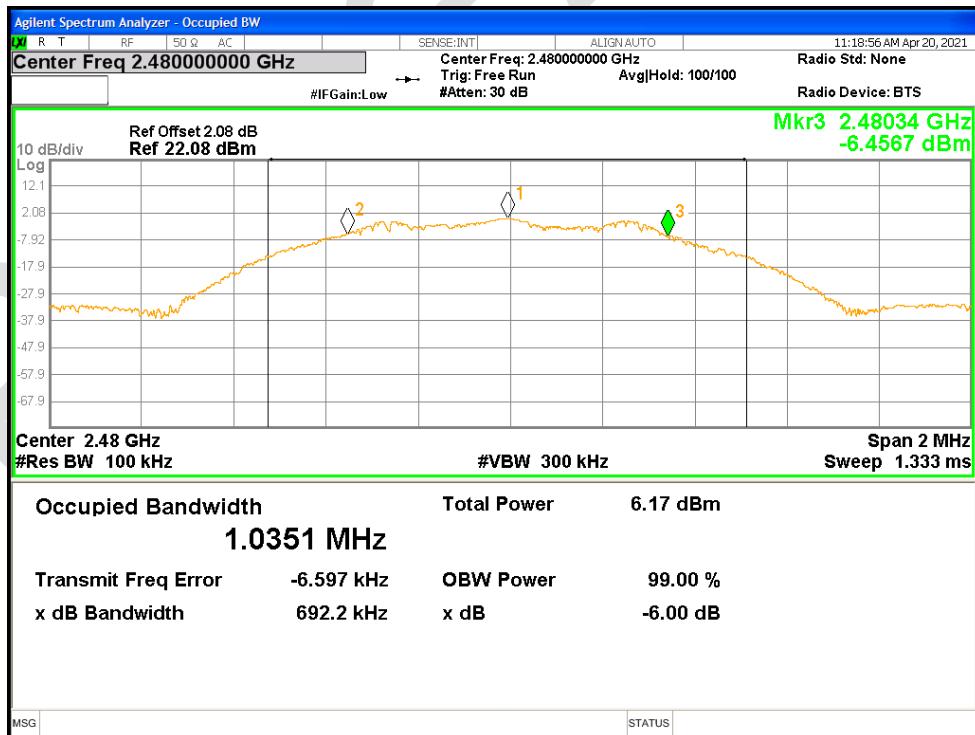

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.03044748
NVNT	BLE 1M	2442	Ant1	1.018512355
NVNT	BLE 1M	2480	Ant1	1.012548319

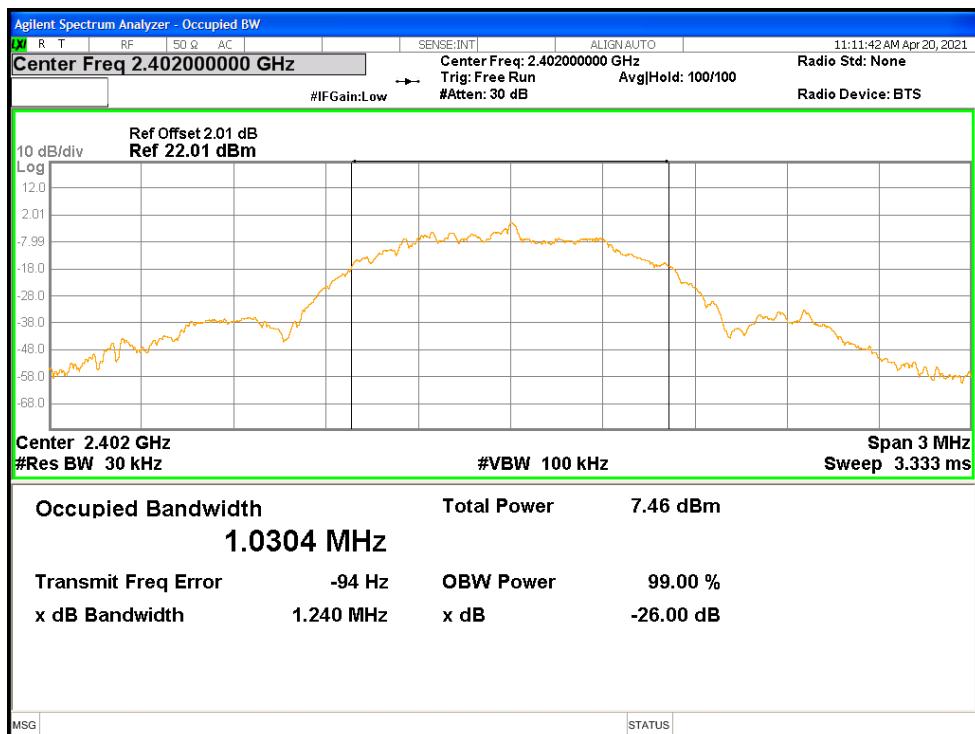OBW NVNT BLE 1M 2402MHz Ant1

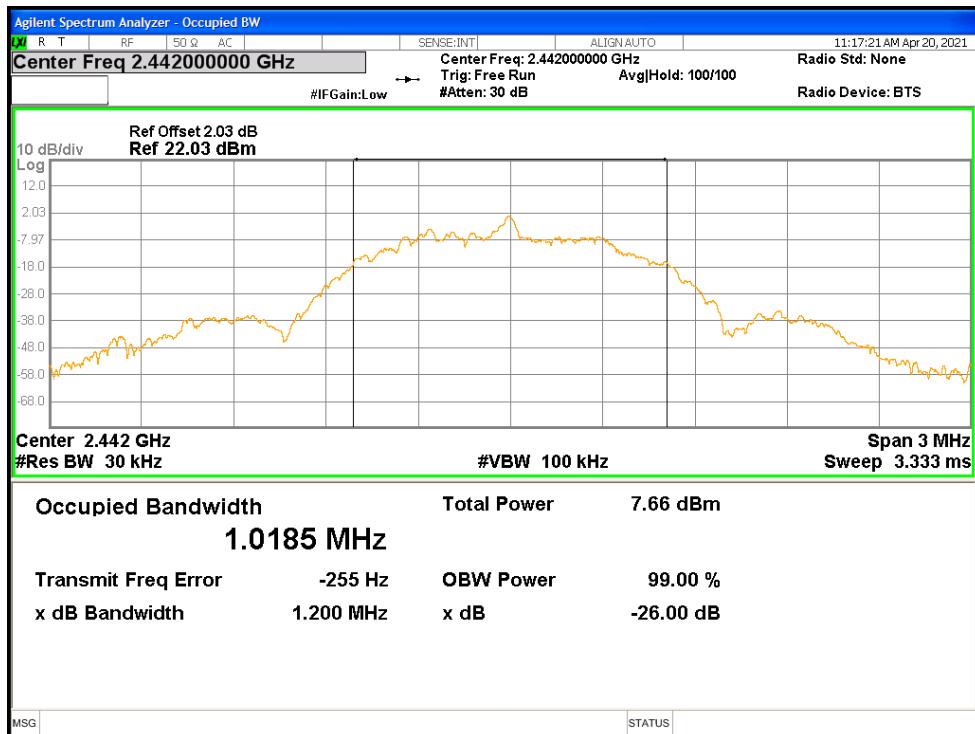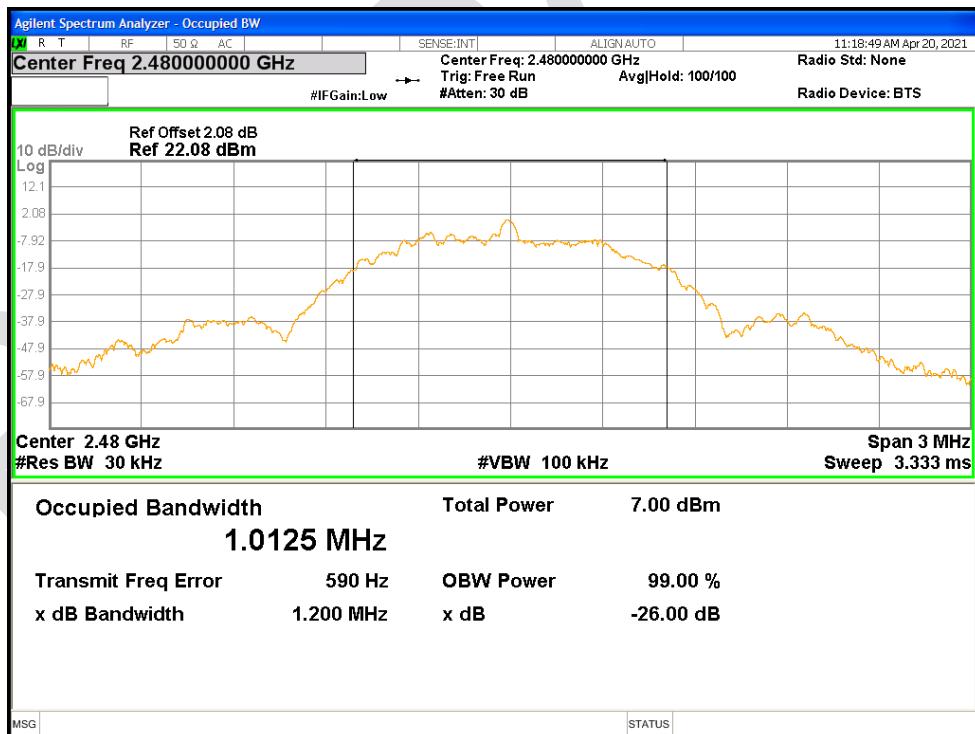
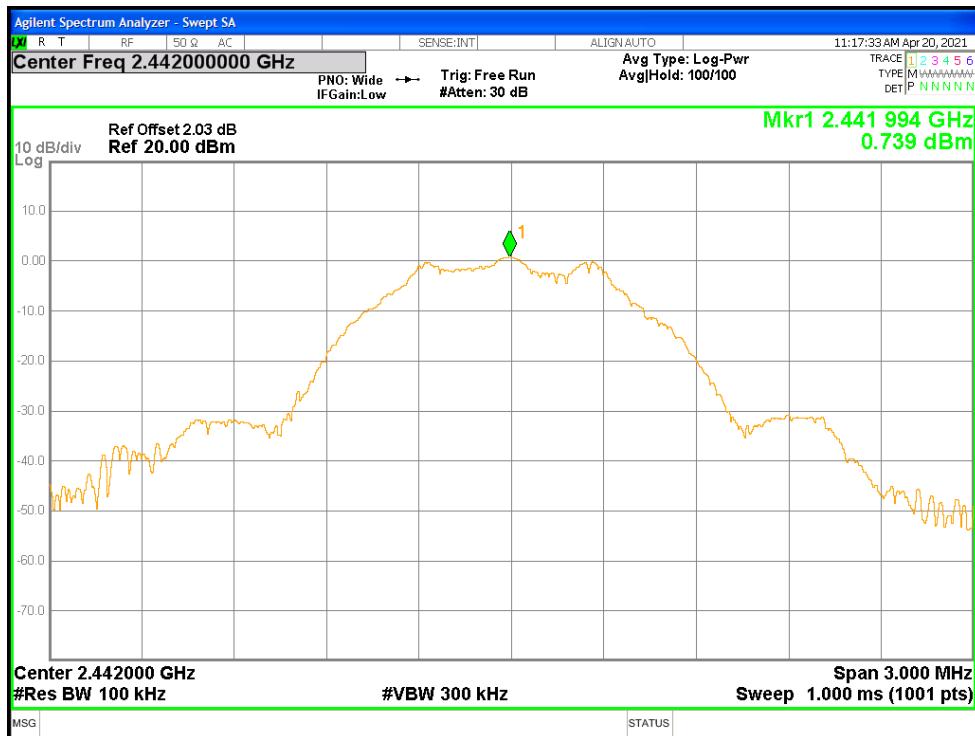
OBW NVNT BLE 1M 2442MHz Ant1

OBW NVNT BLE 1M 2480MHz Ant1


Maximum Power Spectral Density Level

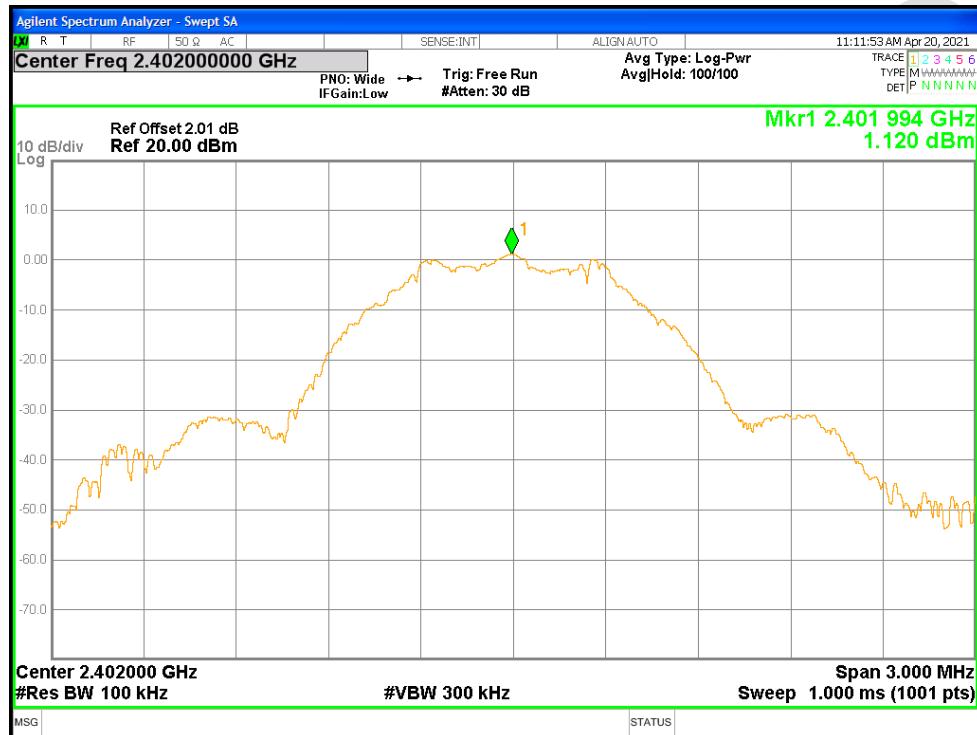
Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.12	8	Pass
NVNT	BLE 1M	2442	Ant1	0.739	8	Pass
NVNT	BLE 1M	2480	Ant1	-0.122	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1


PSD NVNT BLE 1M 2442MHz Ant1




PSD NVNT BLE 1M 2480MHz Ant1

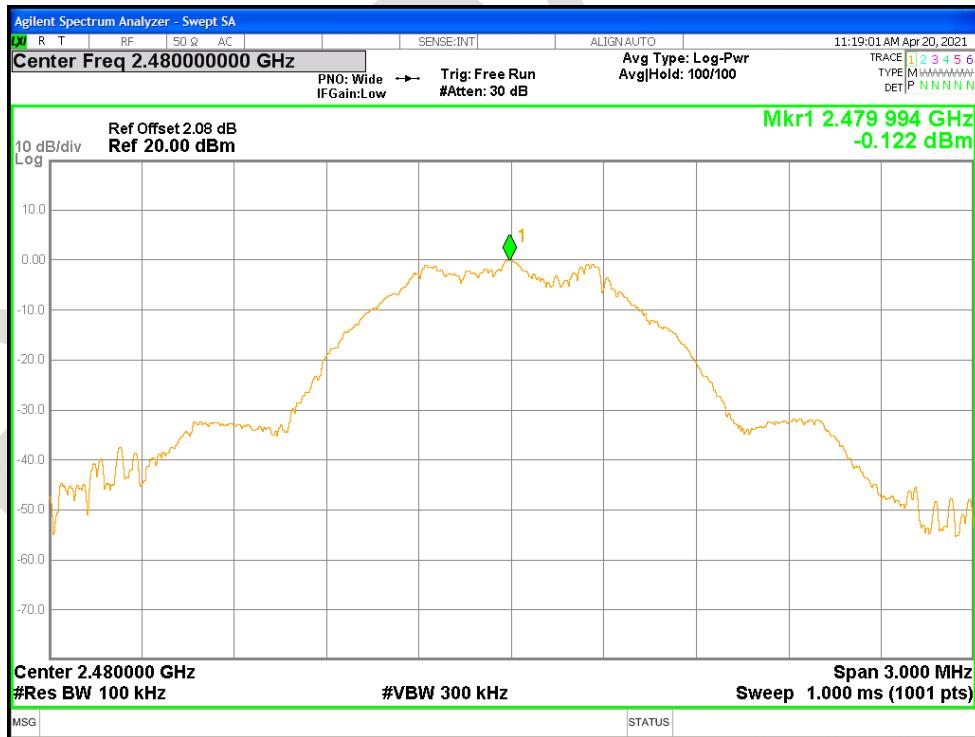


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.12	-30	Pass
NVNT	BLE 1M	2480	Ant1	-53.96	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

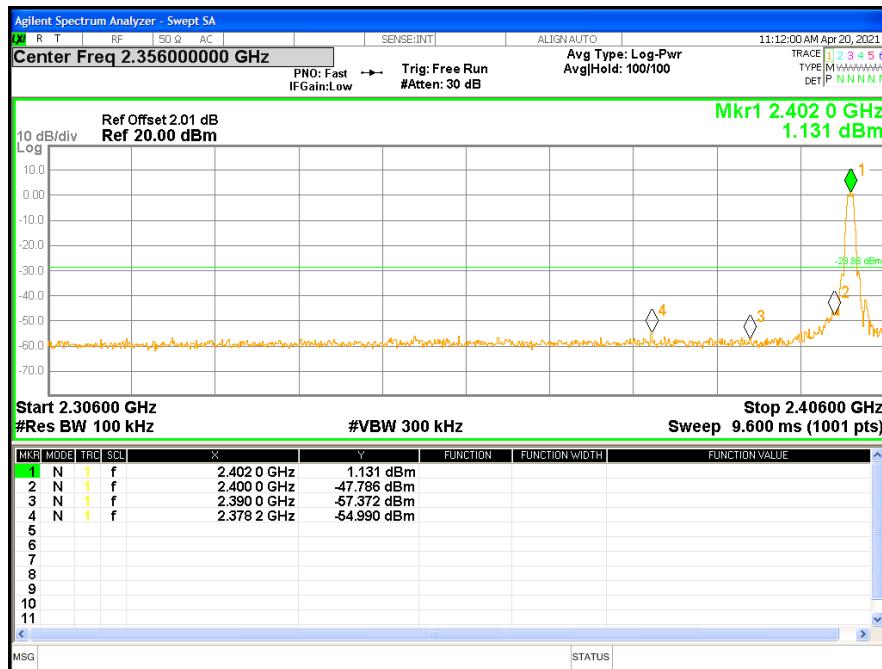


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

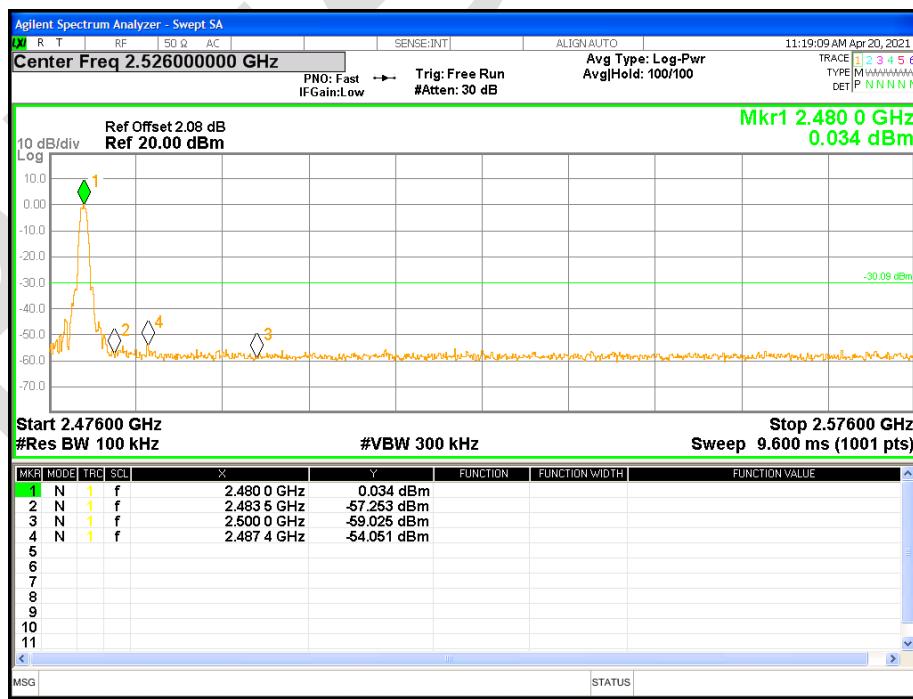


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-46.67	-30	Pass
NVNT	BLE 1M	2442	Ant1	-46.6	-30	Pass
NVNT	BLE 1M	2480	Ant1	-45.29	-30	Pass

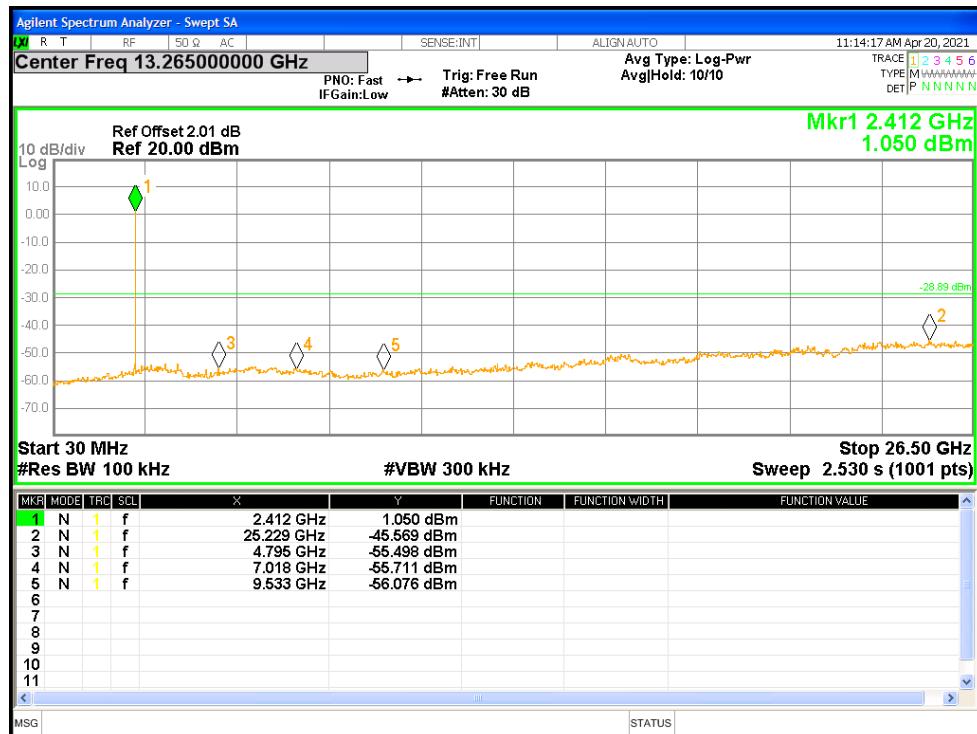Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

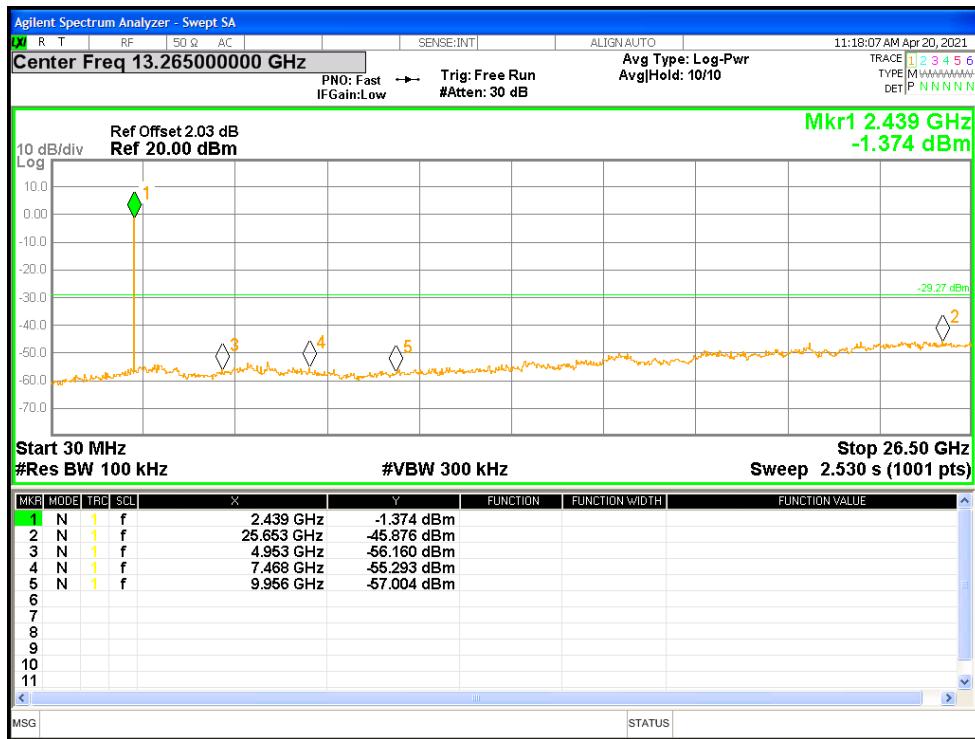

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

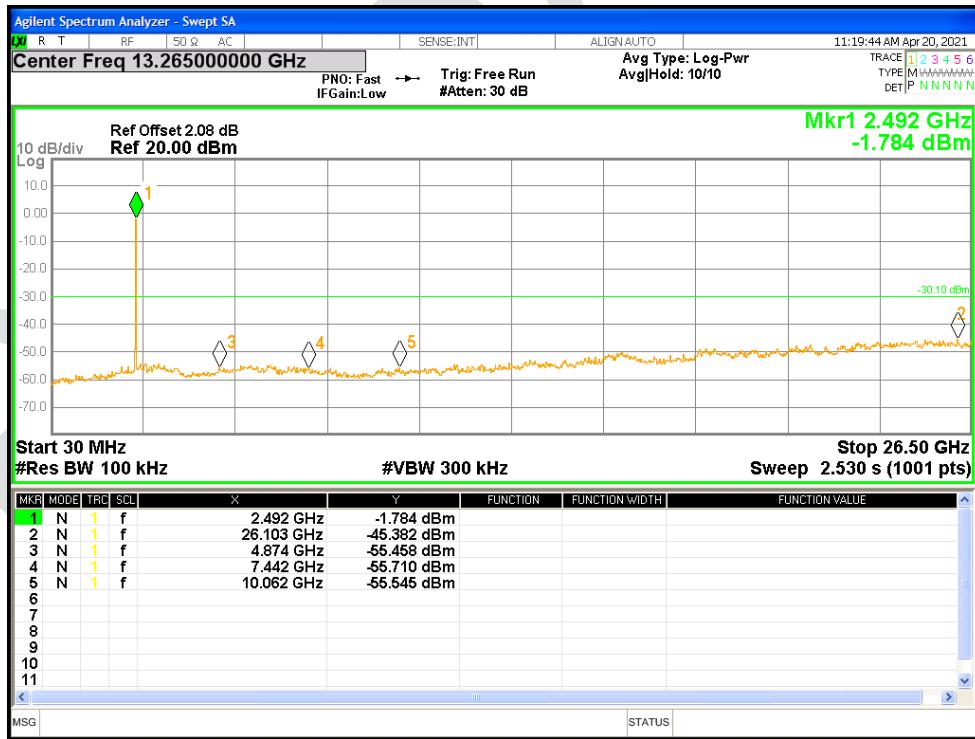


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions

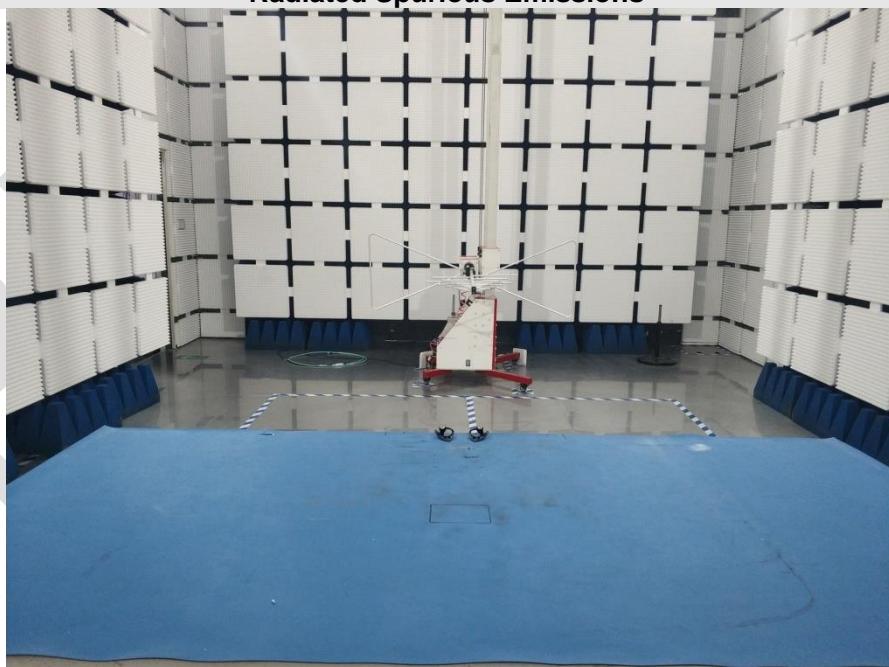



Blue Asia

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202104-A4403

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.