



## TEST REPORT

Product Name:	UWB Tag
FCC ID:	2AZQ7SLU-T1000
Trademark:	N/A
Model Number:	SLU-T1000
Prepared For:	Wanma yun Electronic Technology (zhengzhou) Co., Ltd
Address:	Intelligent Terminal Mobile Phone Industrial Park, Crossing at Xingang Avenue and Renmin Road, Zhengzhou Airport District, PR.China
Manufacturer:	Wanma yun Electronic Technology (zhengzhou) Co., Ltd
Address:	Intelligent Terminal Mobile Phone Industrial Park, Crossing at Xingang Avenue and Renmin Road, Zhengzhou Airport District, PR.China
Prepared By:	Shenzhen CTB Testing Technology Co., Ltd.
Address:	Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date:	Apr. 29, 2021
Sample tested Date:	Apr. 29, 2021 to May. 10, 2021
Issue Date:	May. 10, 2021
Report No.:	CTB210510035RFX
Test Standards	FCC Part15.225 ANSI C63.10:2013
Test Results	PASS
Remark:	This is 13.56MHz radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b>	3
<b>2. TEST SUMMARY</b>	4
<b>3. MEASUREMENT UNCERTAINTY</b>	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b>	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Test Mode	7
4.5 Test Environment	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b>	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
<b>6. AC POWER LINE CONDUCTED EMISSION</b>	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test procedure	10
6.4 Test Result	12
<b>7. RADIATED EMISSION</b>	13
7.1 Block Diagram Of Test Setup	13
7.2 Limit	13
7.3 Test procedure	14
7.4 Test Result	15
<b>8. FREQUENCY TOLERANCE</b>	18
8.1 Block Diagram Of Test Setup	18
8.2 Limit	18
8.3 Test procedure	18
8.4 Test Result	19
<b>9. OCCUPIED BANDWIDTH</b>	20
9.1 Block Diagram Of Test Setup	20
9.2 Limit	20
9.3 Test procedure	20
9.4 Test Result	21
<b>10. ANTENNA REQUIREMENT</b>	22
<b>11. EUT PHOTOGRAPHS</b>	23
<b>12. EUT TEST SETUP PHOTOGRAPHS</b>	26

(Note: N/A means not applicable)

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB210510035RFX	May. 10, 2021	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Emission</b>	47 CFR Part 15 Subpart C Section 15.209; 15.225(a)(b)(c)(d)	ANSI C63.10-2013	PASS
<b>Frequency Tolerance</b>	47 CFR Part 15 Subpart C Section 15.225(e)	ANSI C63.10-2013	PASS
<b>Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.215	ANSI C63.10-2013	PASS
<b>Antenna requirement</b>	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013	PASS

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^\circ\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s): SLU-T1000  
Model Description: N/A  
Hardware Version: V1.0  
Software Version: V1.0

Operation Frequency: 13.56MHz  
Max. RF output power: /  
Type of Modulation: ASK  
Antenna installation: Internal antenna  
Antenna Gain: 1dBi  
Ratings: Battery DC 3.7V

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	--

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode
Keep the EUT in transmitting mode (NFC mode) with modulation.  The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

#### 4.5 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.6
Normal Temperature(°C)	25

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Sep. 28, 2020	Sep. 28, 2021
2	Power Sensor	Agilent	U2021XA	MY56120032	Sep. 28, 2020	Sep. 28, 2021
3	Power Sensor	Agilent	U2021XA	MY56120034	Sep. 28, 2020	Sep. 28, 2021
4	Communication test set	R&S	CMW500	118735	Sep. 28, 2020	Sep. 28, 2021
5	Spectrum Analyzer	R&S	FSP40	100550	Sep. 28, 2020	Sep. 28, 2021
6	Signal Generator	Agilent	N5181A	MY49060920	Sep. 28, 2020	Sep. 28, 2021
7	Signal Generator	Agilent	N5182A	MY47420195	Sep. 28, 2020	Sep. 28, 2021
8	Communication test set	R&S	CMU200	119978	Oct. 10, 2020	Oct. 10, 2021
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Sep. 28, 2020	Sep. 28, 2021
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Sep. 28, 2020	Sep. 28, 2021
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Sep. 28, 2020	Sep. 28, 2021
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Sep. 28, 2020	Sep. 28, 2021
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Sep. 28, 2020	Sep. 28, 2021
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 9, 2019	Nov. 08, 2022
17	Receiver	R&S	ESPI	100362	Sep. 28, 2020	Sep. 28, 2021


18	Amplifier	HP	8447E	2945A02747	Sep. 28, 2020	Sep. 28, 2021
19	Amplifier	Agilent	8449B	3008A01838	Sep. 28, 2020	Sep. 28, 2021
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	Nov. 02, 2020	Nov. 01, 2021
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2020	Nov. 01, 2021
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Sep. 28, 2020	Sep. 28, 2021
24	loop antenna	ZHINAN	ZN30900A	/	Sep. 28, 2020	Sep. 28, 2021
25	Horn antenna	A/H/System	SAS-574	588	Sep. 28, 2020	Sep. 28, 2021
26	Amplifier	AEROFLEX	IT6302	/	Sep. 28, 2020	Sep. 28, 2021
27	DC power supply	ITECH	SAS-574	588	Sep. 28, 2020	Sep. 28, 2021
28	Multimeter	VICTOR	VC890D	093783545	Sep. 28, 2020	Sep. 28, 2021

#### Conducted emissions Test

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
AMN	ROHDE&SCH WARZ	ESH3-Z5	831551852	Sep. 28, 2020	Sep. 28, 2021
Pulse limiter	ROHDE&SCH WARZ	ESH3Z2	357881052	Sep. 28, 2020	Sep. 28, 2021
EMI TEST RECEIVER	ROHDE&SCH WARZ	ESCS30	834115/006	Sep. 28, 2020	Sep. 28, 2021
Coaxial cable	ZDECL	Z302S	18091904	Sep. 28, 2020	Sep. 28, 2021
ISN	TESEQ	NTFM81 58	NTFM8158 #183	Sep. 28, 2020	Sep. 28, 2021
EMI TEST RECEIVER	ROHDE&SCH WARZ	ESCI	10428	Sep. 28, 2020	Sep. 28, 2021
Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

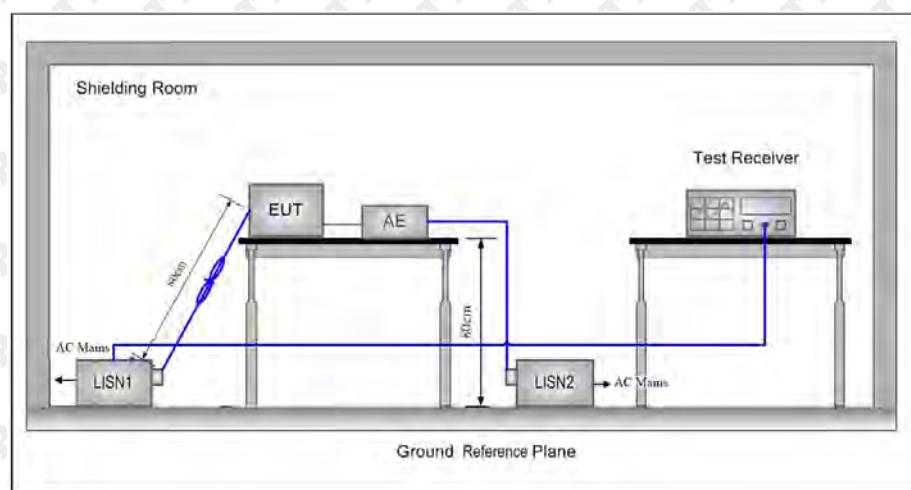

### 6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

## 6.4 Test Result

N/A

NOTE: This EUT is powered by the battery only, this test item is not applicable.

## 7. RADIATED EMISSION

### 7.1 Block Diagram Of Test Setup

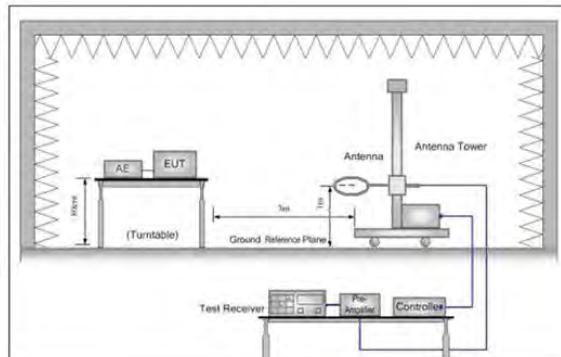


Figure 1. Below 30MHz

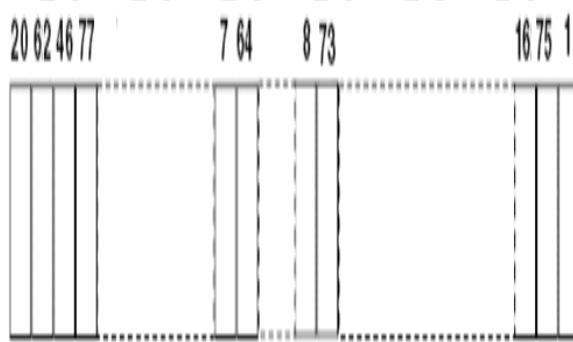


Figure 2. 30MHz to 1GHz

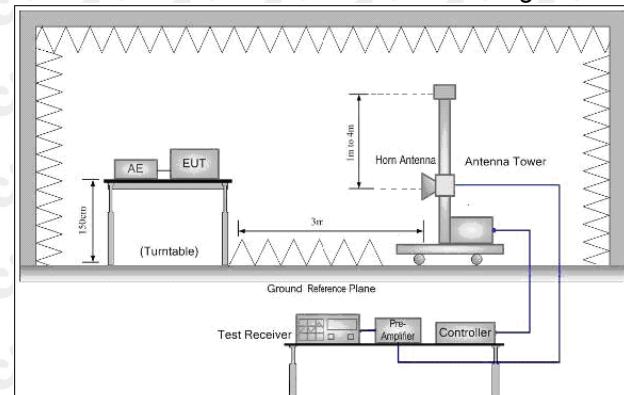


Figure 3. Above 1GHz

### 7.2 Limit

#### Spurious Emissions:

Frequency	Field strength (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F$ (kHz) + 80	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F$ (kHz) + 40	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

#### Field Strength of Fundamental Limit:

- The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. 15,848 microvolts/meter at 3 meters=124 dB $\mu$ V/m.
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. 334 microvolts/meter at 3 meters=94.47 dB $\mu$ V/m.
- Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not

exceed 334 microvolts/meter at 30 meters.

### 7.3 Test procedure

#### **Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### **Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

## 7.4 Test Result

### Field Strength of Fundamental

Frequency (MHz)	Reading (dB <sub>u</sub> V/m)	Correction Factor(dB/m)	Result (dB <sub>u</sub> V/m)	Limit (dB <sub>u</sub> V/m)	Margin (dB)	Polar (H/V)	Detector
13.33	46.44	15.82	62.26	80.51	18.25	H	QP
13.33	46.08	15.82	61.90	80.51	18.61	V	QP
13.90	45.99	15.82	61.81	80.51	18.70	H	QP
13.90	48.37	15.82	64.19	80.51	16.32	V	QP
13.56	88.19	15.82	104.01	124	19.99	H	QP
13.56	84.91	15.82	100.73	124	23.27	V	QP
13.50	53.79	15.82	69.61	90.47	20.86	H	QP
13.50	52.16	15.82	67.98	90.47	22.49	V	QP
13.68	50.36	15.82	66.18	90.47	24.29	H	QP
13.68	49.36	15.82	65.18	90.47	25.29	V	QP

### Harmonics and Spurious Emissions

#### Frequency Range (9 kHz-30MHz)


Frequency (MHz)	Level@3m (dB <sub>u</sub> V/m)	Limit@3m (dB <sub>u</sub> V/m)
--	--	--
--	--	--
--	--	--
--	--	--

**Note:** 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement


**About 30MHz-1GHz Test Results:**

Antenna polarity: H

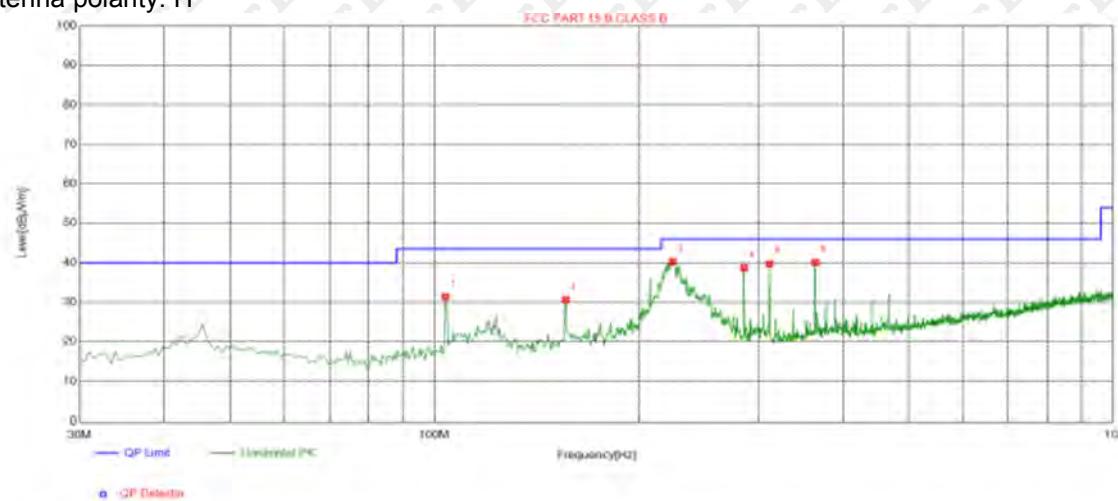**Suspected List**

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	103.720	31.38	-15.41	43.50	12.12	100	209	Horizontal
2	156.100	30.66	-18.50	43.50	12.84	100	338	Horizontal
3	224.485	40.28	-14.45	46.00	5.72	100	344	Horizontal
4	286.080	38.73	-13.00	46.00	7.27	100	172	Horizontal
5	311.785	39.74	-12.52	46.00	6.26	100	155	Horizontal
6	364.165	40.09	-11.20	46.00	5.91	100	159	Horizontal

Antenna polarity: V

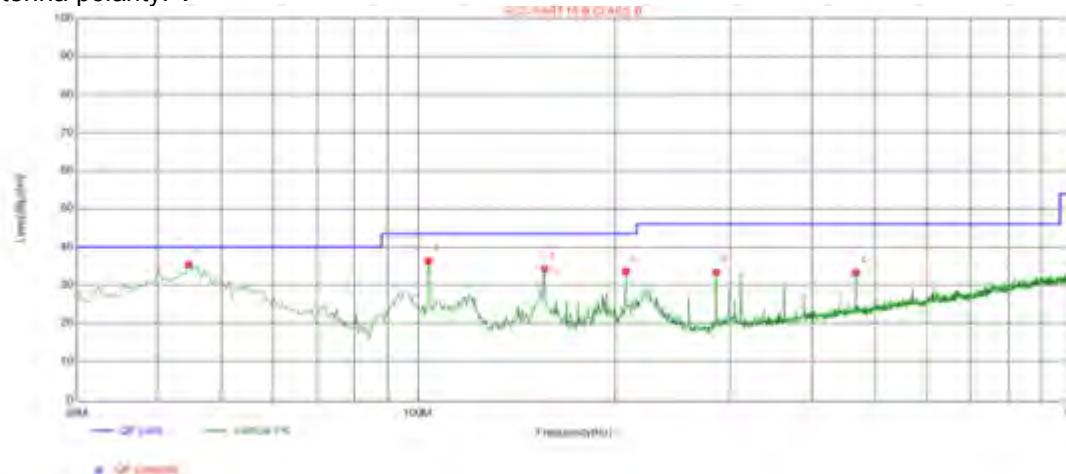**Suspected List**


<b>Suspected List</b>								
NO	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.5500	35.35	-13.73	40.00	4.65	100	293	Vertical
2	103.720	36.36	-15.41	43.50	7.14	100	348	Vertical
3	156.100	34.29	-18.50	43.50	9.21	100	90	Vertical
4	207.995	33.61	-14.85	43.50	9.89	100	214	Vertical
5	286.080	33.40	-13.00	46.00	12.60	100	25	Vertical
6	467.955	33.23	-8.41	46.00	12.77	100	184	Vertical

Remark: 1. Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

2. This EUT was tested in 3 axis and the worst case position data was reported.

## 8. FREQUENCY TOLERANCE

### 8.1 Block Diagram Of Test Setup

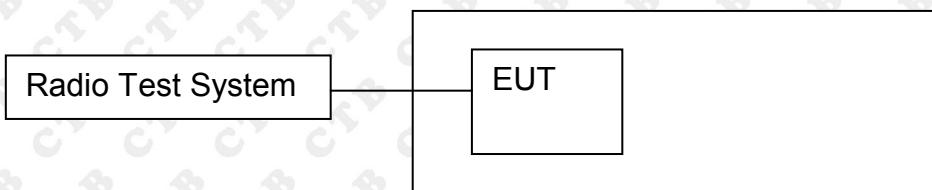

### 8.2 Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Limit:  $\pm 0.01\%$  of 13.56MHz= $\pm 1356\text{Hz}$

### 8.3 Test procedure

1. Set RBW = 1 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. The transmitter output (antenna port) was connected to the spectrum analyzer.


## 8.4 Test Result

Test Conditions			Frequency Deviation		Limit
Frequency MHz	Power(Vdc)	Temperature (°C)	Measured Freq. (MHz)	Deviation (%)	
13.56	Normal	-20	13.560297	0.00219	$\pm 0.01\%$
	Normal	-10	13.560368	0.00271	
	Normal	0	13.560178	0.00131	
	Normal	10	13.560552	0.00407	
	Normal	20	13.560254	0.00187	
	Normal	30	13.560405	0.00299	
	Normal	40	13.560226	0.00167	
	Normal	50	13.560449	0.00331	
	Normal*85%	20	13.560297	0.00219	
	Normal *115%	20	13.560368	0.00271	

Remark: This product is powered by a DC source, can adjust 85%, 115% of the voltage test.

## 9. OCCUPIED BANDWIDTH

### 9.1 Block Diagram Of Test Setup

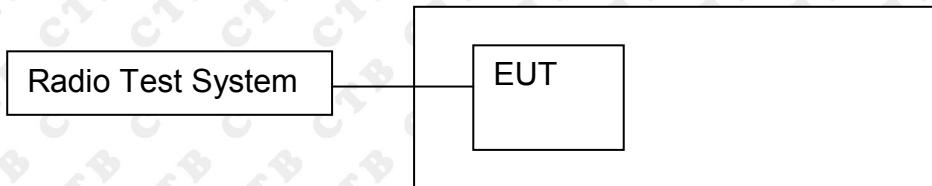

### 9.2 Limit


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.

### 9.3 Test procedure

1. Set RBW = 1 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

## 9.4 Test Result

Test Channel (MHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
13.56	3.036	/	PASS

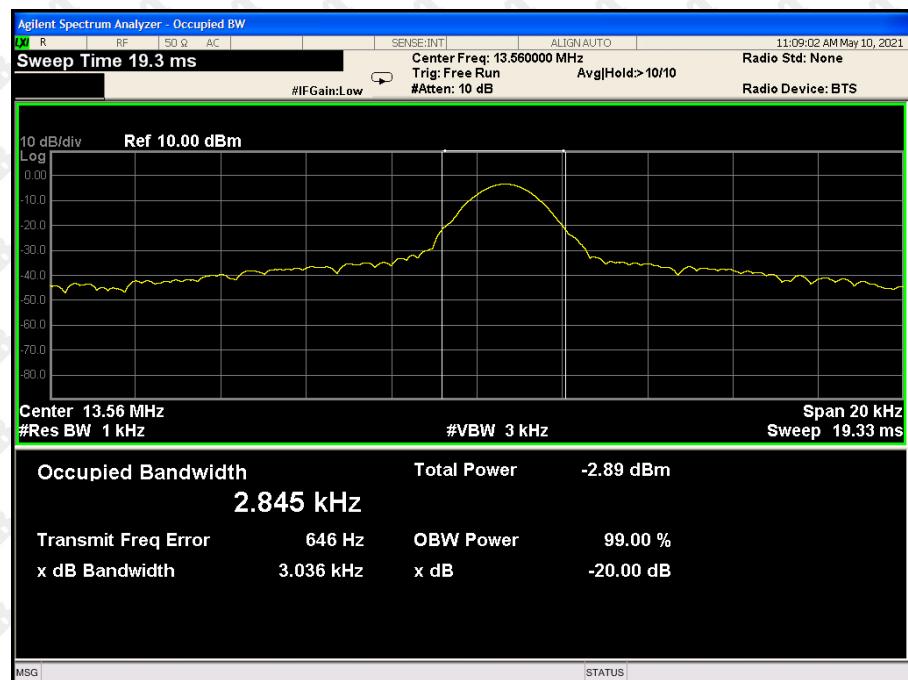

## 10. ANTENNA REQUIREMENT


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### EUT Antenna:

The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1dBi.

## 11. EUT PHOTOGRAPHS

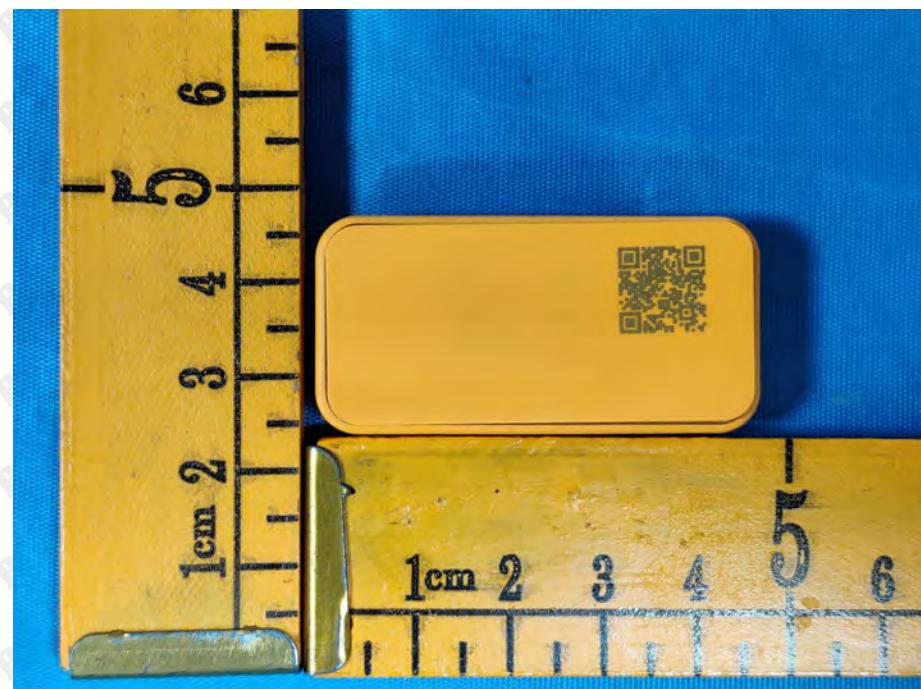**EUT Photo 1****EUT Photo 2**


**EUT Photo 3****EUT Photo 4**

**EUT Photo 5****EUT Photo 6**

## 12. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 30MHz

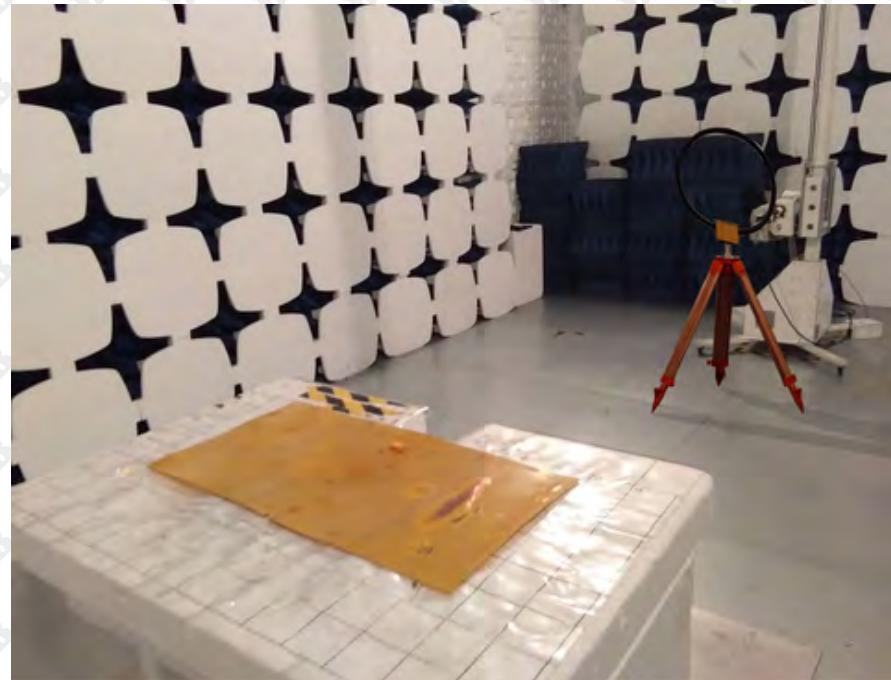

30MHz- 1GHz



\*\*\*\*\* END OF REPORT \*\*\*\*\*