

Prüfbericht-Nr.: Test report no.:	CN21YXFZ 002	Auftrags-Nr.: Order no.:	168305669	Seite 1 von 16 Page 1 of 16
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-01-29	
Auftraggeber: Client:	miha bodytec GmbH miha bodytec GmbH, Siemensstrasse 1, Gersthofen 86368, Germany			
Prüfgegenstand: Test item:	EMS Training Device			
Bezeichnung / Typ-Nr.: Identification / Type no.:	miha bodytec m.ove (project title: MBT2.1 light) miha bodytec II (project title: MBT2.1)			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.225 CFR47 FCC Part 15: Subpart C Section 15.205 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-210 Issue 10 April 2020 RSS-Gen Issue 5 February 2021			
Wareneingangsdatum: Date of sample receipt:	2021-03-03	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A00308132-001~006			
Prüfzeitraum: Testing period:	2021-05-12 – 2021-07-01			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	 Lin Lin		genehmigt von: authorized by:	 Sam Lin
Datum: Date:	2021-07-05		Ausstellungsdatum: Issue date:	2021-07-05
Stellung / Position:	Senior Project Manager		Stellung / Position:	Technical Certifier
Sonstiges / Other:	FCC ID: 2AZQC-MBT IC: 27213-MBT HVIN: MBT-US-CA			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 99% & 20dB BANDWIDTH

RESULT: Pass

5.1.3 FREQUENCY STABILITY

RESULT: Pass

5.1.4 RADIATED SPURIOUS EMISSION (IN-BAND & OUT-BAND EMISSIONS)

RESULT: Pass

5.1.5 CONDUCTED EMISSIONS ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
5.1.1	<i>Antenna Requirement</i>	<i>11</i>
5.1.2	<i>99% & 20dB Bandwidth</i>	<i>12</i>
5.1.3	<i>Frequency Stability.....</i>	<i>13</i>
5.1.4	<i>Radiated Spurious Emission (In-Band & Out-Band Emissions)</i>	<i>14</i>
5.1.5	<i>Conducted Emissions on AC Mains.....</i>	<i>15</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	16
7	LIST OF TABLES.....	16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Setup Photos

Appendix B: Test results of NFC

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Accreditation Designation No.: CN1260

ISED Wireless Device Testing Laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR 7	102021	2021-08-11
System Controller Interface	R&S	SCI-100	S10010038	N/A
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2021-08-10
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-07-06
Conducted Emissions				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2021-08-16
Artificial Mains Network	R&S	ENV216	102333	2021-08-16
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	$\pm 3.70 \text{ dB} / \pm 3.30 \text{ dB}$
Radiated Emission (3m SAC), 30MHz to 1000MHz	$\pm 4.52 \text{ dB}$
Radiated Emission (3m SAC), above 1000MHz	$\pm 4.37 \text{ dB}$
Temperature	$\pm 1 \text{ }^{\circ}\text{C}$
Humidity	$\pm 5 \%$
Voltage (DC)	$\pm 1 \%$
Voltage (AC, <10kHz)	$\pm 2 \%$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The products is an EMS Training Device, which supports Bluetooth, 5GHz Wi-Fi, NFC and 2.4GHz Tiny wireless technology.

Note1: Only the NFC test data show in this report.

Note2: This product contains transmitter module.

Contains FCC ID: Z64-WL18DBMOD

Contains IC: 451I-WL18DBMOD

Note3: According to the product difference declaration, the model miha bodytec m.ove (project title: MBT2.1 light) and miha bodytec II (project title:MBT2.1) only difference of battery build-in & connector board and other circuit boards as well as all radio boards are electrically identical.

Note4: All tests were performed on model miha bodytec m.ove (project title: MBT2.1 light) in this report.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	EMS Training Device
Type Designation:	miha bodytec m.ove (project title: MBT2.1 light) miha bodytec II (project title:MBT2.1)
FCC ID:	2AZQC-MBT
IC:	27213-MBT
HVIN:	MBT-US-CA
Testing Voltage:	Power adapter input (DC 18V, 3.33A) or Internal battery operated (DC 14.4V-16.8V) for MBT2.1 light
Adapter Specification:	Model: GTM91099-6024-6.0-T2 Input: 100-240Vac, 50/60Hz Output: 18Vdc, 3.33A
Technical Specification of NFC	
Operating Frequency:	13.56 MHz
Type of Modulation:	ASK
Channel Number:	1 channel
Antenna Type:	PCB Loop Antenna

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, NFC transmitting mode

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Rating Label

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
DSE	miha bodytec GmbH	i-body connect wireless	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

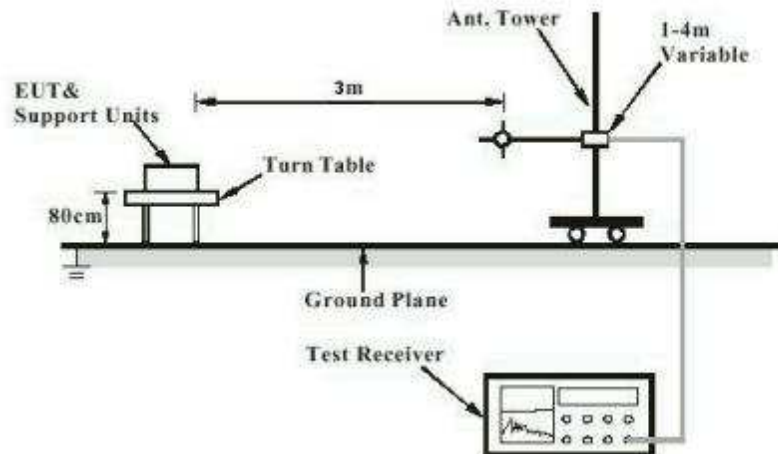


Diagram of Measurement Configuration for Conducted Transmitter Measurement


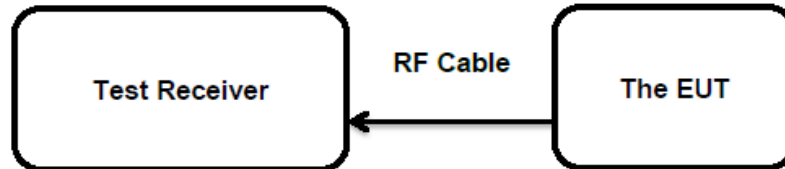


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement

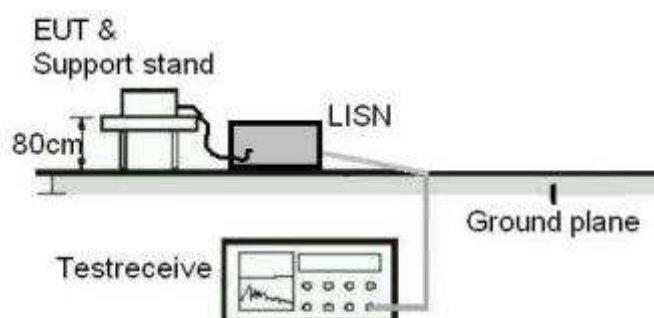

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.203
RSS-Gen, Clause 6.8

According to the manufacturer declared, the EUT has a PCB Loop Antenna and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 99% & 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.215 (c)
RSS-Gen Issue 5, Clause 6.6
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-06-01
Input voltage : AC 120V, 60Hz
Operation mode : A
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

5.1.3 Frequency Stability

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.225 (e) RSS-210 Issue 10, Clause B6(b)
Basic standard	: ANSI C63.10: 2013
Limits	: $\pm 0.01\%$ of Operating Frequency (1356Hz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-06-01
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.4 Radiated Spurious Emission (In-Band & Out-Band Emissions)**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.225 (a)(b)(c)(d) FCC Part 15.209 & 15.205 RSS-210 Issue 10, Clause B6(a) RSS-Gen Issue 5, Clause 8.9
Basic standard	: ANSI C63.10: 2013
Limits	: FCC Part 15.209(a) RSS-Gen Issue 5, Clause 8.9
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-06-01 ~ 2021-06-25
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: 22 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.5 Conducted Emissions on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a) RSS-Gen Issue 5, Clause 8.8
Basic standard	: ANSI C63.10: 2013
Limits	: FCC Part 15.207(a) RSS-Gen Issue 5, Clause 8.8
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-05-17
Input voltage	: AC 120V, 60Hz
Operation mode	: A
Ambient temperature	: 23.1 °C
Relative humidity	: 52 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: List of Accessories and Auxiliary Equipment.....	9