


无源测试数据
 Passive test data


1.参数表
 Parameters Table

电气参数Electrical parameters	
频率frequency（MHz）	2400-2500
增益gain（dBi）	2.37
驻波比standing-wave ratio	≤1.8
输入阻抗input resistance（Ω）	50
最大输入功率Maximum Input Power（W）	2
接头类型Joint type	内置式Built in

2.驻波图
 Standing wave diagram

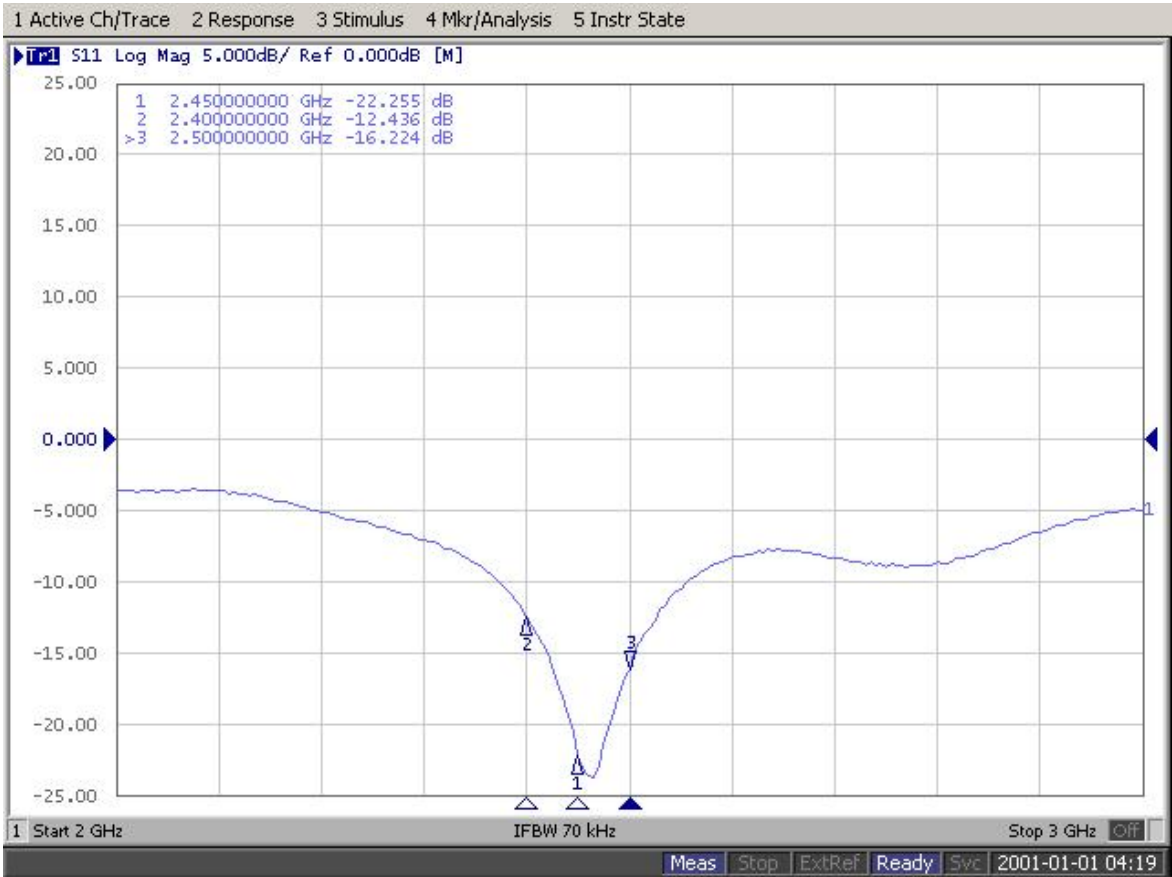

3.测试仪器testing instrument





SATIMO-24

ETS

Simulated head hand






Agilent-8960

Amway-MT8820C

CMW500

Agilent-E5071C

test system

Test-Environment

Active test

Passive testing

SATIMO-24

Temperature: 22℃±3℃

Support-2G/3G/4G
BT/WIFI/GPS

400MHZ G

ETS


Humidity: 50%±15%

4.效率efficiency


Frequency (MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain (dBi)	2.15	2.17	2.21	2.27	2.37	2.31	2.28	2.21	2.13	2.17	2.07
Efficiency (%)	55.49	57.55	55.40	60.65	61.67	61.79	60.55	59.48	57.65	56.07	55.04

5.方向图direction map


2420M

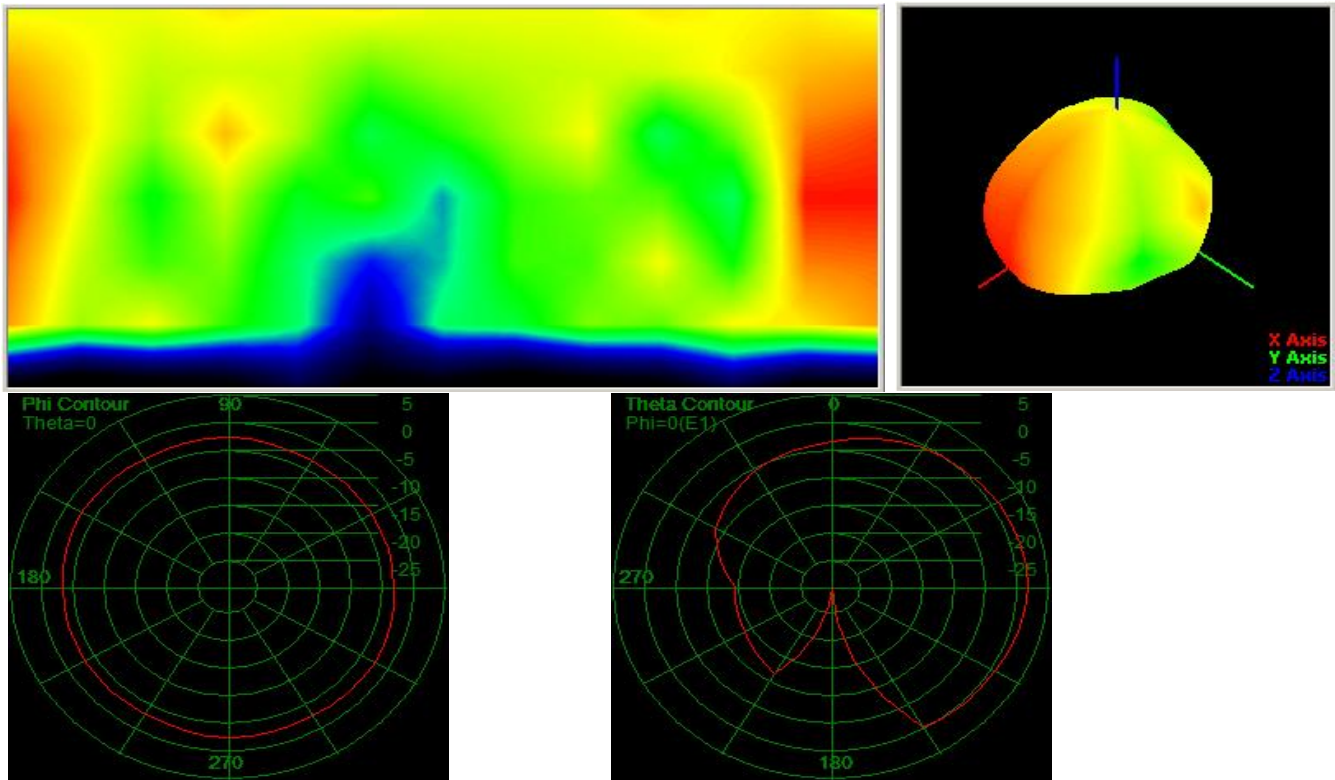

2460M

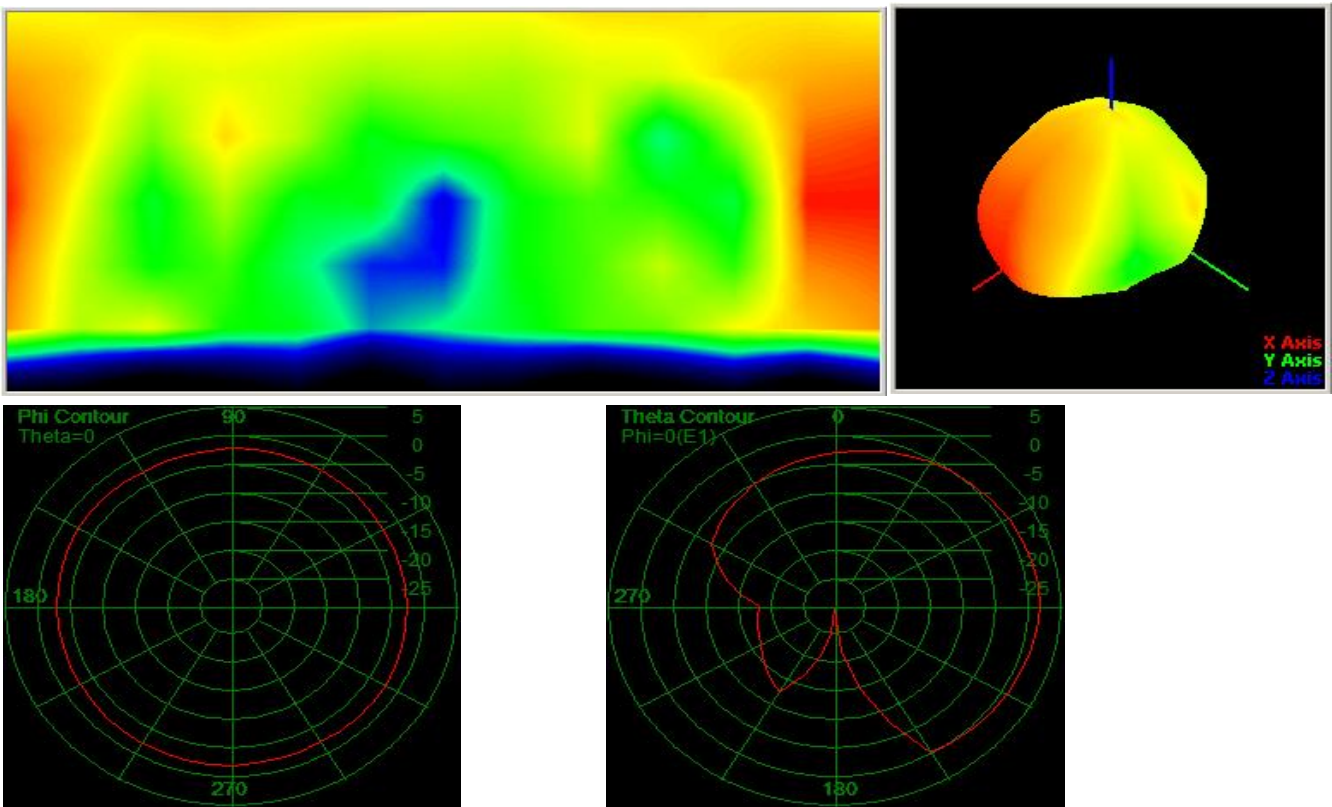

7.实物图Physical pictures

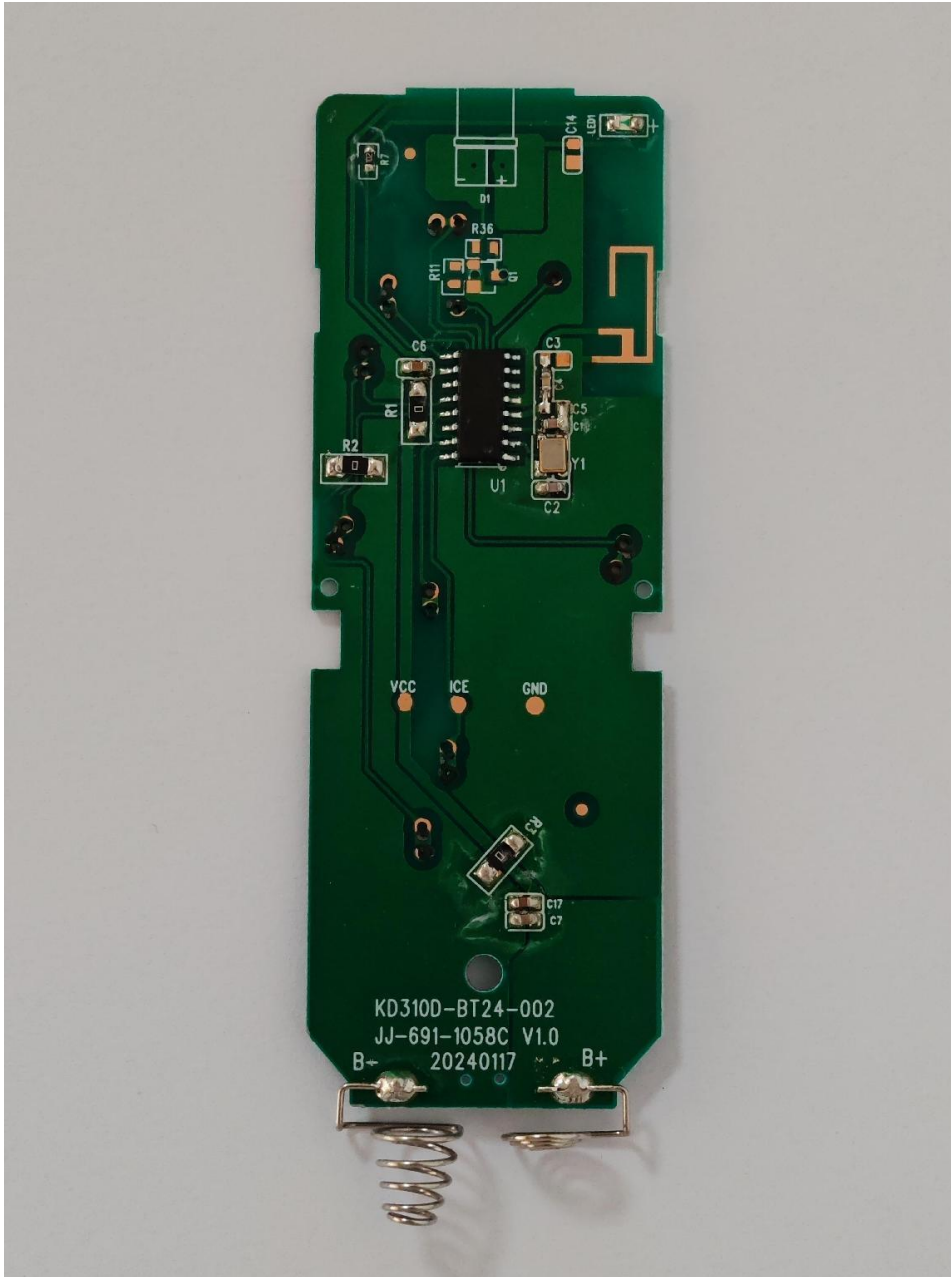

Manufacturer: Shenzhen Jinhong Wireless Technology Co., Ltd.
add: Room 301, Building B1, Weiye Innovation Eighteen Industrial Park,
Nan Chang Community, Xiang Village Sub-district, Ba'o District,
Shenzhen City