

Test Report

Applicant: m-View Live Video Pty Ltd

Address of Applicant: Level 3, 170 Queen Street, Melbourne Victoria 3000

Manufacturer: m-View Live Video Pty Ltd

Address of Manufacturer: Level 3, 170 Queen Street, Melbourne Victoria 3000

Equipment Under Test (EUT)

Product Name: Body Worn Camera

Model No.: Matrix 2 Plus

Series model: N/A

Trade Mark: M-View Matrix

FCC ID: 2AZS6-MATRIX2PLUS

Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407

Date of sample receipt: Apr.20,2021

Date of Test: Apr.20,2021- May.26,2021

Date of report issue: May.26,2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	May.26,2021	Original

Prepared By:



Date:

May.26,2021

Project Engineer

Check By:



Date:

May.26,2021

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY.....	7
5.4 TEST LOCATION.....	7
5.5 DESCRIPTION OF SUPPORT UNITS.....	7
5.6 DEVIATION FROM STANDARDS.....	7
5.7 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT:.....	10
7.2 CONDUCTED EMISSIONS	11
7.3 EMISSION BANDWIDTH	14
7.4 MAXIMUM CONDUCTED AVERAGE OUTPUT POWER	21
7.5 POWER SPECTRAL DENSITY.....	24
7.7 RADIATED EMISSION BAND EDGE	31
7.8 FREQUENCY STABILITY.....	38
8 TEST SETUP PHOTO	40
9 EUT CONSTRUCTIONAL DETAILS.....	40

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	PASS
AC Power Line Conducted Emission	15.207	PASS
Peak Transmit Power	15.407(a)(1)	PASS
Power Spectral Density	15.407(a)(1)	PASS
Undesirable Emission	15.407(b)(6), 15.205/15.209	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.407(b)(1)	PASS
Frequency Stability	15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 40GHz	± 4.68dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

Remark: Test according to ANSI C63.10:2013 and ANSI C63.4:2014

5 General Information

5.1 General Description of EUT

Product Name:	Body Worn Camera
Model No.:	Matrix 2 Plus
Test Model No:	N/A
Test sample(s) ID:	GTS202104000277-1(Engineer sample) GTS202104000277-2(Normal sample)
Power supply:	DC 3.7V/3200mAh From Battery and DC 5V From External Circuit
Adapter Information	Mode: CD122 Input: AC100-240V, 50/60Hz, 500mA Output: DC 5V, 2A

WIFI

Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	N/A	N/A	N/A
Operation frequency:	5180MHz- 5240MHz 5745MHz- 5825MHz	N/A	N/A	N/A
Modulation:	OFDM	N/A	N/A	N/A
Channel number:	9	N/A	N/A	N/A
Channel separation:	20MHz	N/A	N/A	N/A
Antenna type:	FPC Antenna			
Antenna Gain:	0dBi			

Note: For more details, please refer to the user's manual of the EUT.

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	--	--	--	--
	40	5200				
	44	5220	--	--	--	--
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	--	--	--	--
	153	5765	--	--		
	157	5785	--	--		
	161	5805	--	--	--	--
	165	5825	--	--		

Note:

1. "--"Means no channel(s) available any more.
2. The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation and 100% Duty cycle		
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>			
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:			
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.			
Mode	Data rate	Mode	Data rate
802.11a	6Mbps	/	/
802.11n/ac(HT20)	6.5Mbps		

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

• **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

• **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number

5.6 Deviation from Standards

None.

5.7 Additional Instructions

Test Software	
Software name	MPTool
Software version	/
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2015	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data


7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
E.U.T Antenna:	
<p><i>The antennas are FPC ANT, the best case gain of the antennas are 0.00dBi, reference to the appendix II for details</i></p>	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	<p style="text-align: center;">Reference Plane</p> <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mb ar											
Test voltage:	AC 120V, 60Hz																
Test results:	Pass																

Measurement data

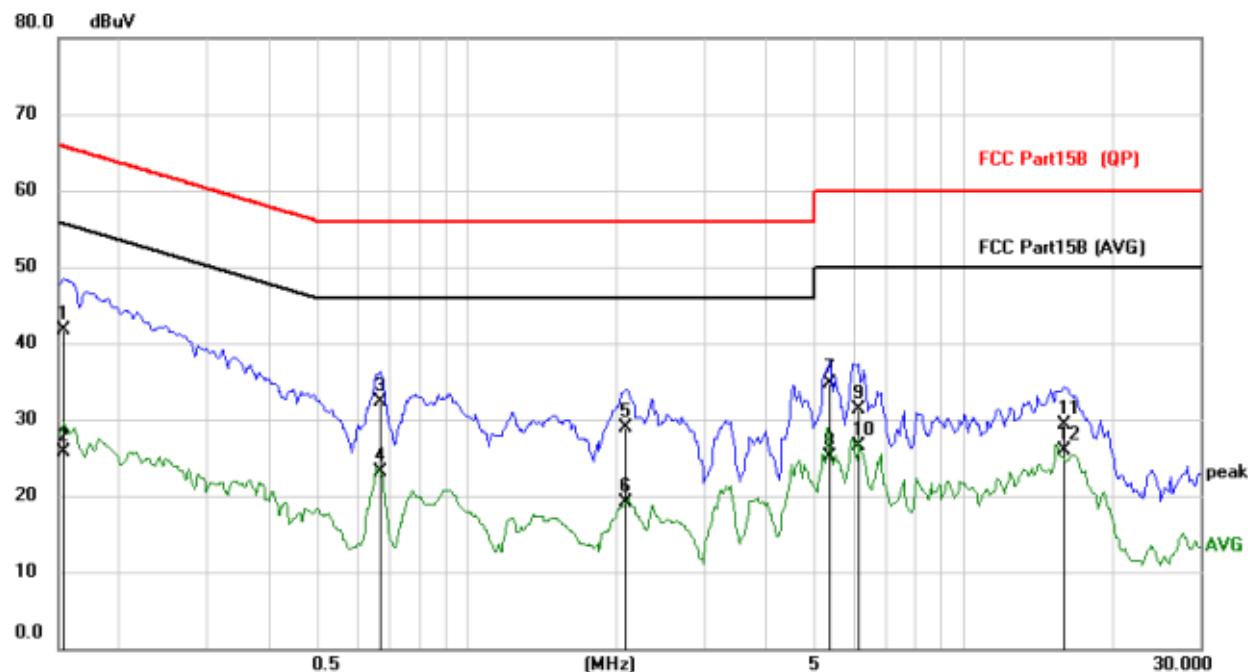Line:


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV		
1		0.1539	30.85	10.92	41.77	65.79	-24.02 QP
2		0.1539	14.79	10.92	25.71	55.79	-30.08 AVG
3		0.6687	21.33	10.92	32.25	56.00	-23.75 QP
4 *		0.6687	12.22	10.92	23.14	46.00	-22.86 AVG
5		2.0844	18.04	10.96	29.00	56.00	-27.00 QP
6		2.0844	8.09	10.96	19.05	46.00	-26.95 AVG
7		5.3673	23.68	11.12	34.80	60.00	-25.20 QP
8		5.3673	14.01	11.12	25.13	50.00	-24.87 AVG
9		6.1668	20.24	11.16	31.40	60.00	-28.60 QP
10		6.1668	15.36	11.16	26.52	50.00	-23.48 AVG
11		15.9246	17.77	11.50	29.27	60.00	-30.73 QP
12		15.9246	14.37	11.50	25.87	50.00	-24.13 AVG

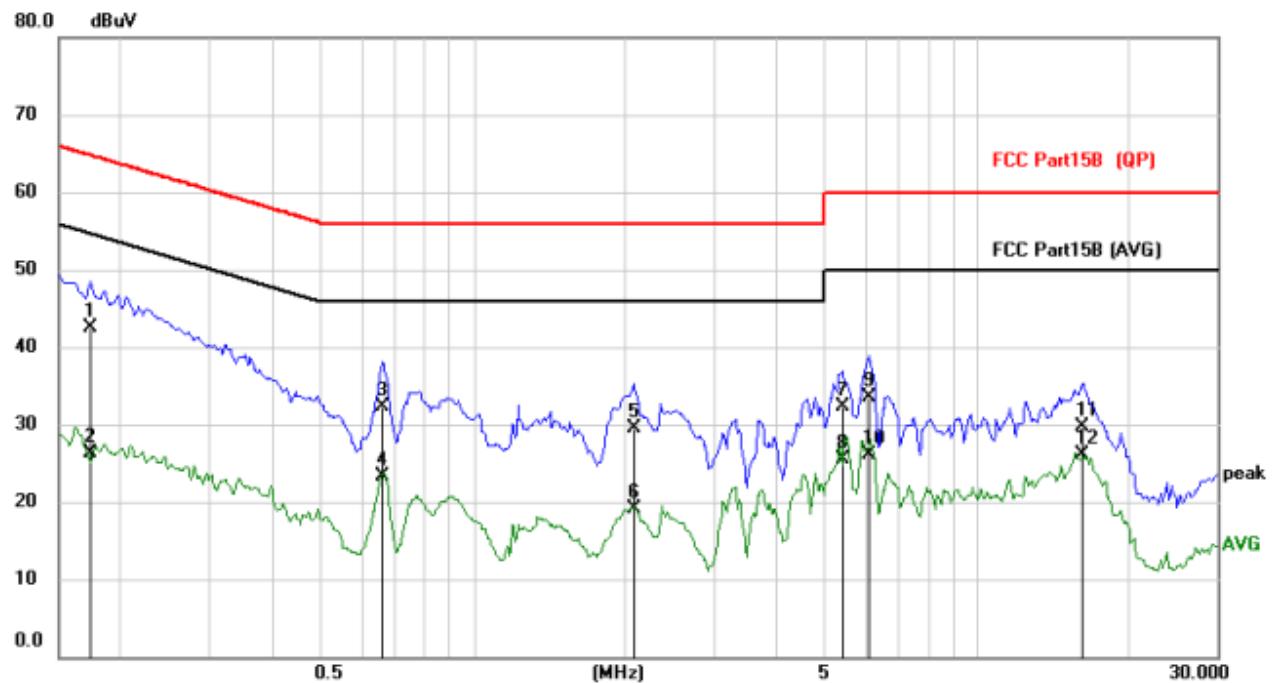
Neutral:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1	*	0.1734	31.68	10.92	42.60	64.80	-22.20 QP
2		0.1734	15.33	10.92	26.25	54.80	-28.55 AVG
3		0.6609	21.33	10.92	32.25	56.00	-23.75 QP
4		0.6609	12.32	10.92	23.24	46.00	-22.76 AVG
5		2.0805	18.55	10.96	29.51	56.00	-26.49 QP
6		2.0805	8.07	10.96	19.03	46.00	-26.97 AVG
7		5.3945	21.22	11.12	32.34	60.00	-27.66 QP
8		5.3945	14.36	11.12	25.48	50.00	-24.52 AVG
9		6.0888	22.33	11.15	33.48	60.00	-26.52 QP
10		6.0888	14.98	11.15	26.13	50.00	-23.87 AVG
11		16.2171	18.23	11.51	29.74	60.00	-30.26 QP
12		16.2171	14.57	11.51	26.08	50.00	-23.92 AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + Correct Factor
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Emission Bandwidth

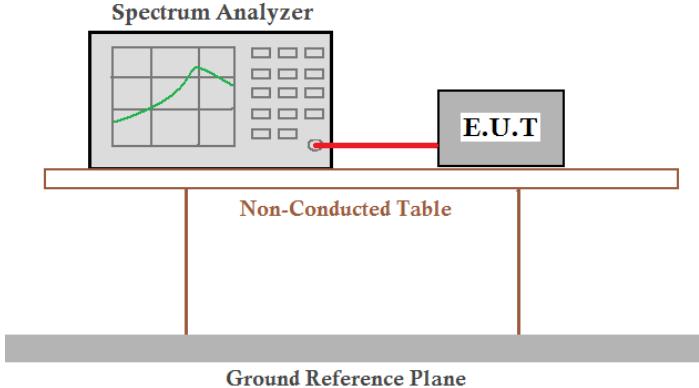
Test Requirement :	FCC Part15 E Section 15.407
Test Method :	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data:

Type	Bands	Channel	26dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	U-NII 1	36	20.306	N/A	Pass
		40	20.312		
		48	20.515		
802.11n(HT20)	U-NII 1	36	57.046	N/A	Pass
		40	55.637		
		48	48.498		
802.11ac(HT20)	U-NII 1	36	56.638	N/A	Pass
		40	55.918		
		48	54.667		

Note:

1. Measured 26dB bandwidth and 99% Bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11ac HT20 ,

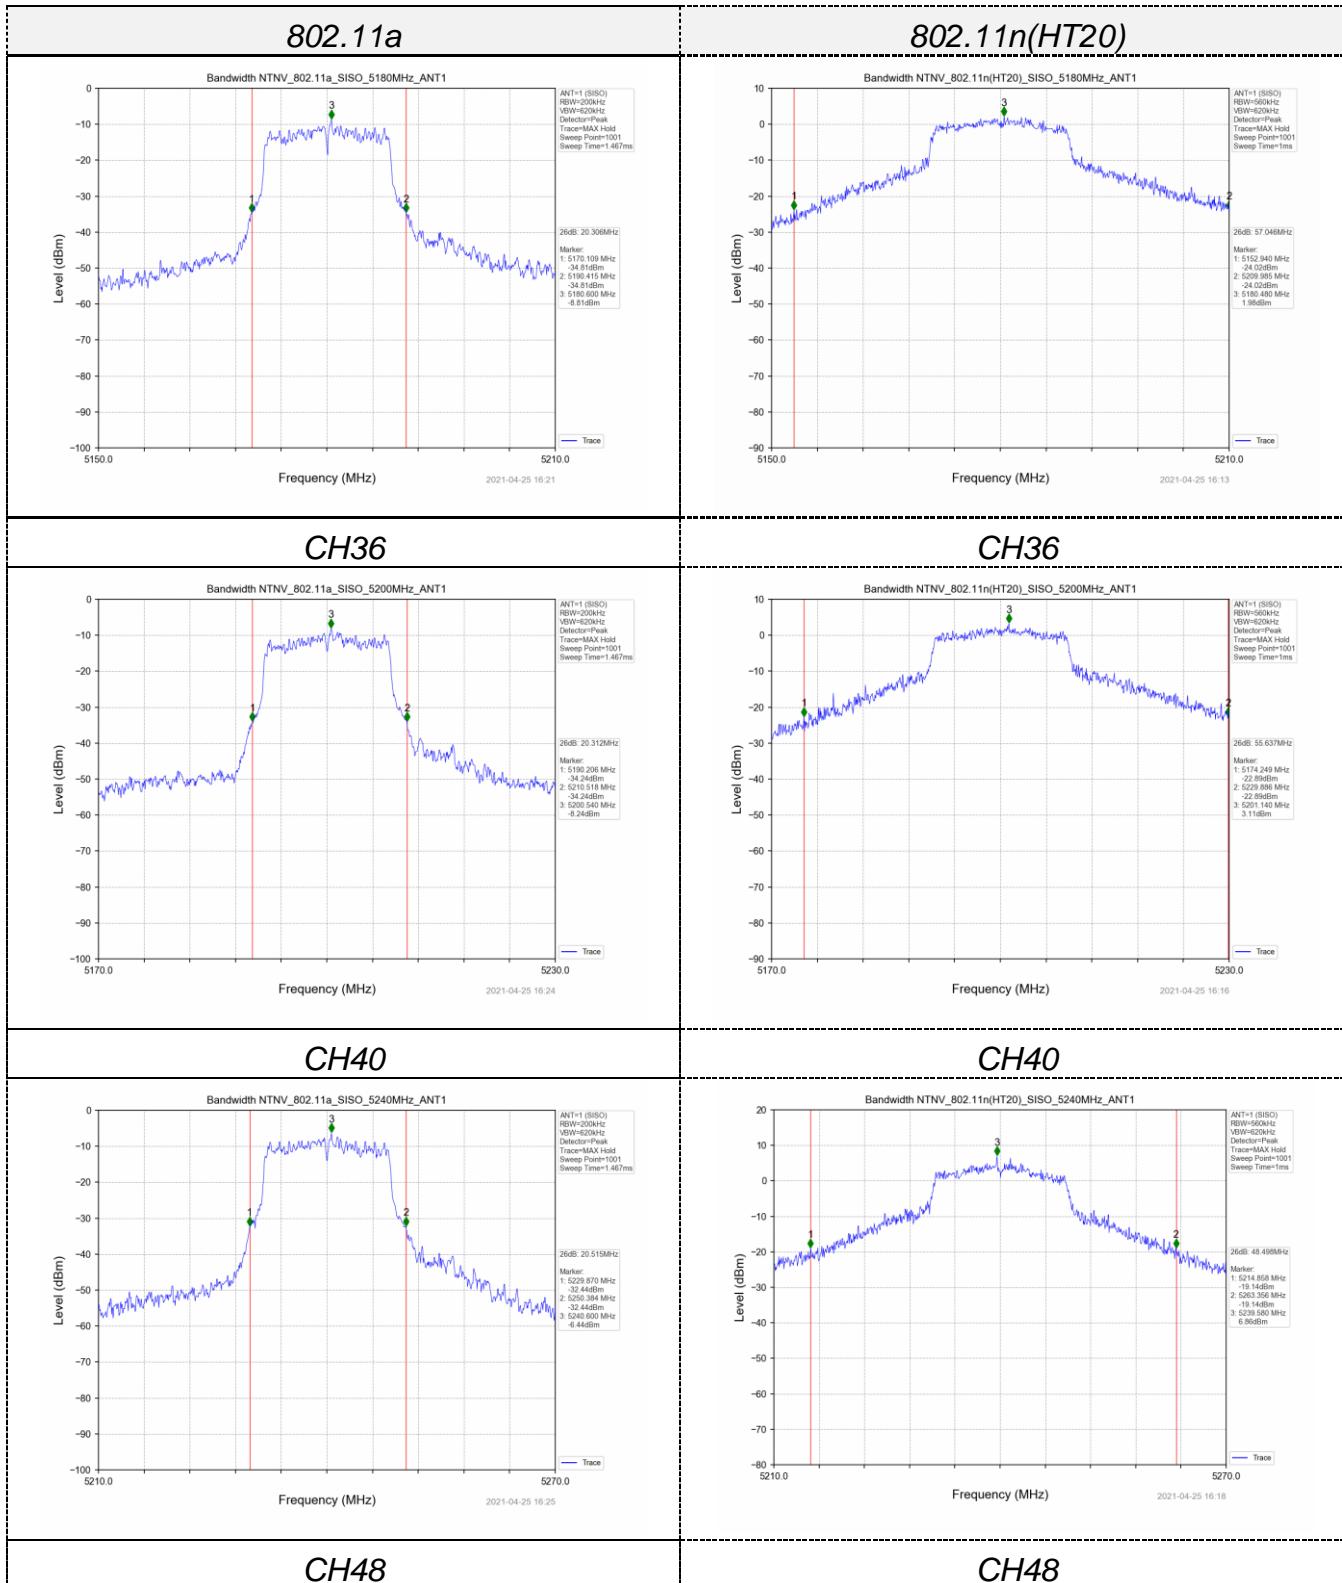


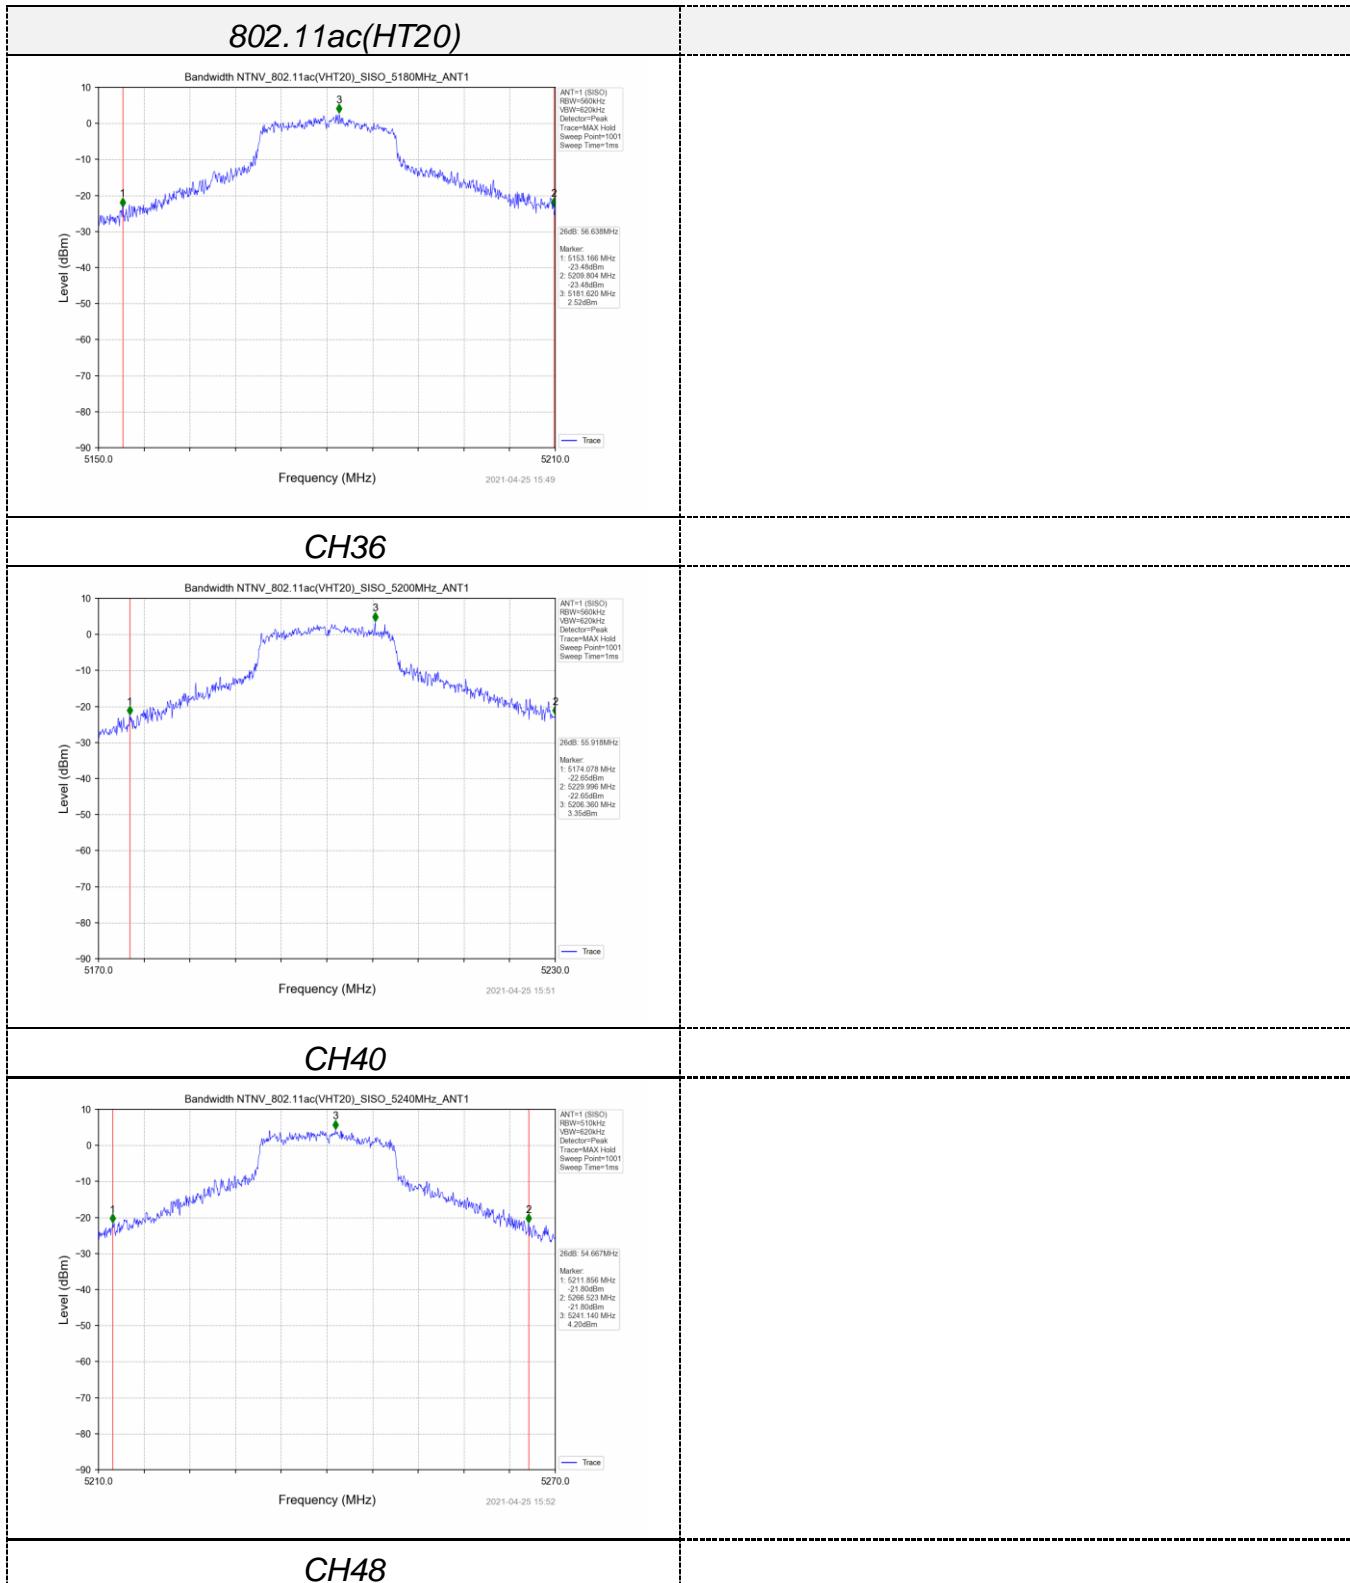


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.276	≥500KHz	Pass
		157	16.269		
		165	16.325		
802.11n(HT20)	U-NII 3	149	16.823	≥500KHz	Pass
		157	17.568		
		165	16.649		
802.11ac(HT20)	U-NII 3	149	17.257	≥500KHz	Pass
		157	16.958		
		165	16.118		


Note:

3. Measured 26dB bandwidth and 99% Bandwidth at difference data rate for each mode and recorded worst case for each mode.
4. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11ac HT20,

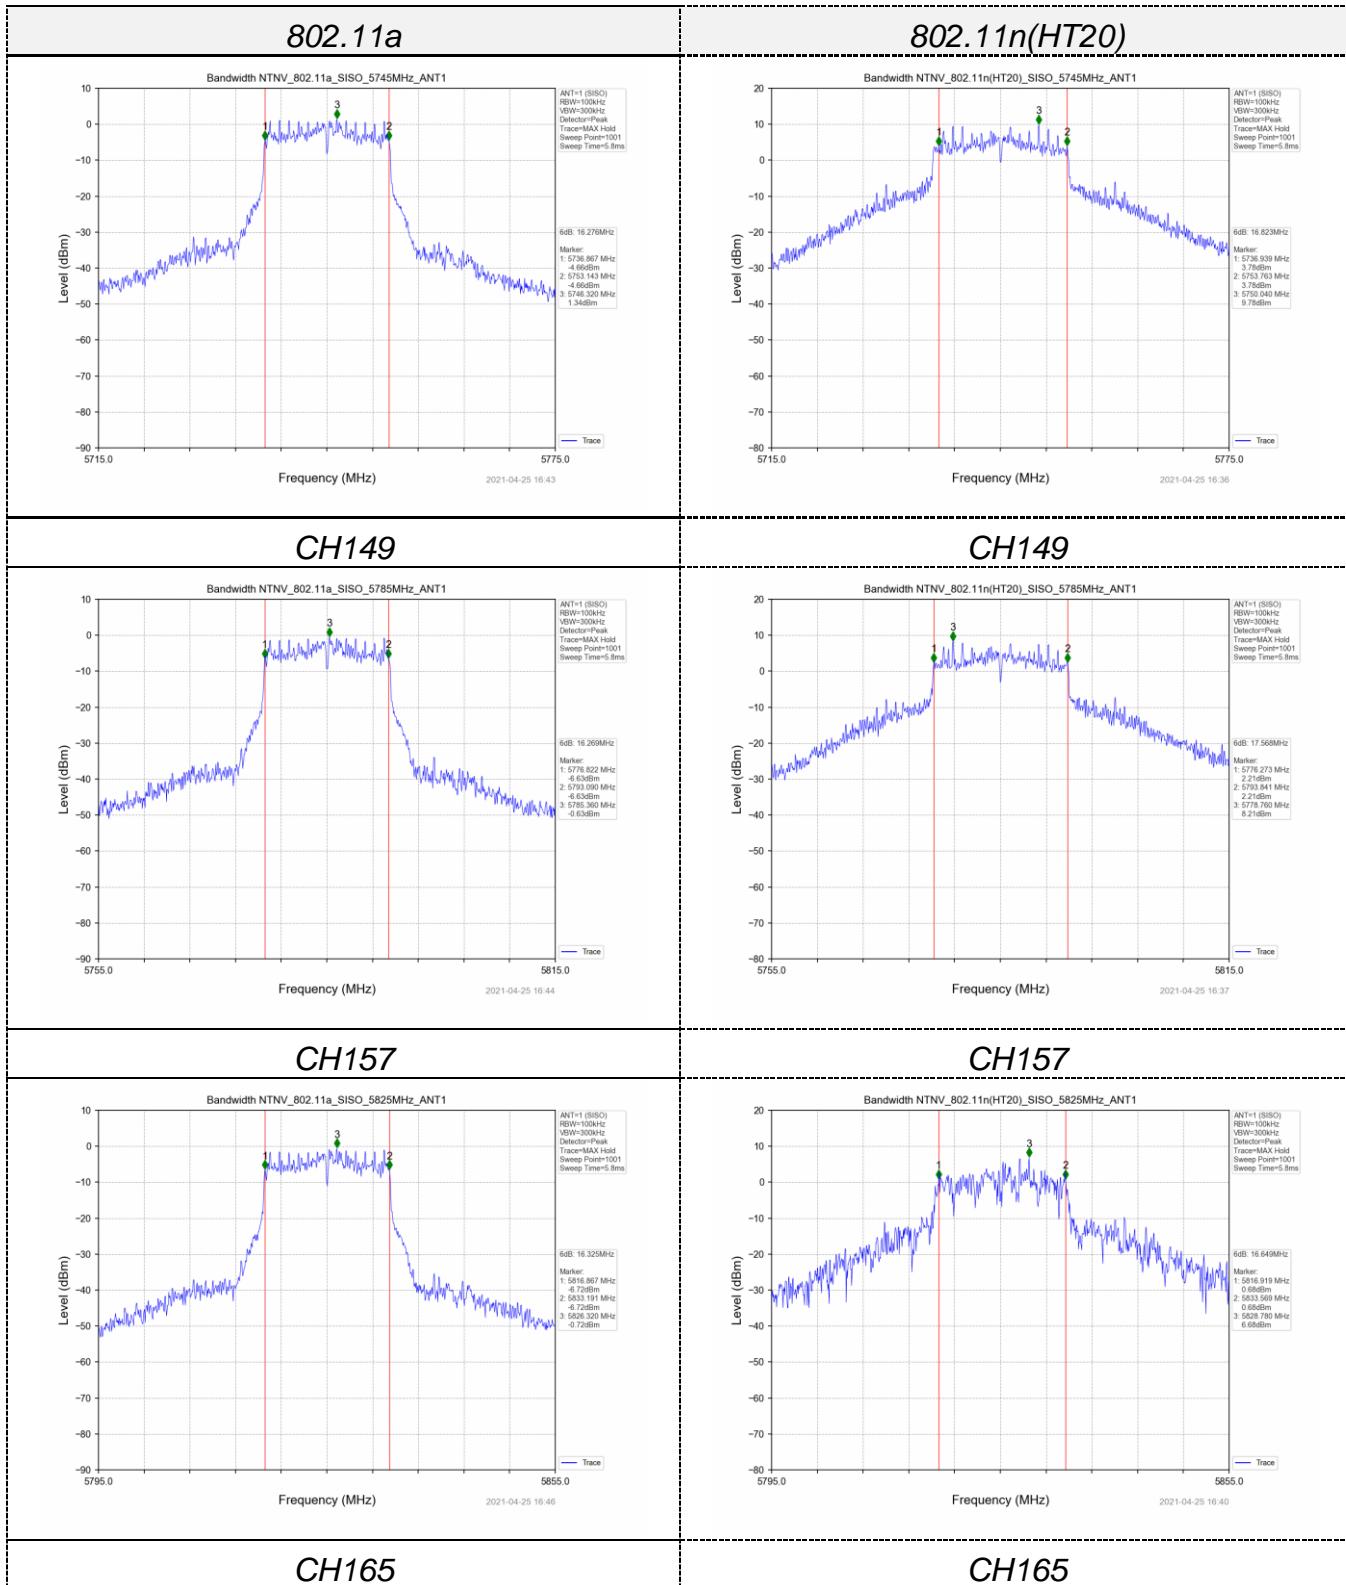Test plot as follows:

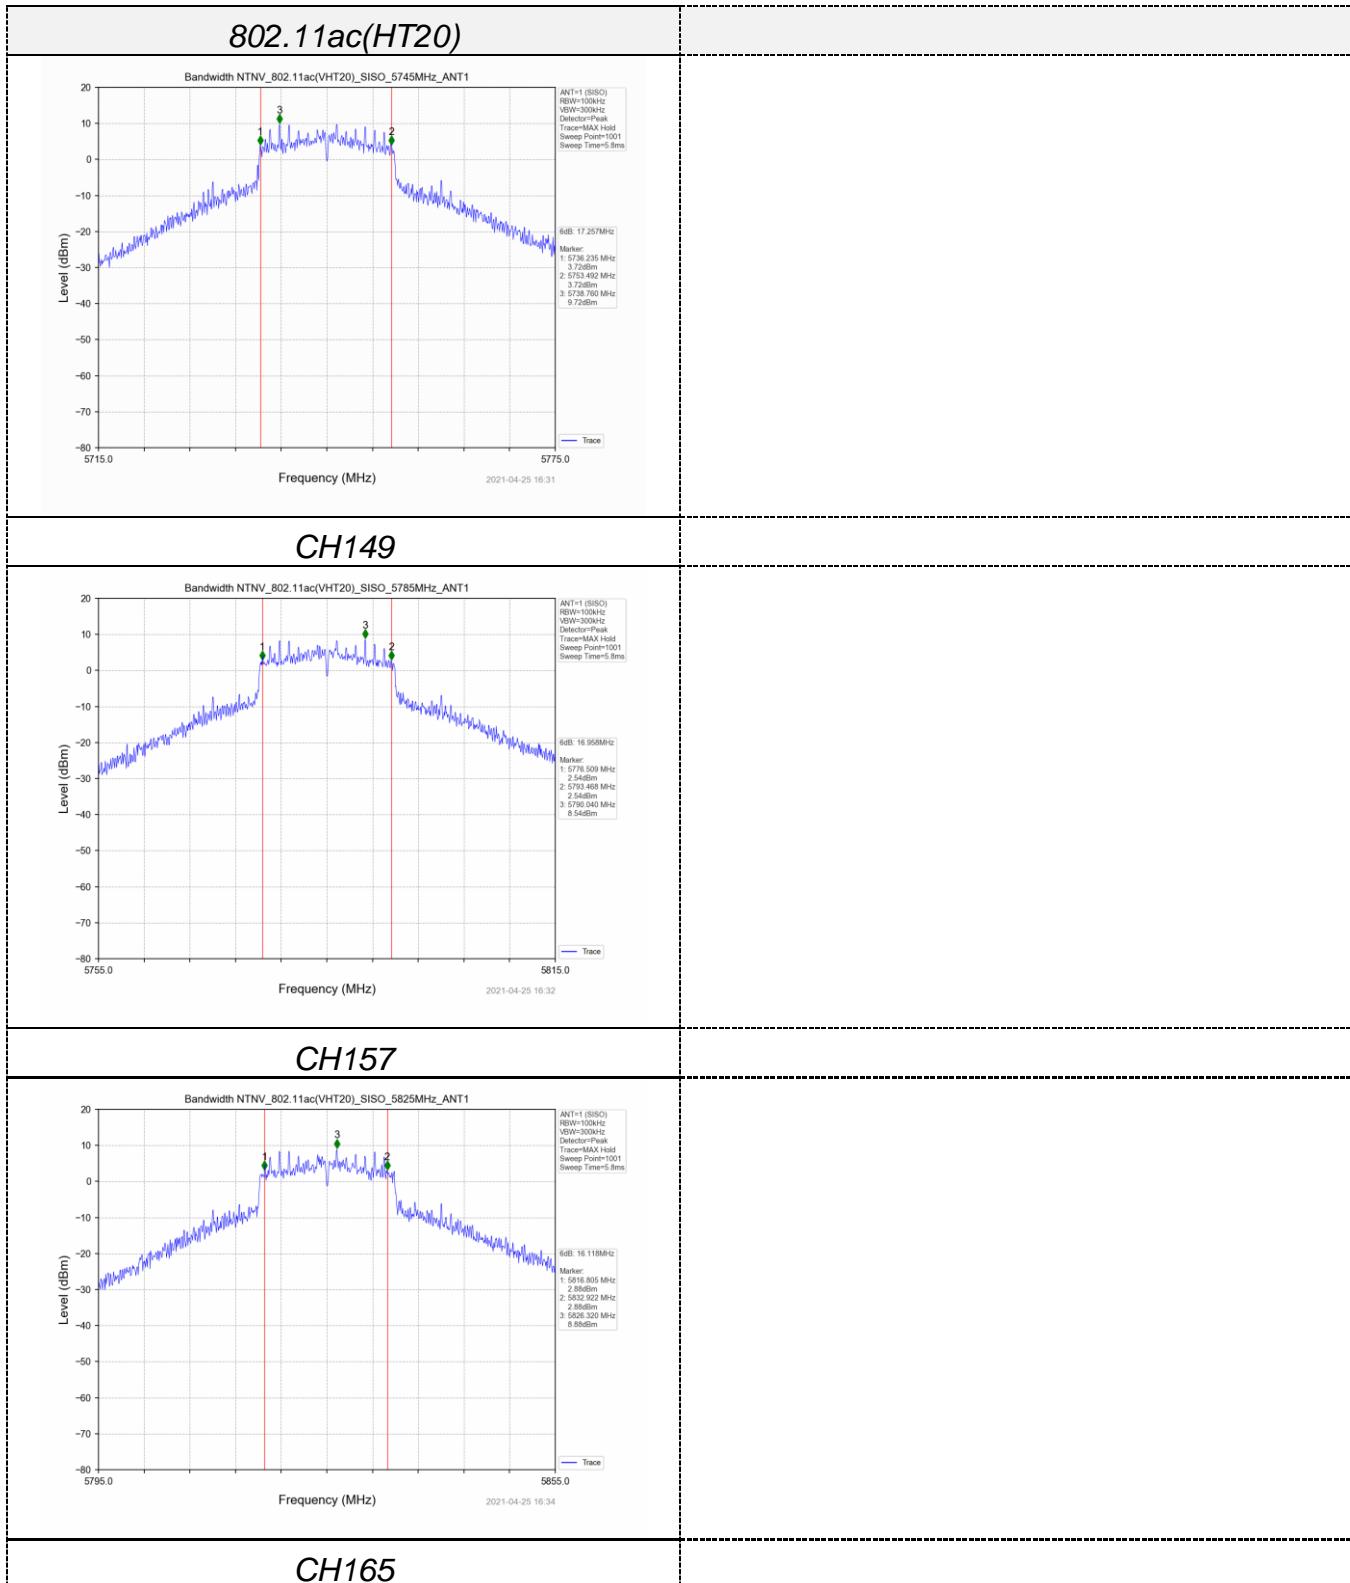


7.4 Maximum Conducted Average Output Power

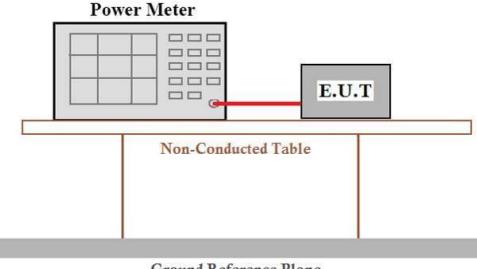Test Requirement	FCC Part15 E Section 15.407								
Test Method :	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01								
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td>≤1W(30dBm) for master device ≤250mW(23.98dBm) for client device</td> </tr> <tr> <td>5250-5350</td> <td>≤250mW(23.98dBm) for client device or 11dBm+10logB*</td> </tr> <tr> <td>5470-5725</td> <td>≤250mW(23.98dBm) for client device or 11dBm+10logB*</td> </tr> </tbody> </table> <p>Remark: *Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p>	Frequency band (MHz)	Limit	5150-5250	≤1W(30dBm) for master device ≤250mW(23.98dBm) for client device	5250-5350	≤250mW(23.98dBm) for client device or 11dBm+10logB*	5470-5725	≤250mW(23.98dBm) for client device or 11dBm+10logB*
Frequency band (MHz)	Limit								
5150-5250	≤1W(30dBm) for master device ≤250mW(23.98dBm) for client device								
5250-5350	≤250mW(23.98dBm) for client device or 11dBm+10logB*								
5470-5725	≤250mW(23.98dBm) for client device or 11dBm+10logB*								
Test setup:									
Test procedure:	<p>Measurement using an RF average power meter</p> <ul style="list-style-type: none"> (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied <ul style="list-style-type: none"> a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10\log(1/0.25)$ if the duty cycle is 25 percent). 								
Test Instruments:	Refer to section 5.10 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Measurement Data

U-NII 1

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	4.35	23.98	Pass
	40	4.40		
	48	4.28		
802.11n(HT20)	36	4.57	23.98	Pass
	40	4.91		
	48	4.25		
802.11ac(HT20)	36	6.18	23.98	Pass
	40	6.22		
	48	6.13		

Note: Output Power = Measured Power + Duty Factor

Duty Factor = $10 \log (1/\text{Duty Cycle})$ and ,and Test Mode : Keep the EUT in transmitting with modulation and 100% Duty cycle


U-NII 3

Type	Channel	Output power Average (dBm)	Limit (dBm)	Result
802.11a	149	6.69	30.00	Pass
	157	6.28		
	165	6.13		
802.11n(HT20)	149	5.24	30.00	Pass
	157	5.49		
	165	5.65		
802.11ac(HT20)	149	5.46	30.00	Pass
	157	5.62		
	165	5.34		

Note: Output Power = Measured Power + Duty Factor

Duty Factor = $10 \log (1/\text{Duty Cycle})$ and ,and Test Mode : Keep the EUT in transmitting with modulation and 100% Duty cycle

7.5 Power Spectral Density

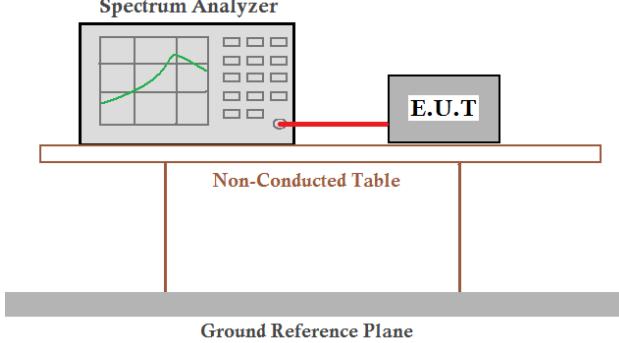Test Requirement:	FCC Part15 E Section 15.407								
Test Method :	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01								
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5150-5250</td> <td> $\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device </td> </tr> <tr> <td>5250-5350</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> <tr> <td>5470-5725</td> <td>$\leq 11\text{dBm}$ in 1MHz for client device</td> </tr> </tbody> </table> <p>Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</p>	Frequency band (MHz)	Limit	5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device	5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device	5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device
Frequency band (MHz)	Limit								
5150-5250	$\leq 17\text{dBm}$ in 1MHz for master device $\leq 11\text{dBm}$ in 1MHz for client device								
5250-5350	$\leq 11\text{dBm}$ in 1MHz for client device								
5470-5725	$\leq 11\text{dBm}$ in 1MHz for client device								
Test setup:									
Test procedure:	<ol style="list-style-type: none"> 1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: <ol style="list-style-type: none"> a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD. 								
Test Instruments:	Refer to section 5.10 for details								
Test mode:	Refer to section 5.2 for details								
Test results:	Pass								

Measurement Data


U-NII 1


Type	Channel	P.S.D (dBm/MHz)	Limit (dBm/ MHz)	Result
802.11a	36	-10.36	11.00	Pass
	40	-9.19		
	48	-6.99		
802.11n(HT20)	36	-1.66	11.00	Pass
	40	-3.06		
	48	1.54		
802.11ac(HT20)	36	-1.75	11.00	Pass
	40	-0.56		
	48	1.15		

Note: 1:PSD = Measured psd + Duty Factor

Duty Factor = $10 \log (1/\text{Duty Cycle})$ and ,and Test Mode : Keep the EUT in transmitting with modulation and 100% Duty cycle

- 2.Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 3.Test results including cable loss;
- 4.Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac HT20 ,IEEE 802.11ac HT40;

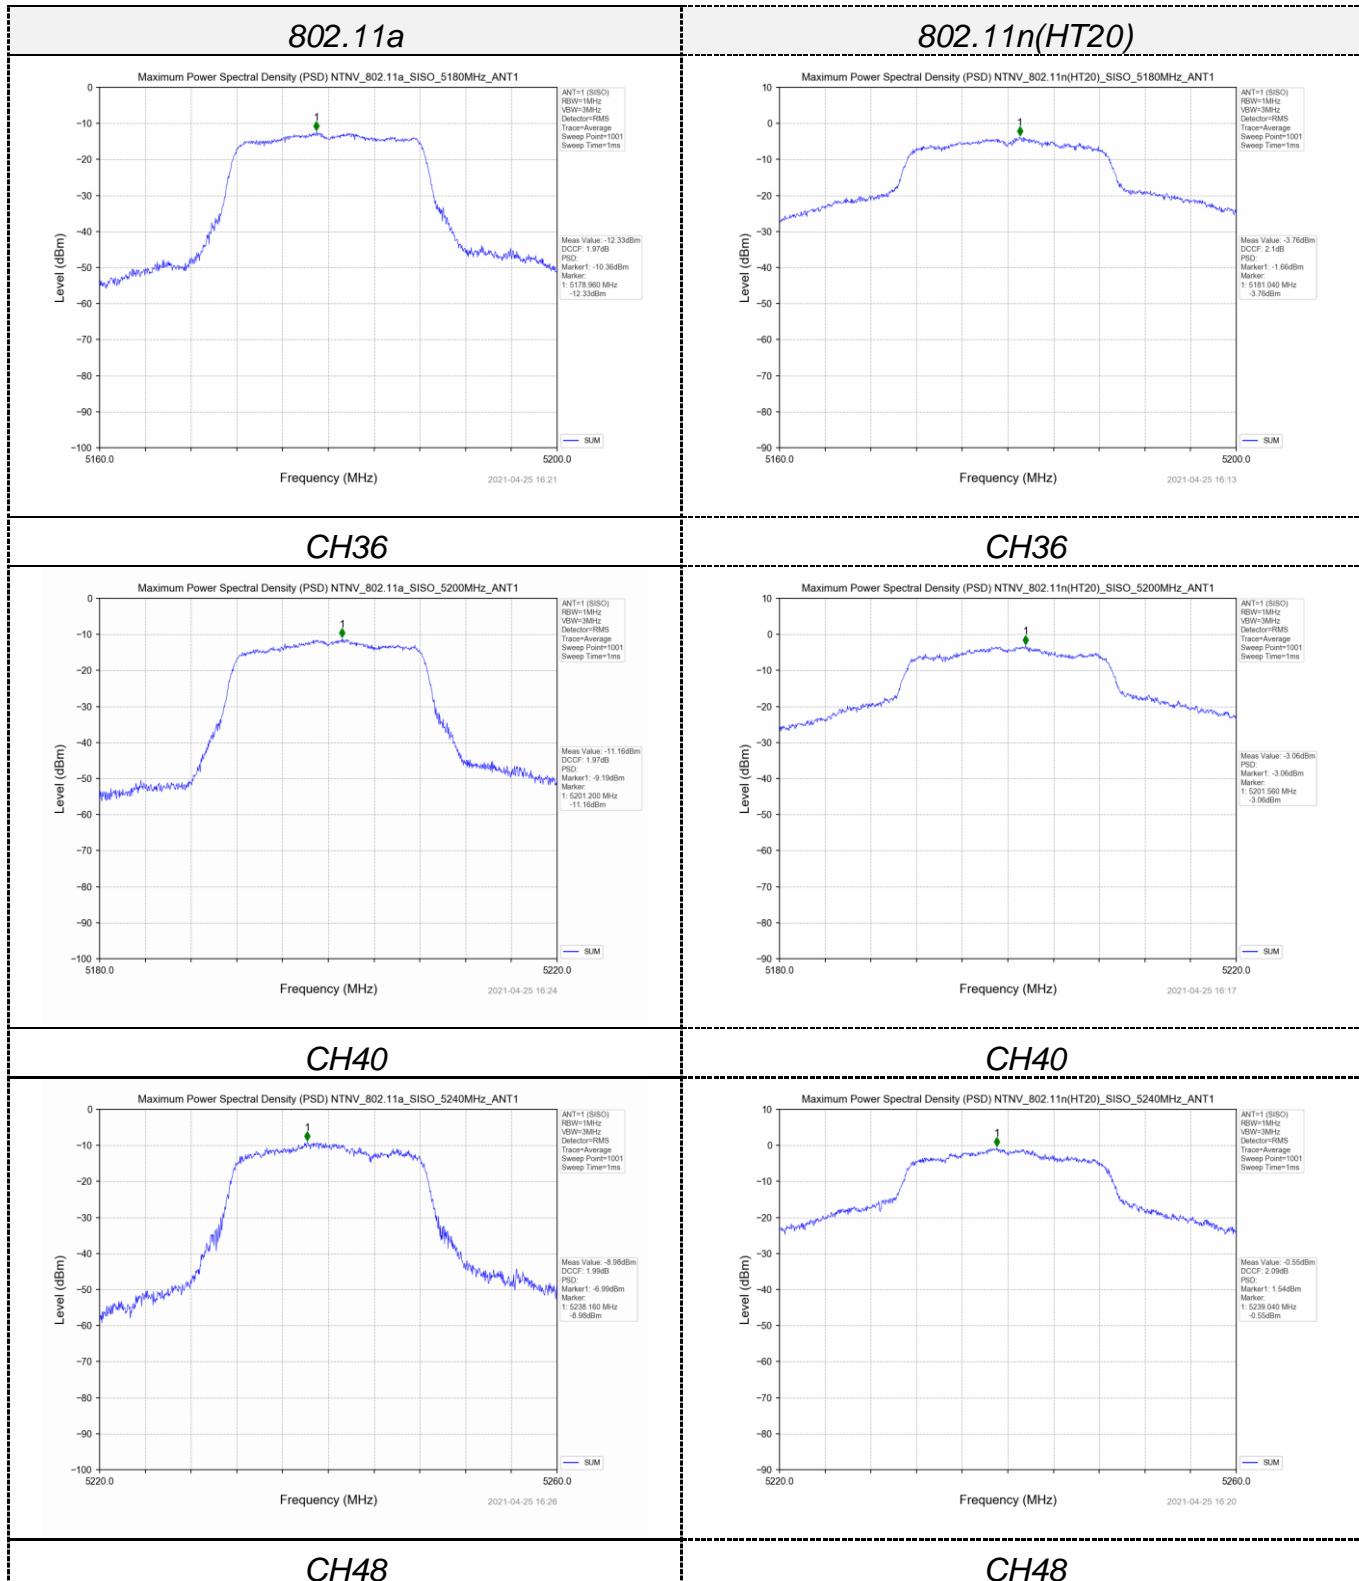

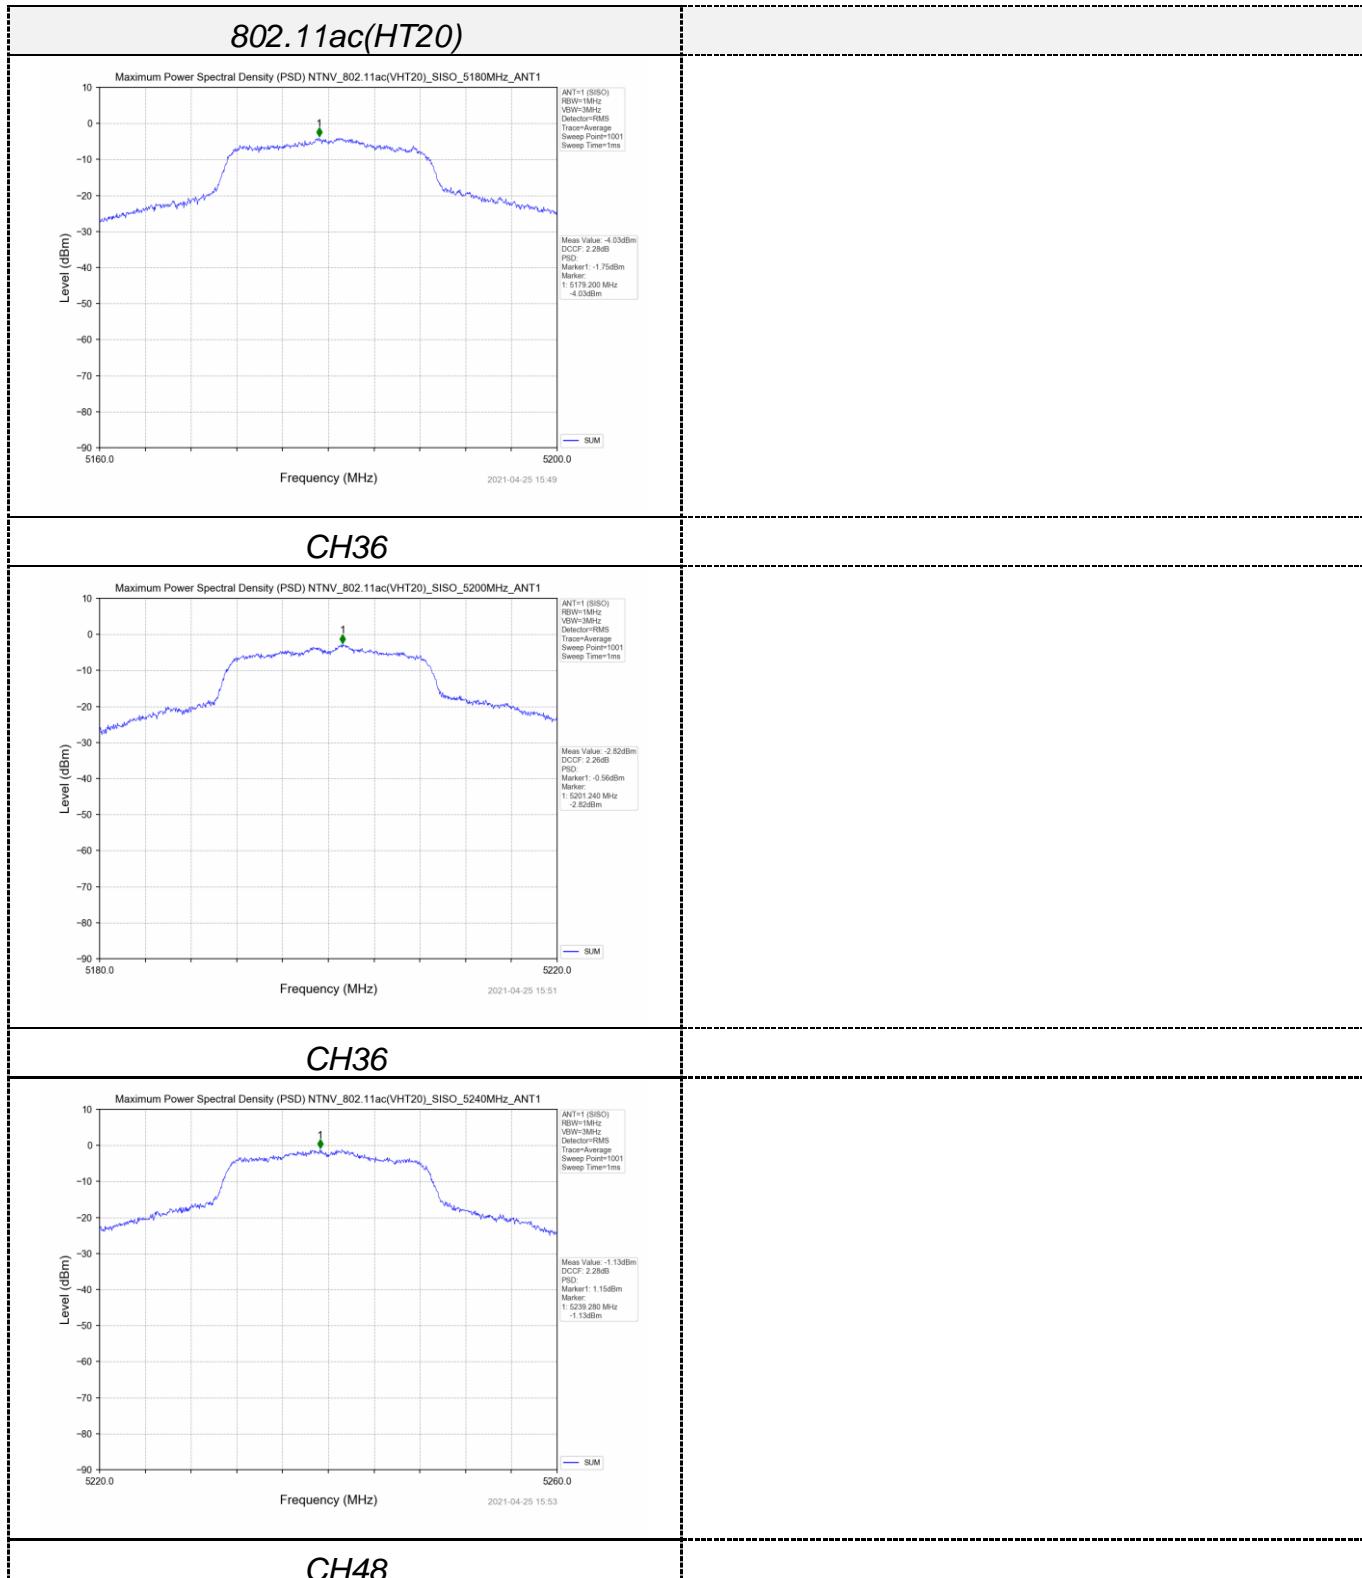

U-NII 3

Type	Channel	Power Spectral Density (dBm/300KHz)	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	149	-7.34	-5.122	30	Pass
	157	-6.87	-4.652		
	165	-8.1	-5.882		
802.11n(HT20)	149	-7.47	-5.252		
	157	-7.64	-5.422		
	165	-8.7	-6.482		
802.11ac(HT20)	149	-7.44	-5.222		
	157	-7.37	-5.152		
	165	-8.82	-6.602		

Note: Output Power = Measured Power + Duty Factor

Duty Factor = $10 \log (1/\text{Duty Cycle})$ and ,and Test Mode : Keep the EUT in transmitting with modulation and 100% Duty cycle

RBW factor = $10 \log (500 \text{ KHz} / 300 \text{ KHz}) = 2.218 \text{ dB}$;

Test plot as follows:

802.11a




802.11n(HT20)



CH149




CH149

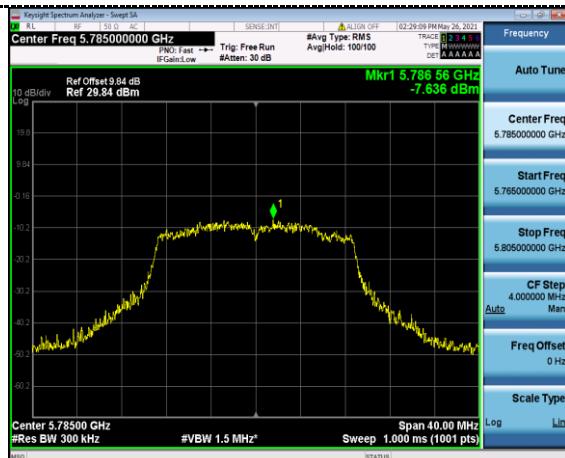

CH157




CH157

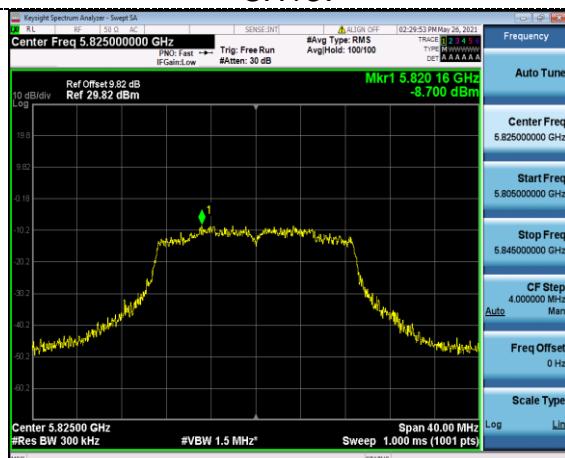


CH165


CH165

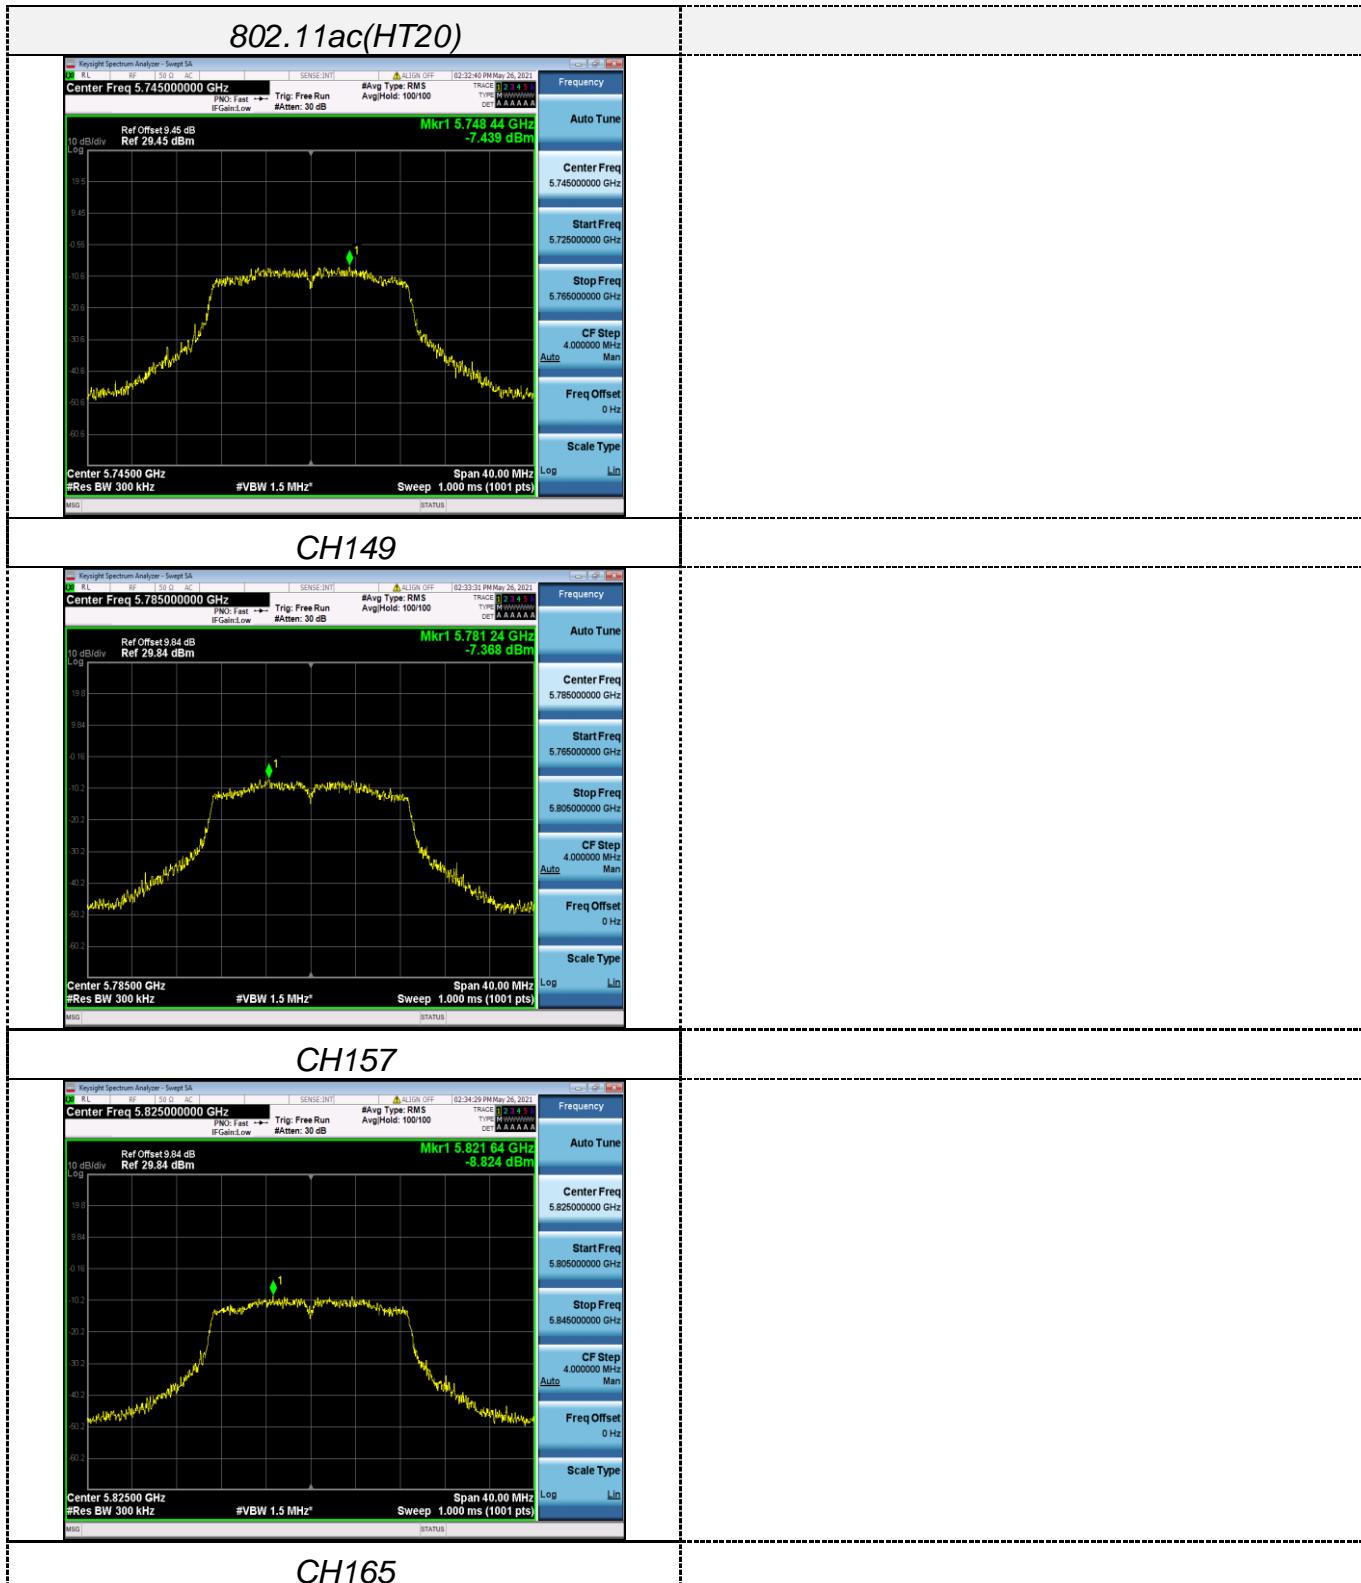


7.7 Radiated Emission Band Edge

Test Requirement :	FCC Part15 C Section 15.209 and 15.205 and FCC Part15 E Section 15.407 and 5.205																																					
Test Method :	ANSI C63.10:2013																																					
Test Frequency Range:	9kHz to 40GHz																																					
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																																					
Receiver setup:	Frequency	Detector	RBW	VBW	Value																																	
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																	
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																																	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																																	
	AV	1MHz	3MHz	Average	Average Value																																	
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (uV/m)</th><th>Value</th><th>Measurement Distance</th></tr> </thead> <tbody> <tr> <td>0.009MHz-0.490MHz</td><td>2400/F(KHz)</td><td>QP</td><td>300m</td></tr> <tr> <td>0.490MHz-1.705MHz</td><td>24000/F(KHz)</td><td>QP</td><td>300m</td></tr> <tr> <td>1.705MHz-30MHz</td><td>30</td><td>QP</td><td>30m</td></tr> <tr> <td>30MHz-88MHz</td><td>100</td><td>QP</td><td rowspan="7">3m</td></tr> <tr> <td>88MHz-216MHz</td><td>150</td><td>QP</td></tr> <tr> <td>216MHz-960MHz</td><td>200</td><td>QP</td></tr> <tr> <td>960MHz-1GHz</td><td>500</td><td>QP</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>500</td><td>Average</td></tr> <tr> <td>5000</td><td>Peak</td></tr> </tbody> </table>				Frequency	Limit (uV/m)	Value	Measurement Distance	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	1.705MHz-30MHz	30	QP	30m	30MHz-88MHz	100	QP	3m	88MHz-216MHz	150	QP	216MHz-960MHz	200	QP	960MHz-1GHz	500	QP	Above 1GHz	500	Average	5000	Peak
Frequency	Limit (uV/m)	Value	Measurement Distance																																			
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m																																			
0.490MHz-1.705MHz	24000/F(KHz)	QP	300m																																			
1.705MHz-30MHz	30	QP	30m																																			
30MHz-88MHz	100	QP	3m																																			
88MHz-216MHz	150	QP																																				
216MHz-960MHz	200	QP																																				
960MHz-1GHz	500	QP																																				
Above 1GHz	500	Average																																				
	5000	Peak																																				
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1>.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. <p>2>.Above 1GHz test procedure:</p>																																					

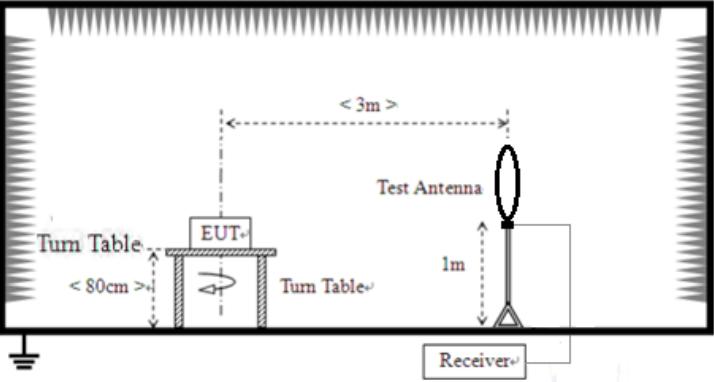	<ol style="list-style-type: none"> 1. On the test site as test setup graph above, the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal use as declared by the provider. 2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. 3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. 4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. 5. Repeat step 4 for test frequency with the test antenna polarized horizontally. 6. Remove the transmitter and replace it with a substitution antenna 7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. 8. Repeat step 7 with both antennas horizontally polarized for each test frequency. 9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ <p>where: Pg is the generator output power into the substitution antenna.</p>
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>

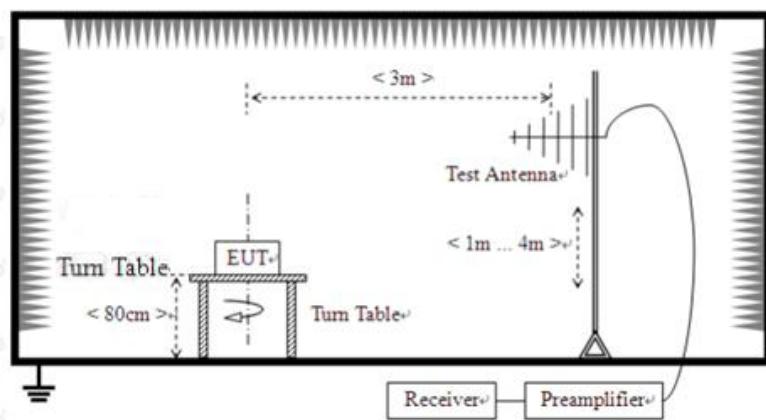

For radiated emissions above 1GHz

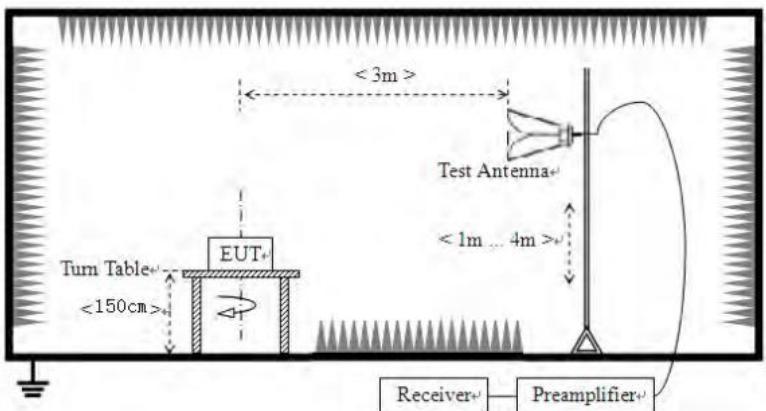


Test Instruments:	Refer to section 5.10 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remarks:


1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:
9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

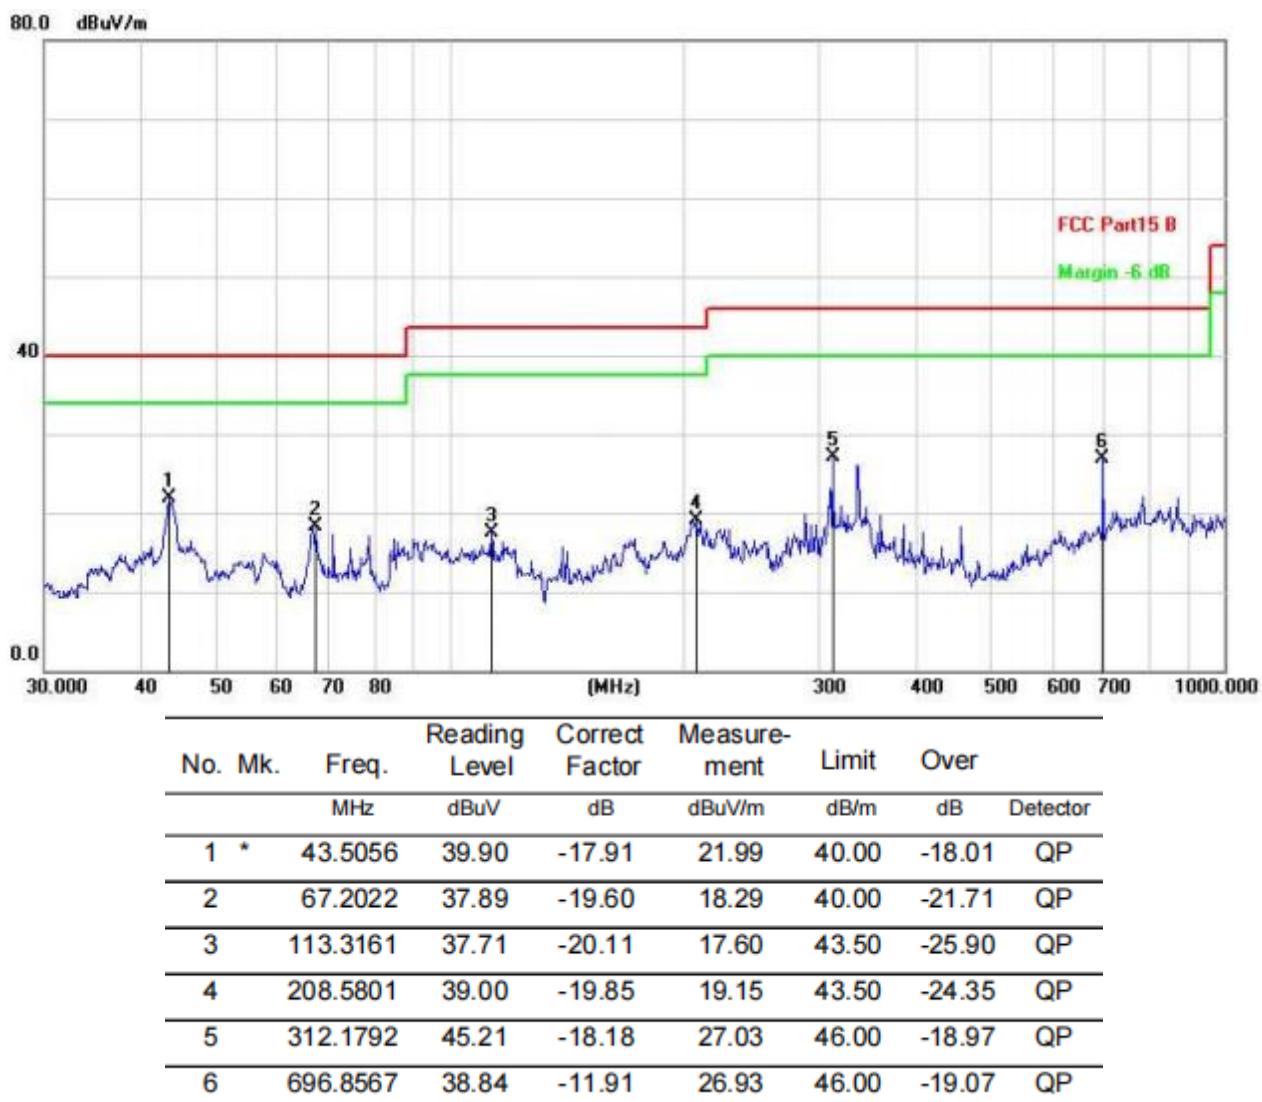30MHz~1GHz
Horizontal:


Final Level = Receiver Read level + Correct Factor

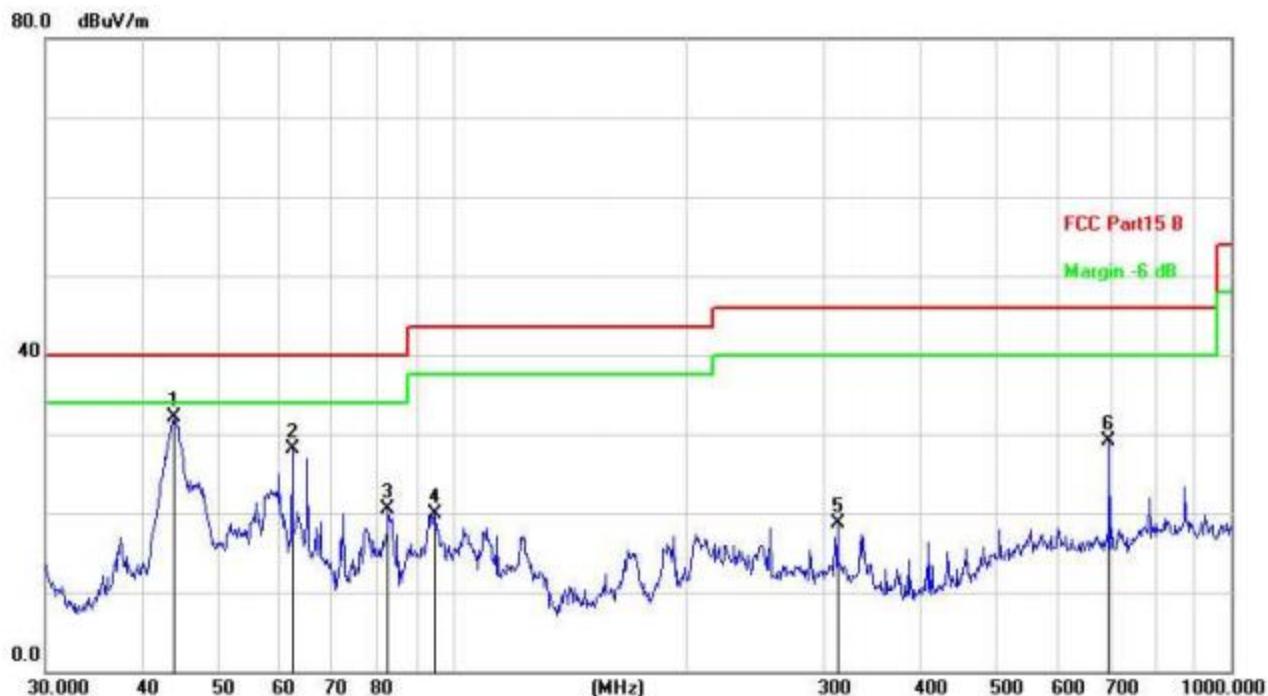Vertical:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dB _{uV}	dB	dB _{uV/m}	dB/m	dB	Detector
1	*	43.8119	50.24	-18.21	32.03	40.00	-7.97	QP
2		62.2128	47.17	-19.02	28.15	40.00	-11.85	QP
3		82.6482	41.49	-20.94	20.55	40.00	-19.45	QP
4		95.0930	40.89	-20.90	19.99	43.50	-23.51	QP
5		312.1792	36.52	-17.84	18.68	46.00	-27.32	QP
6		696.8567	41.07	-11.91	29.16	46.00	-16.84	QP

Final Level = Receiver Read level + Correct Factor

Above 1GHz:

Note: All 802.11a / 802.11n (HT20) /802.11ac (HT20) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 1 & 802.11a Mode (above 1GHz)

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
(5180MHz)	5150.00	55.26	PK	H	68.20	12.94	47.98	34.44	7.12	34.28	7.28
	5150.00	45.98	AV	H	54.00	8.02	38.70	34.44	7.12	34.28	7.28
	10360.00	50.37	PK	H	68.20	17.83	34.64	39.20	11.45	34.92	15.73
	--	--	--	--	--	--	--	--	--	--	--
(5200MHz)	10400.00	50.49	PK	H	68.20	17.71	34.68	39.22	11.48	34.89	15.81
	--	--	--	--	--	--	--	--	--	--	--
(5240MHz)	5350.50	45.68	PK	H	68.20	22.52	38.65	34.23	7.36	34.56	7.03
	10480.00	50.33	PK	H	68.20	17.87	33.18	39.41	11.83	34.09	17.15
	--	--	--	--	--	--	--	--	--	--	--

Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
(5180MHz)	5150.00	54.25	PK	V	68.20	13.95	46.97	34.44	7.12	34.28	7.28
	5150.00	45.26	AV	V	54.00	8.74	37.98	34.44	7.12	34.28	7.28
	10360.00	49.93	PK	V	68.20	18.27	34.20	39.20	11.45	34.92	15.73
	--	--	--	--	--	--	--	--	--	--	--
(5200MHz)	10400.00	49.66	PK	V	68.20	18.54	33.85	39.22	11.48	34.89	15.81
	--	--	--	--	--	--	--	--	--	--	--
(5240MHz)	5350.50	49.57	PK	V	68.20	18.63	42.54	34.23	7.36	34.56	7.03
	10480.00	50.39	PK	V	68.20	17.81	33.24	39.41	11.83	34.09	17.15
	--	--	--	--	--	--	--	--	--	--	--

U-NII 3 & 802.11a Mode (above 1GHz)


Tested Channel	Frequency (MHz)	Emission Level (dBuV/m)	Detector Mode	ANT Pol	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre amplifier (dB)	Correction Factor (dB/m)
	5720.00	49.99	PK	H	68.20	18.21	42.71	34.44	7.12	34.28	7.28
149.00	5720.00	46.58	AV	H	54.00	7.42	35.07	37.64	9.28	35.41	11.51
(5745MHz)	11490.00	48.59	PK	H	68.20	19.61	30.33	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	50.69	PK	H	68.20	17.51	32.24	39.71	13.05	34.31	18.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
48.00	5855.00	49.76	PK	H	68.20	18.44	38.22	37.64	9.28	35.38	11.54
(5825MHz)	11650.00	50.65	PK	H	68.20	17.55	32.03	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5720.00	4.69	PK	V	68.20	63.51	-2.59	34.44	7.12	34.28	7.28
149.00	5720.00	45.66	AV	V	54.00	8.34	34.15	37.64	9.28	35.41	11.51
(5745MHz)	11490.00	49.00	PK	V	68.20	19.20	30.74	39.69	12.90	34.33	18.26
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	49.86	PK	V	68.20	18.34	31.41	39.71	13.05	34.31	18.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
48.00	5855.00	50.39	PK	V	68.20	17.81	38.85	37.64	9.28	35.38	11.54
(5825MHz)	11650.00	52.36	PK	V	68.20	15.84	33.74	39.73	13.19	34.30	18.62
	--	--	--	--	--	--	--	--	--	--	--

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
5. Worst case data at 6Mbps at IEEE 802.11a; MCS0 at IEEE 802.11n HT20, IEEE 802.11ac VHT20 ,

7.8 Frequency stability

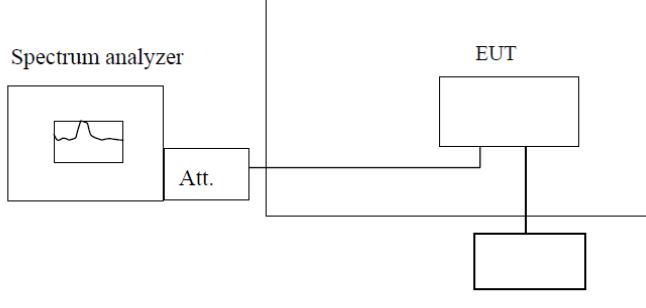Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10:2013, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	<p style="text-align: center;">Temperature Chamber</p>  <p>Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 5.10 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		81.22	0.015680		
3.7	-30	89.56	0.017290	Within the band of operation	Pass
	-20	103.52	0.019985		
	-10	84.26	0.016266		
	0	91.33	0.017631		
	10	59.63	0.011512		
	20	73.55	0.014199		
	30	80.13	0.015469		
	40	87.59	0.016909		
	50	103.25	0.019932		
	4.07	73.55	0.014199		
3.33	25	81.22	0.015680		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.7	-30	88.57	0.015417	Within the band of operation	Pass
	-20	94.69	0.016482		
	-10	55.62	0.009681		
	0	68.91	0.011995		
	10	60.37	0.010508		
	20	55.09	0.009589		
	30	56.79	0.009885		
	40	88.52	0.015408		
	50	93.12	0.016209		
	4.07	57.86	0.010071		
3.33	25	56.59	0.009850		

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---